

# Deutsches Institut für Bautechnik

Anstalt des öffentlichen Rechts

Kolonnenstr. 30 L  
10829 Berlin  
Germany

Tel.: +49(0)30 787 30 0  
Fax: +49(0)30 787 30 320  
E-mail: [dibt@dibt.de](mailto:dibt@dibt.de)  
Internet: [www.dibt.de](http://www.dibt.de)



# DIBt

Mitglied der EOTA  
*Member of EOTA*

## European Technical Approval ETA-09/0238

English translation prepared by DIBt - Original version in German language

Handelsbezeichnung  
*Trade name*

TOGE Rahmendübel TU 10  
*TOGE Metal Frame Anchor TU 10*

Zulassungsinhaber  
*Holder of approval*

TOGE-DÜBEL  
A. Gerhard KG  
Illesheimer Straße 10  
90431 Nürnberg  
DEUTSCHLAND

Zulassungsgegenstand  
und Verwendungszweck

Kraftkontrolliert spreizender Dübel aus galvanisch verzinktem  
Stahl in der Größe 10 für die Verwendung als  
Mehrfachbefestigung von nichttragenden Systemen in Beton  
*Torque controlled expansion anchor made of galvanised steel of size 10  
for multiple use for non-structural applications in concrete*

*Generic type and use  
of construction product*

Geltungsdauer: vom  
*Validity:* from  
bis  
to

29 March 2010  
28 August 2014

Herstellwerk  
*Manufacturing plant*

TOGE-Dübel A. Gerhard KG

Diese Zulassung umfasst  
*This Approval contains*

13 Seiten einschließlich 6 Anhänge  
*13 pages including 6 annexes*

Diese Zulassung ersetzt  
*This Approval replaces*

ETA-09/0238 mit Geltungsdauer vom 28.08.2009 bis 28.08.2014  
*ETA-09/0238 with validity from 28.08.2009 to 28.08.2014*



Europäische Organisation für Technische Zulassungen  
European Organisation for Technical Approvals

## I LEGAL BASES AND GENERAL CONDITIONS

- 1 This European technical approval is issued by Deutsches Institut für Bautechnik in accordance with:
  - Council Directive 89/106/EEC of 21 December 1988 on the approximation of laws, regulations and administrative provisions of Member States relating to construction products<sup>1</sup>, modified by Council Directive 93/68/EEC<sup>2</sup> and Regulation (EC) N° 1882/2003 of the European Parliament and of the Council<sup>3</sup>;
  - Gesetz über das In-Verkehr-Bringen von und den freien Warenverkehr mit Bauprodukten zur Umsetzung der Richtlinie 89/106/EWG des Rates vom 21. Dezember 1988 zur Angleichung der Rechts- und Verwaltungsvorschriften der Mitgliedstaaten über Bauprodukte und anderer Rechtsakte der Europäischen Gemeinschaften (Bauprodukten-gesetz - BauPG) vom 28. April 1998<sup>4</sup>, as amended by law of 31 October 2006<sup>5</sup>;
  - Common Procedural Rules for Requesting, Preparing and the Granting of European technical approvals set out in the Annex to Commission Decision 94/23/EC<sup>6</sup>;
  - Guideline for European technical approval of "Metal anchors for use in concrete - Part 6: Anchors for multiple use for non-structural applications", ETAG 001-06.
- 2 Deutsches Institut für Bautechnik is authorized to check whether the provisions of this European technical approval are met. Checking may take place in the manufacturing plant. Nevertheless, the responsibility for the conformity of the products to the European technical approval and for their fitness for the intended use remains with the holder of the European technical approval.
- 3 This European technical approval is not to be transferred to manufacturers or agents of manufacturers other than those indicated on page 1, or manufacturing plants other than those indicated on page 1 of this European technical approval.
- 4 This European technical approval may be withdrawn by Deutsches Institut für Bautechnik, in particular pursuant to information by the Commission according to Article 5(1) of Council Directive 89/106/EEC.
- 5 Reproduction of this European technical approval including transmission by electronic means shall be in full. However, partial reproduction can be made with the written consent of Deutsches Institut für Bautechnik. In this case partial reproduction has to be designated as such. Texts and drawings of advertising brochures shall not contradict or misuse the European technical approval.
- 6 The European technical approval is issued by the approval body in its official language. This version corresponds fully to the version circulated within EOTA. Translations into other languages have to be designated as such.

---

1 Official Journal of the European Communities L 40, 11 February 1989, p. 12

2 Official Journal of the European Communities L 220, 30 August 1993, p. 1

3 Official Journal of the European Union L 284, 31 October 2003, p. 25

4 *Bundesgesetzblatt Teil I 1998*, p. 812

5 *Bundesgesetzblatt Teil I 2006*, p. 2407, 2416

6 Official Journal of the European Communities L 17, 20 January 1994, p. 34

## **II SPECIFIC CONDITIONS OF THE EUROPEAN TECHNICAL APPROVAL**

### **1.1 Definition of the product**

The TOGE metal frame anchor TU 10 is an anchor made of galvanised steel which is placed into a drilled hole and anchored by torque-controlled expansion.

An illustration of the product and intended use is given in Annexes 1 and 2.

### **1.2 Intended use**

The anchor is intended to be used for anchorages for which requirements for safety in use in the sense of the Essential Requirements 4 of Council Directive 89/106 EEC shall be fulfilled and failure of the fixture represents an immediate risk to human life. The anchor is to be used only for multiple use for non-structural applications. The definition of multiple use according to the Member States is given in the informative Annex 1 of ETAG 001, Part 6.

The anchor may be used for anchorages with requirements related to resistance to fire.

The anchor is to be used only for anchorages subject to static or quasi-static loading in reinforced or unreinforced normal weight concrete of strength classes C20/25 at minimum and C50/60 at most according to EN 206-1:2000-12. It may be anchored in cracked or non-cracked concrete.

The anchor made of galvanised steel may only be used in structures subject to dry internal conditions.

The provisions made in this European technical approval are based on an assumed working life of the anchor of 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

## **2 Characteristics of the product and methods of verification**

### **2.1 Characteristics of the product**

The anchor corresponds to the drawings and provisions given in Annex 3. The characteristic material values, dimensions and tolerances of the anchor not given in Annex 3 shall correspond to the respective values laid down in the technical documentation<sup>7</sup> of this European technical approval.

Regarding the requirements concerning safety in case of fire it is assumed that the anchor meets the requirements of class A1 in relation to reaction to fire in accordance with the stipulations of the Commission decision 96/603/EC, amended by 2000/605/EC.

The characteristic values for the design of anchorages are given in Annex 5.

The characteristic values for the design of the anchorages regarding resistance to fire are given in Annex 6. They are valid for use in a system that is required to provide a specific fire resistance class.

Each anchor is marked with the identifying mark of the manufacturing plant, the anchor identity, the hole diameter and length of the anchor according to Annex 2.

The anchor shall only be packaged and supplied as a complete unit.

---

<sup>7</sup> The technical documentation of this European technical approval is deposited at the Deutsches Institut für Bautechnik and, as far as relevant for the tasks of the approved bodies involved in the attestation of conformity procedure, is handed over to the approved bodies.

## 2.2 Methods of verification

The assessment of fitness of the anchor for the intended use in relation to the requirements for safety in use in the sense of the Essential Requirements 4 has been made in accordance with the "Guideline for European technical approval of Metal Anchors for use in concrete", Part 1 "Anchors in general" and Part 6 "Anchors for multiple use for non-structural applications".

The assessment of the anchor for the intended use in relation to the requirements for resistance to fire has been made in accordance with the Technical Report TR 020 "Evaluation of anchorages in concrete concerning resistance to fire".

In addition to the specific clauses relating to dangerous substances contained in this European technical approval, there may be other requirements applicable to the products falling within its scope (e.g. transposed European legislation and national laws, regulations and administrative provisions). In order to meet the provisions of the Construction Products Directive, these requirements need also to be complied with, when and where they apply.

## 3 Evaluation and attestation of conformity and CE marking

### 3.1 System of attestation of conformity

According to the decision 97/161/EG of the European Commission<sup>8</sup> the system 2(ii) (referred to as system 2+) of attestation of conformity applies.

This system of attestation of conformity is defined as follows:

System 2+: Declaration of conformity of the product by the manufacturer on the basis of:

- (a) Tasks for the manufacturer:
  - (1) initial type-testing of the product;
  - (2) factory production control;
  - (3) testing of samples taken at the factory in accordance with a prescribed control plan.
- (b) Tasks for the approved body:
  - (4) certification of factory production control on the basis of:
    - initial inspection of factory and of factory production control;
    - continuous surveillance, assessment and approval of factory production control.

Note: Approved bodies are also referred to as "notified bodies".

### 3.2 Responsibilities

#### 3.2.1 Tasks for the manufacturer

##### 3.2.1.1 Factory production control

The manufacturer shall exercise permanent internal control of production. All the elements, requirements and provisions adopted by the manufacturer shall be documented in a systematic manner in the form of written policies and procedures, including records of results performed. This production control system shall insure that the product is in conformity with this European technical approval.

The manufacturer may only use initial / raw / constituent materials stated in the technical documentation of this European technical approval.

---

<sup>8</sup> Official Journal of the European Communities L 67 of 03.02.1997

The factory production control shall be in accordance with the control plan which is part of the technical documentation of this European technical approval. The control plan is laid down in the context of the factory production control system operated by the manufacturer and deposited with Deutsches Institut für Bautechnik.<sup>9</sup>

The results of factory production control shall be recorded and evaluated in accordance with the provisions of the control plan.

#### 3.2.1.2 Other tasks of manufacturer

The manufacturer shall, on the basis of a contract, involve a body which is approved for the tasks referred to in section 3.1 in the field of anchors in order to undertake the actions laid down in section 3.2.2. For this purpose, the control plan referred to in sections 3.2.1.1 and 3.2.2 shall be handed over by the manufacturer to the approved body involved.

The manufacturer shall make a declaration of conformity, stating that the construction product is in conformity with the provisions of this European technical approval.

#### 3.2.2 Tasks for the approved bodies

The approved body/bodies shall perform the

- initial inspection of factory and of factory production control,
  - continuous surveillance, assessment and approval of factory production control,
- in accordance with the provisions laid down in the control plan.

The approved body shall retain the essential points of its actions referred to above and state the results obtained and conclusions drawn in a written report.

The approved certification body involved by the manufacturer shall issue an EC certificate of conformity of the factory production control stating the conformity with the provisions of this European technical approval.

In cases where the provisions of the European technical approval and its control plan are no longer fulfilled the certification body shall withdraw the certificate of conformity and inform Deutsches Institut für Bautechnik without delay.

### 3.3 CE marking

The CE marking shall be affixed on each packaging of the anchor. The letters "CE" shall be followed by the identification number of the approved certification body, where relevant, and be accompanied by the following additional information:

- the name and address of the producer (legal entity responsible for the manufacture),
- the last two digits of the year in which the CE marking was affixed,
- the number of the EC certificate for the factory production,
- the number of the European technical approval,
- the number of the guideline for European technical approval
- use category (ETAG 001-6),
- size.

---

<sup>9</sup> The control plan is a confidential part of the European technical approval and only handed over to the approved body involved in the procedure of attestation of conformity. See section 3.2.2.

## **4 Assumptions under which the fitness of the product for the intended use was favourably assessed**

### **4.1 Manufacturing**

The European technical approval is issued for the product on the basis of agreed data/information, deposited with the Deutsches Institut für Bautechnik, which identifies the product that has been assessed and judged. Changes to the product or production process, which could result in this deposited data/information being incorrect, should be notified to the Deutsches Institut für Bautechnik before the changes are introduced. Deutsches Institut für Bautechnik will decide whether or not such changes affect the approval and consequently the validity of the CE marking on the basis of the approval and if so whether further assessment or alterations to the approval shall be necessary.

### **4.2 Design of anchorages**

The fitness of the anchor for the intended use is given under the following conditions:

The anchorages are designed in accordance with the "Guideline for European technical approval of Metal Anchors for Use in Concrete", Annex C, Method A under the responsibility of an engineer experienced in anchorages and concrete work.

The anchor is to be used only for multiple use for non-structural applications, the definition of multiple use according to the Member States is given in the informative Annex 1 of ETAG 001, Part 6.

Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored.

The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports).

The design of anchorages under fire exposure has to consider the conditions given in the Technical Report TR 020 "Evaluation of anchorages in concrete concerning resistance to fire". The relevant characteristic values are given in Annex 6. The design method covers anchors with a fire attack from one side only. If the fire attack is from more than one side, the design method may be taken only, if the edge distance of the anchor is  $c \geq 300$  mm.

### **4.3 Installation of anchors**

The fitness for use of the anchor can only be assumed if the anchor is installed as follows:

- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- Use of the anchor only as supplied by the manufacturer without exchanging the components of an anchor.
- Anchor installation in accordance with the manufacturer's specifications and drawings and using the appropriate tools.
- Checks before placing the anchor to ensure that the strength class of the concrete in which the anchor is to be placed is in the range given and is not lower than that of the concrete to which the characteristic loads apply.
- Check of concrete being well compacted, e.g. without significant voids.
- Edge distances and spacing not less than the specified values without minus tolerances.
- Positioning of the drill holes without damaging the reinforcement.
- In case of aborted hole: new drilling at a minimum distance away of twice the depth of the aborted hole or smaller distance if the aborted drill hole is filled with high strength mortar and if under shear or oblique tension load it is not in the direction of load application.
- Cleaning of the drill hole.

- Anchor installation such that the effective anchorage depth is complied with. This compliance is ensured, if the thickness of fixture is not greater than the maximum thickness of fixture marked on the anchor acc. to Annex 3.
- Application of the torque moment given in Annex 3 using a calibrated torque wrench.

## **5 Indications to the manufacturer**

The manufacturer is responsible to ensure that the information on the specific conditions according to section 1 and 2 including Annexes referred to section 4.2 and 4.3 is given to those who are concerned. This information may be made by reproduction of the respective parts of the European technical approval. In addition all installation data shall be shown clearly on the package and/or on an enclosed instruction sheet, preferably using illustration(s).

The minimum data required are:



- drill bit diameter,
- maximum thickness of fixture,
- Length of the anchor,
- minimum hole depth,
- torque moment,
- information on the installation procedure, including cleaning of the hole, preferably by means of an illustration,
- reference to any special installation equipment needed,
- identification of the manufacturing batch.

All data shall be presented in a clear and explicit form.


Dipl.-Ing. Georg Feistel  
Head of division construction Engineering  
of Deutsches Institut für Bautechnik  
Berlin, 29 March 2010

*beglaubigt*  
Lange

**For multiple use for non-structural applications  
according to ETAG 001 Part 6 Annex 1**

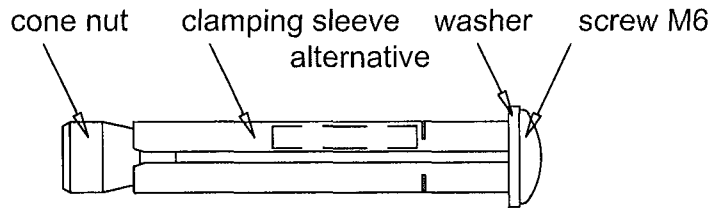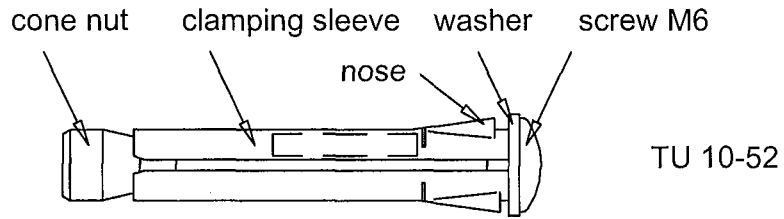

Installed anchor - fixture attached to concrete

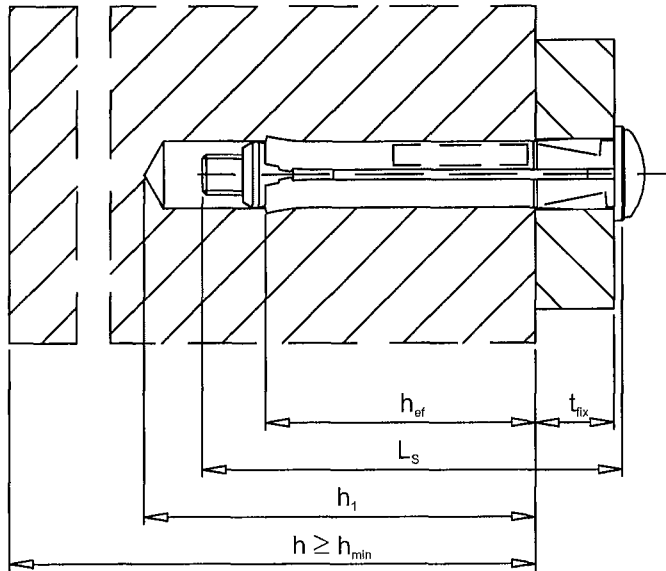

**TOGE metal frame anchor TU10**

Product and intended use


**Annex 1**

of European  
Technical Approval


**ETA-09/0238**



**For multiple use for non-structural applications  
according to ETAG 001 Part 6 Annex 1**

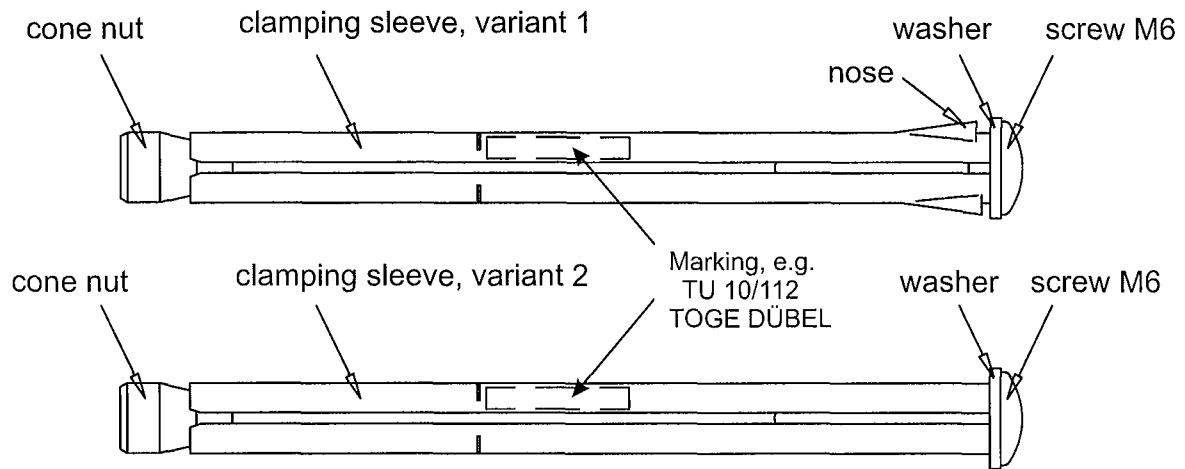

Installed Anchor - fixture mounted with distance to concrete

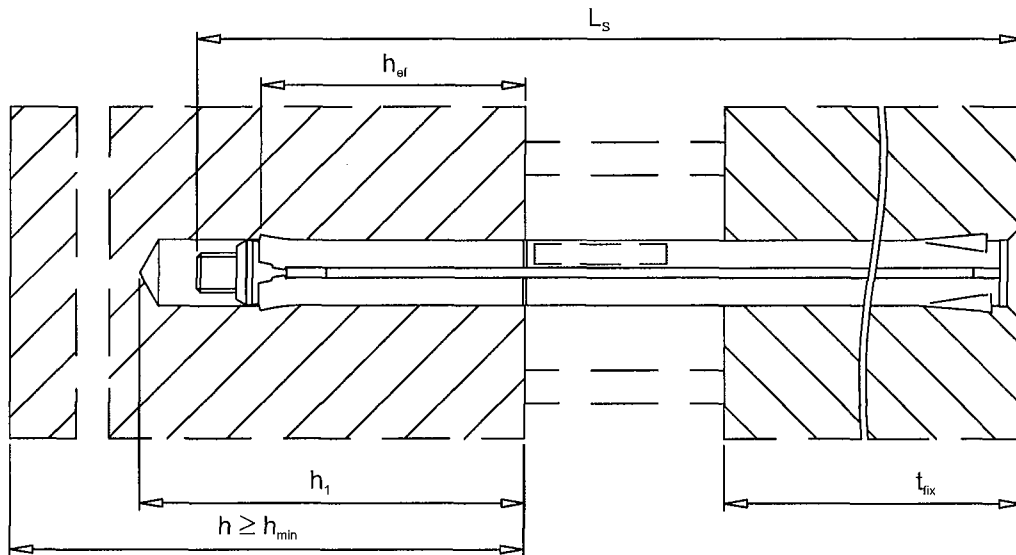


**TOGE metal frame anchor TU10**

Intended use - fixture mounted  
with distance to concrete

**Annex 2**

of European  
Technical Approval

**ETA-09/0238**

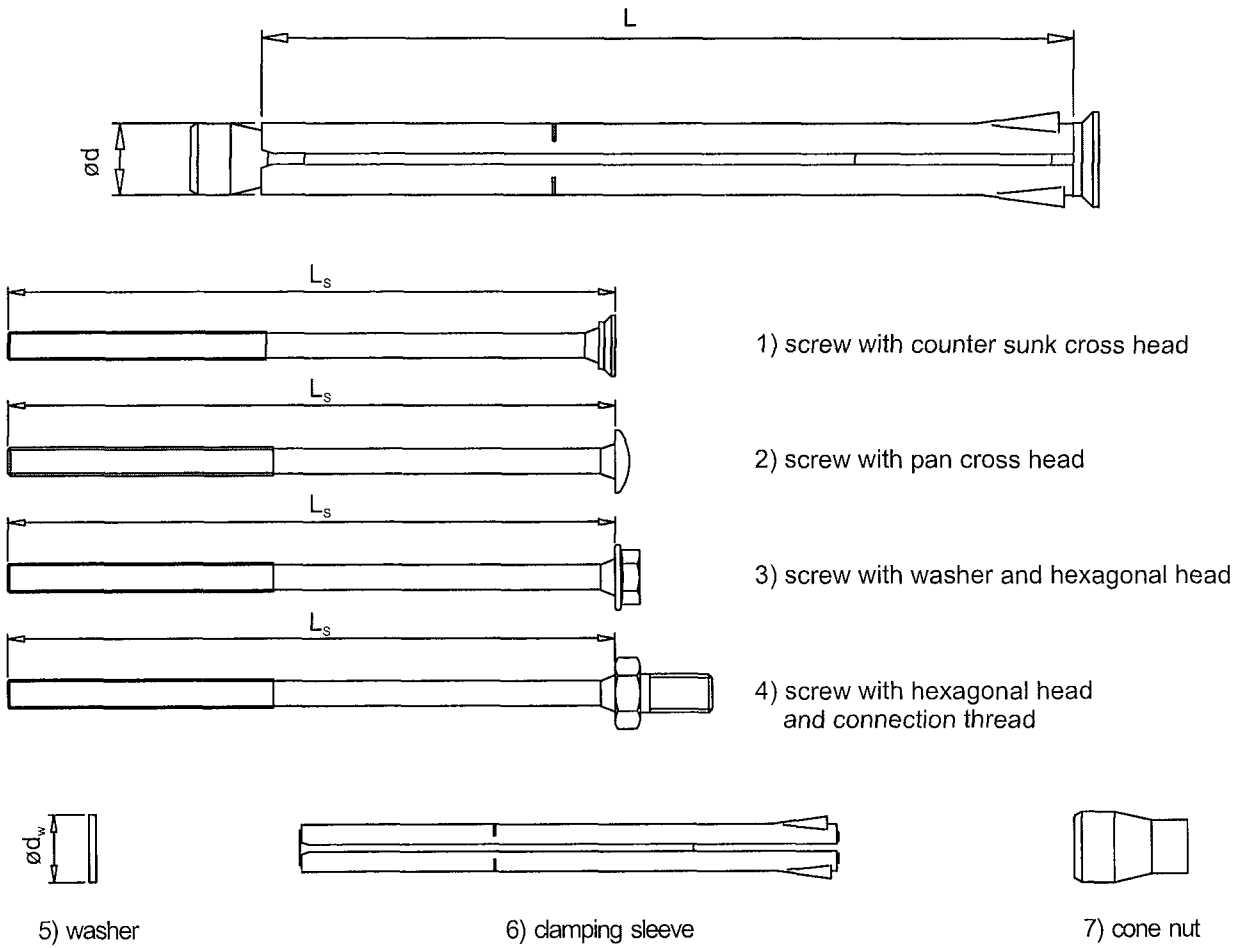

**Table 1:** Dimensions

Anchor size			TU 10
Length of sleeve	$L \geq$	[mm]	52
Diameter of sleeve	$d =$	[mm]	10
Length of screw	$L_s \geq$	[mm]	66
Diameter of washer	$d_w \geq$	[mm]	14

**Table 2:** Materials

Pos.	Item	Material
1	screw with counter sunk cross head	strength class 4.6 (DIN EN ISO 896-1; zinc coated $\geq 5 \mu\text{m}$ DIN EN ISO 4042 A2K)
2	screw with pan cross head	
3	screw with washer and hexagonal head	
4	screw with hexagonal head and connection thread min. M8	
5	washer DIN-EN-ISO-887-7-C	Steel, galv. acc. DIN ISO 4042 A2K
6	clamping sleeve	Steel acc. to EN 10327 DX51D
7	cone nut	Steel acc. to DIN 1651

**TOGE metal frame anchor TU10**

Dimension and materials

**Annex 3**


of European  
Technical Approval

**ETA-09/0238**

**Table 3:** Installation parameters

Anchor size			TU 10
Nominal drill bit diameter	$d_o$	[mm]	10
Cutting diameter of drill bit	$d_{cut}$	[mm]	10,45
Screw length	$L_s \geq$	[mm]	66
Depth of drill hole	$h_1 \geq$	[mm]	$h_{ef} + 15\text{mm}$
Diameter of clearing hole in the fixture	$d_f \geq$	[mm]	10
Torque	$T_{inst}$	[Nm]	8
Min. thickness of attachment part	$t_{fix, min} \geq$	[mm]	3
Max. Thickness of attachment part	$t_{fix, max} \leq$	[mm]	162
Embedment depth of anchor	$h_{ef}$	[mm]	40

**Installation instruction**

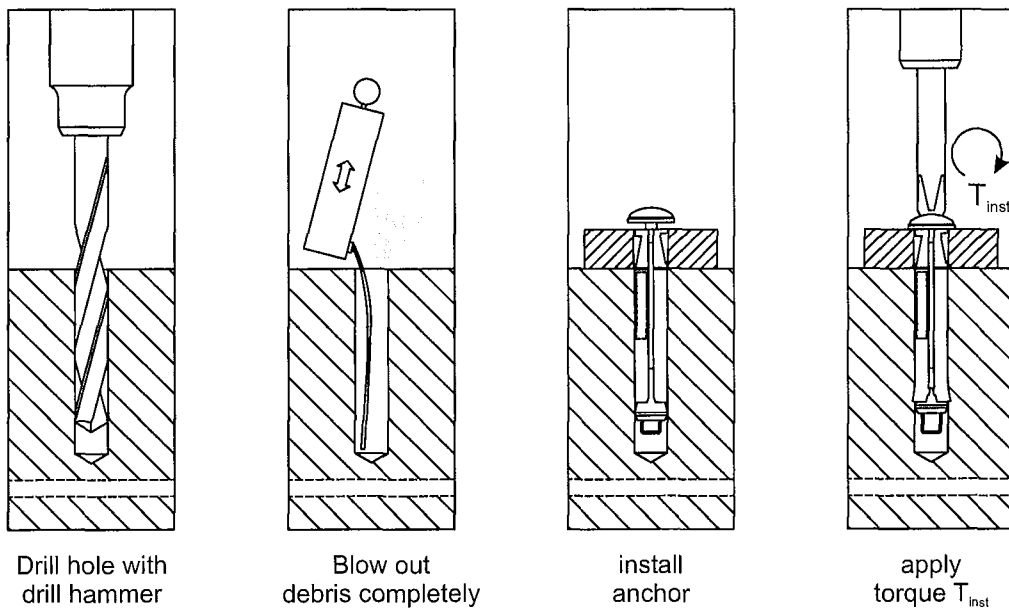

**Table 4:** Minimum thickness of member and minimum spacing and edge distance

Anchor size			TU 10
Minimum thickness of member	$h_{min}$	[mm]	100
Minimum spacing	$s_{min}$	[mm]	60
Minimum edge distance	$c_{min}$	[mm]	70

**TOGE metal frame anchor TU10**

Installation parameter  
minimum thickness of member and  
minimum spacing and edge distance

**Annex 4**

of European  
Technical Approval  
**ETA-09/0238**

**Table 5:** Design method A  
Characteristic values for tension load

Anchor size			TU 10
<b>Steel failure</b>			
Characteristic resistance	$N_{Rk,s}$	[kN]	8
Partial safety factor	$\gamma_{Ms}^{1)}$	-	2
<b>Pullout failure</b>			
Characteristic resistance in cracked or non-cracked concrete C20/25 to C50/60	$N_{Rk,p}$	[kN]	6
Partial safety factor	$\gamma_{Mp}^{1)}$	[kN]	1,5
<b>Concrete cone failure and splitting</b>			
Effective anchorage depth	$h_{ef}$	[mm]	40
Edge distance	$c_{cr,sp}$	[mm]	80
Spacing	$s_{cr,sp}$	[mm]	160
Edge distance	$c_{cr,N}$	[mm]	60
Spacing	$s_{cr,N}$	[mm]	120
Partial safety factor	$\gamma_{Mc}^{1)}$	-	1,5

<sup>1)</sup> In absence of other national regulations

<sup>2)</sup> The installation safety factor  $\gamma_2=1,0$  is included

**Table 6:** Design method A  
Characteristic values for shear load

Anchor size			TU 10
<b>Steel failure</b>			
Characteristic resistance to shear loads	$V_{Rk,s}$	[kN]	4
Characteristic bending moment	$M_{Rk,s}^0$	[Nm]	6,1
Partial safety factor	$\gamma_{Ms}^{1)}$	-	1,67
<b>Concrete pryout failure</b>			
Factor in Equation (5.6), ETAG 001 Annex C	k	[-]	1,0
<b>Concrete edge failure</b>			
Effective length of anchor	$l_f$	[mm]	40
Outside diameter of anchor	$d_{nom}$	[mm]	10
Partial safety factor	$\gamma_{Mc}^{1)2)}$	-	1,5

<sup>1)</sup> In absence of other national regulations

<sup>2)</sup> The installation safety factor  $\gamma_2$  is included

**The anchor is to be used only for multiple use for non-structural applications, the definition of multiple use according to the Member States is given in the informative Annex 1 of ETAG 001, Part 6.**

**TOGE metal frame anchor TU10**

Design Method A  
Characteristic values for tension load,  
Characteristic values for shear load

**Annex 5**

of European  
Technical Approval

**ETA-09/0238**

**Table 7:** Characteristic values under fire exposure in concrete C20/25 to C50/60 in any load direction without lever arm

fire resistance class	TOGE metal frame anchor		TU 10
R 30	Characteristic resistance	$F_{Rk,fi}^0$ <sup>2)</sup> [kN]	0,20
R 60	Characteristic resistance	$F_{Rk,fi}^0$ <sup>2)</sup> [kN]	0,18
R 90	Characteristic resistance	$F_{Rk,fi}^0$ <sup>2)</sup> [kN]	0,14
R 120	Characteristic resistance	$F_{Rk,fi}^0$ <sup>2)</sup> [kN]	0,10
R 30 to R 120	Spacing	$s_{gr,fi}$ [mm]	120
	Edge distance <sup>1)</sup>	$c_{er,fi}$ [mm]	60

<sup>1)</sup> In case of fire attack from more than one side, the edge distance shall be  $\geq 300$  mm

<sup>2)</sup> In absence of other national regulations the partial safety factor for resistance under fire exposure  $\gamma_{M,fi} = 1,0$  is recommended.

**TOGE metal frame anchor TU10**

Characteristic values under fire exposure

**Annex 6**

of European  
Technical Approval

**ETA-09/0238**