



Approval body for construction products and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and Laender Governments



European Technical Assessment

ETA-14/0065 of 27 June 2014

General Part

Technical Assessment Body issuing the European Technical Assessment:

Trade name of the construction product

Product family to which the construction product belongs

Manufacturer

Manufacturing plant

This European Technical Assessment contains

This European Technical Assessment is issued in accordance with Regulation (EU) No 305/2011, on the basis of

Deutsches Institut für Bautechnik

Scell-It Injection system X-MAX for rebar connection

Post-installed rebar connection with Scell-It Injection System X-MAX

SCELL-IT 28 Rue Paul Dubrule 59854 LESQUIN FRANKREICH

Scell-It Plant 1, Germany

15 pages including 3 annexes which form an integral part of this assessment

Guideline for European technical approval of "Metal anchors for use in concrete", ETAG 001 Part 5: "Bonded anchors", April 2013,

used as European Assessment Document (EAD) according to Article 66 Paragraph 3 of Regulation (EU) No 305/2011.



European Technical Assessment ETA-14/0065

Page 2 of 15 | 27 June 2014

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction has to be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission according to Article 25 Paragraph 3 of Regulation (EU) No 305/2011.

Z39973.14 8.06.01-48/14



European Technical Assessment ETA-14/0065

Page 3 of 15 | 27 June 2014

Specific Part

1 Technical description of the product

The subject of this European Technical Assessment is the post-installed connection, by anchoring or overlap connection joint, of reinforcing bars (rebars) in existing structures made of normal weight concrete, using the "Scell-It Injection System X-MAX for rebar connection" in accordance with the regulations for reinforced concrete construction.

Reinforcing bars made of steel with a diameter ϕ from 8 to 25 mm and injection mortar X-MAX are used for rebar connections. The reinforcing bar is placed into a drilled hole filled with injection mortar and is anchored via the bond between embedded element, injection mortar and concrete.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the rebar connection is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the rebar connection of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance	
Design values of the ultimate bond resistance	See Annex C 1	

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Rebar connections satisfy requirements for Class A1
Resistance to fire	No performance determined (NPD)

3.3 Hygiene, health and the environment (BWR 3)

Regarding dangerous substances there may be requirements (e.g. transposed European legislation and national laws, regulations and administrative provisions) applicable to the products falling within the scope of this European Technical Assessment. In order to meet the provisions of Regulation (EU) No 305/2011, these requirements need also to be complied with, when and where they apply.

Z39973.14 8.06.01-48/14



European Technical Assessment ETA-14/0065

Page 4 of 15 | 27 June 2014

3.4 Safety in use (BWR 4)

The essential characteristics regarding Safety in use are included under the Basic Works Requirement Mechanical resistance and stability.

3.5 Protection against noise (BWR 5)

Not applicable.

3.6 Energy economy and heat retention (BWR 6)

Not applicable.

3.7 Sustainable use of natural resources (BWR 7)

The sustainable use of natural resources was not investigated.

3.8 General aspects

The verification of durability is part of testing the essential characteristics. Durability is only ensured if the specifications of intended use according to Annex B are taken into account.

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

According to Decision of the Commission of 24 June 1996 (96/582/EC) (OJ L 254 of 08.10.96 p. 62-65), the system of assessment and verification of constancy of performance (see Annex V and Article 65 Paragraph 2 to Regulation (EU) No 305/2011) given in the following table applies.

Product Intended use		Level or class	System
Metal anchors for use in concrete (heavy-duty type)	For fixing and/or supporting concrete structural elements or heavy units such as cladding and suspended ceilings	_	1

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Dcoument

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.

Issued in Berlin on 27 June 2014 by Deutsches Institut für Bautechnik

Dr.-Ing Karsten Kathage Vice-President

Beglaubigt:
Baderschneider

Z39973.14 8.06.01-48/14



Figure A1: Overlapping joint for rebar connections of slabs and beams




Figure A3: End anchoring of slabs or beams (e.g. designed as simply supported)




Figure A2: Overlapping joint at a foundation of a wall or column where the rebars are stressed in tension




Figure A4: Rebar connection for components stressed primarily in compression. The rebars sre stressed in compression





Figure A5: Anchoring of reinforcemend to cover the line of acting tensile force



Note to Figure A1 to A5:

In the Figures no transverse reinforcement is plotted, the transverse reinforcement shall comply with EN 1992-1-1:2004+AC:2010.

Preparing of joints according to Annex B 2

Scell-It Injection System X-MAX for rebar connection Product description Installed condition and examples of use for rebars Annex A 1



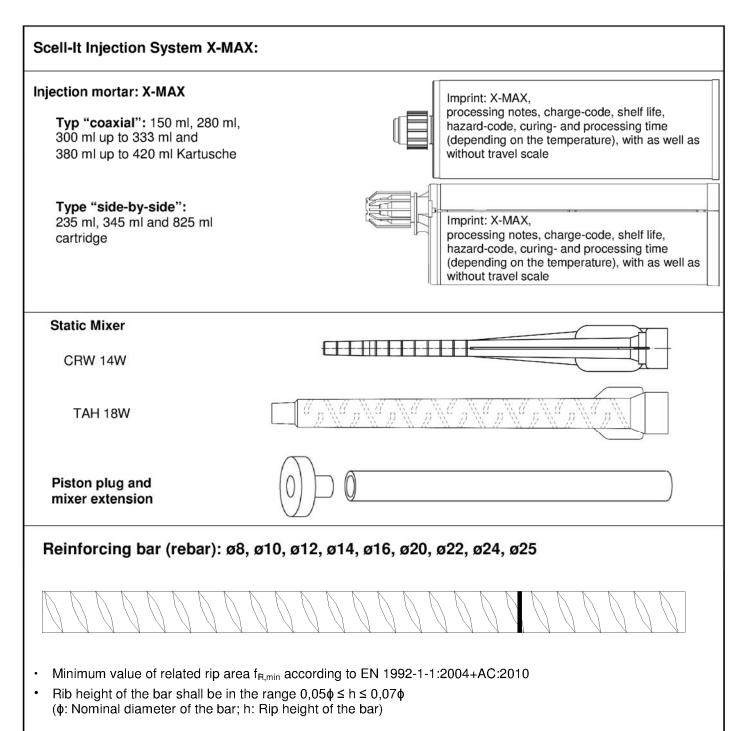


Table A1: Materials

Designation	Material	
	Bars and de-coiled rods class B or C f_{yk} and k according to NDP or NCL of EN 1992-1-1/NA:2013 $f_{uk} = f_{tk} = k \cdot f_{yk}$	

Scell-It Injection System X-MAX for rebar connection	
Product description	Annex A 2
Injection mortar / Static mixer / Rebar	
Materials	



Specifications of intended use

Anchorages subject to:

· Static and quasi-static loads.

Base materials:

- Reinforced or unreinforced normal weight concrete according to EN 206-1:2000.
- Strength classes C12/15 to C50/60 according to EN 206-1:2000.
- Maximum chloride concrete of 0,40% (CL 0.40) related to the cement content according to EN 206-1:2000.
- Non-carbonated concrete.

Note: In case of a carbonated surface of the existing concrete structure the carbonated layer shall be removed in the area of the post-installed rebar connection with a diameter of ϕ + 60 mm prior to the installation of the new rebar

The depth of concrete to be removed shall correspond to at least the minimum concrete cover in accordance with EN 1992-1-1:2004+AC:2010.

The foregoing may be neglected if building components are new and not carbonated and if building components are in dry conditions.

Temperature Range:

- 40°C to +80°C (max. short term temperature +80°C and max long term temperature +50°C).

Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the forces to be transmitted.
- Design according to EN 1992-1-1:2004+AC:2010 and Annex B 2.
- The actual position of the reinforcement in the existing structure shall be determined on the basis of the construction documentation and taken into account when designing.

Installation:


- Dry or wet concrete.
- It must not be installed in flooded holes.
- · Hole drilling by hammer drill or compressed air drill mode.
- The installation of post-installed rebar shall be done only by suitable trained installer and under supervision on site; the conditions under which an installer may be considered as suitable trained and the conditions for supervision on site are up to the Member States in which the installation is done.
- Check the position of the existing rebars (if the position of existing rebars is not known, it shall be determined using a rebar detector suitable for this purpose as well as on the basis of the construction documentation and then marked on the building component for the overlap joint).

Scell-It Injection System X-MAX for rebar connection	
Intended use Specifications	Annex B 1



Figure B1: General construction rules for post-installed rebars

- · Only tension forces in the axis of the rebar may be transmitted
- The transfer of shear forces between new concrete and existing structure shall be designed additionally according to EN 1992-1-1:2004+AC:2010.
- The joints for concreting must be roughened to at least such an extent that aggregate protrude.

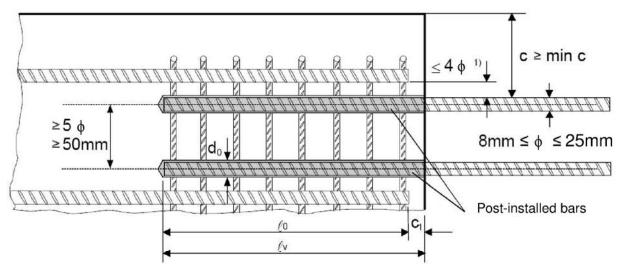

If the clear distance between lapped bars exceeds 4φ, then the lap length shall be increased by the difference between the clear bar distance and 4φ.

The following applies to Figure B1:

c concrete cover of post-installed rebar concrete cover at end-face of existing rebar

min c minimum concrete cover according to Table B1 and to EN 1992-1-1:2004+AC:2010, Section 4.4.1.2

diameter of post-installed rebar


 ℓ_0 lap length, according to EN 1992-1-1:2004+AC:2010, Section 8.7.3

 $\begin{array}{ll} \ell_{\nu} & & \text{effective embedment depth,} \geq \ell_{0} + c_{1} \\ d_{0} & & \text{nominal drill bit diameter, see Annex B 6} \end{array}$

Scell-It Injection System X-MAX for rebar connection	
Intended use General construction rules for post-installed rebars	Annex B 2



Table B1: Minimum concrete cover min c¹⁾ of post-installed rebar depending of drilling method



Drilling method	Rebar diameter	Without drilling aid	With drilling aid
Hammer drilling (HD)	< 25 mm	$30 \text{ mm} + 0.06 \cdot \ell_{v} \ge 2 \phi$	$30 \text{ mm} + 0.02 \cdot \ell_{v} \ge 2 \phi$
Hammer drilling (HD)	= 25 mm	$40 \text{ mm} + 0.06 \cdot \ell_{\text{v}} \ge 2 \phi$	$40 \text{ mm} + 0.02 \cdot \ell_{\text{v}} \ge 2 \phi$
Compressed air drilling (CD)	< 25 mm	50 mm + 0,08 · ℓ _v	50 mm + 0,02 · ℓ _v
Compressed air drilling (CD)	= 25 mm	60 mm + 0,08 · ℓ _v	60 mm + 0,02 · ℓ _v

see Annexes B2, Figures B1
Comments: The minimum concrete cover acc. EN 1992-1-1:2004+AC:2010 must be observed

Table B2: maximum embedment depth $\ell_{v,max}$

Rebar	
Øφ	$\ell_{v,max}$ [mm]
8 mm	1000
10 mm	1000
12 mm	1200
14 mm	1400
16 mm	1600
20 mm	2000
22 mm	2000
24 mm	2000
25 mm	2000

Table B3: Base material temperature, gelling time and curing time

Concrete temperature		mperature	Gelling- / working time ¹⁾	Minimum curing time in dry concrete ⁵⁾
			t _{gel}	t _{cure,dry}
-10°C	bis	-6°C	90 min ²⁾	24 h
-5°C	bis	-1°C	90 min ³⁾	14 h
0°C	bis	+4°C	45 min ³⁾	7 h
+5°C	bis	+9°C	25 min ³⁾	2 h
+10°C	bis	+19°C	15 min ³⁾	80 min
+20°C	bis	+24°C	6 min ³⁾	45 min
+25°C	bis	+29°C	4 min ³⁾	25 min
+30°C	bis	+40°C	2,5 min ⁴⁾	15 min

¹⁾ t_{gel}: maximum time from starting of mortar injection to completing of rebar setting.

 $^{^{\}rm 5)}$ In wet concrete the curing time $t_{\rm cure,dry}$ has to be doubled up

Scell-It Injection System X-MAX for rebar connection	
Intended use Minimum concrete cover Maximum embedment depth / working time and curing times	Annex B 3

²⁾ Cartridge temperature <u>must</u> be at minimum +15°C

³⁾ Cartridge temperature must be between +5°C and +25°C

⁴⁾ Cartridge temperature must be below +20°C






Table B4: Dispensing tools

Cartridge type/size	Har	Pneumatic tool	
Coaxial cartridges 150, 280, 300 up to 333 ml			
	e.g. Type H	I 297 or H244C	e.g. Type TS 492 X
Coaxial cartridges 380 up to 420 ml		The state of the s	
	e.g. Type CCM 380/10	e.g. Type H 285 or H244C	e.g. Type TS 485 LX
Side-by-side cartridges 235, 345 ml		R	
	e.g. Type CBM 330A	e.g. Type H 260	e.g. Type TS 477 LX
Side-by-side cartridge 825 ml	-	-	
			e.g. Type TS 498X

All cartridges could also be extruded by a battery tool.

Scell-It Injection System X-MAX for rebar connection	
Intended Use Dispensing tools	Annex B 4

A) Bore hole drilling









Hammer drill (HD)

Compressed air drill (CD)

Rebar - Ø	Drill - Ø		
ф	[mm]		
8 mm	12		
10 mm	14		
12 mm	16		
14 mm	18		
16 mm	20		
20 mm	25		
22 mm	28		
24 mm	32		
25 mm	32		


B) Bore hole cleaning






2a. Starting from the bottom or back of the bore hole, blow the hole clean with compressed air (min. 6 bar) or a hand pump a minimum of four times. If the bore hole ground is not reached an extension shall be used.

For bore holes deeper then 240 mm, compressed air (min. 6 bar) must be used.




2b. Check brush diameter (Table B5) and attach the brush to a drilling machine or a battery screwdriver. Brush the hole with an appropriate sized wire brush > d_{b.min} (Table B5) a minimum of four times.

If the bore hole ground is not reached with the brush, a brush extension shall be used.



Electronic copy of the ETA by DIBt: ETA-14/0065

2c. Finally blow the hole clean again with compressed air (min. 6 bar) or a hand pump a minimum of four times. If the bore hole ground is not reached an extension shall be used.



For bore holes deeper than 240 mm, compressed air (min. 6 bar) must be used.

Scell-It Injection System X-MAX	X for rebar connection
---------------------------------	------------------------


Intended Use

Installation instruction: Bore hole drilling and


Bore hole cleaning

Annex B 5



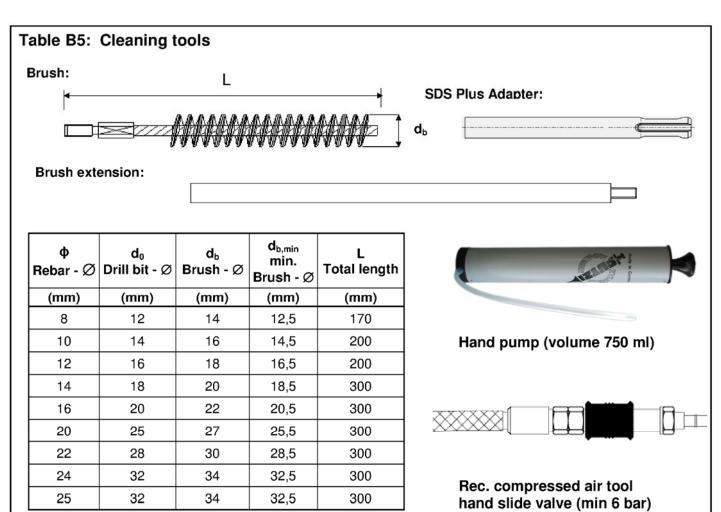


C) Preparation of bar and cartridge




3. Attach the supplied static-mixing nozzle to the cartridge and load the cartridge into the correct dispensing tool.

For every working interruption longer than the recommended working time (Table B3) as well as for every new cartridges, a new static-mixer shall be used.



4. Prior to inserting the reinforcing bar into the filled bore hole, the position of the embedment depth shall be marked (e.g. with tape) on the reinforcing bar and insert bar in empty hole to verify hole and depth ℓ_v .

The anchor should be free of dirt, grease, oil or other foreign material.




5. Prior to dispensing into the anchor hole, squeeze out separately the mortar until it shows a consistent grey colour, but a minimum of three full strokes, and discard non-uniformly mixed adhesive components.


Scell-It Injection System X-MAX for rebar connection	
Intended Use Installation instruction: Cleaning tools and Preparation of bar and cartridge	Annex B 6



D) Filling the bore hole



6. Starting from the bottom or back of the cleaned anchor hole fill the hole up to approximately two-thirds with adhesive. Slowly withdraw the static mixing nozzle as the hole fills to avoid creating air pockets. For embedment larger than 190 mm an extension nozzle shall be used.




For overhead and horizontal installation and bore holes deeper than 240 mm a piston plug and the appropriate mixer extension must be used.

Observe the gel-/ working times given in Table B3.

Table B6: Piston plugs, max anchorage depth and mixer extension

		rill		Cartridge: All sizes			Cartridge: side-by-side (825 ml)			
Bar size	bit	-Ø	Piston plug	Hand or battery tool Pneumatic tool		Hand or nationy tool Pholimatic tool I		Pneuma	Pneumatic tool	
ф	HD	PD	, piag	I _{v,max}	Mixer extension	I _{v,max}	I _{v,max} Mixer extension		Mixer extension	
(mm)	(m	m)	No.	(cm)		(cm)		(cm)		
8	12	-	-			80		80	VI 10/0.75	
10	14	-	#14					100	VL 10/0,75	
12	1	6	#16	70	70	1.0	100		120	
14	1	8	#18		VL 10/0,75	100		140		
16	2	:0	#20				VL 10/0,75	160		
20	25	26	#25]	70			VL 16/1,8	
22	2	8	#28	Ε0		70	70	000		
24	3	2	#32	50		F0		200		
25	3	2	#32			50				



Injection tool must be marked by mortar level mark $\ell_{\rm m}$ and anchorage depth $\ell_{\rm v}$ resp. $\ell_{\rm e,ges}$ with tape or marker.

Quick estimation: $\ell_m = 1/3 \cdot \ell_v$


Continue injection until the mortar level mark $\ell_{\rm m}$ becomes visible.

Optimum mortar volume: $\ell_{m} = \ell_{v} \text{ resp. } \ell_{e,ges} \cdot \left(1,2 \cdot \frac{\phi^{2}}{d_{0}^{2}} - 0,2\right) \text{ [mm]}$

Scell-It Injection System X-MAX for rebar connection	
Intended Use Installation instruction: Filling the bore hole	Annex B 7




E) Inserting the rebar




Push the reinforcing bar into the anchor hole while turning slightly to ensure positive distribution of the adhesive until the embedment depth is reached.

The bar should be free of dirt, grease, oil or other foreign material.



8. Be sure that the bar is inserted in the bore hole until the embedment mark is at the concrete surface and that excess mortar is visible at the top of the hole. If these requirements are not maintained, the application has to be renewed. For overhead installation fix embedded part (e.g. wedges).



9. Observe gelling time $t_{\rm gel}$. Attend that the gelling time can vary according to the base material temperature (see Table B3). It is not allowed to move the bar after geling time $t_{\rm gel}$ has elapsed.

Allow the adhesive to cure to the specified time prior to applying any load. Do not move or load the bar until it is fully cured (attend Table B3). After full curing time \mathbf{t}_{cure} has elapsed, the add-on part can be installed.

Scell-It Injection System X-MAX for rebar connection

Intended Use
Installation instruction: Inserting rebar

Annex B 8



Minimum anchorage length and minimum lap length

The minimum anchorage length $\ell_{b,min}$ and the minimum lap length $\ell_{0,min}$ according to EN 1992-1-1:2004+AC:2010 $\ell_{b,min}$ acc. to Eq. 8.6 and Eq. 8.7 and $\ell_{0,min}$ acc. to Eq. 8.11) shall be multiply by a factor according to Table C1.

Table C1: Factor related to concrete class and drilling method

Concrete class	Drilling method	Factor
C12/15 to C50/60	Hammer drilling and compressed air drilling	1,0

Table C2: Design values of the ultimate bond resistance f_{bd} in N/mm² for all drilling methods for good conditions

according to EN 1992-1-1:2004+AC:2010 for good bond conditions (for all other bond conditions multiply the values by 0.7)

Rebar - Ø	Concrete class								
ф	C12/15	C16/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60
8 to 25 mm	1,6	2,0	2,3	2,7	3,0	3,4	3,7	4,0	4,3

Scell-It Injection System X-MAX for rebar connection	
Performances Minimum anchorage length and minimum lap length	Annex C 1
Design values of ultimate bond resistance f _{bd}	