



European Technical Approval ETA-11/0095

English translation prepared by DIBt - Original version in German language

Handelsbezeichnung
Trade name

fischer Betonschraube FBS, FBS A4 und FBS C
fischer Concrete screw FBS, FBS A4 and FBS C

Zulassungsinhaber
Holder of approval

fischerwerke GmbH & Co. KG
Weinhalde 14-18
72178 Waldachtal
DEUTSCHLAND

Zulassungsgegenstand
und Verwendungszweck
*Generic type and use
of construction product*

Betonschraube aus galvanisch verzinktem und nichtrostendem Stahl in
den Größen 8, 10, 12 und 14 zur Verankerung im Beton
*fischer concrete screw made of galvanised steel and stainless steel of
sizes 8, 10, 12 and 14 for use in concrete*

Geltungsdauer:
Validity: vom
from
bis
to

12 May 2011
18 February 2016

Herstellwerk
Manufacturing plant

fischerwerke

Diese Zulassung umfasst
This Approval contains

14 Seiten einschließlich 6 Anhänge
14 pages including 6 annexes

I LEGAL BASES AND GENERAL CONDITIONS

- 1 This European technical approval is issued by Deutsches Institut für Bautechnik in accordance with:
 - Council Directive 89/106/EEC of 21 December 1988 on the approximation of laws, regulations and administrative provisions of Member States relating to construction products¹, modified by Council Directive 93/68/EEC² and Regulation (EC) N° 1882/2003 of the European Parliament and of the Council³;
 - Gesetz über das In-Verkehr-Bringen von und den freien Warenverkehr mit Bauprodukten zur Umsetzung der Richtlinie 89/106/EWG des Rates vom 21. Dezember 1988 zur Angleichung der Rechts- und Verwaltungsvorschriften der Mitgliedstaaten über Bauprodukte und anderer Rechtsakte der Europäischen Gemeinschaften (Bauproduktengesetz - BauPG) vom 28. April 1998⁴, as amended by law of 31 October 2006⁵;
 - Common Procedural Rules for Requesting, Preparing and the Granting of European technical approvals set out in the Annex to Commission Decision 94/23/EC⁶;
 - Guideline for European technical approval of "Metal anchors for use in concrete - Part 3: Undercut anchors", ETAG 001-03.
- 2 Deutsches Institut für Bautechnik is authorized to check whether the provisions of this European technical approval are met. Checking may take place in the manufacturing plant. Nevertheless, the responsibility for the conformity of the products to the European technical approval and for their fitness for the intended use remains with the holder of the European technical approval.
- 3 This European technical approval is not to be transferred to manufacturers or agents of manufacturers other than those indicated on page 1, or manufacturing plants other than those indicated on page 1 of this European technical approval.
- 4 This European technical approval may be withdrawn by Deutsches Institut für Bautechnik, in particular pursuant to information by the Commission according to Article 5(1) of Council Directive 89/106/EEC.
- 5 Reproduction of this European technical approval including transmission by electronic means shall be in full. However, partial reproduction can be made with the written consent of Deutsches Institut für Bautechnik. In this case partial reproduction has to be designated as such. Texts and drawings of advertising brochures shall not contradict or misuse the European technical approval.
- 6 The European technical approval is issued by the approval body in its official language. This version corresponds fully to the version circulated within EOTA. Translations into other languages have to be designated as such.

¹ Official Journal of the European Communities L 40, 11 February 1989, p. 12
² Official Journal of the European Communities L 220, 30 August 1993, p. 1
³ Official Journal of the European Union L 284, 31 October 2003, p. 25
⁴ *Bundesgesetzblatt Teil I* 1998, p. 812
⁵ *Bundesgesetzblatt Teil I* 2006, p. 2407, 2416
⁶ Official Journal of the European Communities L 17, 20 January 1994, p. 34

II SPECIFIC CONDITIONS OF THE EUROPEAN TECHNICAL APPROVAL

1 Definition of product and intended use

1.1 Definition of the construction product

The fischer Concrete screw FBS is an anchor made of zinc-plated steel respectively steel with zinc flake coating (designated as FBS) or stainless steel (designated as FBS A4) or high corrosion resistant steel (designated as FBS C) of sizes 8, 10, 12 and 14. The anchor is screwed into a predrilled cylindrical drill hole. The special thread of the anchor cuts an internal thread into the member while setting. The anchorage is characterised by mechanical interlock in the special thread.

An illustration of the product and intended use is given in Annex 1.

1.2 Intended use

The anchor is intended to be used for anchorages for which requirements for mechanical resistance and stability and safety in use in the sense of the Essential Requirements 1 and 4 of Council Directive 89/106 EEC shall be fulfilled and failure of anchorages made with these products would cause risk to human life and/or lead to considerable economic consequences.

The anchor may be used for anchorages with requirements related to resistance to fire.

The anchor is to be used only for anchorages subject to static or quasi-static loading in reinforced or unreinforced normal weight concrete of strength classes C20/25 at minimum and C50/60 at most according to EN 206:2000-12.

The anchor may be anchored in cracked and non-cracked concrete.

Anchor made of zinc-plated steel respectively made of steel with zinc flake coating:

The fischer Concrete screw FBS may only be used in structures subject to dry internal conditions.

Anchor made of stainless steel:

The fischer Concrete screw FBS A4 may be used in structures subject to dry internal conditions and also in structures subject to external atmospheric exposure (including industrial and marine environment), or exposure in permanently damp internal conditions, if no particular aggressive conditions exist. Such particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used).

Anchor made of high corrosion resistant steel:

The fischer Concrete screw FBS C may be used in structures subject to dry internal conditions and also in structures subject to external atmospheric exposure, in permanently damp internal conditions or in other particular aggressive conditions. Such particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used).

The provisions made in this European technical approval are based on an assumed working life of the anchor of 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

2 Characteristics of the product and methods of verification

2.1 Characteristics of product

The anchor corresponds to the drawings and information given in Annex 2. The characteristic material values, dimensions and tolerances of the anchor not indicated in Annex 2 shall correspond to the respective values laid down in the technical documentation⁷ of this European technical approval.

Regarding the requirements concerning safety in case of fire it is assumed that the Fischer Concrete Screw FBS meets the requirements of class A1 in relation to reaction to fire in accordance with the stipulations of the Commission decision 96/603/EC, amended by 2000/605/EC.

The characteristic values for the design of the anchorages are given in Annexes 4 and 5.

The characteristic values for the design of the anchorages regarding resistance to fire are given in Annex 6. They are valid for use in a system that is required to provide a specific fire resistance class.

Each anchor shall be marked with the identifying mark of the producer, the anchor type, the diameter and the length of the anchor according to Annex 2.

The anchor shall only be packaged and supplied as a complete unit.

2.2 Methods of verification

The assessment of fitness of the anchor for the intended use in relation to the requirements for mechanical resistance and stability and safety in use in the sense of the Essential Requirements 1 and 4 has been made in accordance with the "Guideline for European technical approval of Metal Anchors for Use in Concrete", Part 1 "Anchors in general" and Part 3 "Undercut anchors", on the basis of Option 1.

The assessment of the anchor for the intended use in relation to the requirements for resistance to fire has been made in accordance with the Technical Report TR 020 "Evaluation of anchorages in concrete concerning resistance to fire".

In addition to the specific clauses relating to dangerous substances contained in this European technical approval, there may be other requirements applicable to the products falling within its scope (e.g. transposed European legislation and national laws, regulations and administrative provisions). In order to meet the provisions of the Construction Products Directive, these requirements need also to be complied with, when and where they apply.

⁷

The technical documentation of this European technical approval is deposited at the Deutsches Institut für Bautechnik and, as far as relevant for the tasks of the approved bodies involved in the attestation of conformity procedure, is handed over to the approved bodies.

3 Evaluation and attestation of conformity and CE marking

3.1 System of attestation of conformity

According to the decision 96/582/EG of the European Commission⁸ the system 2(i) (referred to as system 1) of attestation of conformity applies.

This system of attestation of conformity is defined as follows:

System 1: Certification of the conformity of the product by an approved certification body on the basis of:

- (a) Tasks for the manufacturer:
 - (1) factory production control;
 - (2) further testing of samples taken at the factory by the manufacturer in accordance with a prescribed control plan;
- (b) Tasks for the approved body:
 - (3) initial type-testing of the product;
 - (4) initial inspection of factory and of factory production control;
 - (5) continuous surveillance, assessment and approval of factory production control.

Note: Approved bodies are also referred to as "notified bodies".

3.2 Responsibilities

3.2.1 Tasks of the manufacturer

3.2.1.1 Factory production control

The manufacturer shall exercise permanent internal control of production. All the elements, requirements and provisions adopted by the manufacturer shall be documented in a systematic manner in the form of written policies and procedures, including records of results performed. This production control system shall insure that the product is in conformity with this European technical approval.

The manufacturer may only use initial / raw / constituent materials stated in the technical documentation of this European technical approval.

The factory production control shall be in accordance with the control plan which is part of the technical documentation of this European technical approval. The control plan is laid down in the context of the factory production control system operated by the manufacturer and deposited at Deutsches Institut für Bautechnik.⁹

The results of factory production control shall be recorded and evaluated in accordance with the provisions of the control plan.

3.2.1.2 Other tasks of manufacturer

The manufacturer shall, on the basis of a contract, involve a body which is approved for the tasks referred to in section 3.1 in the field of anchors in order to undertake the actions laid down in section 3.2.2. For this purpose, the control plan referred to in sections 3.2.1.1 and 3.2.2 shall be handed over by the manufacturer to the approved body involved.

The manufacturer shall make a declaration of conformity, stating that the construction product is in conformity with the provisions of this European technical approval.

⁸ Official Journal of the European Communities L 254 of 08.10.1996.

⁹ The control plan is a confidential part of the documentation of the European technical approval, but not published together with the European technical approval and only handed over to the approved body involved in the procedure of attestation of conformity.
See section 3.2.2.

3.2.2 Tasks of approved bodies

The approved body shall perform the

- initial inspection of factory and of factory production control,
 - continuous surveillance, assessment and approval of factory production control,
- in accordance with the provisions laid down in the control plan.

The approved body shall retain the essential points of its actions referred to above and state the results obtained and conclusions drawn in a written report.

The approved certification body involved by the manufacturer shall issue an EC certificate of conformity of the factory production control stating the conformity with the factory production control of this European technical approval.

In cases where the provisions of the European technical approval and its control plan are no longer fulfilled the certification body shall withdraw the certificate of conformity and inform Deutsches Institut für Bautechnik without delay.

3.3 CE marking

The CE marking shall be affixed on each packaging of the anchors. The letters "CE" shall be followed by the identification number of the approved certification body, where relevant, and be accompanied by the following additional information:

- the name and address of the holder of the approval (legal entity responsible for the manufacturer),
- the last two digits of the year in which the CE marking was affixed,
- the number of the EC certificate for the factory production control,
- the number of the European technical approval,
- the number of the guideline for European technical approval,
- use category (ETAG 001-1, Option 1),
- size.

4 Assumptions under which the fitness of the product for the intended use was favourably assessed

4.1 Manufacturing

The European technical approval is issued for the product on the basis of agreed data/information, deposited with Deutsches Institut für Bautechnik, which identifies the product that has been assessed and judged. Changes to the product or production process, which could result in this deposited data/information being incorrect, should be notified to Deutsches Institut für Bautechnik before the changes are introduced. Deutsches Institut für Bautechnik will decide whether or not such changes affect the European technical approval and consequently the validity of the CE marking on the basis of the European technical approval and if so whether further assessment or alterations to the European technical approval shall be necessary.

4.2 Design of anchorages

The fitness of the anchor for the intended use is given under the following conditions:

The anchorages are designed in accordance with the "Guideline for European technical approval of Metal Anchors for Use in Concrete", Annex C, Method A under the responsibility of an engineer experienced in anchorages and concrete work.

Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored.

The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, in cracked or non-cracked concrete, etc.).

The design of anchorages under fire exposure has to consider the conditions given in the Technical Report TR 020 "Evaluation of anchorages in concrete concerning resistance to fire". The relevant characteristic values are given in Annex 6, Table 8 and 9. The design method covers anchors with a fire attack from one side only. If the fire attack is from more than one side, the design method may be taken only, if the edge distance of the anchor is $c \geq 300$ mm.

4.3 Installation of anchors

The fitness for use of the anchor can only be assumed if the following conditions of installation are met:

- Anchor installation carried out by appropriately qualified personnel under the supervision of the person responsible for technical matters on site,
- Use of the anchor only as supplied by the manufacturer,
- Anchor installation in accordance with the manufacturer's specifications and drawings,
- Checks before placing the anchor, to ensure that the characteristic values of the base material in which the anchor is to be placed, is identical with the values, which the characteristic loads apply,
- Check of the concrete being well compacted, e.g. without significant voids,
- Edge distances and spacings not less than the specified values without minus tolerances,
- Placing drill holes without damaging the reinforcement,
- In case of aborted hole: new drilling at a minimum distance away of twice the depth of the aborted hole or smaller distance if the aborted hole is filled with high strength mortar and if under shear or oblique tension load it is not the direction of the load application,
- Cleaning of the hole of drilling dust according to Annex 3,
- Anchor installation such that the embedment depth of the anchor in the concrete is not smaller than the value h_{nom} given in Annex 3, Table 2,
- Further turning of the anchor is not easy,
- The head of the anchor is fully supported on the fixture and is not damaged,
- The anchor may only be used once.

5 Responsibility of the manufacturer

The manufacturer is responsible to ensure that the information on the specific conditions according to 1 and 2 including Annexes referred to as well as sections 4.2 and 4.3 is given to those who are concerned. This information may be made by reproduction of the respective parts of the European technical approval. In addition, all installation data shall be shown clearly on the packaging and/or on an enclosed instruction sheet, preferably using illustrations.



The minimum data required are:

- Drill bit diameter,
- Size of the anchor,
- Maximum thickness of the fixture,
- Minimum embedment depth,
- Minimum hole depth,
- Information on the installation procedure, including cleaning of the hole, preferably by means of an illustration,
- Reference to any special installation equipment needed,
- Identification of the manufacturing batch.

All data shall be presented in a clear and explicit form.

Georg Feistel
Head of Department

beglaubigt:
Baderschneider

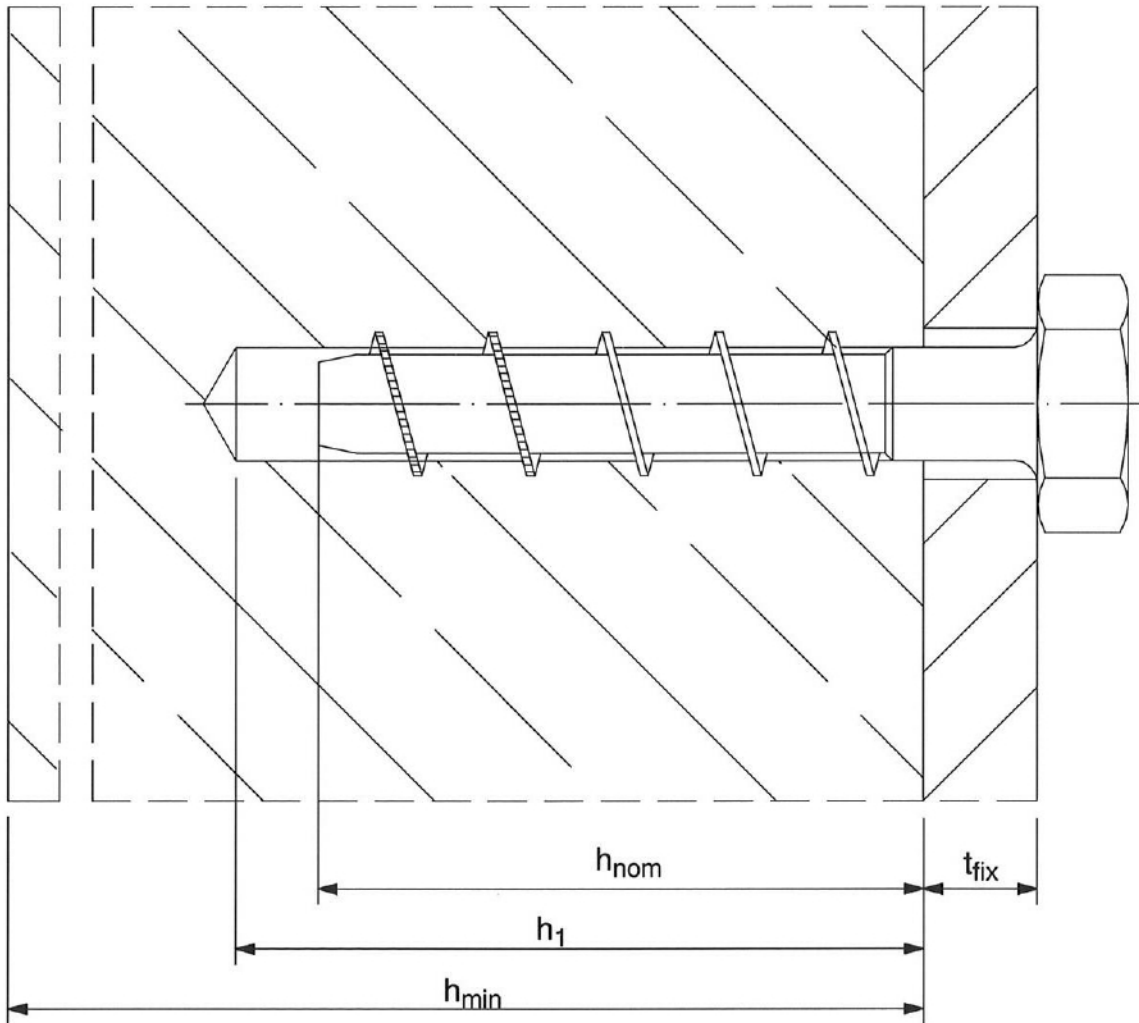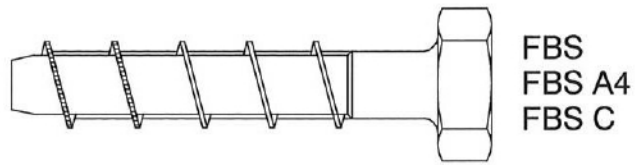

fischer Concrete screw FBS, FBS A4 and FBS C

Product and Intended use

Annex 1

of European
technical approval

ETA-11/0095

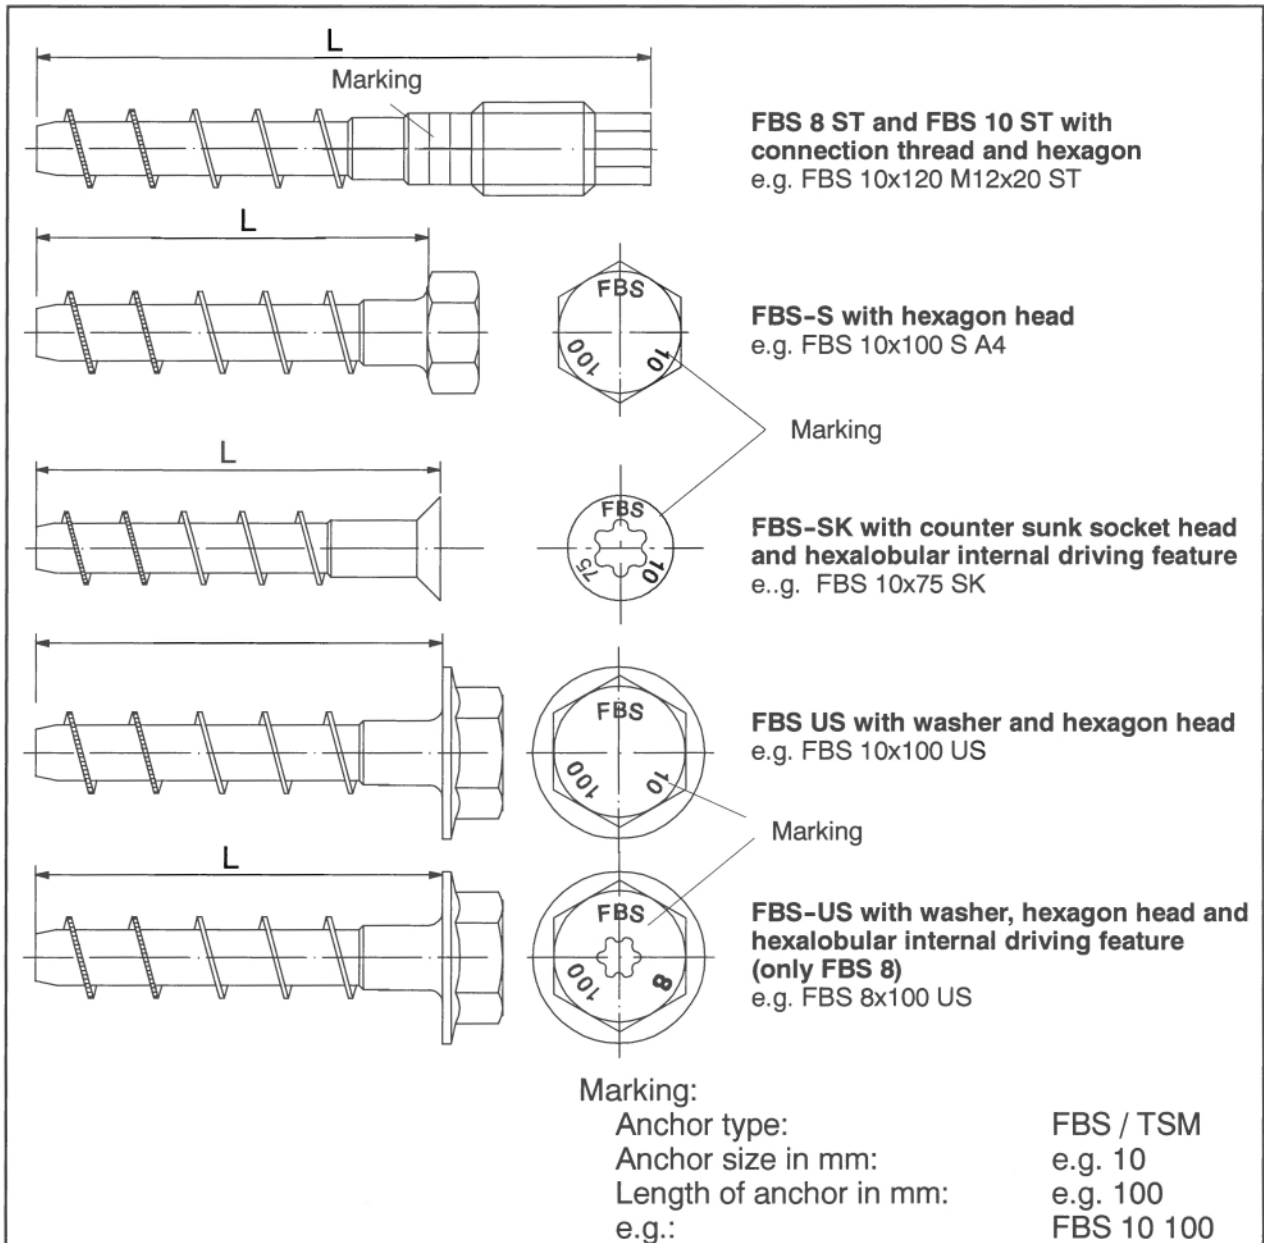


Table 1: Dimensions and materials

Anchor size		FBS 8 FBS 8 A4 FBS 8 C	FBS 10 FBS 10 A4 FBS 10 C	FBS 12 FBS 12 A4 FBS 12 C	FBS 14 FBS 14 A4 FBS 14 C
Length of anchor	$L \geq$ [mm]	70	90	105	130
	$L \leq$ [mm]	310	310	310	310
Diameter of shaft	d_k [mm]	6,8	8,8	10,8	12,8
Diameter of thread	d_s [mm]	10,6	12,6	14,6	16,6
Material FBS		Steel EN 10263-4 galvanized acc. to DIN EN ISO 4042 or Zinc fins coating EN ISO 10683 ($\geq 5 \mu\text{m}$)			
Material FBS A4		1.4401 or 1.4404 or 1.4571 or 1.4578			
Material FBS C		1.4529			

fischer Concrete screw FBS, FBS A4 and FBS C

Head versions,
Dimensions and materials

Annex 2

of European
technical approval

ETA-11/0095


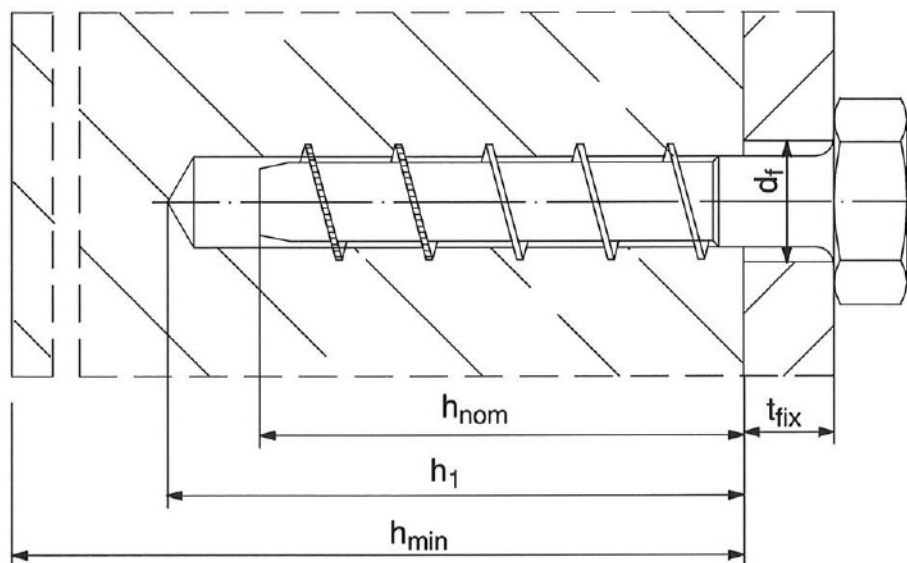



Table 2: Installation parameters

Anchor size			FBS 8 FBS 8 A4 FBS 8 C	FBS 10 FBS 10 A4 FBS 10 C	FBS 12 FBS 12 A4 FBS 12 C	FBS 14 FBS 14 A4 FBS 14 C
Nominal drill bit diameter	d_0	[mm]	8	10	12	14
Cutting diameter of drill bit	$d_{cut} \leq$	[mm]	8,45	10,45	12,50	14,5
Depth of drill hole	$h_1 \geq$	[mm]	75	95	110	135
Embedment depth of anchor	$h_{nom} \geq$	[mm]	65	85	100	125
Diameter of clearance hole in the fixture	$d_f \leq$	[mm]	12	14	16	18


Installation instruction

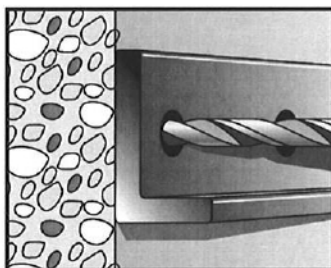

Drill hole with drill hammer

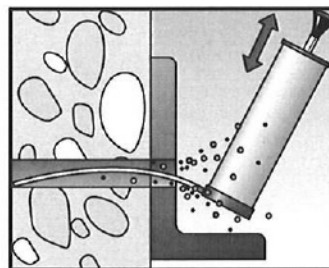

Blow out debris completely



Install anchor

Table 3: Minimum thickness of concrete member, minimum spacing and minimum edge distance

Anchor size			FBS 8 FBS 8 A4 FBS 8 C	FBS 10 FBS 10 A4 FBS 10 C	FBS 12 FBS 12 A4 FBS 12 C	FBS 14 FBS 14 A4 FBS 14 C
Minimum thickness of member	h_{min}	[mm]	120	130	150	200
Minimum edge distance	c_{min}	[mm]	50	70	80	100
Minimum spacing	s_{min}	[mm]	50	70	80	100

fischer Concrete screw FBS, FBS A4 and FBS C

Installation parameters,
Minimum thickness of concrete member,
minimum spacing and edge distance

Annex 3

of European
technical approval

ETA-11/0095

Table 4: Design method A
Characteristic values for tension load

Anchor size	FBS 8	FBS 8 A4 FBS 8 C	FBS 10	FBS 10 A4 FBS 10 C	FBS 12	FBS 12 A4 FBS 12 C	FBS 14	FBS 14 A4 FBS 14 C
Steel failure								
Characteristic resistance $N_{Rk,s}$ [kN]	25	29	42	48	64	73	90	103
Partial safety factor γ_{Ms} ¹⁾	1,40							
Pullout failure								
Characteristic resistance in cracked concrete C 20/25 $N_{Rk,p}$ [kN]	9		16		Pullout failure not decisive			
Characteristic resistance in non-cracked concrete C 20/25 $N_{Rk,p}$ [kN]	12		Pullout failure not decisive					
Increasing factors for cracked and non-cracked concrete ψ_c	C30/37	1,22						
	C40/50	1,41						
	C50/60	1,55						
Partial safety factor γ_{Mp} ¹⁾	1,5 ²⁾							
Concrete cone failure and splitting								
Effective anchorage depth h_{ef} [mm]	51		68		80		100	
Edge distance $c_{cr,N} = c_{cr,sp}$ [mm]	1,5 h_{ef}							
Spacing $s_{cr,N} = s_{cr,sp}$ [mm]	3 h_{ef}							
Partial safety factor γ_{Mc} ¹⁾	1,5 ²⁾							

1) In absence of other national regulations.

2) The installation safety factor $\gamma_2 = 1,0$ is included

Table 5: Displacements under tension loads

Anchor size	FBS 8	FBS 8 A4 FBS 8 C	FBS 10	FBS 10 A4 FBS 10 C	FBS 12	FBS 12 A4 FBS 12 C	FBS 14	FBS 14 A4 FBS 14 C
Tension load N [kN]	4,3		7,6		11,1		15,9	
Displacement	δ_{N0}				0,5			
	$\delta_{N\infty}$				1,0			

fischer Concrete screw FBS, FBS A4 and FBS C

Design method A
Characteristic values for tension loads,
Displacements

Annex 4

of European
technical approval

ETA-11/0095

Table 6: Design method A
Characteristic values for shear load

Anchor size	FBS 8	FBS 8 A4 FBS 8 C	FBS 10	FBS 10 A4 FBS 10 C	FBS 12	FBS 12 A4 FBS 12 C	FBS 14	FBS 14 A4 FBS 14 C
Steel failure without lever arm								
Characteristic resistance $V_{Rk,s}$ [kN]	18	21	34	40	42	49	64	
Partial safety factor γ_{Ms} ¹⁾	1,50							
Steel failure with lever arm								
Characteristic resistance $M^0_{Rk,s}$ [Nm]	26	29	56	64	123	141	200	229
Partial safety factor γ_{Ms} ¹⁾	1,50							
Pryout failure								
Factor k in ETAG 001 Annex C equation (5.6) k	1,0			2,0				
Concrete edge failure								
Effective length of anchor l_f [mm]	51		68		80		100	
Diameter of anchor d_{nom} [mm]	8		10		12		14	
Partial safety factor γ_{Mc} ¹⁾	1,50 ²⁾							

1) In absence of other national regulations.

2) The installation safety factor $\gamma_2 = 1,0$ is included

Table 7: Displacements under shear loads

Anchor size	FBS 8	FBS 8 A4 FBS 8 C	FBS 10	FBS 10 A4 FBS 10 C	FBS 12	FBS 12 A4 FBS 12 C	FBS 14	FBS 14 A4 FBS 14 C	
Shear load V [kN]	8,6	10,0	16,2	19,1	20,0	23,3	30,5		
Displacement	δ_{V0} [mm]	2,7	2,9	2,7	3,5	4,0	4,1	3,1	4,6
	$\delta_{V\infty}$ [mm]	4,1	4,4	4,3	5,3	6,0	6,2	4,7	7,0

Information for design of anchorage under shear load

In general, the conditions given in ETAG 001 Annex C, section 4.2.2.1 a) and section 4.2.2.2 b) are not fulfilled because the diameter of clearance hole in the fixture according to Annex 3 Table 2 is greater than the values given in Annex C Table 4.1 for the corresponding diameter of the anchor.

fischer Concrete screw FBS, FBS A4 and FBS C

Design method A
Characteristic values for shear loads,
Displacements

Annex 5

of European
technical approval

ETA-11/0095

Table 8: Characteristic values under fire exposure in concrete C20/25 to C50/60 for tension load

fire resistance class		FBS 8	FBS 10	FBS 12	FBS 14	
R 30	Characteristic resistance $N^0_{Rk,fi30^{(2)}} [kN]$	2,3	4,0	6,3	9,8	
R 60	Characteristic resistance $N^0_{Rk,fi60^{(2)}} [kN]$	1,7	3,3	5,8	8,1	
R 90	Characteristic resistance $N^0_{Rk,fi90^{(2)}} [kN]$	1,1	2,2	4,2	5,9	
R 120	Characteristic resistance $N^0_{Rk,fi120^{(2)}} [kN]$	0,8	1,7	3,4	4,8	
R 30 to R 120	Spacing	$s_{cr,fi} [mm]$	4 h_{ef}			
		$s_{min} [mm]$	50	70	80	100
	Edge distance ¹⁾	$c_{cr,fi} [mm]$	2 h_{ef}			
		$c_{min} [mm]$	2 h_{ef}			

1) In case of fire attack from more than one side, the edge distance shall be ≥ 300 mm.

2) In absence of other national regulations the partial safety factor for resistance under fire exposure $\gamma_{M,fi} = 1,0$ is recommended.

Table 9: Characteristic values under fire exposure in concrete C20/25 to C50/60 for tension load

fire resistance class			FBS 8 A4		FBS 10 A4		FBS 12 A4		FBS 14 A4	
			FBS 8 C		FBS 10 C		FBS 12 C		FBS 14 C	
R 30	Characteristic resistance $N^0_{Rk,fi30^{(2)}} [kN]$		2,3 ⁴⁾	2,3 ³⁾	4,0 ⁴⁾	4,0 ³⁾	6,3		9,8	
R 60	Characteristic resistance $N^0_{Rk,fi60^{(2)}} [kN]$		1,7 ⁴⁾	2,3 ³⁾	3,3 ⁴⁾	4,0 ³⁾	5,8		8,1	
R 90	Characteristic resistance $N^0_{Rk,fi90^{(2)}} [kN]$		1,1 ⁴⁾	2,3 ³⁾	2,2 ⁴⁾	4,0 ³⁾	4,2		5,9	
R 120	Characteristic resistance $N^0_{Rk,fi120^{(2)}} [kN]$		0,8 ⁴⁾	1,8 ³⁾	1,7 ³⁾	3,2 ³⁾	3,4		4,8	
R 30 to R 120	Spacing	$s_{cr,fi} [mm]$	4 h_{ef}							
		$s_{min} [mm]$	50		70		80		100	
	Edge distance ¹⁾	$c_{cr,fi} [mm]$	2 h_{ef}							
		$c_{min} [mm]$	2 h_{ef}							

1) In case of fire attack from more than one side, the edge distance shall be ≥ 300 mm.

2) In absence of other national regulations the partial safety factor for resistance under fire exposure $\gamma_{M,fi} = 1,0$ is recommended.

3) For anchor version with hexagon head or counter sunk socket head.

4) For anchor version with connection thread.

fischer Concrete screw FBS, FBS A4 and FBS C

Characteristic values under fire exposure

Annex 6

of European technical approval

ETA-11/0095