



## European Technical Approval ETA-13/0674

English translation prepared by DIBt - Original version in German language

Handelsbezeichnung  
*Trade name*

JD-PLUS Schrauben  
*JD-PLUS screws*

Zulassungsinhaber  
*Holder of approval*

Joseph Dresselhaus GmbH & Co. KG  
Zeppelinstraße 13  
32051 Herford  
DEUTSCHLAND

Zulassungsgegenstand  
und Verwendungszweck  
*Generic type and use  
of construction product*

JD-PLUS Schrauben als Holzverbindungsmittel  
*JD-PLUS screws for use in timber constructions*

Geltungsdauer:  
*Validity:* vom  
*from*  
bis  
*to*

18 June 2013  
18 June 2018

Herstellwerk  
*Manufacturing plant*

Werk 1 - 3

Diese Zulassung umfasst  
*This Approval contains*

27 Seiten einschließlich 2 Anhänge  
*27 pages including 2 annexes*

## I LEGAL BASES AND GENERAL CONDITIONS

- 1 This European technical approval is issued by Deutsches Institut für Bautechnik in accordance with:
  - Council Directive 89/106/EEC of 21 December 1988 on the approximation of laws, regulations and administrative provisions of Member States relating to construction products<sup>1</sup>, modified by Council Directive 93/68/EEC<sup>2</sup> and Regulation (EC) N° 1882/2003 of the European Parliament and of the Council<sup>3</sup>;
  - *Gesetz über das In-Verkehr-Bringen von und den freien Warenverkehr mit Bauprodukten zur Umsetzung der Richtlinie 89/106/EWG des Rates vom 21. Dezember 1988 zur Angleichung der Rechts- und Verwaltungsvorschriften der Mitgliedstaaten über Bauprodukte und anderer Rechtsakte der Europäischen Gemeinschaften (Bauproduktengesetz - BauPG) vom 28. April 1998<sup>4</sup>, as amended by Article 2 of the law of 8 November 2011<sup>5</sup>;*
  - Common Procedural Rules for Requesting, Preparing and the Granting of European technical approvals set out in the Annex to Commission Decision 94/23/EC<sup>6</sup>.
- 2 Deutsches Institut für Bautechnik is authorized to check whether the provisions of this European technical approval are met. Checking may take place in the manufacturing plant. Nevertheless, the responsibility for the conformity of the products to the European technical approval and for their fitness for the intended use remains with the holder of the European technical approval.
- 3 This European technical approval is not to be transferred to manufacturers or agents of manufacturers other than those indicated on page 1, or manufacturing plants other than those indicated on page 1 of this European technical approval.
- 4 This European technical approval may be withdrawn by Deutsches Institut für Bautechnik, in particular pursuant to information by the Commission according to Article 5(1) of Council Directive 89/106/EEC.
- 5 Reproduction of this European technical approval including transmission by electronic means shall be in full. However, partial reproduction can be made with the written consent of Deutsches Institut für Bautechnik. In this case partial reproduction has to be designated as such. Texts and drawings of advertising brochures shall not contradict or misuse the European technical approval.
- 6 The European technical approval is issued by the approval body in its official language. This version corresponds fully to the version circulated within EOTA. Translations into other languages have to be designated as such.

<sup>1</sup> Official Journal of the European Communities L 40, 11 February 1989, p. 12  
<sup>2</sup> Official Journal of the European Communities L 220, 30 August 1993, p. 1  
<sup>3</sup> Official Journal of the European Union L 284, 31 October 2003, p. 25  
<sup>4</sup> *Bundesgesetzblatt Teil I 1998*, p. 812  
<sup>5</sup> *Bundesgesetzblatt Teil I 2011*, p. 2178  
<sup>6</sup> Official Journal of the European Communities L 17, 20 January 1994, p. 34

## II SPECIFIC CONDITIONS OF THE EUROPEAN TECHNICAL APPROVAL

### 1 Definition of product/ products and intended use

#### 1.1 Definition of the construction product

JD-PLUS screws are self-tapping screws made from special carbon or stainless steel. The screws made from carbon steel are hardened. The screws made from carbon steel have a corrosion protection according to Annex A 1.6 and an antifriction coating. The outer thread diameter is not less than 3.5 mm and not greater than 6.0 mm. The overall length of the screws is ranging from 20 mm to 240 mm. Further dimensions are shown in Annex 2.

#### 1.2 Intended use

The screws are intended to be used for connecting wood-based members, where requirements for mechanical resistance and stability and safety in use in the sense of the essential requirements N 1 and N 4 of Council Directive 89/106/EEC shall be fulfilled.

The screws are used for connections in load bearing timber structures between wood-based members or between those members and steel members:

- Solid timber (softwood) of strength classes C14 – C40 according to EN 338<sup>7</sup>/ EN 14081-1<sup>8</sup>,
- Glued laminated timber (softwood) of at least strength class GL24c according to EN 1194<sup>9</sup>/ EN 14080<sup>10</sup>,
- Laminated veneer lumber LVL according to EN 14374<sup>11</sup>, arrangement of the screws only perpendicular to the plane of the veneers
- Glued laminated solid timber Duo- and Triobalken according to FprEN 14080<sup>12</sup> or national provisions that apply at the installation site
- Cross-laminated timber according to European technical approvals or national provisions that apply at the installation site

The screws may be used for connecting the following wood-based panels to the timber members mentioned above:

- Plywood according to EN 636<sup>13</sup> and EN 13986<sup>14</sup>,
- Oriented Strand Board, OSB according to EN 300<sup>15</sup> and EN 13986,
- Particleboard according to EN 312<sup>16</sup> and EN 13986,

7	EN 338:2009	Timber structures - Strength classes
8	EN 14081-1:2005+A1:2011	Timber structures – Strength graded structural timber with rectangular cross section – Part 1: General requirements
9	EN 1194:1999	Timber structures – Glued laminated timber – Strength classes and determination of characteristic values
10	EN 14080:2005	Timber structures - Glued laminated timber - Requirements
11	EN 14374:2004	Timber structures - Structural laminated veneer lumber - Requirements
12	FprEN 14080:2013	Timber structures – Glued laminated timber and Glued laminated solid timber - Requirements
13	EN 636:2003	Plywood - Specifications
14	EN 13986:2004	Wood-based panels for use in construction - Characteristics, evaluation of conformity and marking
15	EN 300:2006	Oriented strand boards (OSB) – Definition, classification and specifications

- Fibreboards according to EN 622-2<sup>17</sup>, EN 622-3<sup>18</sup> and EN 13986,
- Cement-bonded particle boards according to national provisions that apply at the building site,
- Solid-wood panels according to national provisions that apply at the building site.

Wood-based panels shall only be arranged on the side of the screw head.

The scope of the screws regarding resistance to corrosion shall be defined according to national provisions that apply at the installation site considering environmental conditions. Annex 1.6 contains the corrosion protection and the material number of the stainless steel for JD-PLUS screws.

The screws may be used for connections subject to static or quasi static loading.

The provisions made in this European technical approval are based on an assumed working life of the screws of 50 years, provided that the conditions laid down in section 4.2 for the installation are met. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

## 2 Characteristics of product

	Characteristic	Assessment of characteristic
2.1 Mechanical resistance and stability <sup>*)</sup>		
2.1.1	Dimensions	See Annex 2
2.1.2	Characteristic yield moment	See Annex 1
2.1.3	Characteristic withdrawal parameter	See Annex 1
2.1.4	Characteristic head pull-through parameter	See Annex 1
2.1.5	Characteristic tensile strength	See Annex 1
2.1.6	Characteristic yield strength	No performance determined
2.1.7	Characteristic torsional strength	See Annex 1
2.1.8	Insertion moment	See Annex 1
2.1.9	Spacing, end and edge distances of the screws and minimum thickness of the wood based material	See Annex 1
2.1.10	Slip modulus for mainly axially loaded screws	See Annex 1
2.2 Safety in case of fire		
2.2.1	Reaction to fire	Self-tapping screws are made of steel classified as Euroclass A1 in accordance with EC decision 96/603/EC, as amended by EC decision 2000/605/EC.

<sup>16</sup> EN 312:2003 Particleboards - Specifications  
<sup>17</sup> EN 622-2:2004 Fibreboards – Specifications – Part 2: Requirements for hardboards  
<sup>18</sup> EN 622-3:2004 Fibreboards - Specifications - Part 3: Requirements for medium boards

	Characteristic	Assessment of characteristic
2.3 Hygiene, health and the environment		
2.3.1	Content and/or release of dangerous substances	The product does not contain cadmium.  There is no risk that chrome VI - contained in the chromated carbon steel screws - will be released by consideration of all possible release scenarios.**)
2.4 Safety in use		
2.4.1	Dimensions	See Annex 2
2.4.2	Characteristic yield moment	See Annex 1
2.4.3	Characteristic withdrawal parameter	See Annex 1
2.4.4	Characteristic head pull-through parameter	See Annex 1
2.4.5	Characteristic tensile strength	See Annex 1
2.4.6	Characteristic yield strength	No performance determined
2.4.7	Characteristic torsional strength	See Annex 1
2.4.8	Insertion moment	See Annex 1
2.4.9	Spacing, end and edge distances of the screws and minimum thickness of the wood based material	See Annex 1
2.4.10	Slip modulus for mainly axially loaded screws	See Annex 1
Protection against noise		Not relevant
Energy economy and heat retention		Not relevant
2.5 General aspects relating to fitness for use		
2.5.1	Durability against corrosion	See Annex 1
2.5.2	Serviceability	The assessment for mechanical resistance and stability as well as durability against corrosion covers this property.

## 2.1 Mechanical resistance and stability

Annex 1 contains the load-carrying capacities for JD-PLUS screws.

The design and construction shall be carried out according to national provisions that apply at the installation site in line with the partial safety factor format, e.g. in accordance with EN 1995-1-1.

\*\*)

In accordance with <http://ec.europa.eu/enterprise/construction/cpd-ds/>. In addition to the specific clauses relating to dangerous substances contained in this European technical approval, there may be other requirements applicable to the products falling within its scope (e.g. transposed European legislation and national laws, regulations and administrative provisions). In order to meet the provisions of the EU Construction Products Directive, these requirements need also to be complied with, when and where they apply.

### 3 Evaluation and attestation of conformity and CE marking

#### 3.1 System of attestation of conformity

According to the decision 97/638/EC of the European Commission<sup>19</sup> the system 2+ of attestation of conformity applies.

This system of attestation of conformity is defined as follows:

System 2+: Declaration of conformity of the product by the manufacturer on the basis of:

(a) Tasks for the manufacturer:

- (1) initial type-testing of the product;
- (2) factory production control;
- (3) testing of samples taken at the factory in accordance with a prescribed test plan.

(b) Tasks for the approved body:

- (4) certification of factory production control on the basis of:
  - initial inspection of factory and of factory production control;
  - continuous surveillance, assessment and approval of factory production control.

Note: Approved bodies are also referred to as "notified bodies".

#### 3.2 Responsibilities

##### 3.2.1 Tasks for the manufacturer

###### 3.2.1.1 Factory production control

The manufacturer shall exercise permanent internal control of production. All the elements, requirements and provisions adopted by the manufacturer shall be documented in a systematic manner in the form of written policies and procedures, including records of results performed. This production control system shall insure that the product is in conformity with this European technical approval.

The manufacturer may only use raw materials stated in the technical documentation of this European technical approval supplied with the relevant inspection documents as laid down in the control plan.

The factory production control shall be in accordance with the "control plan relating to the European technical approval ETA-13/0674 issued on 18 June 2013" which is part of the technical documentation of this European technical approval. The control plan is laid down in the context of the factory production control system operated by the manufacturer and deposited with Deutsches Institut für Bautechnik.<sup>20</sup>

The incoming raw materials shall be subject to controls and tests by the manufacturer before acceptance. Check of materials, such as steel rods or wire, shall include control of the inspection documents presented by suppliers (comparison with nominal values) by verifying dimension and determining material properties, e.g. chemical composition, mechanical properties and corrosion protection.

The manufactured components shall be checked visually and for dimensions. The control plan includes details of the extent, nature and frequency of testing and controls to be performed within the factory production control.

<sup>19</sup> Official Journal of the European Communities L 268/36 of 19 September 1997

<sup>20</sup> The "control plan" is a confidential part of the European technical approval and only handed over to the approved body involved in the procedure of attestation of conformity. See section 3.2.2.

The results of factory production control shall be recorded and evaluated in accordance with the provisions of the control plan. The records shall include at least the following information:

- Designation of the product, basic material and components,
- Type of control or testing,
- Date of manufacture of the product and date of testing of the product or basic material and components,
- Result of control and testing and, if appropriate, comparison with requirements,
- Signature of person responsible for factory production control.

The records shall be presented to the approved body involved in the continuous surveillance and shall be presented to Deutsches Institut für Bautechnik on request.

#### 3.2.1.2 Initial type testing

For initial type-testing the results of the tests performed as part of the assessment for the European technical approval may be used unless there are changes in the production line or plant. In such cases the necessary initial type-testing has to be agreed between Deutsches Institut für Bautechnik and the notified body.

#### 3.2.1.3 Other tasks for the manufacturer

The manufacturer shall, on the basis of a contract, involve a body which is approved for the tasks referred to in section 3.1 in the field of screws in order to undertake the actions laid down in section 3.2.2. For this purpose, the control plan referred to in sections 3.2.1.1 and 3.2.2 shall be handed over by the manufacturer to the approved body involved.

The manufacturer shall make a declaration of conformity, stating that the construction product is in conformity with the provisions of the European technical approval ETA-13/0674 issued on 18 June 2013.

### 3.2.2 Tasks for the approved bodies

The approved body shall perform the

- initial inspection of factory and of factory production control,
- continuous surveillance, assessment and approval of factory production control, in accordance with the provisions laid down in the control plan.

#### 3.2.2.1 Initial inspection of factory and factory production control

The approved body shall ascertain that, in accordance with the control plan, the factory, in particular the staff and equipment, and the factory production control, are suitable to ensure a continuous and orderly manufacturing of the screws with this European technical approval.

#### 3.2.2.2 Continuous surveillance

The approved body shall control the documentation of the factory production control (FPC) twice a year including an annual visit of the factory for routine inspections. It shall be verified that the system of factory production control and the specified manufacturing processes are maintained, taking account of the control plan.

#### 3.2.2.3 Other tasks of the approved body

The approved body shall retain the essential points of its actions referred to above and state the results obtained and conclusions drawn in a written report.

The results of certification and continuous surveillance shall be made available on demand by the certification body to Deutsches Institut für Bautechnik.



The approved certification body involved by the manufacturer shall issue an EC certificate of conformity of the factory production control stating the conformity with the provisions of this European technical approval.

In cases where the provisions of the European technical approval and its control plan are no longer fulfilled the certification body shall withdraw the certificate of conformity and inform Deutsches Institut für Bautechnik without delay.

### 3.3 CE marking

The CE marking shall be affixed on each packaging of the self-tapping screws. The letters "CE" shall be followed by the identification number of the approved certification body and be accompanied by the following additional information:

- the name and address of the producer (legal entity responsible for the manufacture),
- the last two digits of the year in which the CE marking was affixed,
- the number of the EC certificate for the factory production control,
- the number of the European technical approval,
- name of the product,
- outer thread diameter and length of the self-tapping screws,
- type and mean thickness of the corrosion protection, if relevant,
- stainless steel including the material number, if relevant.

## 4 Assumptions under which the fitness of the product for the intended use was favourably assessed

### 4.1 Manufacturing

JD-PLUS screws shall be manufactured in accordance with the provisions of this European technical approval using the manufacturing processes as identified at the inspection of the plant by the notified inspection body and laid down in the technical documentation.

The European technical approval is issued for the product on the basis of agreed data/information, deposited with Deutsches Institut für Bautechnik, which identifies the product that has been assessed and judged. Changes to the product or production process, which could result in this deposited data/information being incorrect, shall be notified to Deutsches Institut für Bautechnik before the changes are introduced. Deutsches Institut für Bautechnik will decide whether or not such changes affect the approval and consequently the validity of the CE marking on the basis of the approval and if so whether further assessment or alterations to the approval shall be necessary.

### 4.2 Installation

The screws are driven into the wood-based member without pre-drilling. The screw holes in steel members shall be pre-drilled with an adequate diameter greater than the outer thread diameter.

A minimum of two screws shall be used for connections in load bearing timber structures.

By fastening screws in wood-based members the head of the screws shall be flush with the surface of the wood-based member. For pan head screws the head part remains unconsidered.



European technical approval  
ETA-13/0674  
*English translation prepared by DIBt*

Page 9 of 27 | 18 June 2013

## 5 Indications to the manufacturer

### 5.1 Use, maintenance, repair

The assessment of the fitness for use is based on the assumption that no maintenance is required during the assumed intended working life.

Andreas Kummerow  
p. p. Head of Department

*beglaubigt:*  
Dewitt

## ANNEX 1 – Characteristic values of the load-carrying capacities

Table 1.1 Characteristic load-carrying capacities of JD-PLUS self-tapping screws

Outer thread diameter [mm]		3.5	4.0	4.5	5.0	6.0
Characteristic yield moment $M_{y,k}$ [Nm]	Carbon steel	2.0	3.0	4.0	5.0	9.0
	Stainless steel	1.0	1.5	2.0	3.0	6.0
Characteristic tensile strength $f_{tens,k}$ [kN]	Carbon steel	4.5	5.0	5.8	8.5	11.5
	Stainless steel	2.5	3.2	3.8	5.0	7.0
Characteristic torsional strength $f_{tor,k}$ [Nm]	Carbon steel	2.2	3.4	4.6	6.0	10.0
	Stainless steel	1.4	1.9	2.8	3.7	6.5

### A.1.1 General

The minimum penetration length of screws in the load-bearing wood-based members shall be  $4 \cdot d$ .  
The inner thread diameter  $d_1$  of the screws shall be greater than the maximal width of the gaps in the layer of the cross-laminated timber.

### A.1.2 Laterally loaded screws

The outer thread diameter  $d$  shall be used as effective diameter of the screw according to EN 1995-1-1.

### A.1.3 Axially loaded screws

The axial slip modulus  $K_{ser}$  of the threaded part of a screw for the serviceability limit state per side shall be taken independent of angle  $\alpha$  to the grain as:

$$K_{ser} = 780 \cdot d^{0,2} \cdot l_{ef}^{0,4} \quad [\text{N/mm}] \quad (1.1)$$

where

$d$  outer thread diameter of the screw [mm]

$l_{ef}$  penetration length of the screw in the wood-based member [mm].

#### A.1.3.1 Axial withdrawal capacity

The characteristic withdrawal parameter at an angle of  $30^\circ \leq \alpha \leq 90^\circ$  to the grain based on a characteristic density of the wood-based member of  $350 \text{ kg/m}^3$  is

$f_{ax,k} = 12.0 \text{ N/mm}^2$  for JD-PLUS screws with  $d < 5 \text{ mm}$

$f_{ax,k} = 11.5 \text{ N/mm}^2$  for JD-PLUS screws with  $d \geq 5 \text{ mm}$ .

For screws penetrating more than one layer of cross-laminated timber the different layers may be taken into account proportionally.

JD-PLUS screws	Annex 1.1
Characteristic values of the load-carrying capacities	

### A.1.3.2 Head pull-through capacity

The characteristic value of the head pull-through parameter for JD-PLUS screws for a characteristic density of 350 kg/m<sup>3</sup> of the timber and for wood-based panels like

- plywood according to EN 636 and EN 13986
- oriented Strand Board, OSB according to EN 300 and EN 13986
- particleboard according to EN 312 and EN 13986
- fibreboards according to EN 622-2, EN 622-3 and EN 13986
- cement-bonded particle board according to national provisions that apply at the building site
- solid wood panel according to national provisions that apply at the building site

with a thickness of more than 20 mm is

$$f_{\text{head,k}} = 9.4 \text{ N/mm}^2.$$

For wood-based panels a maximum characteristic density of 380 kg/m<sup>3</sup> shall be used in equation (8.40b) of EN 1995-1-1.

For wood based panels with a thickness between 12 mm and 20 mm the characteristic value of the head pull-through parameter for JD-PLUS screws is:

$$f_{\text{head,k}} = 8 \text{ N/mm}^2$$

For wood based panels with a thickness of less than 12 mm the characteristic head pull-through capacity for JD-PLUS screws shall be based on a characteristic value of the head pull-through parameter of 8 N/mm<sup>2</sup>, and limited to 400 N complying with the minimum thickness of the wood based panels of  $1.2 \cdot d$ , with  $d$  as outer thread diameter and the values in Table 1.2.

Table 1.2 Minimum thickness of wood based panels

Wood based panel	Minimum thickness [mm]
Plywood	6
Fibreboards (hardboards and medium boards)	6
Oriented Strand Boards, OSB	8
Particleboards	8
Cement-bonded particle board	8
Solid wood Panels	12

In steel-to-timber connections the head pull-through capacity is not governing.

### A.1.4 Spacing, end and edge distances of the screws and minimum thickness of the wood based material

Minimum thickness for structural members is  $t = 30 \text{ mm}$ .

#### A.1.4.1 Laterally and/or axially loaded screws

For JD-PLUS screws minimum spacing and distances are given in EN 1995-1-1:2004+A1:2008, clause 8.3.1.2 and Table 8.2 as for nails in non-predrilled holes. Here, the outer thread diameter  $d$  shall be considered.

For Douglas fir members minimum spacing and distances parallel to the grain shall be increased by 50%.

#### A.1.4.2 Only axially loaded screws

For only axially loaded JD-PLUS screws the minimum spacings, end and edge distances are given in EN 1995-1-1:2004+A1:2008, clause 8.7.2 and Table 8.6.

JD-PLUS screws	Annex 1.2
Characteristic values of the load-carrying capacities	

**A.1.5 Insertion moment**

The ratio between the characteristic torsional strength  $f_{tor,k}$  and the mean value of insertion moment  $R_{tor,mean}$  fulfills the requirement for all screws.

**A.1.6 Durability against corrosion**


Screws made from carbon steel may have the coatings according to Table 1.3

Table 1.3 Coating of JD-PLUS screws

Coating		Thickness of the coating [ $\mu\text{m}$ ]
Electrolytically galvanised	Optional: yellow chromated	5 - 8

Steel no. 1.4567 is used for screws made from stainless steel.

JD-PLUS screws	Annex 1.3
Insertion moment and durability against corrosion	

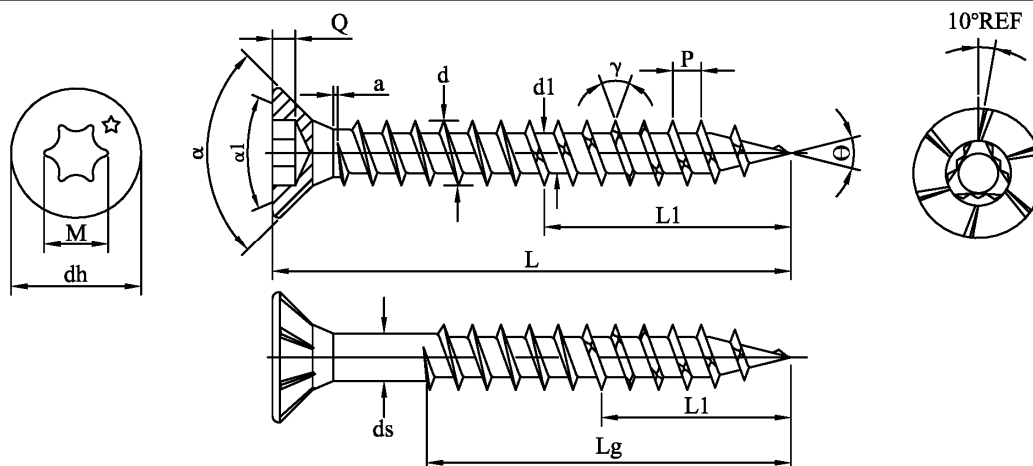


ASTER SCREWS DOUBLE FLAT HEAD TORX DRIVE WITH 6 RIBS UNDER HEAD.

DRAWING NO	AS-388 EX2	DIA OF MATERIAL		2.48-2.50		$\gamma$	37°-43°
DESCRIPTION	AS/6DFT	DIA OF MATERIAL		2.50-2.52	$L_g \geq 21$	$\Theta$	21°-27°
SIZE	M3.5	Head diameter	dh	7.00-0.4	$L_g \leq 20$	$\Theta 1$	32°-35°
MATERIAL	302 HQ	Shaft diameter	ds	2.50-2.60	SCREW LENGTH	L	TOLERANCE ON LENGTH
CUSTOMER DRAWING NO	A124-		$\alpha$	88°-92°			
LENGTH UNIT	mm		$\alpha 1$	43°-47°	$\geq 14 \sim \leq 18$		+0/-0.90
TORSIONAL TEST	12.6 MIN kg-cm	PUNCH NO		T-15	$\geq 20 \sim \leq 30$		+0/-1.10
	$L_g$		M	3.37 REF	$\geq 35 \sim \leq 40$		+0/-1.30
	$L_g \leq 16$		GO	Q	1.40-1.70		
	$L_g > 16$		NO/GO	0.56 MAX			
		Thread outside diameter	d	3.50-0.2			
		Thread inside diameter	d1	2.35-0.25			
			p	1.60 ± 10%			
			a	0.30-0.80	$L \geq 25 \sim \leq 30$		$L_g$ 18-0.3
					$L \geq 35 \sim \leq 40$		$L_g$ 24-0.3

JD-PLUS screws

Countersunk head with torx drive d = 3.5 mm  
Stainless steel

Annex 2.1

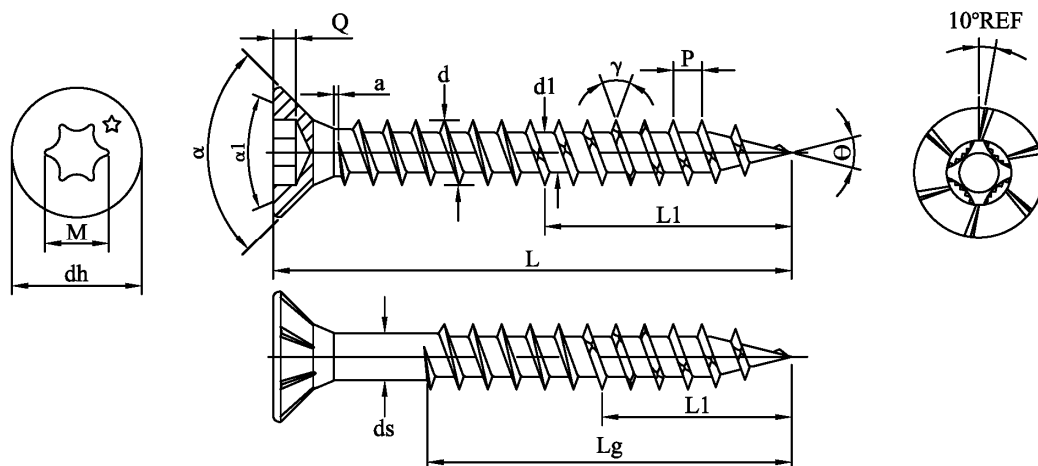


ASTER SCREWS DOUBLE FLAT HEAD TORX DRIVE WITH 6 RIBS UNDER HEAD.

DRAWING NO	AS-389 EX3	DIA OF MATERIAL		2.78-2.80		$\gamma$	37°-43°
DESCRIPTION	AS/6DFT	DIA OF MATERIAL		2.80-2.85	$Lg \geq 22$	$\Theta$	21°-27°
SIZE	M4.0	Head diameter	dh	8.00-0.5	$Lg \leq 20$	$\Theta 1$	32°-35°
MATERIAL	302 HQ	Shaft diameter	ds	2.80-2.90	SCREW LENGTH	L	TOLERANCE ON LENGTH
CUSTOMER DRAWING NO	A124-		$\alpha$	88°-92°			
LENGTH UNIT	mm		$\alpha 1$	43°-47°	18		+0/-0.90
TORSIONAL TEST	19 MIN kg-cm	PUNCH NO		T-20	$\geq 20 \sim \leq 30$		+0/-1.10
	lg   $\pm 1.50$		M	3.95 REF	$\geq 35 \sim \leq 50$		+0/-1.30
	lg $\leq 24$   L1   $1/2 \times Lg$	GO	Q	1.40-1.70	$\geq 60 \sim \leq 70$		+0/-1.50
	lg $> 24$   L1   $1/3 \times Lg$	NO/GO		0.79 MAX			
		Thread outside diameter	d	4.00-0.2	$L \geq 25 \sim \leq 30$		Lg 18-0.3
		Thread inside diameter	d1	2.60-0.25	$L \geq 35 \sim \leq 40$		Lg 24-0.3
			p	$1.80 \pm 10\%$	$L \geq 45 \sim \leq 50$		Lg 30-0.3
			a	0.30-0.70	L60		Lg 36-0.4
					L70		Lg 42-0.4
DRAWING NO	AS-390 EX3	DIA OF MATERIAL		3.13-3.15		$\gamma$	37°-43°
DESCRIPTION	AS/6DFT	DIA OF MATERIAL		3.14-3.16	$Lg \geq 26$	$\Theta$	21°-27°
SIZE	M4.5	Head diameter	dh	9.00-0.5	$Lg \leq 25$	$\Theta 1$	32°-35°
MATERIAL	302 HQ	Shaft diameter	ds	3.14-3.24	SCREW LENGTH	L	TOLERANCE ON LENGTH
CUSTOMER DRAWING NO	A124-		$\alpha$	88°-92°			
LENGTH UNIT	mm		$\alpha 1$	43°-47°			
TORSIONAL TEST	31 MIN kg-cm	PUNCH NO		T-20	$\geq 20 \sim \leq 30$		+0/-1.10
	lg   $\pm 1.50$		M	3.95 REF	$\geq 35 \sim \leq 50$		+0/-1.30
	L1   $1/2 \times Lg$	GO	Q	1.40-1.70	$\geq 60 \sim \leq 70$		+0/-1.50
	L1   $1/3 \times Lg$	NO/GO		0.79 MAX			
		Thread outside diameter	d	4.50-0.25	$L \geq 25 \sim \leq 30$		Lg 18-0.3
		Thread inside diameter	d1	2.90-0.3	$L \geq 35 \sim \leq 40$		Lg 24-0.3
			p	$2.00 \pm 10\%$	$L \geq 45 \sim \leq 50$		Lg 30-0.3
			a	0.30-0.70	L60		Lg 36-0.4
					L70		Lg 42-0.4

JD-PLUS screws

Countersunk head with torx drive  $d = 4.0$  mm and  $d = 4.5$  mm  
Stainless steel

Annex 2.2

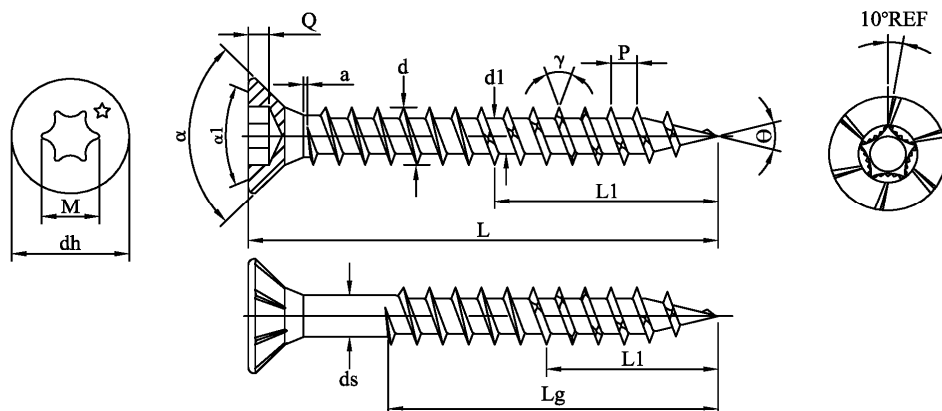

ASTER SCREWS DOUBLE FLAT HEAD TORX DRIVE WITH 6 RIBS UNDER HEAD.


DRAWING NO	AS-391 EX4	DIA OF MATERIAL		3.45-3.47		γ	37°-43°
DESCRIPTION	AS/6DFT	DIA OF MATERIAL		3.45-3.50	Lg ≥ 26	Θ	21°-27°
SIZE	M5.0	Head diameter	dh	10.00-0.5	Lg ≤ 25	Θ1	32°-35°
MATERIAL	302 HQ	Shaft diameter	ds	3.45-3.55	SCREW LENGTH	L	TOLERANCE ON LENGTH
CUSTOMER DRAWING NO	A124-		α	88°-92°			
LENGTH UNIT	mm		α1	43°-47°			
TORSIONAL TEST	39 MIN kg-cm	PUNCH NO		T-25/T20	≥ 22 ~ ≤ 30		+0/-1.10
	Lg ± 1.50		M	4.54 REF	≥ 35 ~ ≤ 50		+0/-1.30
Lg ≤ 30	L1 1/2 × Lg	GO	Q	2.10-2.40	≥ 60 ~ ≤ 80		+0/-1.50
Lg > 30	L1 1/3 × Lg	NO/GO		0.90 MAX	≥ 90 ~ ≤ 100		± 1.10
		Thread outside diameter	d	5.00-0.3	L ≥ 25 ~ ≤ 30	Lg	18-0.3
		Thread inside diameter	d1	3.10-0.3	L ≥ 35 ~ ≤ 40	Lg	24-0.3
			p	2.20 ± 10%	L ≥ 45 ~ ≤ 50	Lg	30-0.3
			a	0.30-0.80	L60	Lg	36-0.4
					L70	Lg	42-0.4
					L80	Lg	48-0.4
					L ≥ 90 ~ ≤ 100	Lg	60-0.5
DRAWING NO	AS-392 EX4	DIA OF MATERIAL		4.18-4.20		γ	37°-43°
DESCRIPTION	AS/6DFT	DIA OF MATERIAL		4.20-4.25	Lg ≥ 41	Θ	21°-27°
SIZE	M6.0	Head diameter	dh	12.00-0.5	Lg ≤ 40	Θ1	32°-35°
MATERIAL	302 HQ	Shaft diameter	ds	4.20-4.30	SCREW LENGTH	L	TOLERANCE ON LENGTH
CUSTOMER DRAWING NO	A124-		α	88°-92°			
LENGTH UNIT	mm		α1	43°-47°			
TORSIONAL TEST	60 MIN kg-cm	PUNCH NO		T-30	≥ 26 ~ ≤ 30		+0/-1.10
	Lg ± 1.50		M	5.63 REF	≥ 35 ~ ≤ 50		+0/-1.30
Lg ≤ 30	L1 1/2 × Lg	GO	Q	2.30-2.70	≥ 60 ~ ≤ 80		+0/-1.50
Lg > 30	L1 1/3 × Lg	NO/GO		1.12 MAX	≥ 90 ~ ≤ 120		± 1.10
		Thread outside diameter	d	6.00-0.25	L ≥ 25 ~ ≤ 30	Lg	18-0.3
		Thread inside diameter	d1	3.80-0.3	L ≥ 35 ~ ≤ 40	Lg	24-0.3
			p	2.60 ± 10%	L ≥ 45 ~ ≤ 50	Lg	30-0.3
			a	0.30-0.80	L60	Lg	36-0.4
					L70	Lg	42-0.4
					L80	Lg	48-0.4
					L ≥ 90 ~ ≤ 100	Lg	60-0.5
					L ≥ 100 ~ ≤ 240	Lg	70-0.5

JD-PLUS screws

Countersunk head with torx drive d = 5.0 mm and d = 6.0 mm  
Stainless steel

Annex 2.3



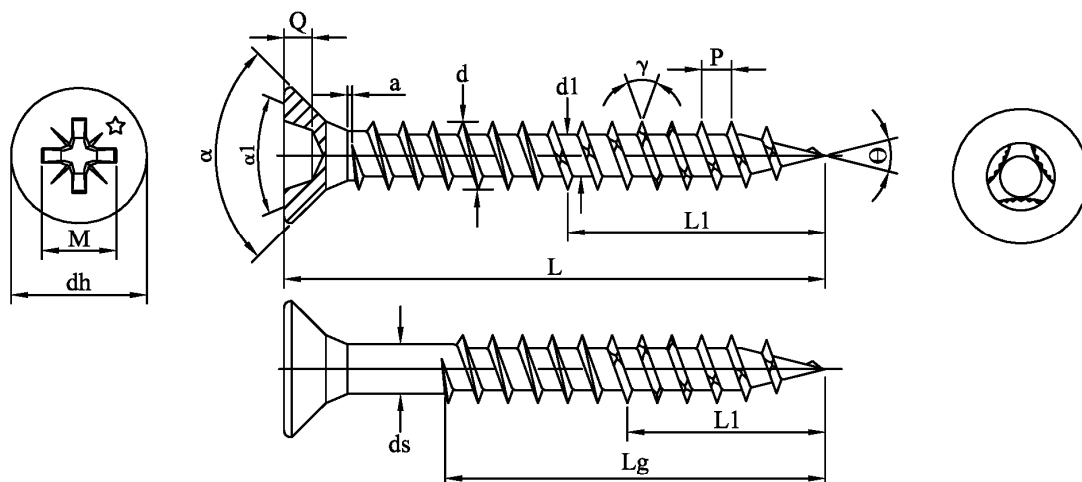


ASTER SCREWS DOUBLE FLAT HEAD POZI DRIVE.

DRAWING NO	AS-562 EX5	DIA OF MATERIAL		2.58-2.60		$\gamma$	37°-43°
DESCRIPTION	AS/DFZ	DIA OF MATERIAL		2.60-2.65	$L_g \geq 21$	$\Theta$	23°-26°
SIZE	M3.5	Head diameter	dh	7.00-0.3	$L_g \leq 20$	$\Theta 1$	32°-35°
MATERIAL	C10B21	Shaft diameter	ds	2.60-2.70	SCREW LENGTH	L	TOLERANCE ON LENGTH
CUSTOMER DRAWING NO	A124-		$\alpha$	88°-92°			
LENGTH UNIT	mm		$\alpha 1$	43°-47°	$\geq 16 \sim \leq 18$		+0/-0.90
TORSIONAL TEST	20.4 MIN kg-cm	PUNCH NO		NO.2	$\geq 20 \sim \leq 30$		+0/-1.10
SURFACE HARDNESS	450-750 HV <sub>0.3</sub>		M	4.00 REF	$\geq 35 \sim \leq 50$		+0/-1.30
CORE HARDNESS	450 MAX HV <sub>0.3</sub>		Q	2.03-2.30			
BENDING	45° MIN	Thread outside diameter	d	3.50-0.25	$L \geq 25 \sim \leq 30$	Lg	18-0.3
	Lg ± 1.50	Thread inside diameter	d1	2.45-0.2	$L \geq 35 \sim \leq 40$	Lg	24-0.3
Lg ≤ 16	L1 1/2 × Lg		p	1.80 ± 10%	$L \geq 45 \sim \leq 50$	Lg	30-0.3
Lg > 16	L1 1/3 × Lg		a	0.30-0.70			

JD-PLUS screws

Countersunk head with pozi drive d = 3.5 mm  
Carbon steel

Annex 2.4

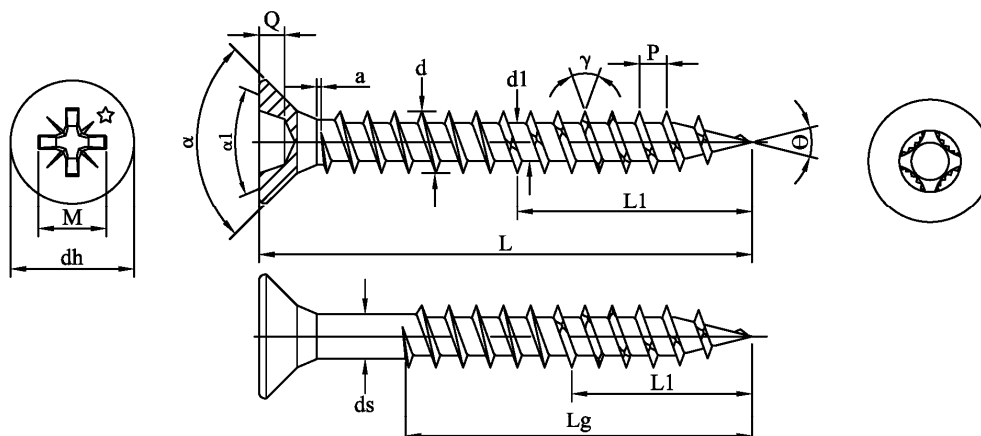


ASTER SCREWS DOUBLE FLAT HEAD POZI DRIVE.

DRAWING NO	AS-563 EX6	DIA OF MATERIAL		2.90-2.92		$\gamma$	37°-43°
DESCRIPTION	AS/DFZ	DIA OF MATERIAL		2.90-2.95	$L_g \geq 21$	$\theta$	23°-26°
SIZE	M4.0	Head diameter	dh	8.00-0.3	$L_g \leq 20$	$\theta_1$	32°-35°
MATERIAL	C10B21	Shaft diameter	ds	2.90-3.00	SCREW LENGTH	L	TOLERANCE ON LENGTH
CUSTOMER DRAWING NO	A124-		$\alpha$	88°-92°			
LENGTH UNIT	mm		$\alpha_1$	43°-47°	18		+0/-0.90
TORSIONAL TEST	33 MIN kg-cm	PUNCH NO		NO.2	$\geq 20 \sim \leq 30$		+0/-1.10
SURFACE HARDNESS	450-750 HV <sub>0.3</sub>		M	4.40 REF	$\geq 35 \sim \leq 50$		+0/-1.30
CORE HARDNESS	450 MAX HV <sub>0.3</sub>		Q	2.50-2.92	$\geq 55 \sim \leq 70$		+0/-1.50
BENDING	45° MIN	Thread outside diameter	d	4.00-0.25			
	$L_g \pm 1.50$	Thread inside diameter	d1	2.70-0.2	$L \geq 25 \sim \leq 30$	$L_g$	18-0.3
$L_g \leq 24$	$L_1 \ 1/2 \times L_g$		p	2.00 ± 10%	$L \geq 35 \sim \leq 40$	$L_g$	24-0.3
$L_g > 24$	$L_1 \ 1/3 \times L_g$		a	0.30-0.70	$L \geq 45 \sim \leq 50$	$L_g$	30-0.3
					L60	$L_g$	36-0.4
					L70	$L_g$	42-0.4
DRAWING NO	AS-564 EX6	DIA OF MATERIAL		3.13-3.15		$\gamma$	37°-43°
DESCRIPTION	AS/DFZ	DIA OF MATERIAL		3.15-3.20	$L_g \geq 26$	$\theta$	23°-26°
SIZE	M4.5	Head diameter	dh	9.00-0.3	$L_g \leq 25$	$\theta_1$	32°-35°
MATERIAL	C10B21	Shaft diameter	ds	3.15-3.25	SCREW LENGTH	L	TOLERANCE ON LENGTH
CUSTOMER DRAWING NO	A124-		$\alpha$	88°-92°			
LENGTH UNIT	mm		$\alpha_1$	43°-47°			
TORSIONAL TEST	44 MIN kg-cm	PUNCH NO		NO.2	$\geq 20 \sim \leq 30$		+0/-1.10
SURFACE HARDNESS	450-750 HV <sub>0.3</sub>		M	4.80 REF	$\geq 35 \sim \leq 50$		+0/-1.30
CORE HARDNESS	450 MAX HV <sub>0.3</sub>		Q	3.02-3.45	$\geq 55 \sim \leq 80$		+0/-1.50
BENDING	45° MIN	Thread outside diameter	d	4.50-0.25			
	$L_g \pm 1.50$	Thread inside diameter	d1	2.90-0.2			
$L_g \leq 24$	$L_1 \ 1/2 \times L_g$		p	2.20 ± 10%	$L \geq 25 \sim \leq 30$	$L_g$	18-0.3
$L_g > 24$	$L_1 \ 1/3 \times L_g$		a	0.30-0.70	$L \geq 35 \sim \leq 40$	$L_g$	24-0.3
					$L \geq 45 \sim \leq 50$	$L_g$	30-0.3
					L60	$L_g$	36-0.4
					L70	$L_g$	42-0.4
					L80	$L_g$	48-0.4

JD-PLUS screws

Countersunk head with pozi drive d = 4.0 mm and d = 4.5 mm  
Carbon steel

Annex 2.5

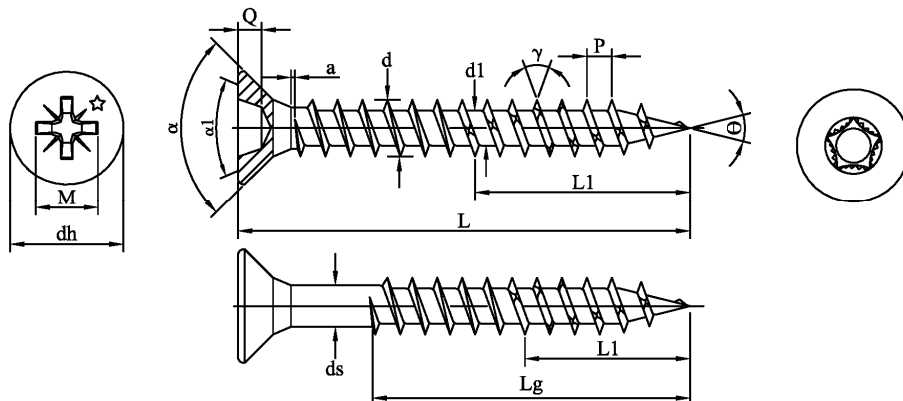


ASTER SCREWS DOUBLE FLAT HEAD POZI DRIVE.

DRAWING NO	AS-565 EX7	DIA OF MATERIAL		3.45-3.47		$\gamma$	37°-43°
DESCRIPTION	AS/DFZ	DIA OF MATERIAL		3.45-3.50	$L_g \geq 26$	$\Theta$	23°-26°
SIZE	M5.0	Head diameter	dh	10.00-0.3	$L_g \leq 25$	$\Theta 1$	32°-35°
MATERIAL	C10B21	Shaft diameter	ds	3.45-3.55	SCREW LENGTH	L	TOLERANCE ON LENGTH
CUSTOMER DRAWING NO	A124-		$\alpha$	88°-92°			
LENGTH UNIT	mm		$\alpha 1$	43°-47°			
TORSIONAL TEST	63 MIN kg-cm	PUNCH NO		NO.2	$\geq 22 \sim \leq 30$		+0/-1.10
SURFACE HARDNESS	450-750 HV <sub>0.3</sub>		M	5.30 REF	$\geq 35 \sim \leq 50$		+0/-1.30
CORE HARDNESS	450 MAX HV <sub>0.3</sub>		Q	3.02-3.45	$\geq 55 \sim \leq 80$		+0/-1.50
BENDING	45° MIN	Thread outside diameter	d	5.00-0.3	$\geq 90 \sim \leq 120$		$\pm 1.10$
	$L_g \pm 1.50$	Thread inside diameter	d1	3.20-0.25	$L \geq 25 \sim \leq 30$	$L_g$	18-0.3
$L_g \leq 30$	L1 $1/2 \times L_g$		p	$2.60 \pm 10\%$	$L \geq 35 \sim \leq 40$	$L_g$	24-0.3
$L_g > 30$	L1 $1/3 \times L_g$		a	0.30-0.80	$L \geq 45 \sim \leq 50$	$L_g$	30-0.3
					L60	$L_g$	36-0.4
					L70	$L_g$	42-0.4
					L80	$L_g$	48-0.4
					$L \geq 90 \sim \leq 100$	$L_g$	60-0.5
					$L \geq 110 \sim \leq 120$	$L_g$	70-0.5
DRAWING NO	AS-566 EX7	DIA OF MATERIAL		4.18-4.20		$\gamma$	37°-43°
DESCRIPTION	AS/DFZ	DIA OF MATERIAL		4.20-4.25	$L_g \geq 41$	$\Theta$	23°-26°
SIZE	M6.0	Head diameter	dh	12.00-0.4	$L_g \leq 40$	$\Theta 1$	32°-35°
MATERIAL	C10B21	Shaft diameter	ds	4.20-4.30	SCREW LENGTH	L	TOLERANCE ON LENGTH
CUSTOMER DRAWING NO	A124-		$\alpha$	88°-92°	$\geq 26 \sim \leq 30$		+0/-1.10
LENGTH UNIT	mm		$\alpha 1$	43°-47°	$\geq 35 \sim \leq 50$		+0/-1.30
TORSIONAL TEST	110.2 MIN kg-cm	PUNCH NO		NO.3	$\geq 55 \sim \leq 80$		+0/-1.50
SURFACE HARDNESS	450-750 HV <sub>0.3</sub>		M	6.60 REF	$\geq 90 \sim \leq 120$		$\pm 1.10$
CORE HARDNESS	450 MAX HV <sub>0.3</sub>		Q	3.40-3.84	$\geq 130 \sim \leq 180$		$\pm 1.30$
BENDING	45° MIN	Thread outside diameter	d	6.00-0.25	$\geq 190 \sim \leq 240$		$\pm 1.50$
	$L_g \pm 1.50$	Thread inside diameter	d1	3.90-0.25	$L \geq 25 \sim \leq 30$	$L_g$	18-0.3
$L_g \leq 30$	L1 $1/2 \times L_g$		p	$3.00 \pm 10\%$	$L \geq 35 \sim \leq 40$	$L_g$	24-0.3
$L_g > 30$	L1 $1/3 \times L_g$		a	0.30-0.80	$L \geq 45 \sim \leq 50$	$L_g$	30-0.3
					L60	$L_g$	36-0.4
					L70	$L_g$	42-0.4
					L80	$L_g$	48-0.4
					$L \geq 90 \sim \leq 100$	$L_g$	60-0.5
					$L \geq 110 \sim \leq 240$	$L_g$	70-0.5

JD-PLUS screws

Countersunk head with pozi drive d = 5.0 mm and d = 6.0 mm  
Carbon steel

Annex 2.6

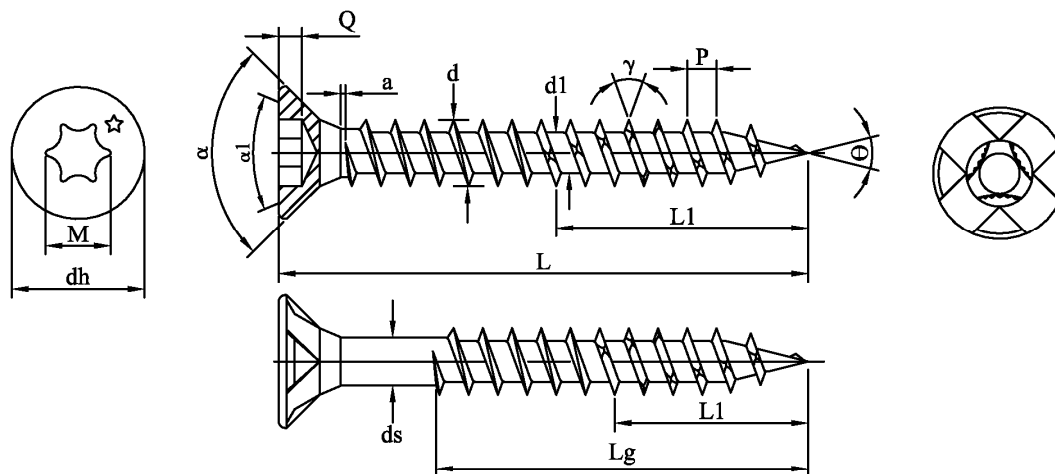


ASTER SCREWS DOUBLE FLAT HEAD TORX DRIVE WITH 4 RIBS UNDER HEAD.

DRAWING NO	AS-587 EX8	DIA OF MATERIAL		2.58-2.60		$\gamma$	37°-43°
DESCRIPTION	AS/4DFT	DIA OF MATERIAL		2.60-2.65	$L_g \geq 21$	$\theta$	23°-26°
SIZE	M3.5	Head diameter	dh	7.00-0.3	$L_g \leq 20$	$\theta_1$	32°-35°
MATERIAL	C10B21	Shaft diameter	ds	2.60-2.70	SCREW LENGTH	L	TOLERANCE ON LENGTH
CUSTOMER DRAWING NO	A124-		$\alpha$	88°-92°			
LENGTH UNIT	mm		$\alpha_1$	43°-47°	$\geq 16 \sim \leq 18$		+0/-0.90
TORSIONAL TEST	20.4 MIN kg-cm	PUNCH NO		T-15	$\geq 20 \sim \leq 30$		+0/-1.10
SURFACE HARDNESS	450-750 HV <sub>0.3</sub>		M	3.37 REF	$\geq 35 \sim \leq 50$		+0/-1.30
CORE HARDNESS	450 MAX HV <sub>0.3</sub>	GO	Q	1.40-1.70			
BENDING	45° MIN	NO/GO		0.56 MAX	$L \geq 25 \sim \leq 30$	Lg	18-0.3
	Lg ± 1.50	Thread outside diameter	d	3.50-0.25	$L \geq 35 \sim \leq 40$	Lg	24-0.3
Lg ≤ 16	L1 1/2 × Lg	Thread inside diameter	d1	2.45-0.2	$L \geq 45 \sim \leq 50$	Lg	30-0.3
Lg > 16	L1 1/3 × Lg		p	1.80 ± 10%			
			a	0.30-0.80			

JD-PLUS screws

Countersunk head with torx drive d = 3.5 mm  
Carbon steel

Annex 2.7

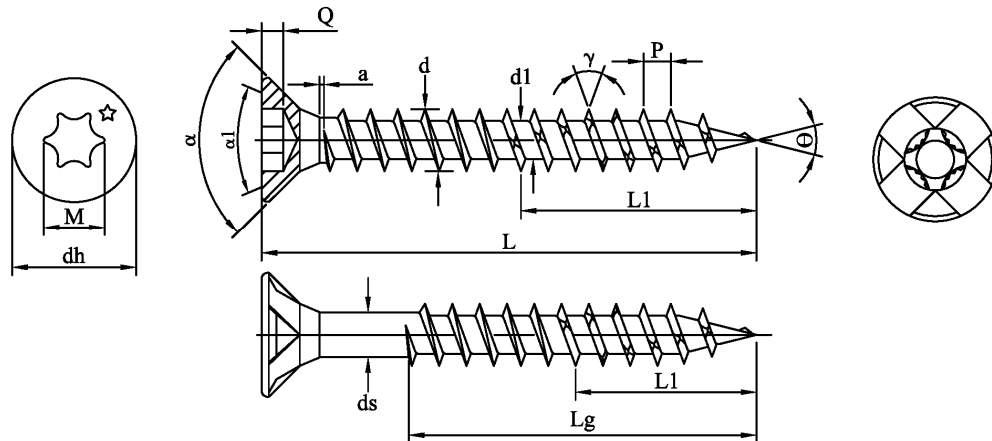

ASTER SCREWS DOUBLE FLAT HEAD TORX DRIVE WITH 4 RIBS UNDER HEAD.


DRAWING NO	AS-588 EX9	DIA OF MATERIAL		2.90-2.92		γ	37°-43°
DESCRIPTION	AS/4DFT	DIA OF MATERIAL		2.90-2.95	Lg ≥ 21	θ	23°-26°
SIZE	M4.0	Head diameter	dh	8.00-0.3	Lg ≤ 20	θ1	32°-35°
MATERIAL	C10B21	Shaft diameter	ds	2.90-3.00	SCREW LENGTH	L	TOLERANCE ON LENGTH
CUSTOMER DRAWING NO	A124-		α	88°-92°			
LENGTH UNIT	mm		α1	43°-47°	18		+0/-0.90
TORSIONAL TEST	33 MIN kg-cm	PUNCH NO		T-20	≥ 20 ~ ≤ 30		+0/-1.10
SURFACE HARDNESS	450-750 HV <sub>0.3</sub>		M	3.95 REF	≥ 35 ~ ≤ 50		+0/-1.30
CORE HARDNESS	450 MAX HV <sub>0.3</sub>	GO	Q	1.40-1.70	≥ 55 ~ ≤ 70		+0/-1.50
BENDING	45° MIN	NO/GO		0.79 MAX	L ≥ 25 ~ ≤ 30		Lg 18-0.3
	L2 ± 1.50	Thread outside diameter	d	4.00-0.25	L ≥ 35 ~ ≤ 40		Lg 24-0.3
Lg ≤ 24	L1 1/2 × Lg	Thread inside diameter	d1	2.70-0.2	L ≥ 45 ~ ≤ 50		Lg 30-0.3
Lg > 24	L1 1/3 × Lg		p	2.00 ± 10%	L60		Lg 36-0.4
			a	0.30-0.80	L70		Lg 42-0.4
DRAWING NO	AS-589 EX9	DIA OF MATERIAL		3.13-3.15		γ	37°-43°
DESCRIPTION	AS/4DFT	DIA OF MATERIAL		3.15-3.20	Lg ≥ 26	θ	23°-26°
SIZE	M4.5	Head diameter	dh	9.00-0.3	Lg ≤ 26	θ1	32°-35°
MATERIAL	C10B21	Shaft diameter	ds	3.15-3.25	SCREW LENGTH	L	TOLERANCE ON LENGTH
CUSTOMER DRAWING NO	A124-		α	88°-92°			
LENGTH UNIT	mm		α1	43°-47°			
TORSIONAL TEST	44 MIN kg-cm	PUNCH NO		T-20	≥ 20 ~ ≤ 30		+0/-1.10
SURFACE HARDNESS	450-750 HV <sub>0.3</sub>		M	3.95 REF	≥ 35 ~ ≤ 50		+0/-1.30
CORE HARDNESS	450 MAX HV <sub>0.3</sub>	GO	Q	1.40-1.70	≥ 55 ~ ≤ 80		+0/-1.50
BENDING	45° MIN	NO/GO		0.79 MAX			
	Lg ± 1.50	Thread outside diameter	d	4.50-0.25			
Lg ≤ 24	L1 1/2 × Lg	Thread inside diameter	d1	2.90-0.2	L ≥ 25 ~ ≤ 30		Lg 18-0.3
Lg > 24	L1 1/3 × Lg		p	2.20 ± 10%	L ≥ 35 ~ ≤ 40		Lg 24-0.3
			a	0.30-0.80	L ≥ 45 ~ ≤ 50		Lg 30-0.3
					L60		Lg 36-0.4
					L70		Lg 42-0.4
					L80		Lg 48-0.4

JD-PLUS screws

Countersunk head with torx drive d = 4.0 mm and d = 4.5 mm  
Carbon steel

Annex 2.8

English translation prepared by DIBt

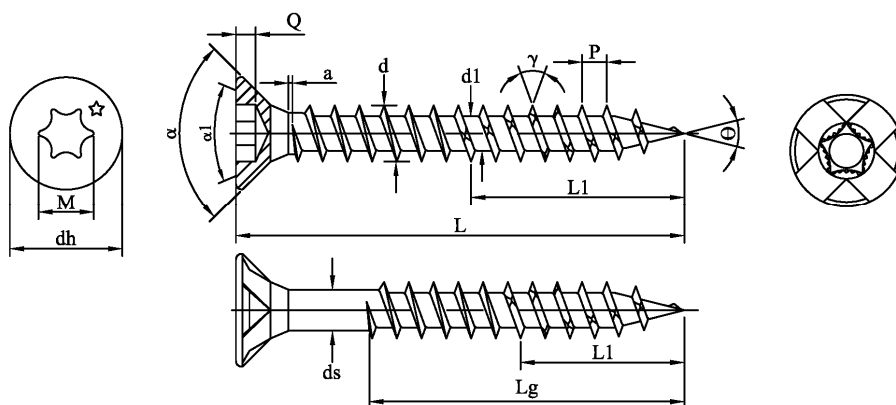


ASTER SCREWS DOUBLE FLAT HEAD TORX DRIVE WITH 4 RIBS UNDER HEAD.

DRAWING NO	AS-590 EX10	DIA OF MATERIAL		3.45-3.47		$\gamma$	37°-43°
DESCRIPTION	AS/4DFT	DIA OF MATERIAL		3.45-3.50	$L_g \geq 26$	$\Theta$	23°-26°
SIZE	M5.0	Head diameter	dh	10.00-0.3	$L_g \leq 25$	$\Theta 1$	32°-35°
MATERIAL	C10B21	Shaft diameter	ds	3.45-3.55	SCREW LENGTH	L	TOLERANCE ON LENGTH
CUSTOMER DRAWING NO	A124-		$\alpha$	88°-92°			
LENGTH UNIT	mm		$\alpha 1$	43°-47°			
TORSIONAL TEST	63 MIN kg-cm	PUNCH NO		T-25 / T-20	$\geq 22 \sim \leq 30$		+0/-1.10
SURFACE HARDNESS	450-750 HV <sub>0.3</sub>		M	4.54 REF	$\geq 35 \sim \leq 50$		+0/-1.30
CORE HARDNESS	450 MAX HV <sub>0.3</sub>	GO	Q	2.10-2.40	$\geq 55 \sim \leq 80$		+0/-1.50
BENDING	45° MIN	NO/GO		0.79 MAX	$\geq 90 \sim \leq 120$		$\pm 1.10$
	L2	$\pm 1.50$	Thread outside diameter	d	5.00-0.3	$L \geq 25 \sim \leq 30$	Lg 18-0.3
Lg ≤ 30	L1	1/2 × Lg	Thread inside diameter	d1	3.20-0.25	$L \geq 35 \sim \leq 40$	Lg 24-0.3
Lg > 30	L1	1/3 × Lg		p	2.60 ± 10%	$L \geq 45 \sim \leq 50$	Lg 30-0.3
				a	0.30-0.80	L60	Lg 36-0.4
						L70	Lg 42-0.4
						L80	Lg 48-0.4
						$L \geq 90 \sim \leq 100$	Lg 60-0.5
						$L \geq 110 \sim \leq 120$	Lg 70-0.5
DRAWING NO	AS-591 EX10	DIA OF MATERIAL		4.18-4.20		$\gamma$	37°-43°
DESCRIPTION	AS/4DFT	DIA OF MATERIAL		4.20-4.25	$L_g \geq 41$	$\Theta$	23°-26°
SIZE	M6.0	Head diameter	dh	12.00-0.4	$L_g \leq 40$	$\Theta 1$	32°-35°
MATERIAL	C10B21	Shaft diameter	ds	4.20-4.30	SCREW LENGTH	L	TOLERANCE ON LENGTH
CUSTOMER DRAWING NO	A124-		$\alpha$	88°-92°	$\geq 26 \sim \leq 30$		+0/-0.80
LENGTH UNIT	mm		$\alpha 1$	43°-47°	$\geq 35 \sim \leq 50$		+0/-1.30
TORSIONAL TEST	110.2 MIN kg-cm	PUNCH NO		T-30	$\geq 55 \sim \leq 80$		+0/-1.50
SURFACE HARDNESS	450-750 HV <sub>0.3</sub>		M	5.63 REF	$\geq 90 \sim \leq 120$		$\pm 1.10$
CORE HARDNESS	450 MAX HV <sub>0.3</sub>	GO	Q	2.30-2.70	$\geq 130 \sim \leq 180$		$\pm 1.30$
BENDING	45° MIN	NO/GO		1.12 MAX	$\geq 190 \sim \leq 240$		$\pm 1.50$
	Lg	$\pm 1.50$	Thread outside diameter	d	6.00-0.25	$L \geq 25 \sim \leq 30$	Lg 18-0.3
Lg ≤ 30	L1	1/2 × Lg	Thread inside diameter	d1	3.90-0.25	$L \geq 35 \sim \leq 40$	Lg 24-0.3
Lg > 30	L1	1/3 × Lg		p	3.00 ± 10%	$L \geq 45 \sim \leq 50$	Lg 30-0.3
				a	0.50-1.00	L60	Lg 36-0.4
						L70	Lg 42-0.4
						L80	Lg 48-0.4
						$L \geq 90 \sim \leq 100$	Lg 60-0.5
						$L \geq 110 \sim \leq 240$	Lg 70-0.5

JD-PLUS screws

Countersunk head with torx drive d = 5.0 mm and d = 6.0 mm  
Carbon steel

Annex 2.9

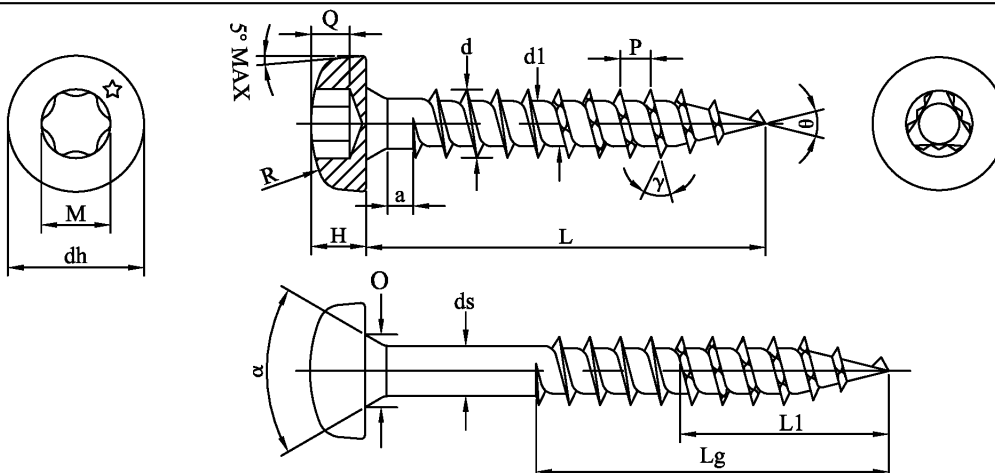

ASTER SCREWS PAN HEAD TORX DRIVE.

DRAWING NO	AS-902 EX11	DIA OF MATERIAL		2.58-2.60		$\gamma$	37°-43°
DESCRIPTION	AS/PT	DIA OF MATERIAL		2.60-2.65	SCREW LENGTH	L	TOLERANCE ON LENGTH
SIZE	M3.5	Head diameter	dh	7.00-0.3			
MATERIAL	C10B21	Shaft diameter	ds	2.60-2.70	$\geq 14 \sim \leq 18$		+0/-0.90
CUSTOMER DRAWING NO	A124-		H	2.30-2.60	$\geq 20 \sim \leq 30$		+0/-1.10
LENGTH UNIT	mm		O	3.50-3.70	$\geq 35 \sim \leq 50$		+0/-1.30
TORSIONAL TEST	20.4 MIN kg-cm		R	7.00R REF			
SURFACE HARDNESS	450-750 HV <sub>0.3</sub>		$\alpha$	57°-63°			
CORE HARDNESS	450 MAX HV <sub>0.3</sub>	PUNCH NO		T-15			
BENDING	45° MIN		M	3.37 REF	$L \geq 25 \sim \leq 30$	Lg	18 -0.3
	Lg $\pm 1.50$		Q	1.30-1.70	$L \geq 35 \sim \leq 40$	Lg	24 -0.3
Lg $\leq 16$	L1 $1/2 \times Lg$	Thread outside diameter	d	3.5-0.25	$L \geq 45 \sim \leq 50$	Lg	30 -0.3
Lg $> 16$	L1 $1/3 \times Lg$	Thread inside diameter	d1	2.45-0.2			
Lg $\geq 21$	$\theta$ 23°-26°		p	1.80 $\pm 10\%$			
Lg $\leq 20$	$\theta 1$ 32°-35°		a	0.30-0.80			


JD-PLUS screws

Pan head with torx drive d = 3.5 mm  
Carbon steel

Annex 2.10



English translation prepared by DIBt

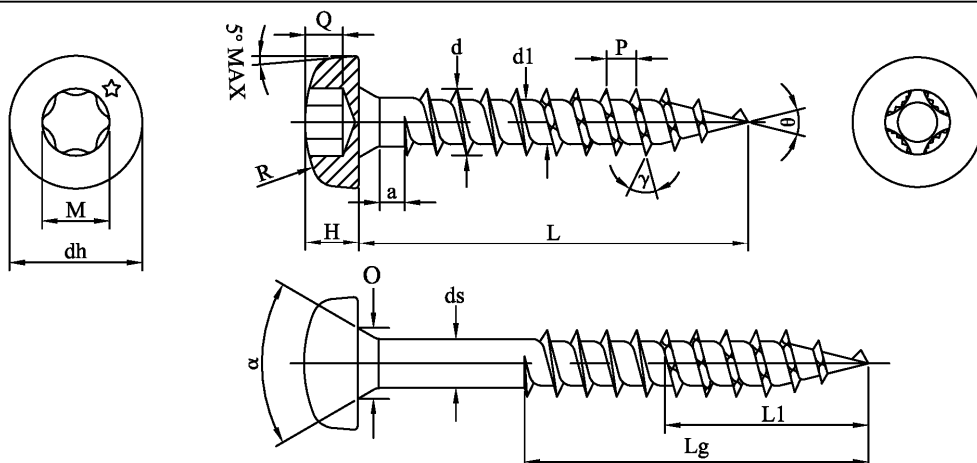


ASTER SCREWS PAN HEAD TORX DRIVE.

DRAWING NO	AS-903 EX1	DIA OF MATERIAL		2.90-2.92		γ	37°-43°
DESCRIPTION	AS/PT	DIA OF MATERIAL		2.90-2.95	SCREW LENGTH	L	TOLERANCE ON LENGTH
SIZE	M4.0	Head diameter	dh	8.00-0.3	≤ 10		+0/-0.80
MATERIAL	C10B21	Shaft diameter	ds	2.90-3.00	18		+0/-0.90
CUSTOMER DRAWING NO	A124-		H	2.60-2.90	≥ 20~≤ 30		+0/-1.10
LENGTH UNIT	mm		O	4.00-4.20	≥ 35~≤ 40		+0/-1.30
TORSIONAL TEST	33 MIN kg-cm		R	8.00R REF			
SURFACE HARDNESS	450-750 HV <sub>0.3</sub>		α	57°-63°			
CORE HARDNESS	450 MAX HV <sub>0.3</sub>	PUNCH NO		T-20			
BENDING	45° MIN		M	3.95 REF			
	Lg	± 1.50		Q	1.40-1.80		
Lg ≤ 24	L1	1/2 × Lg	Thread outside diameter	d	4.00-0.25	L ≥ 25~≤ 30	Lg 18-0.3
Lg > 24	L1	1/3 × Lg	Thread inside diameter	d1	2.70-0.2	L ≥ 35~≤ 40	Lg 24-0.3
			p	2.00 ± 10%			
			a	0.30-0.80			
DRAWING NO	AS-904 EX1	DIA OF MATERIAL		3.13-3.15		γ	37°-43°
DESCRIPTION	AS/PT	DIA OF MATERIAL		3.15-3.20	SCREW LENGTH	L	TOLERANCE ON LENGTH
SIZE	M4.5	Head diameter	dh	9.00-0.3			
MATERIAL	C10B21	Shaft diameter	ds	3.15-3.25			
CUSTOMER DRAWING NO	A124-		H	2.90-3.20	≥ 20~≤ 30		+0/-1.10
LENGTH UNIT	mm		O	4.50-4.70	≥ 35~≤ 50		+0/-1.30
TORSIONAL TEST	44 MIN kg-cm		R	9.00R REF			
SURFACE HARDNESS	450-750 HV <sub>0.3</sub>		α	57°-63°			
CORE HARDNESS	450 MAX HV <sub>0.3</sub>	PUNCH NO		T-20			
BENDING	45° MIN		M	3.95 REF			
	Lg	± 1.50		Q	1.40-1.80		
Lg ≤ 24	L1	1/2 × Lg	Thread outside diameter	d	4.50-0.25		
Lg > 24	L1	1/3 × Lg	Thread inside diameter	d1	2.90-0.2		
			p	2.20 ± 10%	L ≥ 25~≤ 30	Lg	18-0.3
			a	0.30-0.80	L ≥ 35~≤ 40	Lg	24-0.3
					L ≥ 45~≤ 50	Lg	30-0.3

JD-PLUS screws

Pan head with torx drive d = 4.0 mm and d = 4.5 mm  
Carbon steel

Annex 2.11

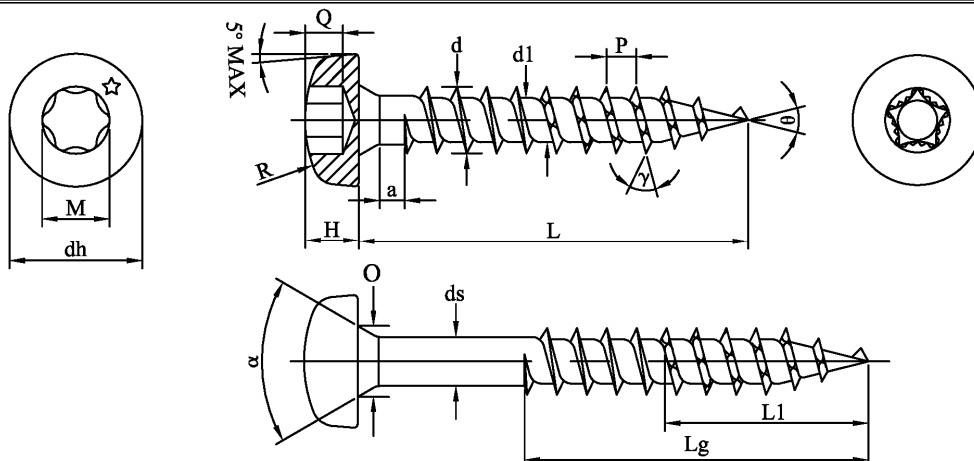


ASTER SCREWS PAN HEAD TORX DRIVE.

DRAWING NO	AS-905 EX12	DIA OF MATERIAL		3.45-3.47		γ	37°-43°	
DESCRIPTION	AS/PT	DIA OF MATERIAL		3.45-3.50	SCREW LENGTH	L	TOLERANCE ON LENGTH	
SIZE	M5.0	Head diameter	dh	10.00-0.3				
MATERIAL	C10B21	Shaft diameter	ds	3.45-3.55				
CUSTOMER DRAWING NO	A124-		H	3.30-3.60	≥22~≤30		+0/-1.10	
LENGTH UNIT	mm		O	5.00-5.20	≥35~≤50		+0/-1.30	
TORSIONAL TEST	63 MIN kg-cm		R	10.00R REF	≥55~≤80		+0/-1.50	
SURFACE HARDNESS	450-750 HV <sub>0.3</sub>		α	57°-63°				
CORE HARDNESS	450 MAX HV <sub>0.3</sub>	PUNCH NO		T-25/T20				
BENDING	45° MIN		M	4.54 REF	L≥25~≤30	Lg	18-0.3	
	Lg	± 1.50		Q	1.80-2.20	L≥35~≤40	Lg	24-0.3
Lg≤30	L1	1/2 × Lg	Thread outside diameter	d	5.00-0.3	L≥45~≤50	Lg	30-0.3
Lg>30	L1	1/3 × Lg	Thread inside diameter	d1	3.20-0.25	L60	Lg	36-0.4
				p	2.60 ± 10%	L70	Lg	42-0.4
				a	0.30-0.80	L80	Lg	48-0.4
DRAWING NO	AS-906 EX12	DIA OF MATERIAL		4.18-4.20		γ	37°-43°	
DESCRIPTION	AS/PT	DIA OF MATERIAL		4.20-4.25	SCREW LENGTH	L	TOLERANCE ON LENGTH	
SIZE	M6.0	Head diameter	dh	12.00-0,4				
MATERIAL	C10B21	Shaft diameter	ds	4.20-4.30				
CUSTOMER DRAWING NO	A124-		H	3.80-4.20	≥26~≤30		+0/-1.10	
LENGTH UNIT	mm		O	6.00-6.20	≥35~≤50		+0/-1.30	
TORSIONAL TEST	110.2 MIN kg-cm		R	12.00R REF	≥55~≤80		+0/-1.50	
SURFACE HARDNESS	450-750 HV <sub>0.3</sub>		α	57°-63°				
CORE HARDNESS	450 MAX HV <sub>0.3</sub>	PUNCH NO		T-30				
BENDING	45° MIN		M	5.63 REF				
	Lg	± 1.50		Q	2.30-2.70	L≥25~≤30	Lg	18-0.3
Lg≤30	L1	1/2 × Lg	Thread outside diameter	d	6.00-0.3	L≥35~≤40	Lg	24-0.3
Lg>30	L1	1/3 × Lg	Thread inside diameter	d1	3.90-0.25	L≥45~≤50	Lg	30-0.3
				p	3.00 ± 10%	L60	Lg	36-0.4
				a	0.30-0.80	L70	Lg	42-0.4
						L80	Lg	48-0.4

JD-PLUS screws

Pan head with torx drive d = 5.0 mm and d = 6.0 mm  
Carbon steel

Annex 2.12

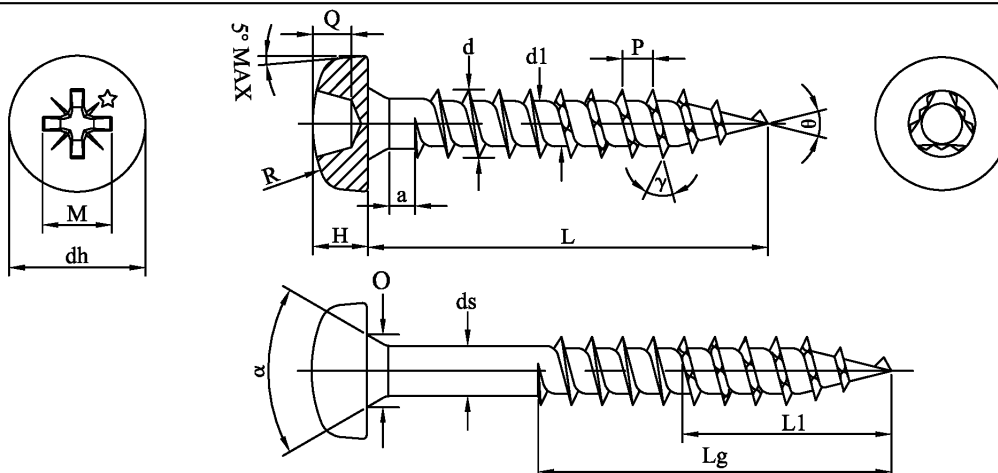


ASTER SCREWS PAN HEAD POZI DRIVE.

DRAWING NO	AS-908 EX13	DIA OF MATERIAL		2.58-2.60		$\gamma$	37°-43°
DESCRIPTION	AS/PZ	DIA OF MATERIAL		2.60-2.65	SCREW LENGTH	L	TOLERANCE ON LENGTH
SIZE	M3.5	Head diameter	dh	7.00-0.3			
MATERIAL	C10B21	Shaft diameter	ds	2.60-2.70	$\geq 14 \sim \leq 18$		+0/-0.90
CUSTOMER DRAWING NO	A124-		H	2.30-2.60	$\geq 20 \sim \leq 30$		+0/-1.10
LENGTH UNIT	mm		O	3.50-3.70	$\geq 35 \sim \leq 50$		+0/-1.30
TORSIONAL TEST	20.4 MIN kg-cm		R	7.00R REF			
SURFACE HARDNESS	450-750 HV <sub>0.3</sub>		$\alpha$	57°-63°			
CORE HARDNESS	450 MAX HV <sub>0.3</sub>	PUNCH NO		NO.2			
BENDING	45° MIN		M	3.80 REF	$L \geq 25 \sim \leq 30$	Lg	18 -0.3
	Lg $\pm 1.50$		Q	1.60-2.10	$L \geq 35 \sim \leq 40$	Lg	24 -0.3
Lg $\leq 16$	L1 $1/2 \times Lg$	Thread outside diameter	d	3.5-0.25	$L \geq 45 \sim \leq 50$	Lg	30 -0.3
Lg $> 16$	L1 $1/3 \times Lg$	Thread inside diameter	d1	2.45-0.2			
Lg $\geq 21$	$\theta$ 23°-26°		p	1.80 $\pm 10\%$			
Lg $\leq 20$	$\theta 1$ 32°-35°		a	0.30-0.80			

JD-PLUS screws

Pan head with pozi drive d = 3.5 mm  
Carbon steel

Annex 2.13

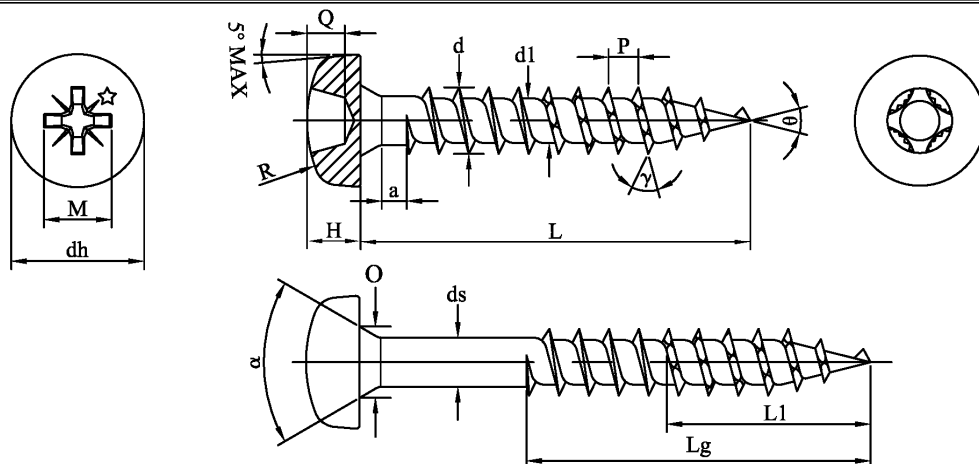


ASTER SCREWS PAN HEAD POZI DRIVE.

DRAWING NO	AS-909 EX14		DIA OF MATERIAL	2.90-2.92	γ	37°-43°
DESCRIPTION	AS/PZ		DIA OF MATERIAL	2.90-2.95	SCREW LENGTH	L TOLERANCE ON LENGTH
SIZE	M4.0	Head diameter	dh	8.00-0.3	≤10	+0/-0.80
MATERIAL	C10B21		Shaft diameter	ds	18	+0/-0.90
CUSTOMER DRAWING NO	A124-		H	2.60-2.90	≥20~≤30	+0/-1.10
	mm		O	4.00-4.20	≥35~≤40	+0/-1.30
TORSIONAL TEST	33 MIN kg-cm		R	8.00R REF		
SURFACE HARDNESS	450-750 HV <sub>0.3</sub>		α	57°-63°		
CORE HARDNESS	450 MAX HV <sub>0.3</sub>		PUNCH NO	NO.2		
BENDING	45° MIN		M	4.30 REF		
	L2	± 1.50	Q	2.10-2.50		
Lg ≤ 24	L1	1/2 × Lg	Thread outside diameter	d	4.00-0.25	L ≥ 25~≤ 30 Lg 18-0.3
Lg > 24	L1	1/3 × Lg	Thread inside diameter	d1	2.70-0.2	L ≥ 35~≤ 40 Lg 24-0.3
Lg ≥ 21	θ	23°-26°		p	2.00 ± 10%	
Lg ≤ 20	θ1	32°-35°		a	0.30-0.80	
DRAWING NO	AS-910 EX14		DIA OF MATERIAL	3.13-3.15	γ	37°-43°
DESCRIPTION	AS/PZ		DIA OF MATERIAL	3.15-3.20	SCREW LENGTH	L TOLERANCE ON LENGTH
SIZE	M4.5	Head diameter	dh	9.00-0.3		
MATERIAL	C10B21		Shaft diameter	ds	3.15-3.25	
CUSTOMER DRAWING NO	A124-		H	2.90-3.20	≥20~≤30	+0/-1.10
LENGTH UNIT	mm		O	4.50-4.70	≥35~≤50	+0/-1.30
TORSIONAL TEST	44 MIN kg-cm		R	9.00R REF		
SURFACE HARDNESS	450-750 HV <sub>0.3</sub>		α	57°-63°		
CORE HARDNESS	450 MAX HV <sub>0.3</sub>		PUNCH NO	NO.2		
BENDING	45° MIN		M	5.00 REF		
	L2	± 1.50	Q	2.60-3.10		
Lg ≤ 24	L1	1/2 × Lg	Thread outside diameter	d	4.50-0.25	
Lg > 24	L1	1/3 × Lg	Thread inside diameter	d1	2.9-0.2	
Lg ≥ 26	θ	23°-26°		p	2.20 ± 10%	L ≥ 25~≤ 30 Lg 18-0.3
Lg ≤ 25	θ1	32°-35°		a	0.30-0.80	L ≥ 35~≤ 40 Lg 24-0.3
					L ≥ 45~≤ 50	Lg 30-0.3

JD-PLUS screws

Pan head with pozi drive d = 4.0 mm and d = 4.5 mm  
Carbon steel

Annex 2.14

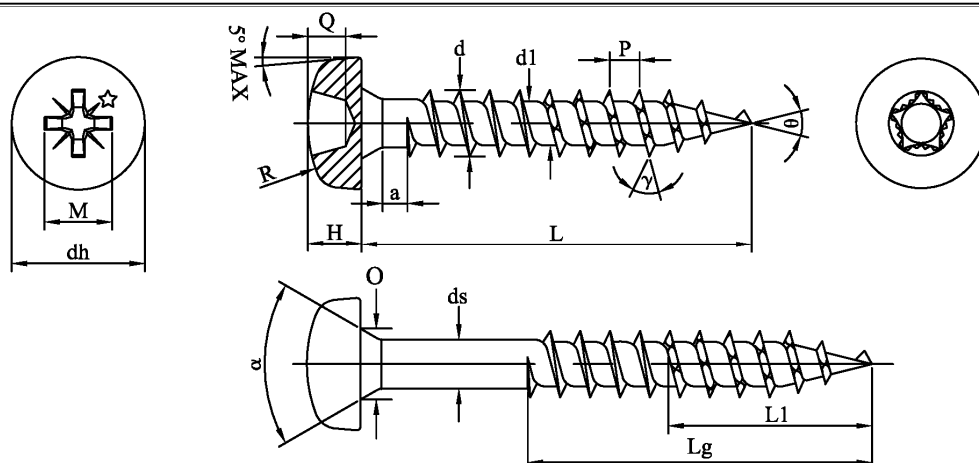

ASTER SCREWS PAN HEAD POZI DRIVE.

DRAWING NO	AS-911 EX15	DIA OF MATERIAL		3.45-3.47		γ	37°-43°
DESCRIPTION	AS/PZ	DIA OF MATERIAL		3.45-3.50	SCREW LENGTH	L	TOLERANCE ON LENGTH
SIZE	M5.0	Head diameter	dh	10.00-0.3			
MATERIAL	C10B21	Shaft diameter	ds	3.45-3.55			
CUSTOMER DRAWING NO	A124-		H	3.30-3.60	≥22~≤30		+0/-1.10
LENGTH UNIT	mm		O	5.00-5.20	≥35~≤50		+0/-1.30
TORSIONAL TEST	63 MIN kg-cm		R	10.00R REF	≥55~≤80		+0/-1.50
SURFACE HARDNESS	450-750 HV <sub>0.3</sub>		α	57°-63°			
CORE HARDNESS	450 MAX HV <sub>0.3</sub>	PUNCH NO		NO.2			
BENDING	45° MIN		M	5.30 REF	L≥25~≤30	Lg	18-0.3
	Lg ± 1.50		Q	3.00-3.45	L≥35~≤40	Lg	24-0.3
Lg≤30	L1 1/2 × Lg	Thread outside diameter	d	5.00-0.3	L≥45~≤50	Lg	30-0.3
Lg>30	L1 1/3 × Lg	Thread inside diameter	d1	3.20-0.25	L60	Lg	36-0.4
Lg≥26	θ 23°-26°		p	2.60 ± 10%	L70	Lg	42-0.4
Lg≤25	θ1 32°-35°		a	0.30-0.80	L80	Lg	48-0.4
DRAWING NO	AS-912 EX15	DIA OF MATERIAL		4.18-4.20		γ	37°-43°
DESCRIPTION	AS/PZ	DIA OF MATERIAL		4.20-4.25	SCREW LENGTH	L	TOLERANCE ON LENGTH
SIZE	M6.0	Head diameter	dh	12.00-0,4			
MATERIAL	C10B21	Shaft diameter	ds	4.20-4.30			
CUSTOMER DRAWING NO	A124-		H	3.80-4.20	≥26~≤30		+0/-1.10
LENGTH UNIT	mm		O	6.00-6.20	≥35~≤50		+0/-1.30
TORSIONAL TEST	110.2 MIN kg-cm		R	12.00R REF	≥55~≤80		+0/-1.50
SURFACE HARDNESS	450-750 HV <sub>0.3</sub>		α	57°-63°			
CORE HARDNESS	450 MAX HV <sub>0.3</sub>	PUNCH NO		NO.3			
BENDING	45° MIN		M	6.60 REF			
	Lg ± 1.50		Q	3.00-3.45	L≥25~≤30	Lg	18-0.3
Lg≤30	L1 1/2 × Lg	Thread outside diameter	d	6.00-0,3	L≥35~≤40	Lg	24-0.3
Lg>30	L1 1/3 × Lg	Thread inside diameter	d1	3.90-0,25	L≥45~≤50	Lg	30-0.3
Lg≥41	θ 23°-26°		p	3.00 ± 10%	L60	Lg	36-0.4
Lg≤40	θ1 32°-35°		a	0.30-0.80	L70	Lg	42-0.4
					L80	Lg	48-0.4

JD-PLUS screws

Pan head with pozi drive d = 5.0 mm and d = 6.0 mm  
Carbon steel

Annex 2.15