

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments



European Technical Assessment

ETA-02/0032
of 7 January 2015

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Hilti push-in anchor HKD

Product family
to which the construction product belongs

Deformation-controlled expansion anchor made of
galvanised or stainless steel of sizes M6, M8, M10, M12,
M16 and M20 for use in non-cracked concrete

Manufacturer

Hilti Aktiengesellschaft
9494 SCHAAN
FÜRSTENTUM LIECHTENSTEIN

Manufacturing plant

Hilti Aktiengesellschaft

This European Technical Assessment
contains

19 pages including 3 annexes

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

Guideline for European technical approval of "Metal
anchors for use in concrete", ETAG 001 Part 4:
"Deformation controlled expansion anchors", April 2013,
used as European Assessment Document (EAD)
according to Article 66 Paragraph 3 of Regulation (EU)
No 305/2011.

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction has to be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission according to Article 25 Paragraph 3 of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The Hilti-push-in anchor HKD of sizes M6, M8, M10, M12, M16 and M20 is an anchor made of galvanised or stainless steel which is placed into a drilled hole and anchored by deformation-controlled expansion.

The anchor consists of an anchor body and an internal plug.

The illustration and the description of the product are given in Annex A.

The fixture shall be anchored with a fastening screw or threaded rod according to Annex B2.

2 Specification of the intended use in accordance with the applicable European assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead the assumption of working life of the anchor of 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance for tension loads in non-cracked concrete	See Annex C1 / C4
Characteristic resistance for shear loads in non-cracked concrete	See Annex C2 / C5
Displacements under tension and shear loads	See Annex C3 / C6

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for Class A1
Resistance to fire	No performance determined (NPD)

3.3 Hygiene, health and the environment (BWR 3)

Not applicable.

3.4 Safety in use (BWR 4)

For Basic Works Requirement Safety in use the same criteria are valid as for Basic Works Requirement Mechanical resistance and stability.

English translation prepared by DIBt

3.5 Protection against noise (BWR 5)

Not applicable.

3.6 Energy economy and heat retention (BWR 6)

Not applicable.

3.7 Sustainable use of natural resources (BWR 7)

For the sustainable use of natural resources no performance was investigated for this product.

3.8 General aspects

The verification of durability is part of testing the essential characteristics. Durability is only ensured if the specifications of intended use according to Annex B are taken into account.

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

According to Decision of the Commission of 24 June 1996 (96/582/EC) (OJ L 254 of 08.10.96 p. 62-65), the system of assessment and verification of constancy of performance (see Annex V and Article 65 Paragraph 2 to Regulation (EU) No 305/2011) given in the following table applies.

Product	Intended use	Level or class	System
Metal anchors for use in concrete (heavy-duty type)	For fixing and/or supporting concrete structural elements or heavy units such as cladding and suspended ceilings	—	1

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European assessment Document

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.

Issued in Berlin on 7 January 2015 by Deutsches Institut für Bautechnik

Uwe Bender
Head of Department

beglaubigt:
Lange

Installed condition

Figure A1:

Hilti push-in anchor HKD with screw


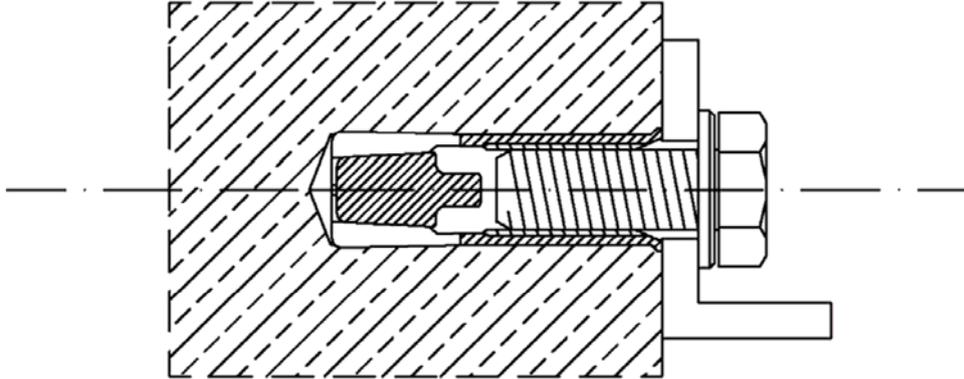


Figure A2:

Hilti push-in anchor HKD with threaded rod, washer and nut

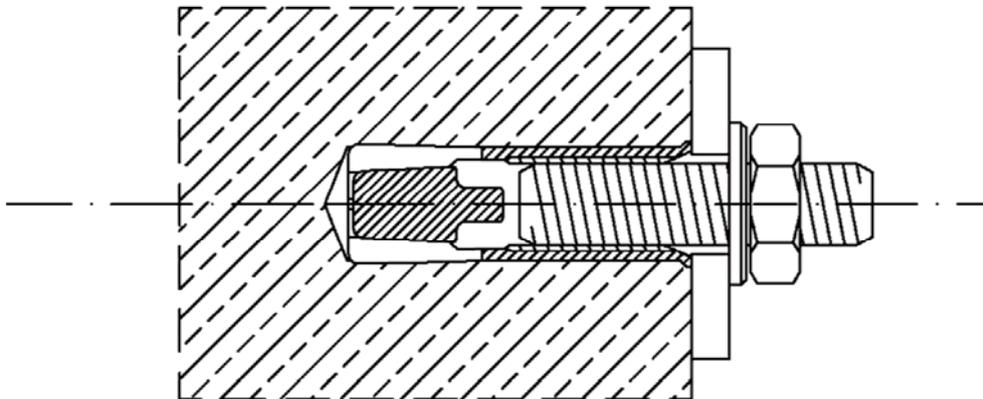


Hilti push-in anchor HKD


Product description
Installed condition

Annex A1

Product description: Hilti push-in anchor HKD

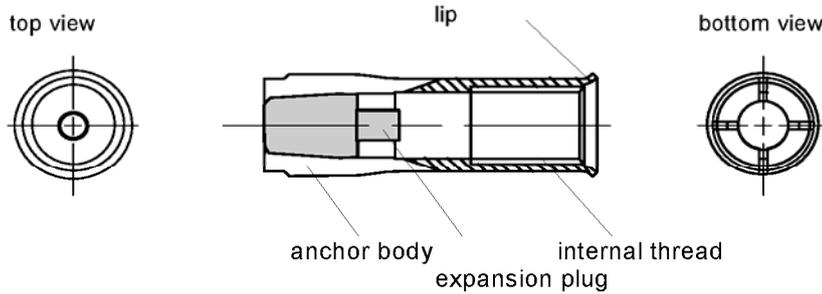


Marking:




HKD

- HKD
- HKD M8 x 30
- HKD M8 x 40
- HKD M10 x 30
- HKD M10 x 40
- HKD M12 x 50
- HKD M16 x 65
- HKD M20 x 80



HKD-woL


- HKD-woL
- HKD-woL M8 x 30
- HKD-woL M8 x 40
- HKD-woL M10 x 30
- HKD-woL M10 x 40
- HKD-woL M12 x 50
- HKD-woL M16 x 65
- HKD-woL M20 x 80



**HKD-S /
HKD-SR**

- HKD-S
- HKD-S M6 x 30 ø8
- HKD-S M8 x 30 ø10
- HKD-S M8 x 40 ø10
- HKD-S M10 x 30 ø12
- HKD-S M10 x 40 ø12
- HKD-S M12 x 50 ø15
- HKD-S M16 x 65 ø20
- HKD-S M20 x 80 ø25

- HKD-SR
- HKD-SR M6 x 30 ø8
- HKD-SR M8 x 30 ø10
- HKD-SR M10 x 40 ø12
- HKD-SR M12 x 50 ø15
- HKD-SR M16 x 65 ø20
- HKD-SR M20 x 80 ø25



**HKD-E /
HKD-ER**

- HKD-E
- HKD-E M6 x 30 ø8
- HKD-E M8 x 30 ø10
- HKD-E M8 x 40 ø10
- HKD-E M10 x 30 ø12
- HKD-E M10 x 40 ø12
- HKD-E M12 x 50 ø15
- HKD-E M16 x 65 ø20
- HKD-E M20 x 80 ø25

- HKD-ER
- HKD-ER M6 x 30 ø8
- HKD-ER M8 x 30 ø10
- HKD-ER M10 x 40 ø12
- HKD-ER M12 x 50 ø15
- HKD-ER M16 x 65 ø20
- HKD-ER M20 x 80 ø25

Hilti push-in anchor HKD






Product description
Anchor types / Marking

Annex A2


Identification after installation

each anchor can be identified with setting tool after installation

Table A1: Identification HKD and HKD-woL

Size		Setting tool	Top view
HKD M8x30		HSD-G M8 x 25/30	
HKD M8x40		HSD-G M8 x 40	
HKD M10x30		HSD-G M10 x 25/30	
HKD M10x40		HSD-G M10 x 40	
HKD M12x50		HSD-G M12 x 50	
HKD M16x65		HSD-G M16 x 65	
HKD M20x80		HSD-G M20 x 80	

Identification HKD-E(R) and HKD-S(R)



additional marking on end-face for M8x40 and M10x40

Hilti push-in anchor HKD

Product description
Identification after installation


Annex A3

Materials and dimensions

Table A2: Materials

designation	material
HKD; HKD-woL	
anchor body	cold formed steel – galvanised to $\geq 5 \mu\text{m}$
expansion plug	cold formed steel
HKD-S; HKD-E	
anchor body	Steel Fe/Zn5 (galvanised $\geq 5 \mu\text{m}$)
expansion plug	cold formed steel
HKD-SR; HKD-ER	
anchor body	stainless steel,, 1.4401, 1.4404 or 1.4571 EN 10088-3:2014
expansion plug	

anchor body

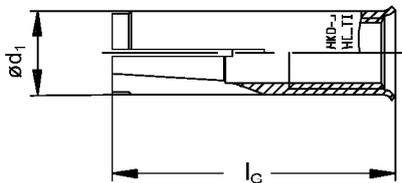

expansion plug




Table A3: Dimensions

anchor size		M6x30	M8x30	M8x40	M10x30	M10x40	M12x50	M16x65	M20x80
Anchor length	l_G [mm]	30	30	40	30	40	50	65	80
Anchor diameter	$\varnothing d_1$ [mm]	8	9,95	9,95	11,8	12	14,9	19,8	24,8
Plug diameter	$\varnothing d_2$ [mm]	5	6,5	6,35	8,2	8,2	10,3	13,8	16,4
Plug length	l_1 [mm]	15	12	16	12	16	20	29	30

Hilti push-in anchor HKD

Product description
Materials and dimensions

Annex A4

Specifications of intended use

Base materials:

- Reinforced or unreinforced normal weight concrete according to EN 206:2013.
- Strength classes C20/25 to C50/60 according to EN 206:2013.
- Non-cracked concrete.

Table B1: Overview use categories and performance categories

Anchorages subject to:	HKD / HKD-woL / HKD-E(R) and HKD-S(R) with ...
	Threaded rod or screw
Hammer drilling 	✓
Static and quasi static loading and non-cracked concrete	M6 to M20 Table : C1, C2, C3, C4, C5 and C6

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (zinc coated steel or stainless steel).
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal conditions, if no particular aggressive conditions exist (stainless steel).

Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e. g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages under static or quasi-static actions are designed in accordance with: "ETAG 001, Annex C, design method A, Edition August 2010"

Installation:

- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- The anchor may only be set once.
- Overhead applications are permitted.

Hilti push-in anchor HKD


Specifications of intended use

Annex B1

Table B2: Installation parameters for HKD-S(R), HKD-E(R), HKD and HKD-woL

HKD	M6x30	M8x30	M8x40	M10x30 ¹⁾	M10x40	M12x50	M16x65	M20x80
Nominal diameter of drill bit d_0 [mm]	8	10	10	12	12	15	20	25
Diameter of thread d [mm]	6	8	8	10	10	12	16	20
drill hole depth h_1 [mm]	32	33	43	33	43	54	70	85
Effective embedment depth h_{ef} [mm]	30	30	40	30	40	50	65	80
Thread engagement length $l_{s,max}$ [mm]	12,5	14,5	17,5	12,7	18	23,5	30,5	42
Minimum screwing depth ¹⁾ $l_{s,min}$ [mm]	6	8	8	10	10	12	16	20
Maximum torque moment T_{inst} [Nm]	4	8	8	15	15	35	60	100
Maximum diameter of clearance hole in the fixture d_f [mm]	7	9	9	12	12	14	18	22

¹⁾ with anchor size M10x30 **only** threaded rod is to be used

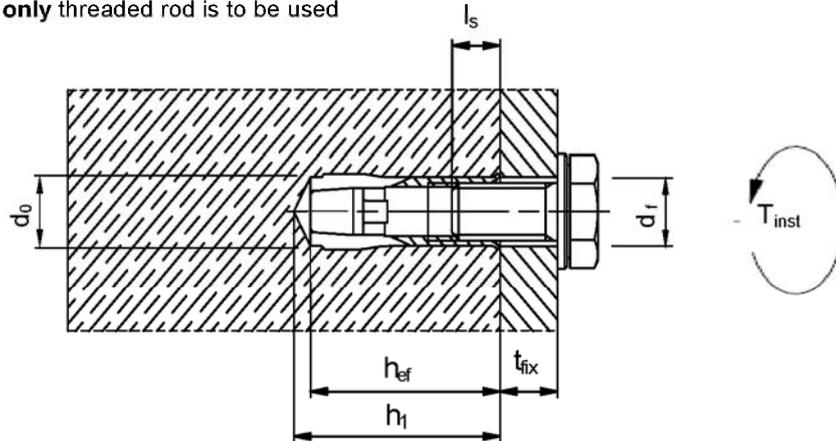

Requirements for fastening screw or threaded rod:

For anchors made of galvanised steel (HKD, HKD-woL, HKD-E and HKD-S) fastening screws or threaded rods of steel grade 4.6 / 5.6 / 5.8 or 8.8 according to EN ISO 898-1:2013 shall be specified.

For anchors made of stainless steel (HKD-ER and HKD-SR) fastening screw or threaded rod of steel grade 70 according EN ISO 3506:2009 shall be specified.

Minimum screw depth $l_{s,min}$: The length of the screw shall be determined depending on thickness of fixture t_{fix} , admissible tolerances and available thread length $l_{s,max}$ as well as minimum screw depth $l_{s,min}$ according table B2

Hilti push-in anchor HKD

Intended Use
Installation parameters


Annex B2

Table B3: Minimum spacing and minimum edge distance for HKD-S(R) and HKD-E(R)

HKD-S(R), HKD-E(R)			M6x30 M8x30 M10x30	M8x40 M10x40	M12x50	M16x65	M20x80
Minimum thickness of concrete member	h_{min}	[mm]	100	100	100	130	160
Minimum spacing	s_{min}	[mm]	60	80	125	130	160
Minimum edge distance	c_{min}	[mm]	105	140	175	230	280

Table B4: Minimum spacing and minimum edge distance for HKD and HKD-woL

HKD, HKD-woL			M8x30 M10x30	M8x40 M10x40	M12x50	M16x65	M20x80
Minimum thickness of concrete member	h_{min}	[mm]	100	100	100	130	160
Minimum spacing	s_{min}	[mm]	60	80	125	130	160
	for $c \geq$	[mm]	105	140	175	230	280
Minimum edge distance	c_{min}	[mm]	80	140	175	230	280
	for $s \geq$	[mm]	120	80	125	130	160

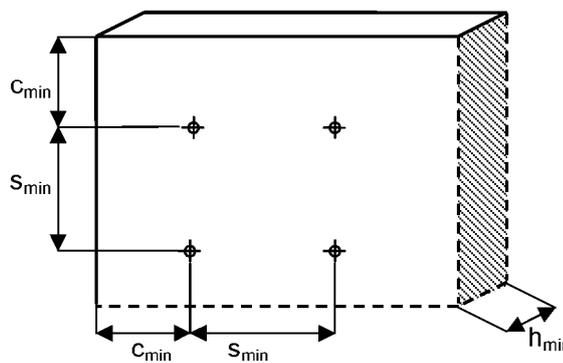

Hilti push-in anchor HKD


Intended Use
Minimum spacing and minimum edge distance

Annex B3


Table B5: Dimensions of the setting tools

Setting tools HSD		M6x30	M8x30	M8x40	M10x30	M10x40	M12x50	M16x65	M20x80
Diameter	d_1 [mm]	7,5	9,5	9,5	11,5	11,5	14,5	18	22
Diameter	d_2 [mm]	5	6,5	6,5	8	8	10,2	13,5	16,5
Length	l_1 [mm]	15	18	28	18	24	30	36	50

Manual setting tool HSD-G M.. x h_{ef} (e.g. HSD-G M8 x 30)

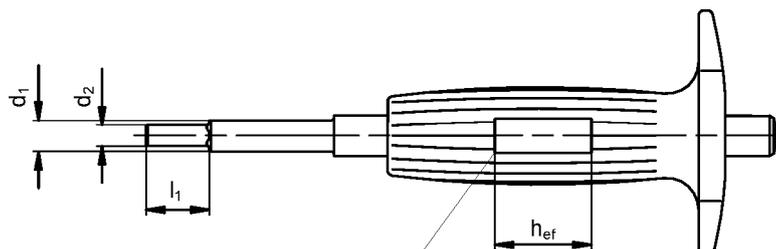

Installation control with
manual setting tool



marking from
setting


anchor gauge with imprint M..x h_{ef} (assigned anchor)
the recess length corresponds to the anchor length h_{ef}

Machine setting tool HSD-M M.. x h_{ef} (e.g. HSD-M M8 x 30)




marking HSD-M M..x h_{ef} (assigned anchor)

Machine setting tool HSD-TE CX M.. x h_{ef} (e.g. HSD-TE-CX M8 x 30)

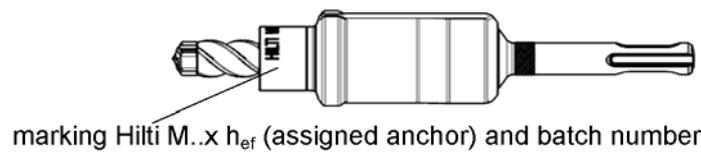


marking Hilti M..x h_{ef} (assigned anchor) and batch number

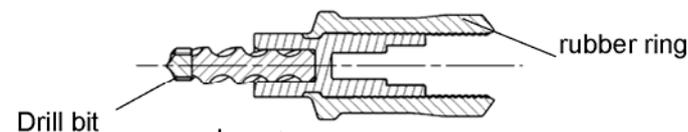

Drill bit

rubber ring

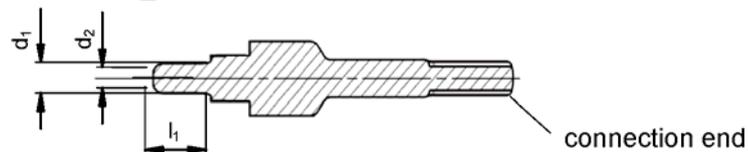


connection end

Hilti push-in anchor HKD

Intended Use
Setting tools

Annex B4

Installation instructions

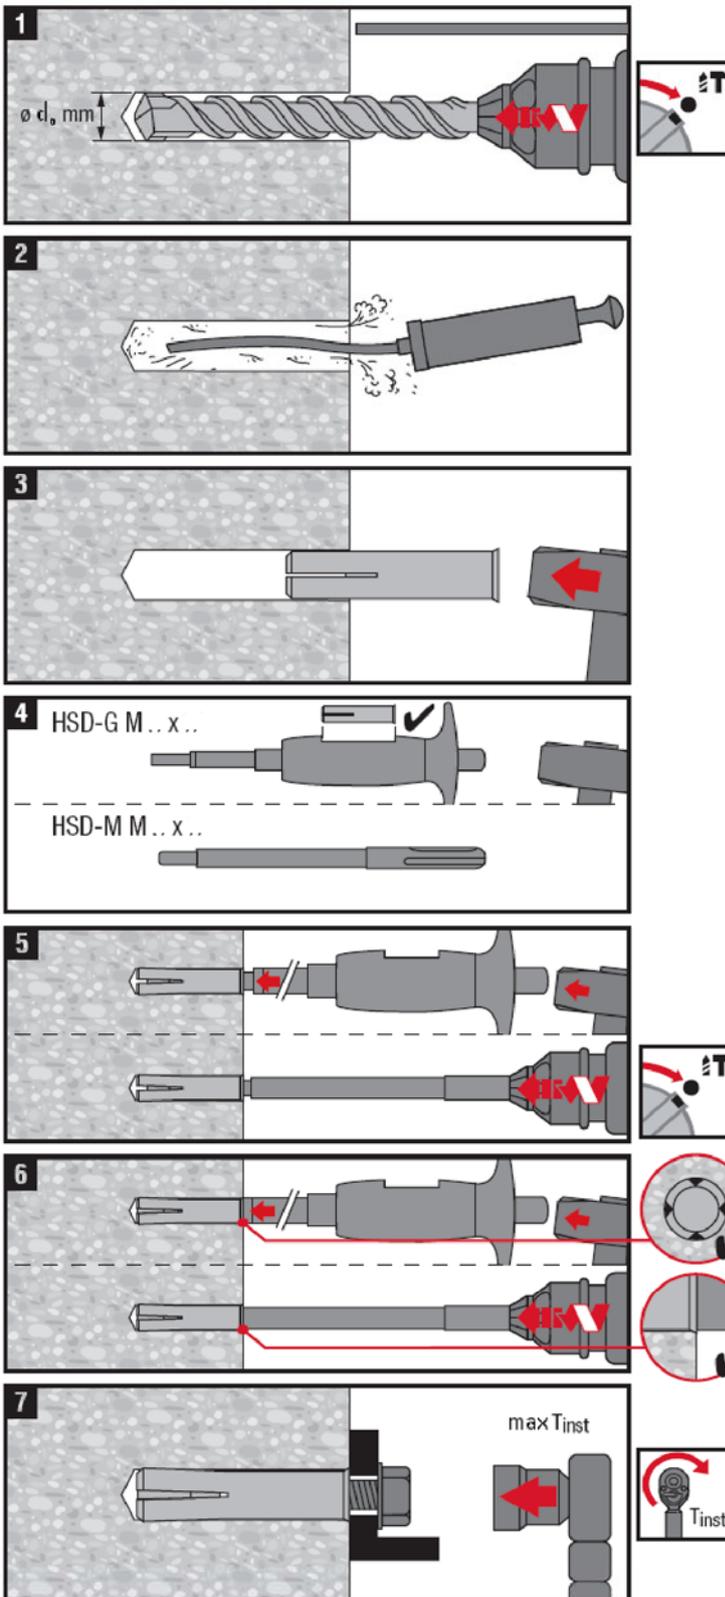

Hilti push-in anchor HKD

Intended Use
Installation instructions

Annex B5

Table C1: Characteristic values of resistance for Hilti push-in anchor HKD-S(R) and HKD-E(R) under tension loads in non-cracked concrete

HKD-S (R) HKD-E (R)		M6x30 ²⁾	M8x30 ²⁾	M8x40	M10x30 ²⁾	M10x40	M12x50	M16x65	M20x80	
Installation safety factor	γ_2	1,0		1,2	1,0					
Steel failure										
Steel grade 4.6	$N_{Rk,s}$ [kN]	8,0	14,6	14,6	23,2	23,2	33,7	62,8	98,0	
Partial safety factor	γ_{Ms} ¹⁾	2,0								
Steel grade 5.6	$N_{Rk,s}$ [kN]	10,1	18,3	18,3	18,5	19,9	42,2	54,7	86,9	
Partial safety factor	γ_{Ms} ¹⁾	2,0			1,49		2,0	1,47		
Steel grade 5.8	$N_{Rk,s}$ [kN]	10,1	17,4	17,4	18,5	19,9	35,3	54,7	86,9	
Partial safety factor	γ_{Ms} ¹⁾	1,50	1,53		1,49		1,47			
Steel grade 8.8	$N_{Rk,s}$ [kN]	13,4	17,4	17,4	18,5	19,9	35,3	54,7	86,9	
Partial safety factor	γ_{Ms} ¹⁾	1,53			1,49		1,47			
Steel grade 70	$N_{Rk,s}$ [kN]	12,8	16,8	-	-	21,1	37,3	64,2	102,0	
Partial safety factor	γ_{Ms} ¹⁾	1,83		-		1,83				
Pullout failure										
Characteristic resistance C20/25	$N_{Rk,p}$ [kN]	-- ³⁾		9,0	-- ³⁾					
Increasing factors for $N_{Rk,p}$	ψ_c	C30/37				1,22				
		C40/50				1,41				
		C50/60				1,55				
Concrete cone and splitting failure										
Effective embedment depth	h_{ef} [mm]	30 ²⁾	30 ²⁾	40	30 ²⁾	40	50	65	80	
Spacing	$s_{cr,N}$ [mm]	90	90	120	90	120	150	195	240	
Edge distance	$c_{cr,N}$ [mm]	45	45	60	45	60	75	97	120	
Spacing	$s_{cr,sp}$ [mm]	210	210	280	210	280	350	455	560	
Edge distance	$c_{cr,sp}$ [mm]	105	105	140	105	140	175	227	280	

¹⁾ In absence of other national regulations

²⁾ For application with statically indeterminate structural components only

³⁾ Pull-out failure mode is not decisive

Hilti push-in anchor HKD

Performances

Characteristic values of resistance for Hilti push-in anchor HKD-S(R) and HKD-E(R) under tension loads in non-cracked concrete

Annex C1

Table C2: Characteristic values of resistance for Hilti push-in anchor HKD-S(R) and HKD-E(R) under shear loads in non-cracked

HKD-S (R) HKD-E (R)			M6x30 ²⁾	M8x30 ²⁾	M8x40	M10x30 ²⁾	M10x40	M12x50	M16x65	M20x80
Steel failure without lever arm										
Steel grade 4.6	$V_{RK,S}$	[kN]	4,0	7,3	7,3	7,4	8,0	16,9	21,9	34,7
Partial safety factor	$\gamma_{Ms}^1)$		1,67			1,25		1,67	1,25	
Steel grade 5.6	$V_{RK,S}$	[kN]	5,0	7,0	7,0	7,4	8,0	14,1	21,9	34,7
Partial safety factor	$\gamma_{Ms}^1)$		1,67	1,27		1,25				
Steel grade 5.8	$V_{RK,S}$	[kN]	5,0	7,0	7,0	7,4	8,0	14,1	21,9	34,7
Partial safety factor	$\gamma_{Ms}^1)$		1,25	1,27		1,25				
Steel grade 8.8	$V_{RK,S}$	[kN]	5,3	7,0	7,0	7,4	8,0	14,1	21,9	34,7
Partial safety factor	$\gamma_{Ms}^1)$		1,27			1,25				
Steel grade 70	$V_{RK,S}$	[kN]	6,4	8,4	-	-	10,5	18,7	32,1	51,0
Partial safety factor	$\gamma_{Ms}^1)$		1,52		-		1,52			
Steel failure with lever arm										
Steel grade 4.6	$M^0_{RK,S}$	[Nm]	6	15	15	30	30	52	133	260
Partial safety factor	$\gamma_{Ms}^1)$		1,67							
Steel grade 5.6	$M^0_{RK,S}$	[Nm]	8	19	19	37	37	65	166	325
Partial safety factor	$\gamma_{Ms}^1)$		1,67							
Steel grade 5.8	$M^0_{RK,S}$	[Nm]	8	19	19	37	37	65	166	325
Partial safety factor	$\gamma_{Ms}^1)$		1,25							
Steel grade 8.8	$M^0_{RK,S}$	[Nm]	12	30	30	60	60	105	266	519
Partial safety factor	$\gamma_{Ms}^1)$		1,25							
Steel grade 70	$M^0_{RK,S}$	[Nm]	11	26	-	-	52	92	233	454
Partial safety factor	$\gamma_{Ms}^1)$		1,56		-		1,56			
Concrete pry-out failure										
Factor in equation (5.6) ETAG Annex C, §5.2.3.3	k		2,0							
Concrete edge failure										
Effective length of anchor	l_f	[mm]	30	30	40	30	40	50	65	80
External diameter of anchor	d_{nom}	[mm]	8	10	10	12	12	15	20	25

¹⁾ In absence of other national regulations

²⁾ For application with statically indeterminate structural components only

Hilti push-in anchor HKD

Performances

Characteristic values of resistance for Hilti push-in anchor HKD-S(R) and HKD-E(R) under shear loads in non-cracked concrete

Annex C2

Table C3: Displacement under tension load for HKD-S(R) and HKD-E(R)

HKD-S (R) HKD-E (R)			M6x30	M8x30	M8x40	M10x30	M10x40	M12x50	M16x65	M20x80
Tension load in C20/25 to C50/60 non-cracked concrete	N	[kN]	3,3	3,3	3,6	3,3	5,1	7,1	12,6	17,2
Displacement	δ_{N0}	[mm]	0,1	0,1	0,1	0,1	0,1	0,1	0,1	0,1
	$\delta_{N\infty}$	[mm]	0,2	0,2	0,2	0,2	0,2	0,2	0,2	0,2

Table C4: Displacement under shear load for HKD-S(R) and HKD-E(R)

HKD-S HKD-E			M6x30	M8x30	M8x40	M10x30	M10x40	M12x50	M16x65	M20x80
Shear load in C20/25 to C50/60 non-cracked concrete	V	[kN]	1,7	3,1	3,1	4,3	4,6	7,2	12,5	19,8
Displacement	δ_{V0}	[mm]	0,35	0,35	0,40	0,35	0,40	0,45	0,75	0,75
	$\delta_{V\infty}$	[mm]	0,50	0,50	0,60	0,50	0,60	0,70	1,1	1,1

Table C5: Displacement under shear load for HKD-S(R) and HKD-E(R)

HKD-SR HKD-ER			M6x30	M8x30	M10x40	M12x50	M16x65	M20x80
Shear load in C20/25 to C50/60 non-cracked concrete	V	[kN]	1,7	3,9	4,9	8,8	15,1	24,0
Displacement	δ_{V0}	[mm]	0,35	0,45	0,45	0,55	0,9	0,9
	$\delta_{V\infty}$	[mm]	0,50	0,65	0,65	0,85	1,3	1,3

Hilti push-in anchor HKD

Performance

Displacement under tension load and under shear load for HKD-S(R) and HKD-E(R)

Annex C3

Table C6: Characteristic values of resistance for Hilti push-in anchor HKD and HKD-woL under tension loads in non-cracked concrete

HKD HKD-woL			M8x30 ²⁾	M8x40	M10x30 ²⁾	M10x40	M12x50	M16x65	M20x80
Installation safety factor	γ_2		1,0	1,2	1,0				
Steel failure									
Steel grade 4.6	$N_{RK,s}$	[kN]	14,6	14,6	19,9	22,1	33,7	62,8	98,0
Partial safety factor	γ_{Ms}	¹⁾	2,0		1,5		2,0		
Steel grade 5.6	$N_{RK,s}$	[kN]	17,1	19,4	19,9	22,1	36,6	67,5	99,0
Partial safety factor	γ_{Ms}	¹⁾	1,5						
Steel grade 5.8	$N_{RK,s}$	[kN]	17,1	19,4	19,9	22,1	36,6	67,5	99,0
Partial safety factor	γ_{Ms}	¹⁾	1,5						
Steel grade 8.8	$N_{RK,s}$	[kN]	17,1	19,4	19,9	22,1	36,6	67,5	99,0
Partial safety factor	γ_{Ms}	¹⁾	1,5						
Pullout failure									
Characteristic resistance C20/25	$N_{RK,p}$	[kN]	-- ³⁾	9,0	-- ³⁾				
Increasing factors for $N_{RK,p}$	ψ_c	C30/37	1,22						
		C40/50	1,41						
		C50/60	1,55						
Concrete cone and splitting failure									
Effective embedment depth	h_{ef}	[mm]	30 ²⁾	40	30 ²⁾	40	50	65	80
Spacing	$s_{cr,N}$	[mm]	90	120	90	120	150	195	240
Edge distance	$c_{cr,N}$	[mm]	45	60	45	60	75	97	120
Spacing	$s_{cr,sp}$	[mm]	210	280	210	280	350	455	560
Edge distance	$c_{cr,sp}$	[mm]	105	140	105	140	175	227	280

¹⁾ In absence of other national regulations

²⁾ For application with statically indeterminate structural components only

³⁾ Pull-out failure mode is not decisive

Hilti push-in anchor HKD

Performances

Characteristic values of resistance under tension loads in non-cracked concrete

Annex C4

Table C7: Characteristic values of resistance for Hilti push-in anchor HKD and HKD-woL under shear loads in non-cracked concrete

HKD HKD-woL			M8x30 ²⁾	M8x40	M10x30 ²⁾	M10x40	M12x50	M16x65	M20x80
Steel failure without lever arm									
Steel grade 4.6	$V_{RK,s}$	[kN]	7,3	7,3	10,0	11,0	16,9	31,4	49
Partial safety factor	γ_{Ms}^1		1,67		1,25		1,67		
Steel grade 5.6	$V_{RK,s}$	[kN]	8,6	9,2	10,0	11,0	18,3	33,8	49,5
Partial safety factor	γ_{Ms}^1		1,25	1,67	1,25				
Steel grade 5.8	$V_{RK,s}$	[kN]	8,6	9,2	10,0	11,0	18,3	33,8	49,5
Partial safety factor	γ_{Ms}^1		1,25						
Steel grade 8.8	$V_{RK,s}$	[kN]	8,6	9,2	10,0	11,0	18,3	33,8	49,5
Partial safety factor	γ_{Ms}^1		1,25						
Steel failure with lever arm									
Steel grade 4.6	$M_{RK,s}^0$	[Nm]	15	15	30	30	52	133	260
Partial safety factor	γ_{Ms}^1		1,67						
Steel grade 5.6	$M_{RK,s}^0$	[Nm]	19	19	37	37	65	166	325
Partial safety factor	γ_{Ms}^1		1,67						
Steel grade 5.8	$M_{RK,s}^0$	[Nm]	19	19	37	37	65	166	325
Partial safety factor	γ_{Ms}^1		1,25						
Steel grade 8.8	$M_{RK,s}^0$	[Nm]	30	30	60	60	105	266	519
Partial safety factor	γ_{Ms}^1		1,25						
Concrete pry-out failure									
Factor in equation (5.6) ETAG Annex C, §5.2.3.3	k		2,0						
Concrete edge failure									
Effective length of anchor	l_f	[mm]	30	40	30	40	50	65	80
External diameter of anchor	d_{nom}	[mm]	10	10	12	12	15	20	25

¹⁾ In absence of other national regulations

²⁾ For application with statically indeterminate structural components only

Hilti push-in anchor HKD

Performances

Characteristic values of resistance for Hilti push-in anchor HKD and HKD-woL under shear loads in non-cracked concrete

Annex C5

Table C8: Displacement under tension load for HKD and HKD-woL

HKD HKD-woL		M8x30	M8x40	M10x30	M10x40	M12x50	M16x65	M20x80
Tension load in C20/25 to C50/60 non-cracked concrete	N [kN]	4,0	4,3	4,0	6,1	8,5	12,6	17,2
Displacement	δ_{N0} [mm]	0,1	0,1	0,1	0,1	0,1	0,1	0,1
	$\delta_{N\infty}$ [mm]	0,3	0,3	0,3	0,3	0,3	0,2	0,2

Table C9: Displacement under shear load for HKD and HKD-woL

HKD HKD-woL		M8x30	M8x40	M10x30	M10x40	M12x50	M16x65	M20x80
Shear load in C20/25 to C50/60 non-cracked concrete	N [kN]	3,1	3,1	4,3	4,6	7,2	12,5	19,8
Displacement	δ_{N0} [mm]	0,35	0,40	0,35	0,40	0,45	0,75	0,75
	$\delta_{N\infty}$ [mm]	0,50	0,60	0,50	0,60	0,70	1,1	1,1

Hilti push-in anchor HKD

Performance

Displacement under tension load and under shear load for HKD and HKD-woL

Annex C6