

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments



European Technical Assessment

ETA-04/0092
of 26 January 2015

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

MKT Injection System VMZ

Product family
to which the construction product belongs

Torque controlled bonded anchor with anchor rod VMZ-A
and internal threaded rod VMZ-IG for use in concrete

Manufacturer

MKT
Metall-Kunststoff-Technik GmbH & Co. KG
Auf dem Immel 2
67685 Weilerbach

Manufacturing plant

MKT
Metall-Kunststoff-Technik GmbH & Co. KG
Auf dem Immel 2
67685 Weilerbach

This European Technical Assessment
contains

32 pages including 3 annexes which form an integral part
of this assessment

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

Guideline for European technical approval of "Metal
anchors for use in concrete", ETAG 001 Part 5: "Bonded
anchors", April 2013,
used as European Assessment Document (EAD)
according to Article 66 Paragraph 3 of Regulation (EU)
No 305/2011.

**European Technical Assessment
ETA-04/0092**

English translation prepared by DIBt

Page 2 of 32 | 26 January 2015

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction has to be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission according to Article 25 Paragraph 3 of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The Injection System VMZ is a torque controlled bonded anchor consisting of a cartridge with injection mortar VMZ or VMZ Express and an anchor rod with expansion cones and external connection thread (type VMZ-A) or with internal connection thread (type VMZ-IG).

The load transfer is realised by mechanical interlock of several cones in the bonding mortar and then via a combination of bonding and friction forces in the anchorage ground (concrete).

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance of VMZ-A	See Annex C1 to C7
Displacements under tension and shear loads for VMZ-A	See Annex C8 and C9
Characteristic resistance of VMZ-IG	See Annex C10 and C12
Displacements under tension and shear loads for VMZ-IG	See Annex C12

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for Class A1
Resistance to fire	No performance determined (NPD)

3.3 Hygiene, health and the environment (BWR 3)

Regarding dangerous substances there may be requirements (e.g. transposed European legislation and national laws, regulations and administrative provisions) applicable to the products falling within the scope of this European Technical Assessment. In order to meet the provisions of Regulation (EU) No 305/2011, these requirements need also to be complied with, when and where they apply.

3.4 Safety in use (BWR 4)

The essential characteristics regarding Safety in use are included under the Basic Works Requirement Mechanical resistance and stability.

3.5 Protection against noise (BWR 5)

Not applicable.

3.6 Energy economy and heat retention (BWR 6)

Not applicable.

3.7 Sustainable use of natural resources (BWR 7)

The sustainable use of natural resources was not investigated.

3.8 General aspects

The verification of durability is part of testing the essential characteristics. Durability is only ensured if the specifications of intended use according to Annex B are taken into account.

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

According to Decision of the Commission of 24 June 1996 (96/582/EC) (OJ L 254 of 08.10.96 p. 62-65), the system of assessment and verification of constancy of performance (see Annex V and Article 65 Paragraph 2 to Regulation (EU) No 305/2011) given in the following table applies.

Product	Intended use	Level or class	System
Metal anchors for use in concrete (heavy-duty type)	For fixing and/or supporting concrete structural elements or heavy units such as cladding and suspended ceilings	—	1

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document

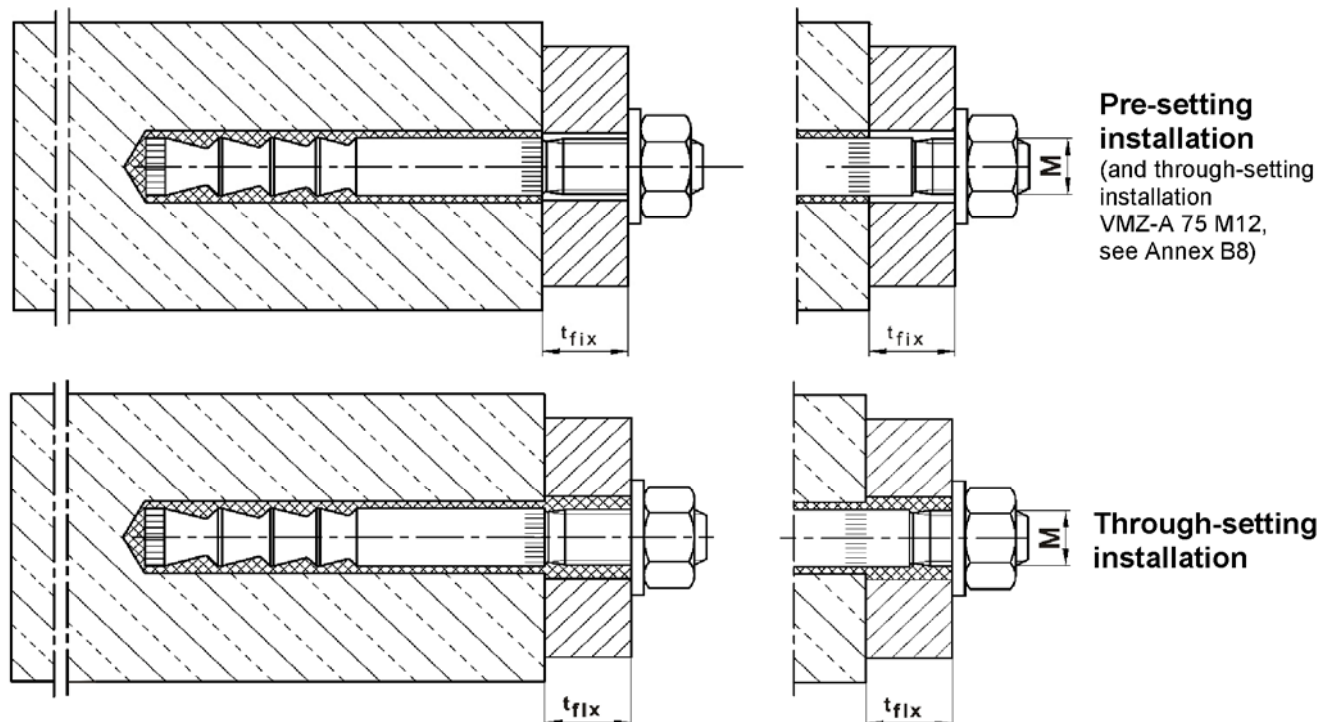
Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.

Issued in Berlin on 26 January 2015 by Deutsches Institut für Bautechnik


Andreas Kummerow
p. p. Head of Department

beglaubigt:
Lange

Anchor rod VMZ-A



Anchor rod **VMZ-IG** ¹⁾

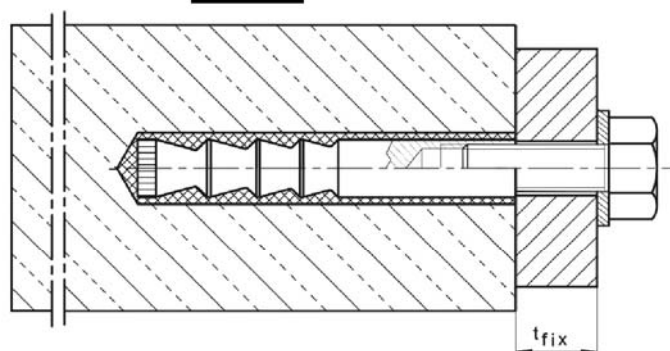

¹⁾ Illustration with hexagon head screw exemplified; other screws or threaded rods also permitted (see Annex A5, requirements of the fastening screw or threaded rod)

Anchor version	Product description	Intended use	Performance
VMZ-A	Annex A1 – Annex A4	Annex B1 – Annex B8	Annex C1 – Annex C9
VMZ-IG	Annex A1 – Annex A2; Annex A5	Annex B1 – Annex B2; Annex B9 – Annex B11	Annex C10 – Annex C12


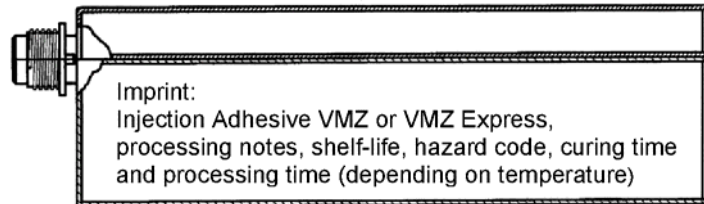

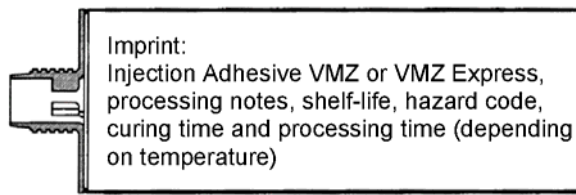
Injection System VMZ

Product description
Installation situation

Annex A1

Injection System VMZ




Mortar cartridge




Sealing
cap



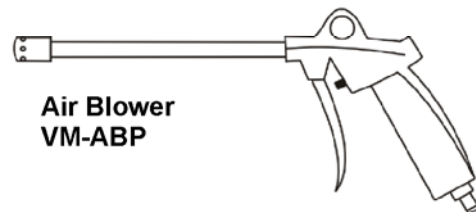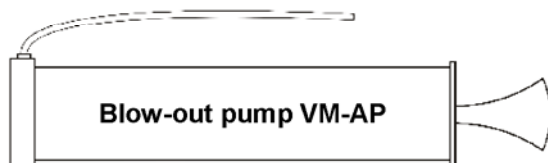Static mixer
VM-X




Cleaning Brush RB




Anchor rod VMZ-A

Washer

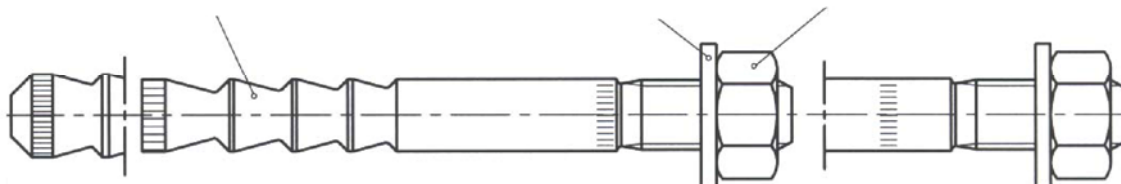Hexagon nut



Anchor rod VMZ-IG



Injection System VMZ

Product description
Cartridges / Cleaning tools / Anchor types

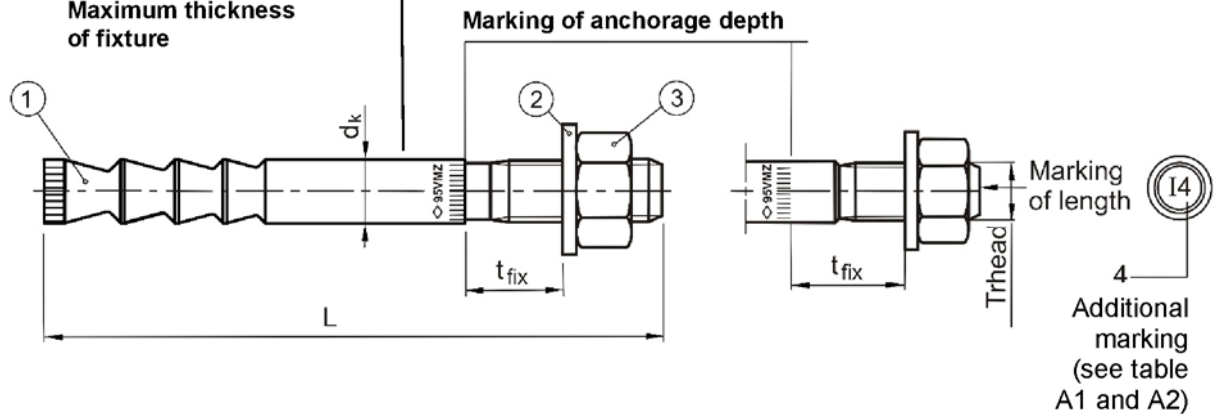
Annex A2

Marking: e.g. ◇ 95 VMZ 12-25 ...

◇ Identifying mark of
manufacturing plant
95 Anchorage depth
VMZ Trade name
12 Size of thread
25 Maximum thickness
of fixture

A4 additional marking of
stainless steel A4

HCR additional marking of
high corrosion resistant steel HCR



Marking of length	B	C	D	E	F	G	H	I	J	K	L	M
Length of anchor min \geq	50,8	63,5	76,2	88,9	101,6	114,3	127,0	139,7	152,4	165,1	177,8	190,5
Length of anchor max $<$	63,5	76,2	88,9	101,6	114,3	127,0	139,7	152,4	165,1	177,8	190,5	203,2

Marking of length	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	>Z
Length of anchor min \geq	203,2	215,9	228,6	241,3	254,0	279,4	304,8	330,2	355,6	381,0	406,4	431,8	457,2	482,6
Length of anchor max $<$	215,9	228,6	241,3	254,0	279,4	304,8	330,2	355,6	381,0	406,4	431,8	457,2	482,6	

Table A1: Dimensions of anchor rod, VMZ-A M8 – M12

Anchor size VMZ-A		40 M8	50 M8	60 M10	75 M10	75 M12	70 M12	80 M12	95 M12	100 M12	110 M12	125 M12
Additional marking		1	2	1	2	1	2	3	4	5	6	7
1	Anchor rod	Thread	M8	M8	M10	M10	M12	M12	M12	M12	M12	M12
		Number of cones	2	3	3	3	3	4	4	6	6	6
		$d_k =$	8,0	8,0	9,7	9,7	10,7	12,5	12,5	12,5	12,5	12,5
		Length L	$52+t_{fix}$	$63+t_{fix}$	$75+t_{fix}$	$90+t_{fix}$	$95+t_{fix}$	$90+t_{fix}$	$100+t_{fix}$	$115+t_{fix}$	$120+t_{fix}$	$130+t_{fix}$
3	Hexagon nut	SW	13	13	17	17	19	19	19	19	19	19

Dimensions in mm

Injection System VMZ

Product description

Anchor parts / Marking / Anchor dimensions **VMZ-A M8 – M12**

Annex A3

Table A2: Dimensions of anchor rod, VMZ-A M16 – M24

Anchor size VMZ-A		90 M16	105 M16	125 M16	145 M16	160 M16	115 M20	170 M20 (LG)	190 M20 (LG)	170 M24 (LG)	200 M24 (LG)	225 M24 (LG)
Additional marking		1	2	3	4	5	1	2	3	1	2	3
1	Anchor rod											
	Thread	M16	M16	M16	M16	M16	M20	M20	M20	M24	M24	M24
	Number of cones	3	4	6	6	6	3	6	6	6	6	6
	$d_k =$	16,5	16,5	16,5	16,5	16,5	19,7	22,0	22,0	24,0	24,0	24,0
Length L		114	129	150	170	185	143	203	223	210	240	265
		+t _{fix}	+t _{fix}	+t _{fix}	+t _{fix}	+t _{fix}	+t _{fix}	+t _{fix}	+t _{fix}	+t _{fix}	+t _{fix}	+t _{fix}
3	Hexagon nut SW	24	24	24	24	24	30	30	30	36	36	36

Dimensions in mm

Table A3: Materials VMZ-A

Part	Designation	Steel, zinc plated	Steel, hot-dip galvanised $\geq 40\mu\text{m}$	Stainless steel A4	High corrosion resistant steel (HCR)
1	Anchor rod	Steel acc. to EN 10087:1998, galvanised and coated	Steel acc. to EN 10087:1998, hot-dip galvanised and coated	Stainless steel, 1.4401, 1.4404, 1.4571, 1.4362, EN 10088:2005, coated	High corrosion resistant steel 1.4529, 1.4565 acc. to EN 10088:2005, coated
2	Washer	Steel, zinc plated	Steel, zinc plated	Stainless steel, 1.4401, 1.4571, EN 10088:2005	High corrosion resistant steel 1.4529 or 1.4565, acc. to EN 10088:2005
3	Hexagon nut	Property class 8 acc. to EN ISO 898-2:2012-08, galvanised	Property class 8 acc. to EN ISO 898-2:2012-08, hot-dip galvanised	ISO 3506:2009, A4-70, 1.4401, 1.4571, EN 10088:2005	ISO 3506:2009, Property class 70, high corrosion resistant steel 1.4529 or 1.4565, EN 10088:2005
4	Mortar cartridge	Vinylester resin, styrene free, mixing ratio 1:10			

Injection System VMZ

Product description

Anchor dimensions VMZ-A M16 – M24 / Materials VMZ-A

Annex A4

Marking: e.g. \diamond 80 VMZ M10



Identifying mark of
manufacturing plant

80

Anchorage depth

VMZ

Trade name

M10

Size of internal thread

A4 additional marking
of stainless steel A4

HCR additional marking of
high corrosion resistant steel HCR

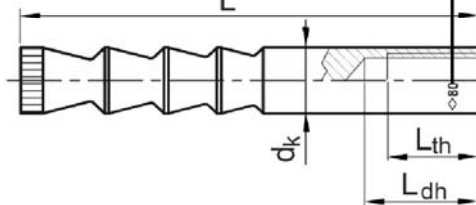


Table A4: Dimensions of anchor rod **VMZ-IG**

Anchor size VMZ-IG		40 M6	50 M6	60 M8	75 M8	70 M10	80 M10	90 M12	105 M12	125 M12	115 M16	170 M16	170 M20
Internal thread	-	M6	M6	M8	M8	M10	M10	M12	M12	M12	M16	M16	M20
Number of cones	-	2	3	3	3	3	4	3	4	6	3	6	6
Outer diameter	d_k [mm]	8,0	8,0	9,7	10,7	12,5	12,5	16,5	16,5	16,5	19,7	22,0	24,0
Thread length	L_{th} [mm]	12	15	16	19	20	23	24	27	30	32	32	40
Total length	L [mm]	41	52	63	78	74	84	94	109	130	120	180	182
Length identifier	[mm]	L_{dh} < 18	L_{dh} > 19	L_{dh} < 22,5	L_{dh} > 23,5	L_{dh} < 27	L_{dh} > 28	L_{dh} < 31,5	32,5 < L_{dh} < 34,5	L_{dh} > 35,5	d_k < 21	d_k > 21	-

Table A5: Materials **VMZ-IG**

Part	Designation	Steel, zinc plated	Stainless steel A4	High corrosion resistant steel (HCR)
1	Anchor rod	Steel acc. to EN 10087:1998, galvanised and coated	Stainless steel, 1.4401, 1.4404, 1.4571, 1.4362, EN 10088:2005, coated	High corrosion resistant steel 1.4529, 1.4565 acc. to EN 10088:2005, coated
4	Mortar cartridge	Vinylester resin, styrene free, mixing ratio 1:10		

Requirements of the fastening screw or the threaded rod and nut

- Minimum screw-in depth L_{smin} see Table B8:
- The length of screw or the threaded rod must depending on the thickness of fixture t_{fix} , available thread length L_{th} (= maximum available thread length, see Table B8:) and the minimum screw-in depth L_{smin} be established.
- $A_5 > 8$ % ductility

Steel, zinc plated

- Minimum property class 8.8 according to EN ISO 898-1:2013 or EN ISO 898-2:2012

Stainless steel A4

- Material 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 according to EN 10088:2005
- Minimum property class 70 according to EN ISO 3506:2009

High corrosion resistant steel (HCR)

- Material 1.4529; 1.4565 according to EN 10088:2005
- Minimum property class 70 according to EN ISO 3506:2009

Injection System VMZ

Product description

Anchor parts / anchor dimensions / Materials **VMZ-IG**

Annex A5

Specifications of intended use

Injection System VMZ-A	M8	M10	M12	M16	M20	M24
Static or quasi-static action	✓					
Seismic action, category C1 and C2	-	✓	✓	✓	✓	✓
Cracked and non-cracked	✓					
Injection System VMZ-IG	M6	M8	M10	M12	M16	M20
Static or quasi-static action	✓					
Seismic action	-					
Cracked and non-cracked	✓					

Base materials:

- Reinforced or unreinforced normal weight concrete according to EN 206-1:2000-12
- Strength classes C20/25 to C50/60 according to EN 206-1:2000-12

Temperature Range:

- Temperature Range I: -40 °C to +80 °C (max short term temperature +80 °C and max long term temperature +50 °C)
- Temperature Range II: -40 °C to +120 °C (max short term temperature +120 °C and max long term temperature +72 °C)

Use conditions:

- Structures subject to dry internal conditions (zinc plated steel or hot dip galvanized steel, stainless steel or high corrosion resistant steel).
- Structures subject to external atmospheric exposure including industrial and marine environment or exposure to permanently damp internal condition, if no particular aggressive conditions exist (stainless steel or high corrosion resistant steel).
- Structures subject to external atmospheric exposure and to permanently damp internal condition, if other particular aggressive conditions (high corrosion resistant steel).
Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used).

Design:

- Anchorage are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorage under static or quasi-static actions are designed in accordance with:
 - ETAG 001, Annex C, design method A, Edition August 2010 or
 - CEN/TS 1992-4:2009, design method A
- Anchorage under seismic actions (cracked concrete) are designed in accordance with:
 - EOTA Technical Report TR 045, Edition February 2013
 - Anchorage shall be positioned outside of critical regions (e.g. plastic hinges) of the concrete structure.
 - Fastenings in stand-off installation or with a grout layer are not allowed.

Injection System VMZ

Intended Use
Specifications

Annex B1

Table B1: Installation conditions

- Anchor installation is carried out by appropriately qualified personnel and under the supervision of the construction manager.
- Water filled bore holes (where admissible) must not be polluted – otherwise the cleaning of the drill hole must be repeated.
- The anchor component installation temperature shall be at least +5 °C; during curing of the injection mortar the temperature of the concrete must not fall below -5 °C. Curing time must be observed prior to loading the anchor.

Anchor size VMZ-A			M8	M10 and 75 M12	70 M12 and 80 M12 - M24
Nominal diameter of drill hole	d ₀	[mm]	< 14		≥ 14
Installation allowable in	dry concrete	-	yes		yes
	wet concrete	-	yes		yes
	water-filled hole	-	no		yes
Hole drilling by	Hammer drill bit	-	yes		yes
	Diamond drill bit (not under seismic action)	-	no	yes	yes

Anchor size VMZ-IG			M6 – M8		M10 – M20
Nominal diameter of drill hole	d ₀	[mm]	< 14		≥ 14
Installation allowable in	dry concrete	-	yes		yes
	wet concrete	-	yes		yes
	water-filled hole	-	no		yes
Hole drilling by	Hammer drill bit	-	yes		yes
	Diamond drill bit	-	no		yes

Table B2: Processing time and curing time VMZ

Temperature [°C] in the drill hole	Maximum processing time	Minimum curing time	
		dry concrete	wet concrete
+ 40 °C	1,4 min	15 min	30 min
+ 35 °C to + 39 °C	1,4 min	20 min	40 min
+ 30 °C to + 34 °C	2 min	25 min	50 min
+ 20 °C to + 29 °C	4 min	45 min	1:30 h
+ 10 °C to + 19 °C	6 min	1:20 h	2:40 h
+ 5 °C to + 9 °C	12 min	2:00 h	4:00 h
0 °C to + 4 °C	20 min	3:00 h	6:00 h
- 4 °C to - 1 °C	45 min	6:00 h	12:00 h
- 5 °C	1:30 h	6:00 h	12:00 h

Table B3: Processing time and curing time VMZ Express

Temperature [°C] in the drill hole	Maximum processing time	Minimum curing time	
		dry concrete	wet concrete
+ 30 °C	1 min	10 min	20 min
+ 20 °C to + 29 °C	1 min	20 min	40 min
+ 10 °C to + 19 °C	3 min	40 min	80 min
+ 5 °C to + 9 °C	6 min	1:00 h	2:00 h
+ 0 °C to + 4 °C	10 min	2:00 h	4:00 h
- 4 °C to - 1 °C	20 min	4:00 h	8:00 h
- 5 °C	40 min	4:00 h	8:00 h

Injection System VMZ

Intended Use

Installation conditions / processing and curing time

Annex B2

Table B4: Installation parameters, VMZ-A M8 – M12

Anchor size VMZ-A			40 M8	50 M8	60 M10	75 M10	75 M12	70 M12	80 M12	95 M12	100 M12	110 M12	125 M12
Effective anchorage depth	$h_{ef} \geq$	[mm]	40	50	60	75	75	70	80	95	100	110	125
Nominal diameter of drill hole	$d_0 =$	[mm]	10	10	12	12	12	14	14	14	14	14	14
Depth of drill hole	$h_0 \geq$	[mm]	42	55	65	80	80	75	85	100	105	115	130
Diameter of cleaning brush	$D \geq$	[mm]	10,8	10,8	13,0	13,0	13,0	15,0	15,0	15,0	15,0	15,0	15,0
Installation torque	$T_{inst} \leq$	[Nm]	10	10	15	15	25	25	25	25	30	30	30
Diameter of clearance hole in the fixture													
Pre-setting installation	$d_f \leq$	[mm]	9	9	12	12	14	14	14	14	14	14	14
Through-setting installation	$d_f \leq$	[mm]	-	-	14	14	14 ¹⁾ / 16	16	16	16	16	16	16

¹⁾ see Annex B8

Table B5: Installation parameters, VMZ-A M16 – M24

Anchor size VMZ-A			90 M16	105 M16	125 M16	145 M16	160 M16	115 M20	170 M20 (LG)	190 M20 (LG)	170 M24 (LG)	200 M24 (LG)	225 M24 (LG)
Effective anchorage depth	$h_{ef} \geq$	[mm]	90	105	125	145	160	115	170	190	170	200	225
Nominal diameter of drill hole	$d_0 =$	[mm]	18	18	18	18	18	22	24	24	26	26	26
Depth of drill hole	$h_0 \geq$	[mm]	98	113	133	153	168	120	180	200	185	215	240
Diameter of cleaning brush	$D \geq$	[mm]	19,0	19,0	19,0	19,0	19,0	23,0	25,0	25,0	27,0	27,0	27,0
Installation torque	$T_{inst} \leq$	[Nm]	50	50	50	50	50	80	80	80	100	120	120
Diameter of clearance hole in the fixture													
Pre-setting installation	$d_f \leq$	[mm]	18	18	18	18	18	22	24 (22)	24 (22)	26	26	26
Through-setting installation	$d_f \leq$	[mm]	20	20	20	20	20	24	26	26	28	28	28

Pre-setting installation

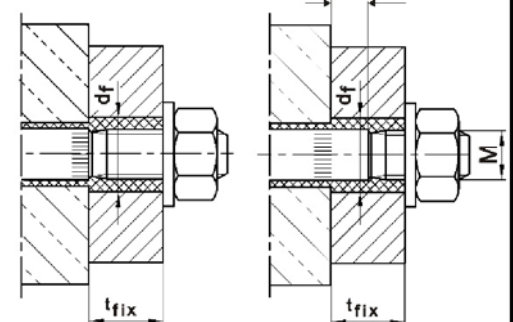
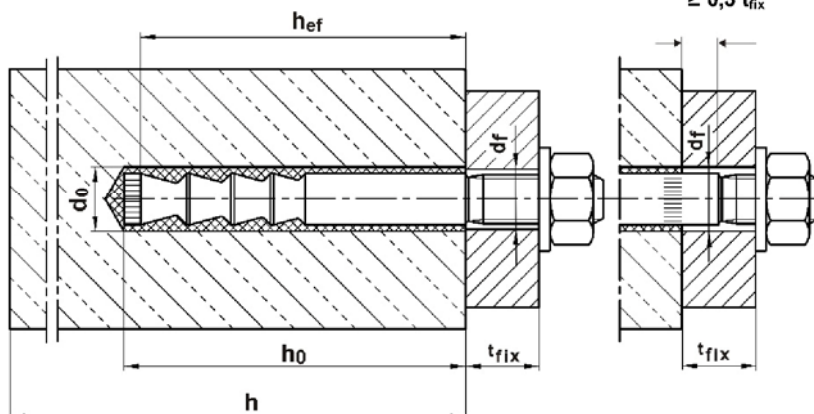
Through-setting installation

size M20 + M24

$\geq 0,5 t_{fix}$

size M20 + M24

$\geq 0,5 t_{fix}$



The annular gap in the clearance hole in the fixture has to be filled completely by excess mortar!

Injection System VMZ

Intended Use
Installation parameters VMZ-A

Annex B3

Table B6: Minimum spacing and edge distance, VMZ-A M8 – M12

Anchor size VMZ-A			40 M8	50 M8	60 M10	75 M10	75 M12	70 M12	80 M12	95 M12	100 M12	110 M12	125 M12
Minimum thickness of concrete	h_{min}	[mm]	80	80	100	110 100 ¹⁾	110	110	110	130 125 ¹⁾	130	140	160
Cracked concrete													
Minimum spacing	s_{min}	[mm]	40	40	40	40	50	55	40	40	50	50	50
Minimum edge distance	c_{min}	[mm]	40	40	40	40	50	55	50	50	50	50	50
Non-cracked concrete													
Minimum spacing	s_{min}	[mm]	40	40	50	50	50	55	55	55	80 ²⁾	80 ²⁾	80 ²⁾
Minimum edge distance	c_{min}	[mm]	40	40	50	50	50	55	55	55	55 ²⁾	55 ²⁾	55 ²⁾

Table B7: Minimum spacing and edge distance, VMZ-A M16 – M24

Anchor size VMZ-A			90 M16	105 M16	125 M16	145 M16	160 M16	115 M20	170 M20 (LG)	190 M20 (LG)	170 M24 (LG)	200 M24 (LG)	225 M24 (LG)
Minimum thickness of concrete	h_{min}	[mm]	130	150	170 160 ¹⁾	190 180 ¹⁾	205 200 ¹⁾	160	230 220 ¹⁾	250 240 ¹⁾	230 220 ¹⁾	270 260 ¹⁾	300 290 ¹⁾
Cracked concrete													
Minimum spacing	s_{min}	[mm]	50	50	60	60	60	80	80	80	80	80	80
Minimum edge distance	c_{min}	[mm]	50	50	60	60	60	80	80	80	80	80	80
Non-cracked concrete													
Minimum spacing	s_{min}	[mm]	50	60	60	60	60	80	80	80	80	105	105
Minimum edge distance	c_{min}	[mm]	50	60	60	60	60	80	80	80	80	105	105

¹⁾ The remote face of the concrete member shall be inspected to ensure there has been no break-through by drilling. In case of break-through, the ground of the drill hole shall be closed with high strength mortar. The full bonded length h_{ef} shall be achieved and any potential loss of injection mortar shall be compensated.

²⁾ For an edge distance $c \geq 80$ mm a minimum spacing $s_{min} = 55$ mm is applicable.













Injection System VMZ

Intended Use
Minimum spacing and edge distance, VMZ-A

Annex B4

Installation instructions VMZ-A

Making and cleaning of hammer drilled holes









1	Pre-setting installation V		Use Hammer drill or air drill with drill bit and depth gauge. Drill perpendicular to concrete surface.
	Through-setting installation D		Drill hole must be cleaned directly prior to installation of the anchor. It must be ensured that icing does not occur in the drill hole.
2	V		VMZ-A M8 - M16: Blow out drill hole from the bottom with Blow-out pump VM-AP at least two times. The Extension Tube with reduced diameter must be added to the Blow-out pump for the diameter M8.
			VMZ-A M20 - M24: Connect Air Blower VM-ABP to compressed air (min. 6 bar, oil-free). Open air valve and blow out drill hole along the entire depth with back and forth motion at least two times.
	D		VMZ-A M10 - M16: Blow out drill hole from the bottom with Blow-out pump VM-AP at least two times.
			VMZ-A M20 - M24: Connect Air Blower VM-ABP to compressed air (min. 6 bar, oil-free). Open air valve and blow out drill hole along the entire depth with back and forth motion at least two times.
3	V		Check diameter of cleaning brush RB. If brush can be pushed into the drill hole without any resistance, it must be replaced. Chuck brush into drill machine. Turn on drill machine. Brush drill hole back and forth along the entire drill hole depth at least two times while rotated by drill machine.
	D		
4	V		VMZ-A M8 - M16: Blow out drill hole from the bottom with Blow-out pump VM-AP at least two times. The Extension Tube with reduced diameter must be added to the Blow-out pump for the diameter M8.
			VMZ-A M20 - M24: Connect Air Blower VM-ABP to compressed air (min. 6 bar, oil-free). Open air valve and blow out drill hole along the entire depth with back and forth motion at least two times.
	D		VMZ-A M10 - M16: Blow out drill hole from the bottom with Blow-out pump VM-AP at least two times.
			VMZ-A M20 - M24: Connect Air Blower VM-ABP to compressed air (min. 6 bar, oil-free). Open air valve and blow out drill hole along the entire depth with back and forth motion at least two times.

Injection System VMZ

Intended Use
Installation instructions VMZ-A
Making and cleaning of hammer drilled holes

Annex B5

Making and cleaning of diamond core drilled holes





1	Pre-setting installation V		Use diamond drill with diamond drill bit and depth gauge. Drill perpendicular to concrete surface.
	Through-setting installation D		Drill hole must be cleaned directly prior to installation of the anchor. It must be ensured that icing does not occur in the drill hole.
2	V		Remove drill core at least up to the nominal hole depth and check drill hole depth.
	D		
3	V		Flushing of drill hole: Flush drill hole with water, starting from the bottom, until clear water gets out of the drill hole.
	D		
4	V		Connect Air Blower VM-ABP to compressed air (min. 6 bar, oil-free). Open air valve and blow out drill hole along the entire depth with back and forth motion at least two times.
	D		

Injection System VMZ








Intended Use
Installation instructions VMZ-A
Making and cleaning of diamond core drilled holes

Annex B6

Injection

5	D + V		Check expiration date on VMZ cartridge. Never use when expired. Remove cap from VMZ cartridge. Screw Mixer Nozzle VM-X on cartridge. When using a new cartridge always use a new Mixer Nozzle. Never use cartridge without Mixer Nozzle and never use Mixer Nozzle without helix inside.
6	D + V		Insert cartridge in Dispenser. Before injecting discard mortar (at least 2 full strokes or a line of 10 cm) until it shows a consistent grey colour. Never use this mortar.
7	V		Prior to injection, check if Mixer Nozzle VM-X reaches the bottom of the drill hole. If it does not reach the bottom, plug Mixer Extension VM-XE onto Mixer Nozzle in order to fill the drill hole properly. Fill hole with a sufficient quantity of injection mortar. Start from the bottom of the drill hole and work out to avoid trapping air pockets.
	D		

Insertion of anchor rod

8	V		Insert the anchor rod VMZ-A by hand, rotating slightly up to the full embedment depth as marked on the anchor rod. The anchor rod is properly set when excess mortar seeps from the hole. If the hole is not completely filled, pull out anchor rod, let mortar cure, drill out hole and repeat entire cleaning process.
	D		Insert the anchor rod VMZ-A by hand, rotating slightly up to the full embedment depth. After the installation, the annular gap in the clearance hole in the fixture has to be filled completely by excess mortar. If the hole is not completely filled, pull out anchor rod, let mortar cure, drill out hole and repeat entire cleaning process.
9	V		Follow minimum curing time shown in Table B2 or Table B3 During curing time, anchor rod must not be moved or loaded.
	D		
10	V		Remove excess mortar.
	D		
11	D + V		The fixture can be mounted after curing time. Apply installation torque T_{inst} according to Table B4 or Table B5 by using torque wrench.

Injection System VMZ

Intended Use
Installation instructions VMZ-A
Anchor installation





Annex B7

Installation instructions VMZ-A 75 M12

Through-setting installation with clearance between concrete and anchor plate

Work step 1-7 as illustrated in Annexes B5 – B7

Requirement: Diameter of clearance hole in the fixture $d_f \leq 14$ mm

8		Insert the anchor rod VMZ-A by hand, rotating slightly up to the full embedment depth.
9		Check if excess mortar seeps from the hole. If the hole is not completely filled, pull out anchor rod, let mortar cure, drill out hole and repeat the entire cleaning process. The annular gap in the fixture does not have to be filled.
10		During curing time according to Table B2 or Table B3 anchor rod must not be moved or loaded.
11		Washer and nut can be mounted after curing time and backfilling of anchor plate. Apply installation torque T_{inst} according to Table B4 by using torque wrench.

Injection System VMZ

Intended Use

Installation instructions **VMZ-A 75 M12**


Through-setting installation with clearance between concrete and anchor plate

Annex B8

Table B8: Installation parameters VMZ-IG

Anchor size VMZ-IG			40 M6	50 M6	60 M8	75 M8	70 M10	80 M10	90 M12	105 M12	125 M12	115 M16	170 M16	170 M20
Effective anchorage depth	$h_{ef} =$	[mm]	40	50	60	75	70	80	90	105	125	115	170	170
Nominal diameter of drill hole	$d_0 =$	[mm]	10	10	12	12	14	14	18	18	18	22	24	26
Depth of drill hole	$h_0 \geq$	[mm]	42	55	65	80	80	85	98	113	133	120	180	185
Diameter of cleaning brush	$D \geq$	[mm]	10,8	10,8	13,0	13,0	15,0	15,0	19,0	19,0	19,0	23,0	25,0	27,0
Installation torque	$T_{inst} \leq$	[Nm]	8	8	10	10	15	15	25	25	25	50	50	80
Diameter of clearance hole in the fixture	$d_f \leq$	[mm]	7	7	9	9	12	12	14	14	14	18	18	22
Available thread length	L_{th}	[mm]	12	15	16	19	20	23	24	27	30	32	32	40
Minimum screw-in depth	L_{sdmin}	[mm]	7	7	9	9	12	12	14	14	14	18	18	22
Minimum thickness of concrete	h_{min}	[mm]	80	80	100	110	110	110	130	150	170 160 ¹⁾	160	230 220 ¹⁾	230 220 ¹⁾
Cracked concrete														
Minimum spacing	s_{min}	[mm]	40	40	40	40	55	40	50	50	60	80	80	80
Minimum edge distance	c_{min}	[mm]	40	40	40	40	55	50	50	50	60	80	80	80
Non-cracked concrete														
Minimum spacing	s_{min}	[mm]	40	40	50	50	55	55	50	60	60	80	80	80
Minimum edge distance	c_{min}	[mm]	40	40	50	50	55	55	50	60	60	80	80	80

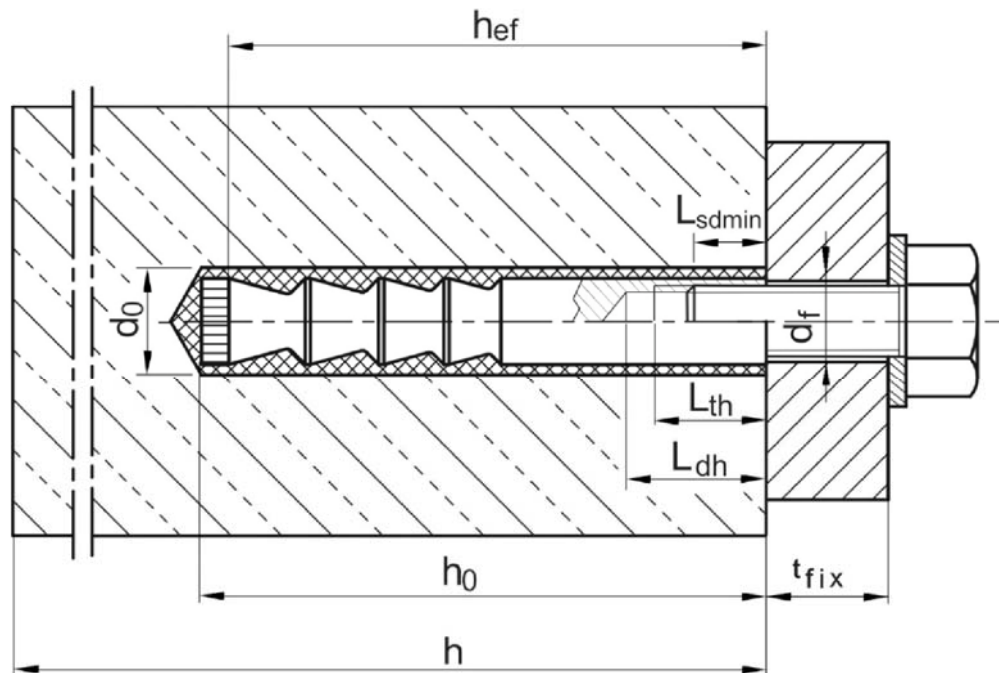¹⁾ The remote face of the concrete member shall be inspected to ensure there has been no break-through by drilling. In case of break-through the ground of the drill hole shall be closed with high strength mortar. The full bonded length h_{ef} shall be achieved and any potential loss of injection mortar shall be compensated.









Injection System VMZ

Intended Use
Installation parameters **VMZ-IG**





Annex B9

Installation instructions **VMZ-IG**

Making and cleaning of hammer drilled holes

1		Use Hammer drill or air drill with drill bit and depth gauge. Drill perpendicular to concrete surface. Drill hole must be cleaned directly prior to installation of the anchor. It must be ensured that icing does not occur in the drill hole.
2		VMZ-IG M6 - M12: Blow out drill hole from the bottom with Blow-out pump VM-AP at least two times. The Extension Tube with reduced diameter must be added to the Blow-out pump for the diameter M6.
		VMZ-IG M16 - M20: Connect MKT Air Blower VM-ABP to compressed air (min. 6 bar, oil-free). Open air valve and blow out drill hole along the entire depth with back and forth motion at least two times.
3		Check diameter of Cleaning Brush RB. If brush can be pushed into the drill hole without any resistance, it must be replaced. Chuck brush into drill machine. Turn on drill machine. Brush drill hole back and forth along the entire drill hole depth at least two times while rotated by drill machine.
4		VMZ-IG M6 - M12: Blow out drill hole from the bottom with Blow-out pump VM-AP at least two times. The Extension Tube with reduced diameter must be added to the Blow-out pump for the diameter M6.
		VMZ-IG M16 - M20: Connect Air Blower VM-ABP to compressed air (min. 6 bar, oil-free). Open air valve and blow out drill hole along the entire depth with back and forth motion at least two times.

Making and cleaning of diamond drilled holes




1		Use diamond drill with diamond drill bit and depth gauge. Drill perpendicular to concrete surface. Drill hole must be cleaned directly prior to installation of the anchor. It must be ensured that icing does not occur in the drill hole.
2		Remove drill core at least up to the nominal hole depth and check drill hole depth.
3		Flushing of drill hole: Flush drill hole with water, starting from the bottom, until clear water gets out of the drill hole.
4		Connect Air Blower VM-ABP to compressed air (min. 6 bar, oil-free). Open air valve and blow out drill hole along the entire depth with back and forth motion at least two times.

Injection System VMZ





Intended Use
Installation instructions **VMZ-IG**
Drilling and cleaning

Annex B10

Injection

5		Check expiration date on VMZ cartridge. Never use when expired. Remove cap from VMZ cartridge. Screw Mixer Nozzle VM-X on cartridge. When using a new cartridge always use a new Mixer Nozzle. Never use cartridge without Mixer Nozzle and never use Mixer Nozzle without helix inside.
6		Insert cartridge in dispenser. Before injecting discard mortar (at least 2 full strokes or a line of 10 cm) until it shows a consistent grey colour. Never use this mortar.
7		Prior to injection, check if Mixer Nozzle VM-X reaches the bottom of the drill hole. If it does not reach the bottom, plug Mixer Extension VM-XE onto Mixer Nozzle in order to fill the drill hole properly. Fill cleaned drill hole with a sufficient quantity of injection mortar. Start from the bottom of the drill hole and work out to avoid trapping air pockets.

Setting of anchor

8		Insert the anchor rod VMZ-IG by hand, rotating slightly up to about 1mm below the concrete surface in the drill hole. The anchor rod is properly set when excess mortar seeps from the hole. If the hole is not completely filled, pull out anchor rod, let mortar cure, drill out hole and repeat the entire cleaning process.
9		Follow minimum curing time shown in Table B2 and Table B3. During curing time anchor rod must not be moved or loaded.
10		Remove excess mortar.
11		The fixture can be mounted after curing time. Apply installation torque T_{inst} according to Table B8 by using torque wrench.

Injection System VMZ

Intended Use
Installation instructions **VMZ-IG**
Anchor installation

Annex B11

Table C1: Characteristic values for **tension loads, VMZ-A M8 – M12, cracked concrete**, static and quasi-static action
(Design method A according to ETAG 001, Annex C or CEN/TS 1992-4)

Anchor size VMZ-A			40 M8	50 M8	60 M10	75 M10	75 M12	70 M12	80 M12	95 M12	100 M12	110 M12	125 M12	
Installation safety factor		$\gamma_2=\gamma_{inst}$	[-]	1,0										
Steel failure														
Characteristic tension resistance $N_{Rk,s}$	Steel, zinc plated	[kN]	15	18	25	35	49	54	57					
	A4, HCR	[kN]	15	18	25	35	49	54	57					
Partial safety factor		γ_{Ms}	[-]	1,5										
Pull-out														
Characteristic resistance $N_{Rk,p}$ in concrete C20/25	50°C / 80°C ²⁾	[kN]	1)											
	72°C / 120°C ²⁾	[kN]	5	7,5	12	12	12	16	20	20	30	30	30	
Increasing factor		ψ_c	[-]	$\left(\frac{f_{ck,cube}}{25}\right)^{0,5}$										
Concrete cone failure														
Effective anchorage depth		$h_{ef}\geq$	[mm]	40	50	60	75	75	70	80	95	100	110	125
Factor for cracked concrete		k_{cr}	[-]	7,2										

¹⁾ Pull-out failure is not decisive

²⁾ Maximum long term temperature / Maximum short term temperature

Table C2: Characteristic values for **tension loads, VMZ-A M16 – M24, cracked concrete**, static and quasi-static action
(Design method A according to ETAG 001, Annex C or CEN/TS 1992-4)

Anchor size VMZ-A			90 M16	105 M16	125 M16	145 M16	160 M16	115 M20	170 M20 (LG)	190 M20 (LG)	170 M24 (LG)	200 M24 (LG)	225 M24 (LG)	
Installation safety factor		$\gamma_2=\gamma_{inst}$	[-]	1,0										
Steel failure														
Characteristic tension resistance $N_{Rk,s}$	Steel, zinc plated	[kN]	88	95	111		97	96	188		222			
	A4, HCR	[kN]	88	95	111		97	114	165		194			
Partial safety factor		γ_{Ms}	[-]	1,5				1,68	1,5		1,5			
Pull-out														
Characteristic resistance $N_{Rk,p}$ in concrete C20/25	50°C / 80°C ²⁾	[kN]	1)											
	72°C / 120°C ²⁾	[kN]	25	30	50		51	30	60		75			
Increasing factor		ψ_C	[-]	$\left(\frac{f_{ck,cube}}{25}\right)^{0,5}$										
Concrete cone failure														
Effective anchorage depth		$h_{ef}\geq$	[mm]	90	105	125	145	160	115	170	190	170	200	225
Factor for cracked concrete		k_{cr}	[-]	7,2										

¹⁾ Pull-out failure is not decisive

²⁾ Maximum long term temperature / Maximum short term temperature

Injection System VMZ

Performance

Characteristic values for **tension loads, VMZ-A in cracked concrete**, static and quasi-static action
(Design method A according to ETAG 001, Annex C or CEN/TS 1992-4)

Annex C1

Table C3: Characteristic values for **tension loads**,
VMZ-A M8 – M12 in non-cracked concrete, static and quasi-static action
(Design method A according to ETAG 001, Annex C or CEN/TS 1992-4)

Anchor size VMZ-A			40 M8	50 M8	60 M10	75 M10	75 M12	70 M12	80 M12	95 M12	100 M12	110 M12	125 M12	
Installation safety factor		$\gamma_z = \gamma_{inst}$	[-]	1,0										
Steel failure														
Characteristic tension resistance $N_{Rk,s}$	Steel, zinc plated	[kN]	15	18	25	35	49	54	57					
	A4, HCR	[kN]	15	18	25	35	49	54	57					
Partial safety factor		γ_{Ms}	[-]	1,5										
Pull-out														
Characteristic resistance $N_{Rk,p}$ in non-cracked concrete C20/25	50°C / 80°C ²⁾	[kN]	9	1) ¹⁾	1) ¹⁾	1) ¹⁾			40	1) ¹⁾	50	50		
	72°C / 120°C ²⁾	[kN]	6	9	16	16	16	25	25	30	30	30		
Splitting														
Splitting for standard thickness of concrete member (The higher resistance of Case 1 and Case 2 may be applied.)														
Standard thickness of concrete		$h_{std} \geq 2 h_{ef}$	[mm]	100	120	150	150	140	160	190	200	220	250	
Case 1 ($N^0_{Rk,c}$ has to be replaced by $N^0_{Rk,sp}$)														
Characteristic resistance in non-cracked concrete C20/25		$N^0_{Rk,sp}$	[kN]	7,5	9	16	20	20	20	1) ¹⁾	30	40	40	40
Spacing (edge distance)		$s_{cr,sp} (= 2 c_{cr,sp})$	[mm]	3 h_{ef}										
Case 2														
Spacing (edge distance)		$s_{cr,sp} (= 2 c_{cr,sp})$	[mm]	6 h_{ef}	5 h_{ef}	7 h_{ef}	7 h_{ef}	5 h_{ef}	3 h_{ef}	5 h_{ef}	4 h_{ef}	6 h_{ef}	5 h_{ef}	
Splitting for minimum thickness of concrete member (The higher resistance of Case 1 and Case 2 may be applied.)														
Minimum thickness of concrete		$h_{min} \geq$	[mm]	80	100	110	110	110	125	130	140	160		
Case 1 ($N^0_{Rk,c}$ has to be replaced by $N^0_{Rk,sp}$)														
Characteristic resistance in non-cracked concrete C20/25		$N^0_{Rk,sp}$	[kN]	7,5	-	16	16	20	25	25	30	30	30	
Spacing (edge distance)		$s_{cr,sp} (= 2 c_{cr,sp})$	[mm]	3 h_{ef}	-	3 h_{ef}	3 h_{ef}							
Case 2														
Spacing (edge distance)		$s_{cr,sp} (= 2 c_{cr,sp})$	[mm]	6 h_{ef}	7 h_{ef}	6 h_{ef}	7 h_{ef}	7 h_{ef}	7 h_{ef}	6 h_{ef}	7 h_{ef}	6 h_{ef}	6 h_{ef}	
Increasing factor for $N_{Rk,p}$ and $N^0_{Rk,sp}$		ψ_c	[-]	$\left(\frac{f_{ck,cube}}{25}\right)^{0,5}$										
Concrete cone failure														
Effective anchorage depth		$h_{ef} \geq$	[mm]	40	50	60	75	75	70	80	95	100	110	125
Factor for non-cracked concrete		k_{ucr}	[-]	10,1										

¹⁾ Pull-out failure is not decisive

²⁾ Maximum long term temperature / Maximum short term temperature

Injection System VMZ

Performance

Characteristic values for **tension loads**, **VMZ-A M8 – M12**,
non-cracked concrete, static and quasi-static action
(Design method A according to ETAG 001, Annex C or CEN/TS 1992-4)

Annex C2

Table C4: Characteristic values for **tension loads, VMZ-A M16 – M24, non-cracked concrete**, static and quasi-static action,
(Design method A according to ETAG 001, Annex C or CEN/TS 1992-4)

Anchor size VMZ-A			90 M16	105 M16	125 M16	145 M16	160 M16	115 M20	170 M20 (LG)	190 M20 (LG)	170 M24 (LG)	200 M24 (LG)	225 M24 (LG)
Installation safety factor $\gamma_2=\gamma_{inst}$		[-]	1,0										
Steel failure													
Characteristic tension resistance $N_{Rk,s}$	Steel, zinc plated	[kN]	88	95	111	111	97	96	188	188	222	222	222
	A4, HCR	[kN]	88	95	111	111	97	114	165	165	194	194	194
Partial safety factor γ_{Ms}		[-]	1,5					1,68	1,5		1,5		
Pull-out													
Characteristic resistance $N_{Rk,p}$ in non-cracked concrete C20/25	50°C / 80°C ²⁾	[kN]	1)			75	90	1)			1)		
	72°C / 120°C ²⁾	[kN]	25	35	50	50	53	40	75	75	95	95	95
Splitting													
Splitting for standard thickness of concrete (The higher resistance of Case 1 and Case 2 may be applied.)													
Standard thickness of concrete $h_{std} \geq 2 h_{ef}$		[mm]	180	200	250	290	320	230	340	380	340	400	450
Case 1 ($N^0_{Rk,c}$ has to be replaced by $N^0_{Rk,sp}$)													
Characteristic resistance in non-cracked concrete C20/25 $N^0_{Rk,sp}$		[kN]	40	50	50	60	80	1)		115	1)		140
Spacing (edge distance) $s_{cr,sp} (= 2 c_{cr,sp})$		[mm]	3 h_{ef}										
Case 2													
Spacing (edge distance) $s_{cr,sp} (= 2 c_{cr,sp})$		[mm]	4 h_{ef}	4 h_{ef}	4 h_{ef}	4 h_{ef}	4 h_{ef}	3 h_{ef}	3 h_{ef}	4 h_{ef}	3 h_{ef}	3 h_{ef}	3,6 h_{ef}
Splitting for minimum thickness of concrete (The higher resistance of Case 1 and Case 2 may be applied.)													
Minimum thickness of concrete $h_{min} \geq$		[mm]	130	150	160	180	200	160	220	240	220	260	290
Case 1 ($N^0_{Rk,c}$ has to be replaced by $N^0_{Rk,sp}$)													
Characteristic resistance in non-cracked concrete C20/25 $N^0_{Rk,sp}$		[kN]	35	50	40	50	71	-	75	75	1)	115	115
Spacing (edge distance) $s_{cr,sp} (= 2 c_{cr,sp})$		[mm]	3 h_{ef}										
Case 2													
Spacing (edge distance) $s_{cr,sp} (= 2 c_{cr,sp})$		[mm]	5 h_{ef}	5 h_{ef}	6 h_{ef}	5 h_{ef}	5 h_{ef}	5 h_{ef}	5,2 h_{ef}	4,4 h_{ef}	5,2 h_{ef}	4,4 h_{ef}	4,4 h_{ef}
Increasing factor for $N_{Rk,p}$ and $N^0_{Rk,sp}$ ψ_c		[-]	$\left(\frac{f_{ck,cube}}{25}\right)^{0,5}$										
Concrete cone failure													
Effective anchorage depth $h_{ef} \geq$		[mm]	90	105	125	145	160	115	170	190	170	200	225
Factor for non-cracked concrete k_{ucr}		[-]	10,1										

¹⁾ Pull-out failure is not decisive

²⁾ Maximum long term temperature / Maximum short term temperature

Injection System VMZ

Performance

Characteristic values for **tension loads, VMZ-A M16 – M24, non-cracked concrete**, static and quasi-static action,
(Design method A according to ETAG 001, Annex C or CEN/TS 1992-4)

Annex C3

Table C5: Characteristic values for **shear load, VMZ-A M8 – M12, cracked and non-cracked concrete**, static and quasi-static action
(Design method A according to ETAG 001, Annex C or CEN/TS 1992-4)

Anchor size VMZ-A			40 M8	50 M8	60 M10	75 M10	75 M12	70 M12	80 M12	95 M12	100 M12	110 M12	125 M12
Installation safety factor $\gamma_2=\gamma_{inst}$		[-]	1,0										
Steel failure without lever arm													
Characteristic shear resistance $V_{Rk,s}$	Steel, zinc plated	[kN]	14		21		34						
	A4, HCR	[kN]	15		23		34						
Partial safety factor γ_{Ms}		[-]	1,25										
Factor for ductility k_2		[-]	1,0										
Steel failure with lever arm													
Characteristic bending moments $M^0_{Rk,s}$	Steel, zinc plated	[Nm]	30		60		105						
	A4, HCR	[Nm]	30		60		105						
Partial safety factor γ_{Ms}		[-]	1,25										
Concrete pry-out failure													
k-factor $k_{(3)}$		[-]	2										
Concrete edge failure													
Effective length of anchor in shear load l_f		[mm]	40	50	60	75	75	70	80	95	100	110	112
Diameter of anchor d_{nom}		[mm]	10		12		12	14					

Injection System VMZ

Performance


Characteristic values for **shear load, VMZ-A M8 – M12, cracked and non-cracked concrete**, static and quasi-static action
(Design method A according to ETAG 001, Annex C or CEN/TS 1992-4)

Annex C4

Table C6: Characteristic values for **shear load, VMZ-A M16 – M24, cracked and non-cracked concrete**, static and quasi-static action
(Design method A according to ETAG 001, Annex C or CEN/TS 1992-4)

Anchor size VMZ-A			90 M16	105 M16	125 M16	145 M16	160 M16	115 M20	170 M20 (LG)	190 M20 (LG)	170 M24 (LG)	200 M24 (LG)	225 M24 (LG)
Installation safety factor $\gamma_2=\gamma_{inst}$		[-]	1,0										
Steel failure without lever arm													
Characteristic shear resistance $V_{Rk,s}$	Steel, zinc plated	[kN]	63					70	149 ¹⁾ (98)		178 ¹⁾ (141)		
	A4, HCR	[kN]	63					86	131 ¹⁾ (86)		156 ¹⁾ (123)		
Partial safety factor γ_{Ms}		[-]	1,25					1,4	1,25		1,25		
Factor for ductility k_2		[-]	1,0										
Steel failure with lever arm													
Characteristic bending moments $M^0_{Rk,s}$	Steel, zinc plated	[Nm]	266					392	519		896		
	A4, HCR	[Nm]	266					454		784			
Partial safety factor γ_{Ms}		[-]	1,25					1,4	1,25		1,25		
Concrete pry-out failure													
k-factor $k_{(3)}$		[-]	2										
Concrete edge failure													
Effective length of anchor in shear load l_f		[mm]	90	105	125	145	160	115	170	190	170	200	225
Diameter of anchor d_{nom}		[mm]	18					22	24		26		

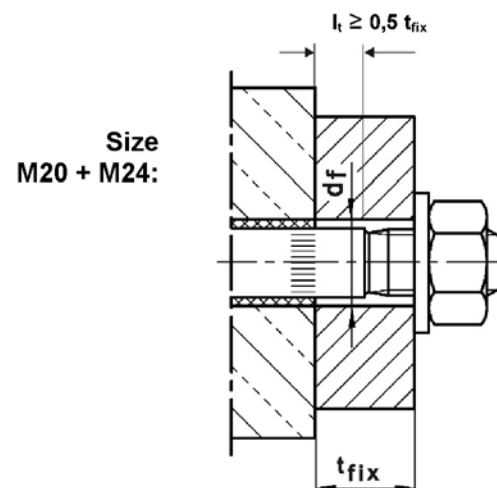¹⁾ This value may only be applied if $l_t \geq 0,5 t_{fix}$



Injection System VMZ

Performance

Characteristic values for **shear load, VMZ-A M16 – M24, cracked and non-cracked concrete**, static and quasi-static action
(Design method A according to ETAG 001, Annex C or CEN/TS 1992-4)

Annex C5

Table C7: Characteristic resistances for **seismic tension loading**
VMZ-A M10 – M12 performance category **C1** and **C2**
(Design according to EOTA Technical Report TR045)

Anchor size VMZ-A			60 M10	75 M10	75 M12	70 M12	80 M12	95 M12	100 M12	110 M12	125 M12
Installation safety factor		$\gamma_2=\gamma_{inst}$	[-]		1,0						
Steel failure, steel zinc plated											
Characteristic resistance C1	$N_{Rk,s,seis,C1}$	[kN]	25		35	49	54		57		
Characteristic resistance C2	$N_{Rk,s,seis,C2}$	[kN]	25		35	49	54		57		
Steel failure, stainless steel A4, HCR											
Characteristic resistance C1	$N_{Rk,s,seis,C1}$	[kN]	25		35	49	54		57		
Characteristic resistance C2	$N_{Rk,s,seis,C2}$	[kN]	25		35	49	54		57		
Partial safety factor		$\gamma_{Ms,seis}$	[-]		1,5						
Pull-out											
Characteristic resistance C1	$N_{Rk,p,seis,C1}$	50°C / 80°C ¹⁾	[kN]	14,5		14,5		30,6			
		72°C / 120°C ¹⁾	[kN]	10,9		10,9		20,0			
Characteristic resistance C2	$N_{Rk,p,seis,C2}$	50°C / 80°C ¹⁾	[kN]	7,4		7,4		8,7			
		72°C / 120°C ¹⁾	[kN]	5,1		5,1		6,5			

Table C8: Characteristic resistances for **seismic tension loading**
VMZ-A M16 – M24 performance category **C1** and **C2**
(Design according to EOTA Technical Report TR045)

Anchor size VMZ-A			90 M16	105 M16	125 M16	145 M16	160 M16	115 M20	170 M20 (LG)	190 M20 (LG)	170 M24 (LG)	200 M24 (LG)	225 M24 (LG)
Installation safety factor		$\gamma_2=\gamma_{inst}$	[-]		1,0								
Steel failure, steel zinc plated													
Characteristic resistance C1		$N_{Rk,s,seis,C1}$	[kN]	88	95	111	97	96	188	222			
Characteristic resistance C2		$N_{Rk,s,seis,C2}$	[kN]	88	95	111	97	96	188	222			
Steel failure, stainless steel A4, HCR													
Characteristic resistance C1		$N_{Rk,s,seis,C1}$	[kN]	88	95	111	97	114	165	194			
Characteristic resistance C2		$N_{Rk,s,seis,C2}$	[kN]	88	95	111	97	114	165	194			
Partial safety factor		$\gamma_{Ms,seis}$	[-]		1,5			1,68	1,5	1,5			
Pull-out													
Characteristic resistance C1	$N_{Rk,p,seis,C1}$	50°C / 80°C ¹⁾	[kN]	30,6		43,7		30,6	88,2	90,7			
		72°C / 120°C ¹⁾	[kN]	20,0		38,5		20,0	55,8	59,3			
Characteristic resistance C2	$N_{Rk,p,seis,C2}$	50°C / 80°C ¹⁾	[kN]	13,5	16,1	26,1		16,1	59,7	59,7			
		72°C / 120°C ¹⁾	[kN]	10,0	12,0	19,5		11,0	44,4	44,4			

¹⁾ Maximum long term temperature / Maximum short term temperature

Injection System VMZ

Performance

Characteristic resistances for **seismic tension loading**, VMZ-A,
performance category **C1** and **C2** (Design according to TR045)

Annex C6

Table C9: Characteristic resistances for **seismic shear loading**
VMZ-A M10 – M12 performance category **C1** and **C2**
(Design according to EOTA Technical Report TR045)

Anchor size VMZ-A			60 M10	75 M10	75 M12	70 M12	80 M12	95 M12	100 M12	110 M12	125 M12
Installation safety factor $\gamma_2=\gamma_{inst}$		[-]	1,0								
Steel failure without lever arm, steel zinc plated											
Characteristic resistance C1	$V_{Rk,s,seis,C1}$	[kN]	11,8			27,2					
Characteristic resistance C2	$V_{Rk,s,seis,C2}$	[kN]	12,6			27,2					
Partial safety factor $\gamma_{Ms,seis}$		[-]	1,25								
Steel failure without lever arm, stainless steel A4, HCR											
Characteristic resistance C1	$V_{Rk,s,seis,C1}$	[kN]	12,9			27,2					
Characteristic resistance C2	$V_{Rk,s,seis,C2}$	[kN]	13,8			27,2					
Partial safety factor $\gamma_{Ms,seis}$		[-]	1,25								
Steel failure with lever arm											
Characteristic bending moment C1	$M^0_{Rk,s,seis,C1}$	[Nm]	no performance determined								
Characteristic bending moment C2	$M^0_{Rk,s,seis,C2}$	[Nm]	no performance determined								

Table C10: Characteristic resistances for **seismic shear loading**
VMZ-A M16 – M24 performance category **C1** and **C2**
(Design according to EOTA Technical Report TR045)

Anchor size VMZ-A			90 M16	105 M16	125 M16	145 M16	160 M16	115 M20	170 M20 (LG)	190 M20 (LG)	170 M24 (LG)	200 M24 (LG)	225 M24 (LG)
Installation safety factor $\gamma_2=\gamma_{inst}$		[-]	1,0										
Steel failure without lever arm, steel zinc plated													
Characteristic resistance C1	$V_{Rk,s,seis,C1}$	[kN]	39,1					39,1	82,3		107		
Characteristic resistance C2	$V_{Rk,s,seis,C2}$	[kN]	50,4					51,0	108,8 ¹⁾ (71,5)		154,9 ¹⁾ (122,7)		
Partial safety factor	$\gamma_{Ms,seis}$	[-]	1,25					1,4	1,25		1,25		
Steel failure without lever arm, stainless steel A4, HCR													
Characteristic resistance C1	$V_{Rk,s,seis,C1}$	[kN]	39,1					39,1	72,2		93		
Characteristic resistance C2	$V_{Rk,s,seis,C2}$	[kN]	50,4					62,6	95,6 ¹⁾ (62,8)		135,7 ¹⁾ (107)		
Partial safety factor	$\gamma_{Ms,seis}$	[-]	1,25					1,4	1,25		1,25		
Steel failure with lever arm													
Characteristic bending moment C1	$M^0_{Rk,s,seis,C1}$	[Nm]	no performance determined										
Characteristic bending moment C2	$M^0_{Rk,s,seis,C2}$	[Nm]	no performance determined										

¹⁾ This value may only be applied if $l_t \geq 0,5 t_{fix}$ (see Annex C5)

Injection System VMZ

Performance

Characteristic resistances for **seismic shear loading, VMZ-A**,
performance category **C1** and **C2** (Design according to TR045)

Annex C7

Table C11: Displacements under tension loads, VMZ-A M8 – M12

Anchor size VMZ-A			40 M8	50 M8	60 M10	75 M10	75 M12	70 M12	80 M12	95 M12	100 M12	110 M12	125 M12
Tension load in cracked concrete	N	[kN]	4,3	6,1	8,0	11,1	11,1	10,0	12,3	15,9	17,1	19,8	24,0
Displacement	δ_{N0}	[mm]	0,5	0,5	0,5	0,6	0,6	0,6	0,6	0,6	0,6	0,7	0,7
	$\delta_{N\infty}$	[mm]	1,3										
Tension load in non-cracked concrete	N	[kN]	4,3	8,5	11,1	15,6	15,6	14,1	17,2	19,0	24,0	23,8	23,8
Displacement	δ_{N0}	[mm]	0,2	0,4	0,4	0,4	0,4	0,4	0,4	0,4	0,4	0,6	0,6
	$\delta_{N\infty}$	[mm]	1,3										
Displacements under seismic tension loads C2													
Displacements for DLS	$\delta_{N,seis,C2(DLS)}$	[mm]	-	-	1,0		1,0		1,3				
Displacements for ULS	$\delta_{N,seis,C2(ULS)}$	[mm]	-	-	3,0		3,0		3,9				

Table C12: Displacements under tension loads, VMZ-A M16 – M24

Anchor size VMZ-A			90 M16	105 M16	125 M16	145 M16	160 M16	115 M20	170 M20 (LG)	190 M20 (LG)	170 M24 (LG)	200 M24 (LG)	225 M24 (LG)
Tension load in cracked concrete	N	[kN]	14,6	18,4	24,0	30,0	34,7	21,1	38,0	44,9	38,0	48,5	57,9
Displacement	δ_{N0}	[mm]	0,7	0,7	0,7	0,8	1,2	0,7	0,8	0,8	0,8	0,9	0,9
	$\delta_{N\infty}$	[mm]	1,3				1,6	1,1	1,3		1,3		
Tension load in non-cracked concrete	N	[kN]	20,5	25,9	33,0	35,7	48,1	29,6	53,3	63,0	53,3	67,9	81,1
Displacement	δ_{N0}	[mm]	0,6	0,6	0,6	0,6	0,8	0,5	0,6	0,6	0,6	0,6	0,6
	$\delta_{N\infty}$	[mm]	1,3				1,6	1,1	1,3		1,3		
Displacements under seismic tension loads C2													
Displacements for DLS	$\delta_{N,seis,C2(DLS)}$	[mm]	1,5				1,9				1,9		
Displacements for ULS	$\delta_{N,seis,C2(ULS)}$	[mm]	4,4				4,5				4,5		

Injection System VMZ

Performance
Displacements under tension loads, **VMZ-A**

Annex C8

Table C13: Displacements under shear loads VMZ-A M8 – M12

Anchor size VMZ-A			40 M8	50 M8	60 M10	75 M10	75 M12	70 M12	80 M12	95 M12	100 M12	110 M12	125 M12
Shear load	V	[kN]	8,3		13,3		19,3						
Displacements	δ_{V0}	[mm]	2,4	2,5	2,9		3,3						
	$\delta_{V\infty}$	[mm]	3,6	3,8	4,4		5,0						
Displacements under seismic shear loads C2													
Displacements for DLS	$\delta_{V,seis,C2(DLS)}$	[mm]	-	-	2,1		2,5						
Displacements for ULS	$\delta_{V,seis,C2(ULS)}$	[mm]	-	-	3,7		5,1						

Table C14: Displacements under shear loads VMZ-A M16 – M24

Anchor size VMZ-A			90 M16	105 M16	125 M16	145 M16	160 M16	115 M20	170 M20 (LG)	190 M20 (LG)	170 M24 (LG)	200 M24 (LG)	225 M24 (LG)
Shear load	V	[kN]	36					44	75 (49)	89 (71)			
Displacements	δ_{V0}	[mm]	3,8					3,0	4,3 (3,0)	4,6 (3,5)			
	$\delta_{V\infty}$	[mm]	5,7					4,5	6,5 (4,5)	6,9 (5,3)			
Displacements under seismic shear loads C2													
Displacements for DLS	$\delta_{V,seis,C2(DLS)}$	[mm]	2,9					3,5			3,7		
Displacements for ULS	$\delta_{V,seis,C2(ULS)}$	[mm]	6,8					9,3			9,3		

Injection System VMZ

Performance
Displacements under shear loads, VMZ-A

Annex C9

Table C15: Characteristic values for **tension load, VMZ-IG**, cracked concrete
(Design method A according to ETAG 001, Annex C or CEN/TS 1992-4)

Anchor size VMZ-IG			40 M6	50 M6	60 M8	75 M8	70 M10	80 M10	90 M12	105 M12	125 M12	115 M16	170 M16	170 M20	
Installation safety factor		$\gamma_2=\gamma_{inst}$	[-]		1,0										
Steel failure															
Characteristic tension resistance $N_{Rk,s}$	Steel, zinc plated	[kN]	15	16	19	29	35		67		52	125	108		
	A4, HCR	[kN]	11		19	21	33		47		65	88	94		
Partial safety factor		γ_{Ms}	[-]		1,5										
Pull-out															
Characteristic resistance $N_{Rk,p}$ in cracked concrete C20/25	50°C / 80°C ²⁾	[kN]	1)												
	72°C / 120°C ²⁾	[kN]	5	7,5	12		16	20	20	30	50	30	60	75	
Increasing factor		ψ_c	[-]		$\left(\frac{f_{ck,cube}}{25}\right)^{0,5}$										
Concrete cone failure															
Effective anchorage depth		h_{ef}	[mm]	40	50	60	75	70	80	90	105	125	115	170	170
Factor for cracked concrete		k_{cr}	[-]		7,2										

¹⁾ Pull-out failure is not decisive

²⁾ Maximum long term temperature / Maximum short term temperature

Injection System VMZ

Performance

Characteristic values for **tension load, VMZ-IG**, cracked concrete
(Design method A according to ETAG 001, Annex C or CEN/TS 1992-4)

Annex C10

Table C16: Characteristic values for **tension load, VMZ-IG, non-cracked concrete**
(Design method A according to ETAG 001, Annex C or CEN/TS 1992-4)

Anchor size VMZ-IG			40 M6	50 M6	60 M8	75 M8	70 M10	80 M10	90 M12	105 M12	125 M12	115 M16	170 M16	170 M20
Installation safety factor $\gamma_2=\gamma_{inst}$		[-]	1,0											
Steel failure														
Characteristic tension resistance $N_{Rk,s}$	Steel, zinc plated	[kN]	15	16	19	29	35		67		52	125	108	
	A4, HCR	[kN]	11		19	21	33		47		65	88	94	
Partial safety factor γ_{Ms}		[-]	1,5											
Pull-out														
Characteristic resistance $N_{Rk,p}$ in non-cracked concrete C20/25	50°C / 80°C ²⁾	[kN]	9	1)	1)									
	72°C / 120°C ²⁾	[kN]	6	9	16		16	25	25	35	50	40	75	95
Splitting														
Splitting for standard thickness of concrete (The higher resistance of Case 1 and Case 2 may be applied.)														
Standard thickness of concrete $h_{std} \geq 2h_{ef}$		[mm]	100		120	150	140	160	180	200	250	230	340	340
Case 1 ($N^0_{Rk,c}$ has to be replaced by $N^0_{Rk,sp}$)														
Characteristic resistance in concrete C20/25 $N^0_{Rk,sp}$		[kN]	7,5	9	16	20	20	1)	40	50	50	1)		1)
Spacing (edge distance) $s_{cr,sp} (= 2 c_{cr,sp})$		[mm]	3 h_{ef}											
Case 2														
Spacing (edge distance) $s_{cr,sp} (= 2 c_{cr,sp})$		[mm]	6 h_{ef}	6 h_{ef}	5 h_{ef}	7 h_{ef}	5 h_{ef}	3 h_{ef}	4 h_{ef}	4 h_{ef}	4 h_{ef}	3 h_{ef}	3 h_{ef}	3 h_{ef}
Splitting for minimum thickness of concrete (The higher resistance of Case 1 and Case 2 may be applied.)														
Minimum thickness of concrete $h_{min} \geq$		[mm]	80		100	110	110		130	150	160	160	220	220
Case 1 ($N^0_{Rk,c}$ has to be replaced by $N^0_{Rk,sp}$)														
Characteristic resistance in concrete C20/25 $N^0_{Rk,sp}$		[kN]	7,5	-	16		20	25	35	50	40	-	75	1)
Spacing (edge distance) $s_{cr,sp} (= 2 c_{cr,sp})$		[mm]	3 h_{ef}											
Case 2														
Spacing (edge distance) $s_{cr,sp} (= 2 c_{cr,sp})$		[mm]	6 h_{ef}	7 h_{ef}	6 h_{ef}	7 h_{ef}	7 h_{ef}	6 h_{ef}	5 h_{ef}	5 h_{ef}	6 h_{ef}	5 h_{ef}	5,2 h_{ef}	5,2 h_{ef}
Increasing factor for $N_{Rk,p}$ and $N^0_{Rk,sp}$ ψ_c		[-]	$\left(\frac{f_{ck,cube}}{25}\right)^{0,5}$											
Concrete cone failure														
Effective anchorage depth h_{ef}		[mm]	40	50	60	75	70	80	90	105	125	115	170	170
Factor for non-cracked concrete k_{ucr}		[-]	10,1											

¹⁾ Pull-out failure is not decisive

²⁾ Maximum long term temperature / Maximum short term temperature

Injection System VMZ

Performance

Characteristic values for tension loads, **VMZ-IG**, non-cracked concrete
(Design method A according to ETAG 001, Annex C or CEN/TS 1992-4)

Annex C11

Table C17: Characteristic values for shear load, VMZ-IG, cracked and non-cracked concrete
(Design method A according to ETAG 001, Annex C or CEN/TS 1992-4)

Anchor size VMZ-IG			40 M6	50 M6	60 M8	75 M8	70 M10	80 M10	90 M12	105 M12	125 M12	115 M16	170 M16	170 M20
Installation safety factor		$\gamma_2=\gamma_{inst}$	[-]	1,0										
Steel failure without lever arm														
Characteristic shear resistance $V_{Rk,s}$	Steel, zinc plated	[kN]	8,0	9,5	15	18	34			26	63	54		
	A4, HCR	[kN]	5,5	9,5	10	16	24			32	44	47		
Partial safety factor	γ_{Ms}	[-]	1,25											
Factor for ductility	k_2	[-]	1,0											
Steel failure with lever arm														
Characteristic bending moments $M^0_{Rk,s}$	Steel, zinc plated	[kN]	12	30	60	105			212	266	519			
	A4, HCR	[kN]	8,5	21	42	74			187	187	365			
Partial safety factor	γ_{Ms}	[-]	1,25											
Concrete pry-out failure														
k factor	$k_{(3)}$	[-]	2											
Concrete edge failure														
Effective length of anchor in shear load	l_f	[mm]	40	50	60	75	70	80	90	105	125	115	170	170
Diameter of anchor	d_{nom}	[mm]	10	12	14	18			22	24	26			

Table C18: Displacements under tension loads, VMZ-IG

Anchor size VMZ-IG		40 M6	50 M6	60 M8	75 M8	70 M10	80 M10	90 M12	105 M12	125 M12	115 M16	170 M16	170 M20
Tension load in cracked concrete	N [kN]	4,3	6,1	8,0	11,1	10,0	12,3	14,6	18,4	24,0	21,1	38,0	38,0
Displacement	δ_{N0} [mm]	0,5	0,5	0,6	0,6	0,7		0,7			0,7	0,8	0,8
	$\delta_{N\infty}$ [mm]					1,3					1,1	1,3	1,3
Tension load in non-cracked concrete	N [kN]	4,3	8,5	11,1	15,6	14,1	17,2	20,5	25,9	33,0	29,6	53,3	53,3
Displacement	δ_{N0} [mm]	0,2	0,4	0,4	0,4	0,6		0,6			0,5	0,6	0,6
	$\delta_{N\infty}$ [mm]					1,3					1,1	1,3	1,3

Table C19: Displacements under shear loads, VMZ-IG

Anchor size VMZ-IG		40 M6	50 M6	60 M8	75 M8	70 M10	80 M10	90 M12	105 M12	125 M12	115 M16	170 M16	170 M20
Shear load	V [kN]	4,6	5,4	8,4	10,1	19,3		14,8	35,8	30,7			
Displacement	δ_{V0} [mm]	0,4	0,5	0,4	0,5	1,2		0,8	1,9	1,2			
	$\delta_{V\infty}$ [mm]	0,7	0,8	0,7	0,8	1,9		1,2	2,8	1,9			
Shear load	V [kN]	3,2	5,4	5,9	9,3	13,5		18,5	25,2	26,9			
Displacement	δ_{V0} [mm]	0,3	0,5	0,3	0,5	0,9		1,0	1,4	1,1			
	$\delta_{V\infty}$ [mm]	0,4	0,7	0,5	0,7	1,4		1,5	2,1	1,6			

Injection System VMZ

Performance

Characteristic values for shear load, VMZ-IG, cracked and non-cracked concrete
(Design method A according to ETAG 001, Annex C or CEN/TS 1992-4), Displacements

Annex C12