

Approval body for construction products  
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and  
Laender Governments



## European Technical Assessment

**ETA-10/0060**  
**of 11 June 2015**

English translation prepared by DIBt - Original version in German language

### General Part

Technical Assessment Body issuing the  
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Tecfi HVE Rock

Product family  
to which the construction product belongs

Torque controlled expansion anchor for use in concrete

Manufacturer

Tecfi S.p.A  
Strada Statale Appia, Km. 193  
81050 PASTORANO (CE)  
ITALIEN

Manufacturing plant

Tecfi S.p.A. Italy

This European Technical Assessment  
contains

15 pages including 3 annexes

This European Technical Assessment is  
issued in accordance with Regulation (EU)  
No 305/2011, on the basis of

Guideline for European technical approval of "Metal  
anchors for use in concrete", ETAG 001 Part 2: "Torque  
controlled expansion anchors", April 2013,  
used as European Assessment Document (EAD)  
according to Article 66 Paragraph 3 of Regulation (EU)  
No 305/2011.

**European Technical Assessment**

**ETA-10/0060**

English translation prepared by DIBt

**Page 2 of 15 | 11 June 2015**

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction has to be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission according to Article 25 Paragraph 3 of Regulation (EU) No 305/2011.

**Specific Part****1 Technical description of the product**

The Tecfi HVE Rock is an anchor made of galvanised steel of sizes M6, M8, M10, M12 and M16 which is placed into a drilled hole and anchored by torque-controlled expansion.

The product description is given in Annex A.

**2 Specification of the intended use in accordance with the applicable European Assessment Document**

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

**3 Performance of the product and references to the methods used for its assessment****3.1 Mechanical resistance and stability (BWR 1)**

Essential characteristic	Performance
Characteristic resistance for static and quasi static action and seismic performance category C1	See Annex C 1
Displacements	See Annex C 4

**3.2 Safety in case of fire (BWR 2)**

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for Class A1
Resistance to fire	See Annex C 2 / C 3

**3.3 Hygiene, health and the environment (BWR 3)**

Not applicable.

**3.4 Safety in use (BWR 4)**

The essential characteristics regarding Safety in use are included under the Basic Works Requirement Mechanical resistance and stability.

**3.5 Protection against noise (BWR 5)**

Not applicable.

**3.6 Energy economy and heat retention (BWR 6)**

Not applicable.

**3.7 Sustainable use of natural resources (BWR 7)**

The sustainable use of natural resources was not investigated.

### 3.8 General aspects

The verification of durability is part of testing the essential characteristics. Durability is only ensured if the specifications of intended use according to Annex B are taken into account.

## 4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

According to Decision of the Commission of 24 June 1996 (96/582/EC) (OJ L 254 of 08.10.96 p. 62-65), the system of assessment and verification of constancy of performance (see Annex V and Article 65 Paragraph 2 to Regulation (EU) No 305/2011) given in the following table applies.

Product	Intended use	Level or class	System
Metal anchors for use in concrete (heavy-duty type)	For fixing and/or supporting concrete structural elements or heavy units such as cladding and suspended ceilings	—	1

## 5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.


Issued in Berlin on 11 June 2015 by Deutsches Institut für Bautechnik

Andreas Kummerow  
p.p. Head of Department


*beglaubigt:*  
Lange

Installed conditions


HVE01

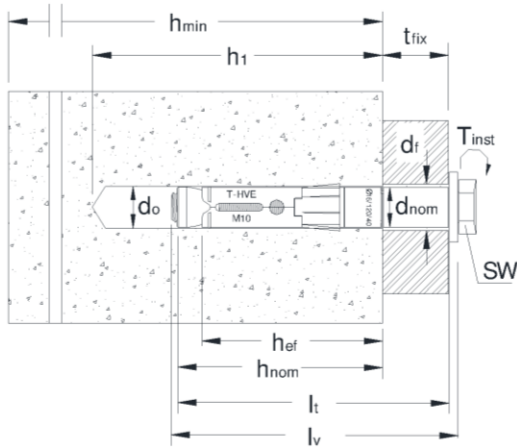


HVE02

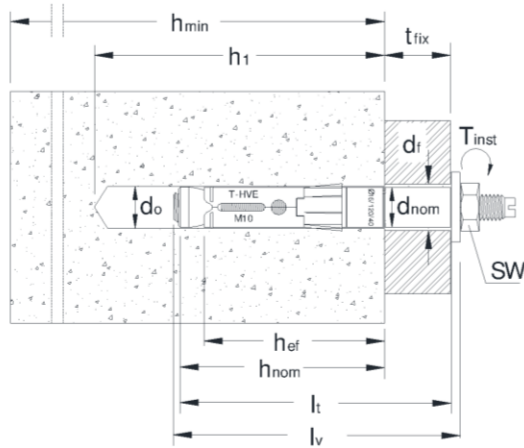

HVE03

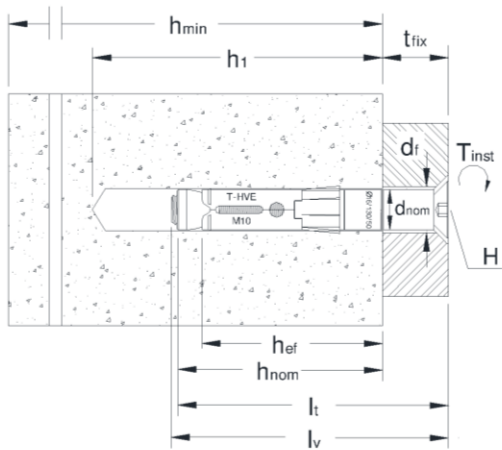

HVE04

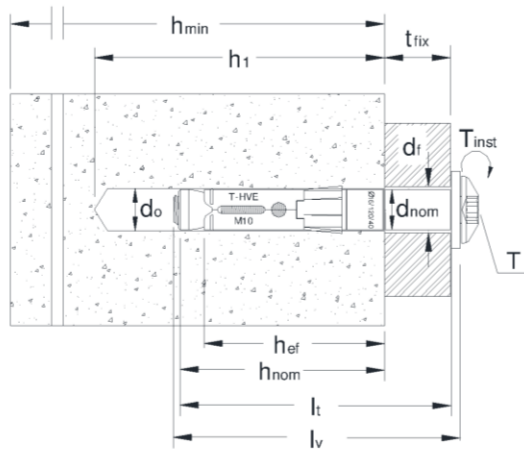

Designation



$d_{nom}$	Outside diameter of the anchor
$T_{inst}$	Required torque moment
$t_{fix}$	Thickness of the fixtures
$d_o$	Diameter of the drill hole
$d_f$	Diameter of the clearance hole in the fixture
$h_{min}$	Minimum thickness of the concrete member
$h_{nom}$	Overall anchor embedment depth
$h_{ef}$	Anchorage depth
$l_t$	Anchor length
$l_v$	Bolt length
T	Hexalobular socket number
SW	Wrench size/Socket size
H	Hexagonal socket

Tecfi HVE Rock

Product description  
Installed condition

Annex A1

#### Anchor type HVE01 with hexagon head screw

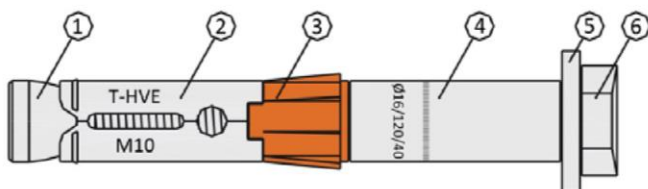

**HVE01**  
(M6-M16)

#### Marking


##### Expansion sleeve :

- Identifying mark of producer
- Trade name
- Anchor diameter
- Screw diameter

e.g. : T-HVE

Ø16  
M10

#### Anchor type HVE02 with threaded stud

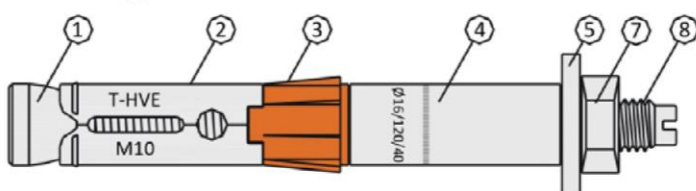



**HVE02**  
(M6-M16)

##### Distance sleeve :

- Anchor diameter
- Anchor length
- Maximum thickness of the fixture



e.g.: Ø16/120/40

#### Anchor type HVE03 with countersunk washer and flat countersunk head screw

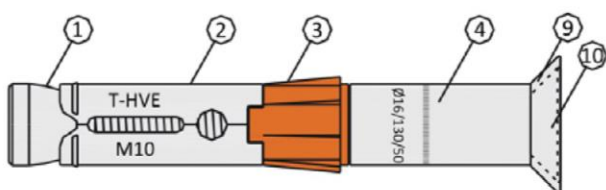


**HVE03**  
(M6-M12)

#### Anchor type HVE04 with mushroom head screw

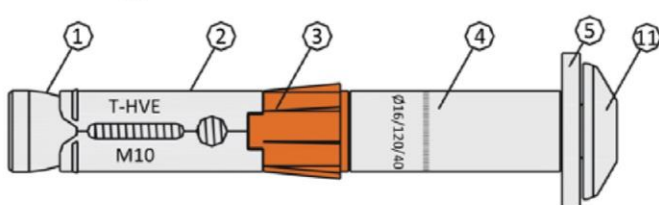

**HVE04**  
(M8-M10)



**Table A1: Materials**


ITEM	Description	Finishing
1	Zinc plated conical steel nut	Materials galvanised $\geq 5$ [ $\mu\text{m}$ ] according to ISO 4042:1999
2	Zinc plated expansion steel sleeve (marking: T-HVE / bolt size, e.g. M10)	
3	Nylon 6.6 cylinder with helix, red brick color	
4	Zinc plated steel extension (marking: $d_{\text{nom}}/l/t_{\text{fix}}$ , e.g. Ø16/120/40)	
5	Zinc plated steel washer	
6	Zinc plated steel hexagonal head bolt, class 8.8 according to ISO 898-1:2012	
7	Zinc plated steel hexagonal nut, class 8 according to ISO 898-2:2012	
8	Zinc plated steel threaded stud, class 8.8 according to ISO 898-1:2012	
9	Zinc plated steel countersunk washer, according to EN 10083-6:2006	
10	Zinc plated steel flat countersunk head screw, class 8.8 according to ISO 898-1:2012	
11	Zinc plated steel mushroom head screw, class 8.8 according to ISO 898-1:2012	

#### Tecfi HVE Rock

#### Product description

Anchor types and components, Materials

#### Annex A2

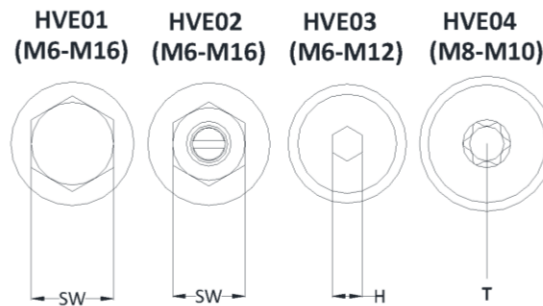

**Table A2: HVE01 dimensions**

Item	Outside diameter of anchor [mm]	Outside diameter of metric thread [mm]	Length range [mm]	Maximum thickness of fixture range [mm]
HVE01-M6	10	6	70 - 120	5 - 15
HVE01-M8	12	8	80 - 140	10 - 70
HVE01-M10	16	10	100 - 160	20 - 80
HVE01-M12	18	12	120 - 200	20 - 100
HVE01-M16	24	16	140 - 220	20 - 100

**Table A3: HVE02 dimensions**

Item	Outside diameter of anchor [mm]	Outside diameter of metric thread [mm]	Length range [mm]	Maximum thickness of fixture range [mm]
HVE02-M6	10	6	70 - 120	5 - 15
HVE02-M8	12	8	80 - 140	10 - 70
HVE02-M10	16	10	100 - 160	20 - 80
HVE02-M12	18	12	120 - 200	20 - 100
HVE02-M16	24	16	140 - 220	20 - 100

**Table A4: HVE03 dimensions**

Item	Outside diameter of anchor [mm]	Outside diameter of metric thread [mm]	Length range [mm]	Maximum thickness of fixture range [mm]
HVE03-M6	10	6	85 - 125	20 - 60
HVE03-M8	12	8	85 - 125	15 - 55
HVE03-M10	16	10	110 - 130	30 - 50
HVE03-M12	18	12	120 - 140	20 - 40

**Table A5: HVE04 dimensions**

Item	Outside diameter of anchor [mm]	Outside diameter of metric thread [mm]	Length range [mm]	Maximum thickness of fixture range [mm]
HVE04-M8	12	8	80 - 120	10 - 50
HVE04-M10	16	10	100 - 120	20 - 40

**Tecfi HVE Rock**

Product description  
Anchor's dimensions

**Annex A3**



## Specifications of intended use

### Anchorage subject to:

- Static and quasi-static loads: all sizes
- Seismic action for Performance Category C1: all sizes
- Fire exposure: all sizes

### Base materials:

- Reinforced or unreinforced normal weight concrete according to EN 206:2013.
- Strength classes C20/25 to C50/60 according to EN 206:2013.
- Non-cracked or cracked concrete

### Use conditions (Environmental conditions):

- Anchorages subject to dry internal conditions

### Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages under static or quasi-static actions and under fire exposure are designed in accordance with:
  - ETAG 001, Annex C, design method A, Edition August 2010;
  - CEN TS CEN/TS 1992-4-1:2009;
- Anchorages under seismic actions (cracked concrete) are designed in accordance with:
  - EOTA Technical Report TR 045, Edition February 2013
  - Anchorages shall be positioned outside of critical regions (e.g. plastic hinges) of the concrete structure
  - Fastening in stand-off installation or with a grout layer are not allowed
- Anchorages under fire exposure are designed in accordance with:
  - ETAG 001, Annex C, design method A, Edition August 2010 and EOTA Technical Report TR 020, Edition May 2004
  - CEN/TS 1992-4: 2009, Annex D
  - It must be ensured that local spalling of the concrete cover does not occur

### Installation:

- Hole drilling by rotary plus hammer mode
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- In case of aborted hole: new drilling at a minimum distance away of twice the depth of the aborted hole or smaller distance if the aborted hole is filled with high strength mortar and if under shear or oblique tension load it is not the direction of the load application.

**Tecfi HVE Rock**


**Intended use**  
**Specifications**

**Annex B1**



**Table B1: Installation parameters**

Sizes		HVE M6	HVE M8	HVE M10	HVE M12	HVE M16
Nominal drill hole diameter	$d_o = [\text{mm}]$	10	12	16	18	24
Cutting diameter of drill bit	$d_{\text{cut}} \leq [\text{mm}]$	10,45	12,50	16,50	18,50	24,55
Effective anchorage depth	$h_{\text{ef}} = [\text{mm}]$	55	60	70	90	105
Depth of drill hole	$h_1 = [\text{mm}]$	80	90	100	120	140
Diameter of clearance in the fixture	$d_f = [\text{mm}]$	12	14	18	20	26
Overall anchor embedment depth in the	$h_{\text{nom}} = [\text{mm}]$	65	70	80	100	120
Required torque moment	$T_{\text{inst}} = [\text{Nm}]$	15	30	50	100	160
Outside diameter of anchor	$d_{\text{nom}} = [\text{mm}]$	10	12	16	18	24
Minimum thickness of concrete member	$h_{\text{min}} = [\text{mm}]$	110	120	140	180	210
Minimum edge distance	$c_{\text{min}} = [\text{mm}]$	70	100	90	175	180
Corresponding spacing	$s \geq [\text{mm}]$	110	160	175	255	290
Minimum spacing	$s_{\text{min}} = [\text{mm}]$	55	110	80	135	130
Corresponding edge distance	$c \geq [\text{mm}]$	110	145	120	220	240

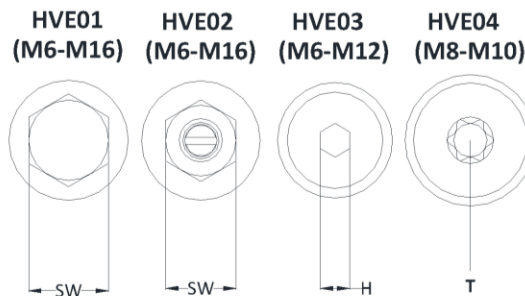

**Table B2: Wrenches, sockets and maximum thickness of fixture**

Sizes		M6	M8	M10	M12	M16
HVE 01 – Wrench size	$SW = [\text{mm}]$	10	13	17	19	24
HVE 01 – Thickness of fixture	$t_{\text{fix,max}} = [\text{mm}]$	55	70	80	100	100
	$t_{\text{fix,min}} = [\text{mm}]$	5	10	20	20	20
HVE 02 – Wrench size	$SW = [\text{mm}]$	10	13	17	19	24
HVE 02 – Thickness of fixture	$t_{\text{fix,max}} = [\text{mm}]$	55	70	80	100	100
	$t_{\text{fix,min}} = [\text{mm}]$	5	10	20	20	20
HVE 03 – Hexagonal socket size	$H = [\text{mm}]$	4	5	6	8	-
HVE 03 – Thickness of fixture	$t_{\text{fix,max}} = [\text{mm}]$	60	55	50	100	-
	$t_{\text{fix,min}} = [\text{mm}]$	20	15	30	20	-
HVE 04 – Hexalobular socket number	$T = [-]$	-	40	40	-	-
HVE 04 – Thickness of fixture	$t_{\text{fix,max}} = [\text{mm}]$	-	50	40	-	-
	$t_{\text{fix,min}} = [\text{mm}]$	-	10	20	-	-

**Tecfi HVE Rock**


**Intended use**

Installation parameters

Wrenches, sockets and maximum thickness of fixture

**Annex B2**

*Drill bit*

	Anchor size	Drill bit item code
	M6 / Ø10	EO 01 08 210
	M8 / Ø12	EO 01 10 210
	M10 / Ø16	EO 01 16 210
	M12 / Ø18	EO 01 18 210
	M16 / Ø24	EO 01 24 210

*Blowing pump*




**Tecfi HVE Rock**

**Intended use**


Cleaning and setting tools

**Annex B3**


Installation sequence HVE01

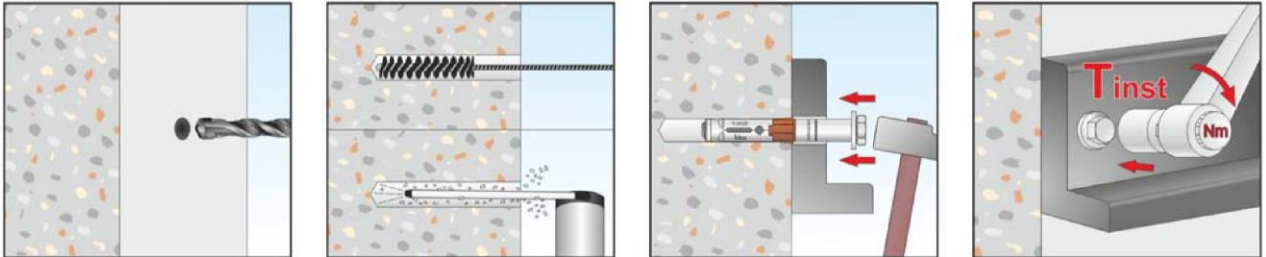


Installation sequence HVE02

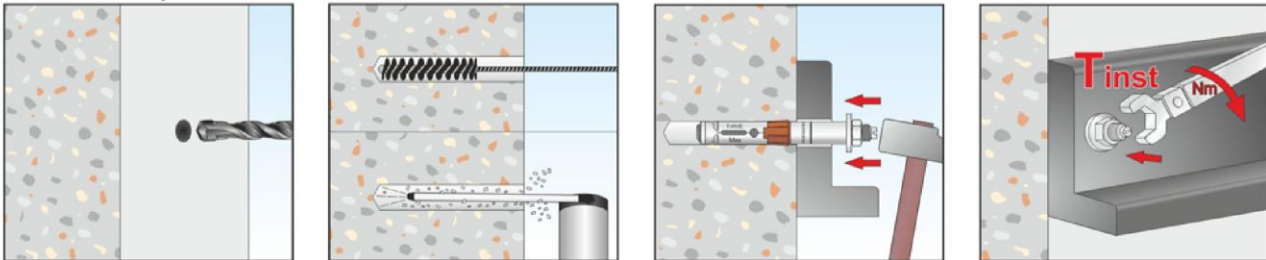

Installation sequence HVE03

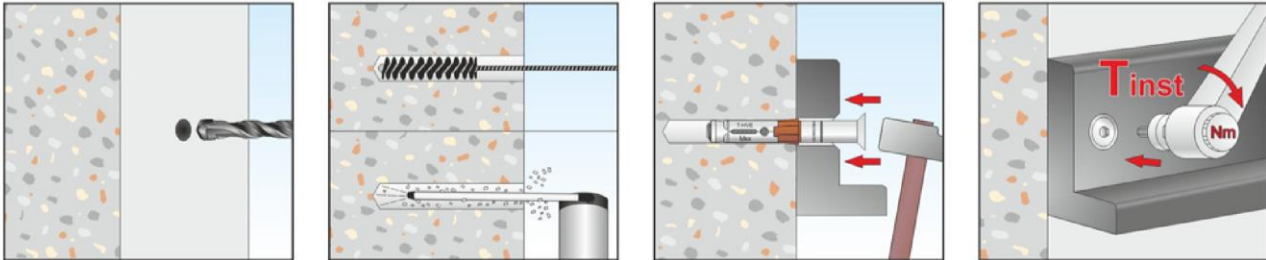

Installation sequence HVE04

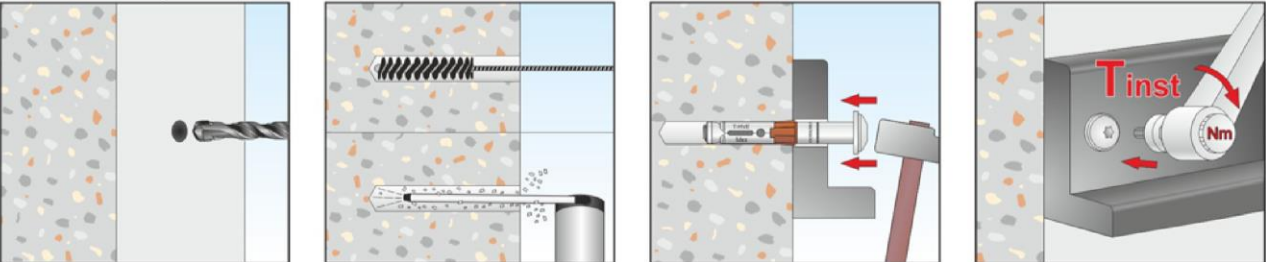

Step 1	Drill a hole into the concrete in rotary plus hammer mode
Step 2	Remove the dust into the hole using a brush and a blowing pump
Step 3	Place the fixture and hammer the anchor in the drill hole
Step 4	Apply the required torque moment

Tecfi HVE Rock

Intended use  
Installation instructions

Annex B4

**Table C1: Performances for design method A (tension)**

Type of anchor / Size			HVE M6	HVE M8	HVE M10	HVE M12	HVE M16
Steel Failure							
Characteristic Resistance	$N_{Rk,s} = N_{Rk,s,seis,C1}$	[kN]	16	29	46	67	125
Partial safety factor	$\gamma_{Ms}^{1)}$		1,5				
Pull-out failure							
Effective embedment depth	$h_{ef}$	[mm]	55	60	70	90	105
Characteristic Resistance in uncracked concrete C20/25	$N_{Rk,p}$	[kN]	16	16	20	35	45
Characteristic Resistance in cracked concrete C20/25			5	6	16	25	35
Characteristic Resistance for seismic performance category C1	$N_{Rk,p,seis,C1}$	[kN]	5	4,2	14,4	25	35
Increasing factors for $N_{Rk,p}$ for cracked and uncracked concrete	$\Psi_c$	C30/37	1,22				
		C40/50	1,41				
		C50/60	1,55				
Installation safety factor	$\gamma_2 = \gamma_{inst}$		1,0				
Concrete cone failure and splitting failure							
Effective embedment depth	$h_{ef}$	[mm]	55	60	70	90	105
Spacing	$s_{cr,N}$	[mm]	165	180	210	270	315
Edge distance	$c_{cr,N}$	[mm]	85	90	105	135	160
Spacing(splitting)	$s_{cr,sp}$	[mm]	220	320	240	370	390
Edge distance (splitting)	$c_{cr,sp}$	[mm]	110	160	120	185	195
Factor for uncracked concrete, acc. CEN/TS 1992-4	$k_{ucr}$		10,1				
Factor for cracked concrete, acc. CEN/TS 1992-4	$k_{cr}$		7,2				
Installation safety factor	$\gamma_2 = \gamma_{inst}$		1,0				

<sup>1)</sup> In absence of other national regulations.

**Table C2: Performances for design method A (shear)**

Type of anchor / Size			HVE M6	HVE M8	HVE M10	HVE M12	HVE M16
Steel Failure without level arm							
Characteristic Resistance	$V_{Rk,s}$	[kN]	16	25	43	58	107
Characteristic Resistance for seismic performance category C1	$V_{Rk,s,seis,C1}$	[kN]	11,4	17	28	43,5	96,3
Partial safety factor	$\gamma_{Ms}^{1)}$		1,45				
Steel Failure with level arm							
Characteristic bending moment	$M^0_{Rk,s}$	[Nm]	12	30	60	105	266
Partial safety factor	$\gamma_{Ms}^{1)}$		1,45				
Concete pryout failure							
Effective embedmen depth	$h_{ef}$	[mm]	55	60	70	90	105
Factor for pryout failure	$k = k_3$		1	2	2	2	2
Installation safety factor	$\gamma_2 = \gamma_{inst}$		1,0				
Concrete edge failure							
Effective achorage legth	$l_{ef}$	[mm]	55	60	70	90	105
Effective external diameter anchor	$d_{nom}$	[mm]	10	12	16	18	24
Installation safety factor	$\gamma_2 = \gamma_{inst}$		1,0				

<sup>1)</sup> In absence of other national regulations.

## Tecfi HVE Rock

### Performances

Characteristic resistance to tension loads under static and quasi-static actions and seismic performance category C1

## Annex C1

**Table C3: Performances under fire exposure in concrete C20/25 to C50/60 (tension)**

Duration of fire resistance = 30min, anchor type HVE			M6	M8	M10	M12	M16
<b>Steel Failure</b>							
Characteristic Resistance	$N_{Rk,s,fi,30}$	[kN]	0,2	0,4	0,9	1,7	3,1
<b>Pull-out failure</b>							
Characteristic Resistance in concrete C20/25 to C50/60	$N_{Rk,p,fi,30}$	[kN]	1,3	1,5	4,0	6,3	8,8
<b>Concrete cone failure</b>							
Characteristic Resistance in concrete C20/25 to C50/60	$N_{Rk,c,fi,30}^0$	[kN]	4,0	5,0	7,4	13,8	20,3
Duration of fire resistance = 60min, anchor type HVE			M6	M8	M10	M12	M16
<b>Steel Failure</b>							
Characteristic Resistance	$N_{Rk,s,fi,60}$	[kN]	0,2	0,3	0,8	1,3	2,4
<b>Pull-out failure</b>							
Characteristic Resistance in concrete C20/25 to C50/60	$N_{Rk,p,fi,60}$	[kN]	1,3	1,5	4,0	6,3	8,8
<b>Concrete cone failure</b>							
Characteristic Resistance in concrete C20/25 to C50/60	$N_{Rk,c,fi,60}^0$	[kN]	4,0	5,0	7,4	13,8	20,3
Duration of fire resistance = 90min, anchor type HVE			M6	M8	M10	M12	M16
<b>Steel Failure</b>							
Characteristic Resistance	$N_{Rk,s,fi,90}$	[kN]	0,1	0,3	0,6	1,1	2,0
<b>Pull-out failure</b>							
Characteristic Resistance in concrete C20/25 to C50/60	$N_{Rk,p,fi,90}$	[kN]	1,3	1,5	4,0	6,3	8,8
<b>Concrete cone failure</b>							
Characteristic Resistance in concrete C20/25 to C50/60	$N_{Rk,c,fi,90}^0$	[kN]	4,0	5,0	7,4	13,8	20,8
Duration of fire resistance = 120min, anchor type HVE			M6	M8	M10	M12	M16
<b>Steel Failure</b>							
Characteristic Resistance	$N_{Rk,s,fi,120}$	[kN]	0,1	0,2	0,5	0,8	1,6
<b>Pull-out failure</b>							
Characteristic Resistance in concrete C20/25 to C50/60	$N_{Rk,p,fi,120}$	[kN]	1,0	1,2	3,2	5,0	7,0
<b>Concrete cone failure</b>							
Characteristic Resistance in concrete C20/25 to C50/60	$N_{Rk,c,fi,120}^0$	[kN]	3,2	4,0	5,9	11,1	16,3
Spacing	$S_{cr,N}$	[mm]	$4 \times h_{ef}$				
	$S_{min}$		55	110	80	135	130
Edge distance	$c_{cr,N}$		$2 \times h_{ef}$				
	$c_{min}$		$c_{min} = 2xh_{ef}$ ; If fire attack comes from more than one side, the edge distance of the anchor has to be $\geq 300\text{mm}$ or $\geq 2 \times h_{ef}$				

**Tecfi HVE Rock**

**Performances**

Characteristic values for tension loads under fire exposure

**Annex C2**



**Table C4: Performances under fire exposure in concrete C20/25 to C50/60 (shear)**

Duration of fire resistance = 30min, anchor type HVE			M6	M8	M10	M12	M16
<b>Shear load without lever arm</b>							
Characteristic resistance	$V_{Rk,s,fi,30}$	[kN]	0,3	0,5	1,2	2,1	3,9
<b>Shear load with lever arm</b>							
Characteristic bending resistance	$M_{Rk,s,fi,30}^0$	[Nm]	0,2	0,4	1,1	2,6	6,7
Duration of fire resistance = 60min, anchor type HVE			M6	M8	M10	M12	M16
<b>Shear load without lever arm</b>							
Characteristic resistance	$V_{Rk,s,fi,60}$	[kN]	0,3	0,4	1,0	1,6	2,9
<b>Shear load with lever arm</b>							
Characteristic bending resistance	$M_{Rk,s,fi,60}^0$	[Nm]	0,1	0,3	1,0	2,0	5,0
Duration of fire resistance = 90min, anchor type HVE			M6	M8	M10	M12	M16
<b>Shear load without lever arm</b>							
Characteristic resistance	$V_{Rk,s,fi,90}$	[kN]	0,2	0,3	0,8	1,4	2,5
<b>Shear load with lever arm</b>							
Characteristic bending resistance	$M_{Rk,s,fi,90}^0$	[Nm]	0,1	0,3	0,8	1,7	4,3
Duration of fire resistance = 120min, anchor type HVE			M6	M8	M10	M12	M16
<b>Shear load without lever arm</b>							
Characteristic resistance	$V_{Rk,s,fi,120}$	[kN]	0,2	0,2	0,6	1,0	1,9
<b>Shear load with lever arm</b>							
Characteristic bending resistance	$M_{Rk,s,fi,120}^0$	[Nm]	0	0,2	0,6	1,3	3,3
<b>Concrete pryout failure</b>							
The characteristic resistance $V_{Rk,cp,fi,Ri}$ in concrete C20/25 to C50/60 is determined by: $V_{Rk,c,fi(90)} = k \times N_{Rk,c,fi(90)} (\leq R90)$ and $V_{Rk,c,fi(120)} = k \times N_{Rk,c,fi(120)}$ (up to R120)							
<b>Concrete edge failure</b>							
The characteristic resistance $V_{Rk,cp,fi,Ri}$ in concrete C20/25 to C50/60 is determined by: $V_{Rk,c,fi(90)}^0 = 0,25 \times V_{Rk,c}^0$ (R30, R60, R90) and $V_{Rk,c,fi(120)}^0 = 0,20 \times V_{Rk,c}^0$ (R120) with $V_{Rk,c}^0$ as an initial value of the characteristic resistance of a single anchor in cracked concrete C20/25							

**Tecfi HVE Rock**

**Performances**

Characteristic values for shear loads under fire exposure

**Annex C3**



**Table C5 : Displacements**

Tension loads in cracked and uncracked concrete			M6	M8	M10	M12	M16
Service tension load in uncracked concrete C20/25	N	[kN]	7,6	7,6	9,5	16,7	21,4
Displacements	$\delta_{N0}$	[mm]	1,3	1,5	1,0	1,3	1,8
	$\delta_{N\infty}$	[mm]	1,3	1,5	1,0	1,3	1,8
Service tension load in cracked concrete C20/25	N	[kN]	2,4	2,9	7,6	11,9	16,7
Displacements	$\delta_{N0}$	[mm]	1,0	0,7	1,0	1,2	1,5
	$\delta_{N\infty}$	[mm]	1,6	1,3	1,6	1,7	1,5
Shear loads in cracked and uncracked concrete			M6	M8	M10	M12	M16
Service shear load in cracked and uncracked concrete C20/25	V	[kN]	7,7	12,3	21,0	23,3	52,5
Displacements	$\delta_{V0}$	[mm]	2,4	2,6	2,5	3,0	4,0
	$\delta_{V\infty}$	[mm]	3,6	3,9	3,8	4,5	6,0

**Tecfi HVE Rock**

**Performances**  
**Displacements**

**Annex C4**