

Approval body for construction products and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments



European Technical Assessment

ETA-10/0383
of 17 June 2015

English translation prepared by DIBt - Original version in German language

General Part

| | |
|--------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Technical Assessment Body issuing the European Technical Assessment: | Deutsches Institut für Bautechnik |
| Trade name of the construction product | fischer injection system FIS V for use in masonry |
| Product family to which the construction product belongs | Injection system for use in masonry |
| Manufacturer | fischerwerke GmbH & Co. KG Otto-Hahn-Straße 15 79211 Denzlingen DEUTSCHLAND |
| Manufacturing plant | fischerwerke |
| This European Technical Assessment contains | 98 pages including 3 annexes which form an integral part of this assessment |
| This European Technical Assessment is issued in accordance with Regulation (EU) No 305/2011, on the basis of | Guideline for European technical approval of "Metal Injection Anchors for Use in Masonry", ETAG 029, April 2013, used as European Assessment Document (EAD) according to Article 66 Paragraph 3 of Regulation (EU) No 305/2011. |

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction has to be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission according to Article 25 Paragraph 3 of Regulation (EU) No 305/2011.

European Technical Assessment**ETA-10/0383**

English translation prepared by DIBt

Page 3 of 98 | 17 June 2015

Specific Part**1 Technical description of the product**

The fischer injection system FIS V for masonry is a bonded anchor (injection type) consisting of a mortar cartridge with injection mortar fischer FIS V, FIS VS and FIS VW, a perforated sieve sleeve and an anchor rod with hexagon nut and washer or an internal threaded rod in the range of M6 to M16. The steel elements are made of zinc coated steel, stainless steel or high corrosion resistant steel.

The anchor rod is placed into a drilled hole filled with injection mortar and is anchored via the bond between steel element, injection mortar and masonry and mechanical interlock.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment**3.1 Mechanical resistance and stability (BWR 1)**

| Essential characteristic | Performance |
|--------------------------------------------------------|----------------------|
| Characteristic resistance for tension and shear loads | See Annex C 1 – C 75 |
| Characteristic resistance for bending moments | See Annex C 76 |
| Displacements under shear and tension loads | See Annex C 78 |
| Reduction Factor for job site tests (β -Factor) | See Annex C 78 |
| Edge distances and spacing | See Annex C 1 – C 75 |

3.2 Safety in case of fire (BWR 2)

| Essential characteristic | Performance |
|--------------------------|-----------------------------------------------|
| Reaction to fire | Anchorage satisfies requirements for Class A1 |
| Resistance to fire | No performance assessed |

3.3 Hygiene, health and the environment (BWR 3)

Regarding dangerous substances there may be requirements (e.g. transposed European legislation and national laws, regulations and administrative provisions) applicable to the products falling within the scope of this European Technical Assessment. In order to meet the provisions of Regulation (EU) No 305/2011, these requirements need also to be complied with, when and where they apply.

3.4 Safety in use (BWR 4)

The essential characteristics regarding Safety in use are included under the Basic Works Requirement Mechanical resistance and stability.

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with guideline for European technical approval ETAG 029, April 2013 used as European Assessment Document (EAD) according to Article 66 Paragraph 3 of Regulation (EU) No 305/2011 the applicable European legal act is: [97/177/EC].

The system to be applied is: 1

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.


Issued in Berlin on 17 June 2015 by Deutsches Institut für Bautechnik

Uwe Bender
Head of Department

beglaubigt:
Wittstock


Installation conditions part 1

Threaded rods with perforated sleeve FIS H K; Installation in perforated and solid brick masonry

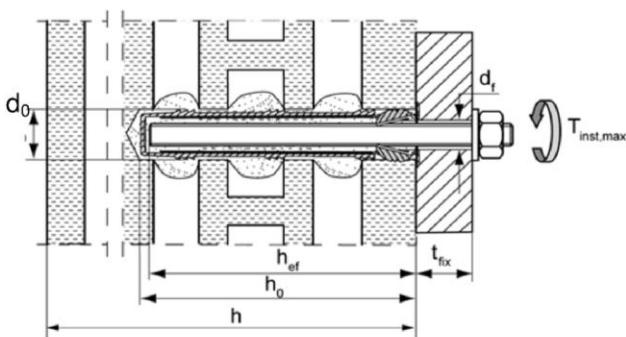

Pre-positioned anchorage

FIS H 12x50 K
FIS H 12x85 K
FIS H 16x85 K
FIS H 16x130 K
FIS H 20x85 K
FIS H 20x130 K
FIS H 20x200 K

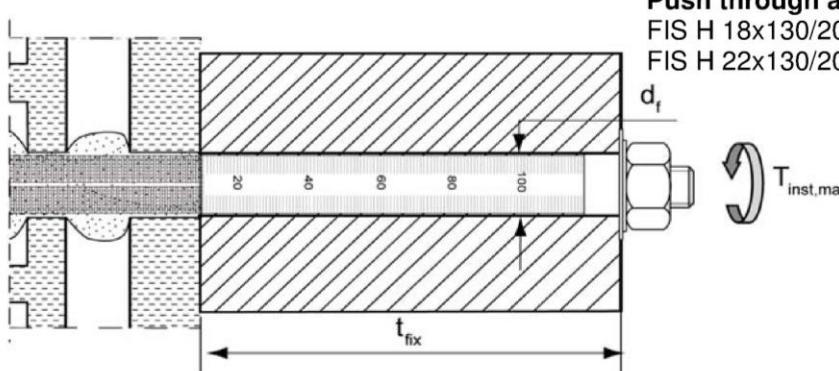


Push through anchorage

FIS H 18x130/200 K
FIS H 22x130/200 K

Internal threaded anchor FIS E with perforated sleeve FIS H K; Installation in perforated and solid brick masonry

Pre-positioned anchorage

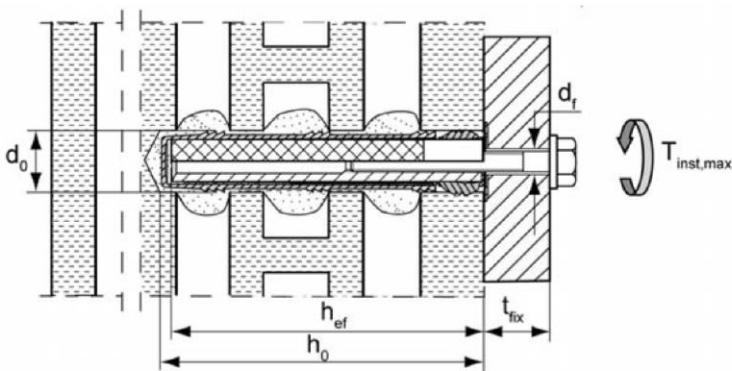

d_0 = nominal drill bit diameter

d_f = diameter of clearance hole in the fixture

$T_{inst,max}$ = maximum torque moment

h = thickness of masonry

h_{ef} = effective anchorage depth

h_0 = depth of drill hole

t_{fix} = thickness of fixture

fischer injection system FIS V masonry

Product description


Installation conditions part 1, in perforated and solid brick masonry

Annex A 1


Installation conditions part 2

Threaded rods without perforated sleeve FIS H K; installation in solid brick masonry and autoclaved aerated concrete

Pre-positioned anchorage

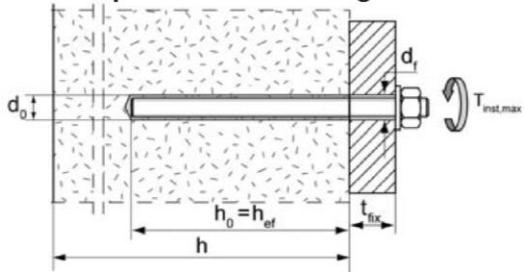


Push-through anchorage

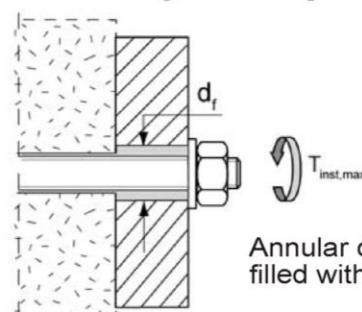

Annular clearance
filled with mortar


Internal threaded anchors FIS E without perforated sleeve FIS H K; installation in solid brick masonry and autoclaved aerated concrete

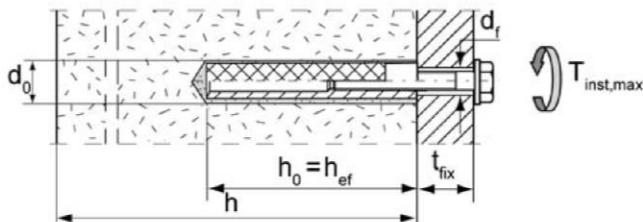

Threaded rods and internal threaded anchors FIS E without perforated sleeve FIS H K;
installation in autoclaved aerated concrete (installation with special conic drill bit PBB)


Threaded rods M8, M10, M12

Pre-positioned anchorage

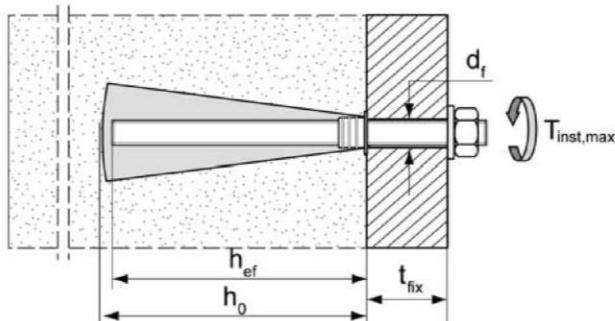

Internal threaded anchor FIS E 11x85 M6 and
FIS E 11x85 M8

Pre-positioned anchorage

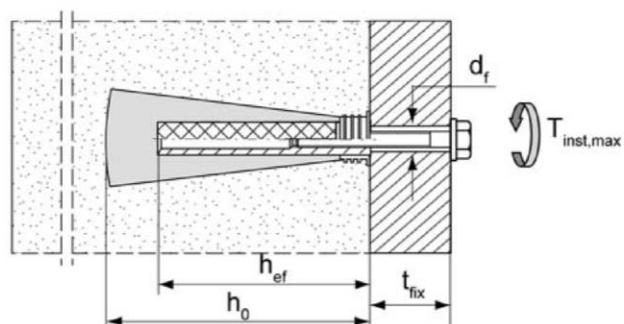

d_0 = nominal drill bit diameter

d_f = diameter of clearance hole in the fixture

$T_{inst,max}$ = maximum torque moment

h = thickness of masonry

h_{ef} = effective anchorage depth

h_0 = depth of drill hole


t_{fix} = thickness of fixture

fischer injection system FIS V masonry

Product description


Installation conditions part 2, in solid bricks

Annex A 2

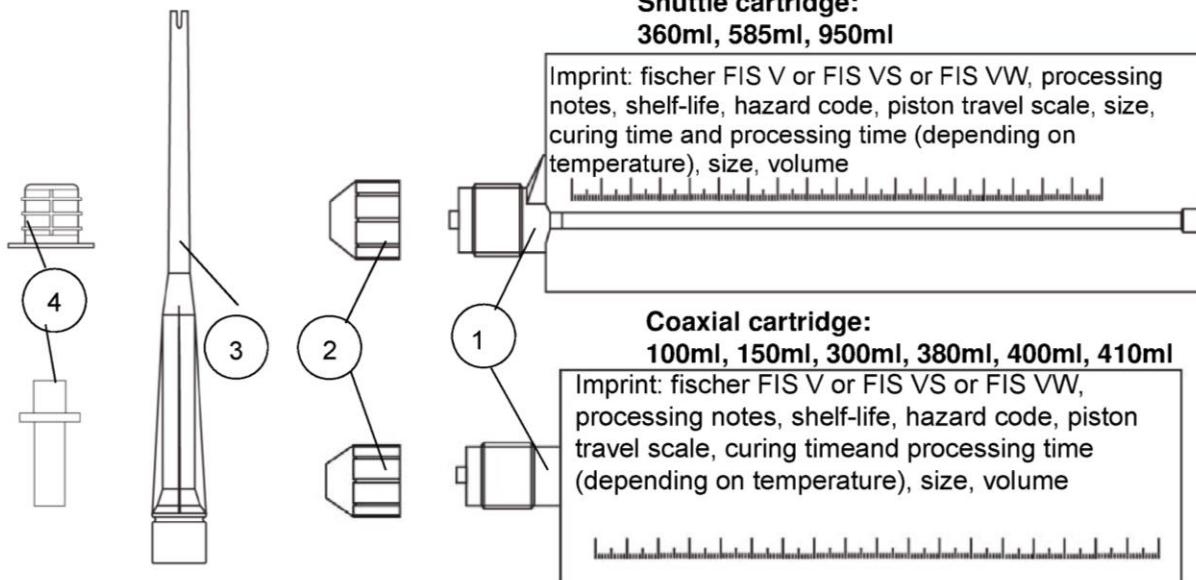

FIS A
Size: M6, M8, M10, M12, M16

fischer internal threaded anchor FIS E
Size: FIS E 11x85 M6, FIS E 11x85 M8, FIS E 15x85 M10, FIS E 15x85 M12

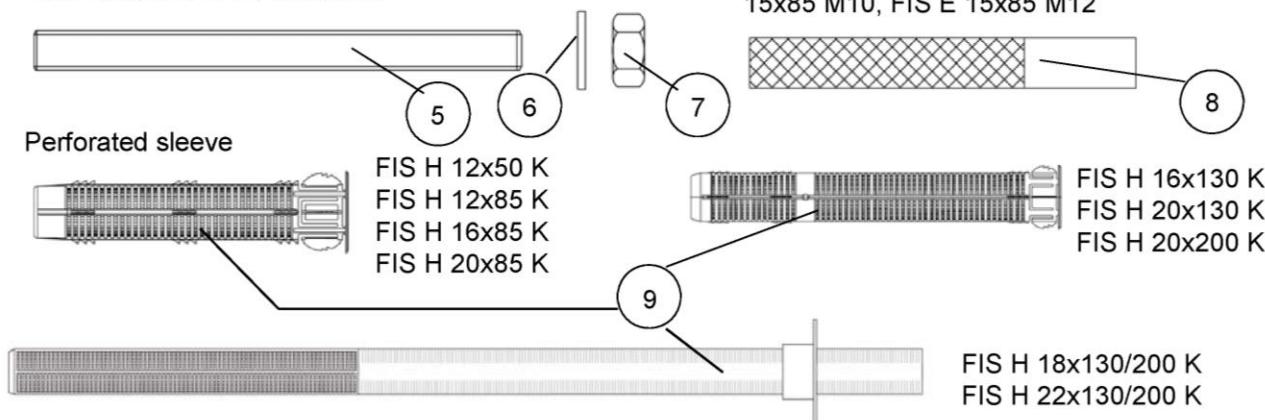

- ① Mortar cartridge
- ② Sealing cap
- ③ Static mixer ME (Easy Mixer); MR
- ④ Injection adapter and center nozzle for aerated concrete
- ⑤ Threaded rod
- ⑥ Washer
- ⑦ Hexagon nut
- ⑧ Internal threaded anchor FIS E
- ⑨ Perforated sleeve FIS H K

fischer injection system FIS V masonry

Product description
Product

Annex A 3

Table A1: Materials

| Part | Designation | Material | | |
|------|-------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Mortar cartridge | Mortar, hardener; filler | | |
| | | Steel, zinc plated | Stainless steel A4 | High corrosion-resistant steel C |
| 5 | Threaded rod | Property class 5.8 or 8.8; EN ISO 898-1: 2013 zinc plated $\geq 5\mu\text{m}$, EN ISO 4042:1999 A2K or hot-dip galvanised EN ISO 10684:2004 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8\%$ fracture elongation | Property class 50, 70 or 80 EN ISO 3506:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; 1.4062 EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8\%$ fracture elongation | Property class 50 or 80 EN ISO 3506:2009 or property class 70 with $f_{yk} = 560 \text{ N/mm}^2$ 1.4565; 1.4529 EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8\%$ fracture elongation |
| 6 | Washer ISO 7089:2000 | zinc plated $\geq 5\mu\text{m}$, EN ISO 4042:1999 A2K or hot-dip galvanised EN ISO 10684:2004 | 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014 | 1.4565; 1.4529 EN 10088-1:2014 |
| 7 | Hexagon nut | Property class 5 or 8; EN ISO 898-2:2013 zinc plated $\geq 5\mu\text{m}$, ISO 4042:1999 A2K or hot-dip galvanised ISO 10684:2004 | Property class 50, 70 or 80 EN ISO 3506:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014 | Property class 50, 70 or 80 EN ISO 3506:2009 1.4565; 1.4529 EN 10088-1:2014 |
| 8 | Internal threaded anchor FIS E | Property class 5.8; EN 10277-1:2008-06 zinc plated $\geq 5\mu\text{m}$, ISO 4042:1999 A2K | Property class 70 EN ISO 3506:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014 | Property class 70 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014 |
| | Screw or threaded rod for internal threaded anchor FIS E | Property class 5.8 or 8.8; EN ISO 898-1:2013 zinc plated $\geq 5\mu\text{m}$, ISO 4042:1999 A2K | Property class 70 EN ISO 3506:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014 | Property class 70 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014 |
| 9 | Perforated sleeve | PP / PE | | |

fischer injection system FIS V masonry

Product description
Materials

Annex A 4

Specifications of intended use

Anchors subject to:

- Static and quasi-static loads

Base materials:

- Solid brick masonry (Use category b) and autoclaved aerated concrete (Use category d), acc. to Annex B10, B11, B12

Note: The characteristic resistance is also valid for larger brick sizes and higher compressive strength of the masonry unit.

- Hollow brick masonry (use category c), according to Annex B10, B11
- Mortar strength class of the masonry M2,5 at minimum according to EN 998-2:2010
- For other bricks in solid masonry, hollow or perforated masonry and autoclaved aerated concrete, the characteristic resistance of the anchor may be determined by job site tests according to ETAG 029, Annex B under consideration of the β-factor according to Annex C78, Table C120

Temperature Range:

- I: From - 40°C to +80°C (max. short term temperature +80°C and max. long term temperature +50°C)
- II: From -40°C to +120°C (max. short term temperature +120°C and max. long term temperature +72°C)

Use conditions (Environmental conditions):

- Dry and wet structure (regarding injection mortar)
- Structures subject to dry internal conditions exist
(zinc coated steel, stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure including industrial and marine environment or exposure to permanently damp internal condition, if no particular aggressive conditions exist exist
(stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure and to permanently damp internal condition, if other particular aggressive conditions exist (high corrosion resistant steel)
Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used)

fischer injection system FIS V masonry

Intended Use
Specifications

Annex B 1

Specifications of intended use

Design:

- The anchorages have to be designed in accordance with the ETAG 029, Annex C, Design method A under the responsibility of an engineer experienced in anchorages and masonry work
Applies to all bricks, if no other values are specified:

$$N_{Rk} = N_{Rk,s} = N_{Rk,p} = N_{Rk,b} = N_{Rk,pb}$$

$$V_{Rk} = V_{Rk,s} = V_{Rk,b} = V_{Rk,c} = V_{Rk,pb}$$

- Verifiable calculation notes and drawings have to be prepared taking account the relevant masonry in the region of the anchorage, the loads to be transmitted and their transmission to the supports of the structure. The position of the anchor is indicated on the design drawings

Installation:

- Category d/d: -Installation and use in dry structures
- Category w/w: -Installation and use in dry and wet structures
- Hole drilling by hammer drill mode
- In case of aborted hole: The hole shall be filled with mortar
- Bridging of unbearing layer (e.g. plaster) see Annex B 4 (Table B3)
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- Fastening screws or threaded rods (including nut and washer) must comply with the appropriate material and property class of the fischer internal threaded anchor FIS E
- minimum curing time see Annex B5. Table B6
- Commercial standard threaded rods, washers and hexagon nuts may also be used if the following requirements are fulfilled:

Material dimensions and mechanical properties of the metal parts according to the specifications are given in Annex A4, Table A1

Conformation of material and mechanical properties of the metal parts by inspection certificate 3.1 according to EN 10204:2004, the documents shall be stored

Marking of the threaded rod with the envisaged embedment depth. This may be done by the manufacturer of the rod or by a person on job site

fischer injection system FIS V masonry

Intended Use
Specifications

Annex B 2

Table B1: Installation parameters for threaded rods in solid bricks and autoclaved aerated concrete without perforated sleeves

| Size | | M6 | M8 | M10 | M12 | M16 |
|-----------------------------------------------------------------------|--------------------------------------------------------------|--------|---------|-------------------------|----------|----------|
| Nominal drill hole diameter | d_0 [mm] | 8 | 10 | 12 | 14 | 18 |
| Effective anchorage depth AAC cylindrical drill hole $h_{ef}^{1)}$ | $h_{ef,min}$ [mm] | | | 100 | | |
| Effective anchorage depth AAC Conical drill hole $h_{ef}^{1)}$ | $h_{0,min}$ [mm] | - | | 80 | | - |
| Effective anchorage depth $h_{ef}^{1)}$ | $h_{ef,min}$ [mm] | | | 50 | | |
| Depth of drill hole $h_0 = h_{ef}$ | $h_{ef,max}$ [mm] | | | $h-30, \leq 200$ | | |
| Diameter of clearance hole in the fixture | pre-position $d_f \leq$ [mm] push through $d_f \leq$ [mm] | 7 9 | 9 11 | 12 14 | 14 16 | 18 20 |
| Diameter of steel brush | $d_b \geq$ [mm] | | | See Table B5 | | |
| Maximum installation torque | $T_{inst,max}$ [Nm] | | | see parameters of brick | | |

¹⁾ $h_{ef,min} \leq h_{ef} \leq h_{ef,max}$ is possible.

fischer threaded rods M6, M8, M10, M12, M16



Marking



Marking:

Property class 8.8 or high corrosion resistant steel, property class 80: •

Stainless steel A4, property class 50 and high corrosion resistant steel, property class 50: ..

Table B2: Installation parameters for internal threaded anchors FIS E in solid bricks and autoclaved aerated concrete without perforated sleeves

| Size FIS E... | 11x85 M6 | 11x85 M8 | 15x85 M10 | 15x85 M12 |
|-------------------------------------------|---------------------|----------|-------------------------|-----------|
| Diameter of anchor | d_H [mm] | 11 | | 15 |
| Nominal drill bit diameter | d_0 [mm] | 14 | | 18 |
| Length of anchor | L_H [mm] | | 85 | |
| Drill hole depth | $h_0 = h_{ef}$ [mm] | | 85 | |
| Effective anchorage depth | h_{ef} [mm] | | 85 | |
| Effective anchorage depth AAC | h_0 [mm] | 100 | | |
| Conical drill hole $h_{ef}^{1)}$ | h_{ef} [mm] | 85 | | - |
| Diameter of steel brush | $d_b \geq$ [mm] | | See Table B5 | |
| Maximum installation torque | $T_{inst,max}$ [Nm] | | see parameters of brick | |
| Diameter of clearance hole in the fixture | d_f [mm] | 7 | 9 | 12 |
| Screw-in depth | $l_{E,min}$ [mm] | 6 | 8 | 10 |
| | $l_{E,max}$ [mm] | | | 12 |
| | | | 60 | |

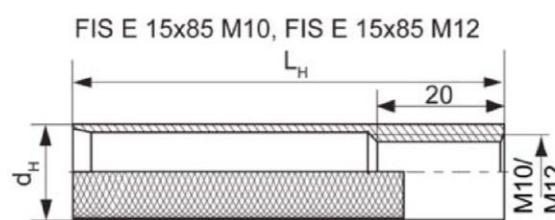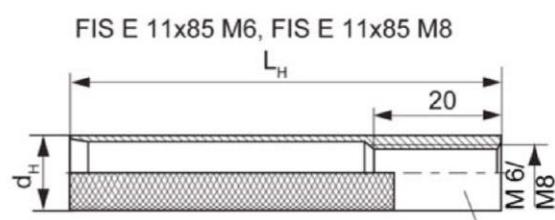

Marking: Size, e.g. **M8**, Stainless steel: A4, e.g. **M8 A4** High corrosion-resistant steel: C, e.g. **M8 C**

fischer injection system FIS V masonry

Intended Use

Installation parameters threaded rods and internal threaded anchors FIS E without perforated sleeves

Annex B 3

Table B3: Installation parameters for threaded rods and internal threaded anchors FIS E with perforated sleeves (pre-positioned anchorage)

| Size FIS H K | 12x50 | 12x85 | 16x85 | 16x130 ²⁾ | 20x85 | 20x130 ²⁾ | 20x200 ²⁾ |
|--------------------------------------------------------------|----------------------------|-------------------------|-------|----------------------|-------|----------------------|----------------------|
| Nominal drill hole diameter $d_0 = D_{\text{sleeve,nom}}$ | d ₀ [mm] | 12 | | 16 | | 20 | |
| Depth of drill hole | h ₀ [mm] | 55 | 90 | 90 | 135 | 90 | 135 |
| Effective anchorage depth | h _{ef,min} [mm] | 50 | 85 | 85 | 110 | 85 | 110 |
| | h _{ef,max} [mm] | 50 | 85 | 85 | 130 | 85 | 130 |
| Size of threaded rod | [-] | M6 or M8 | | M8 or M10 | | M12 or M16 | |
| Size of internal threaded anchor FIS E | --- | --- | 11x85 | --- | 15x85 | --- | --- |
| Diameter of steel brush ¹⁾ | d _b ≥ [mm] | See Table B5 | | | | | |
| Maximum installation torque | T _{inst,max} [Nm] | see parameters of brick | | | | | |

¹⁾ Only for solid areas in hollow bricks and solid bricks

²⁾ Bridging of unbearing layer (e.g. plaster) possible

Perforated sleeves

FIS H 12x50 K; FIS H 12x85 K; FIS H 16x85 K; FIS H 16x130 K;

FIS H 20x85 K; FIS H 20x130 K; FIS H 20x200 K

Marking:

Size D_{sleeve,nom} x L_{sleeve}
(e. g.: 16x85)


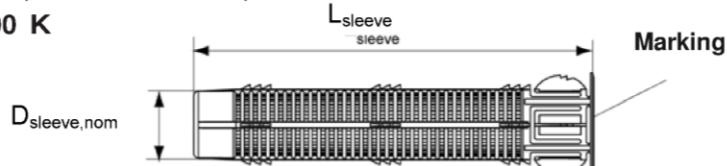


Table B4: Installation parameters for threaded rods with perforated sleeves (push through anchorage)

| Size FIS H K | 18x130/200 | 22x130/200 |
|---------------------------------------|------------------------------|-------------------------|
| Nominal sleeve diameter | D _{sleeve,nom} [mm] | 16 |
| Nominal drill hole diameter | d ₀ [mm] | 18 |
| Depth of drill hole | h ₀ [mm] | 135 + t _{fix} |
| Effective anchorage depth | h _{ef} [mm] | ≥ 130 |
| Diameter of steel brush ¹⁾ | d _b ≥ [mm] | See Table B5 |
| Size of threaded rod | [-] | M10 M12 M16 |
| Maximum installation torque | T _{inst,max} [Nm] | see parameters of brick |
| Thickness of fixture | t _{fix,max} [mm] | 200 |

¹⁾ Only for solid areas in hollow bricks and solid bricks

Perforated sleeves FIS H 18x130/200 K; FIS H 22x130/200 K

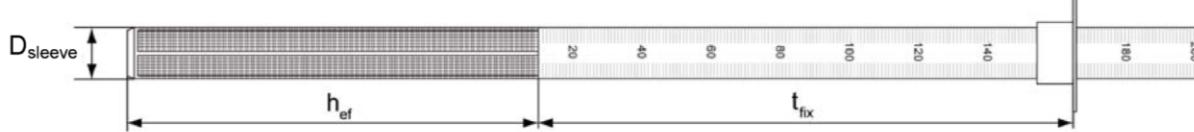

fischer injection system FIS V masonry

Intended Use

Installation parameters threaded rods and internal threaded anchors FIS E with perforated sleeves

Annex B4

Steel brush



Only for solid bricks and autoclaved aerated concrete

Table B5: Parameters of steel brush

| | | | | | | | | | | |
|---------------------|-------------|------|---|----|----|----|----|----|----|----|
| Drill hole diameter | d_0 | [mm] | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 |
| Brush diameter | $d_{b,nom}$ | [mm] | 9 | 11 | 14 | 16 | 20 | 20 | 25 | 25 |

Table B6: Maximum processing times and minimum curing times

(During the curing time of the mortar the masonry temperature may not fall below the listed minimum temperature).

| Temperature at anchoring base [°C] | Minimum curing time ¹⁾ t_{cure} [minutes] | | |
|--------------------------------------|--------------------------------------------------------|---------------------|-------------------------------|
| | FIS V High Speed ³⁾ | FIS V ²⁾ | FIS V Low Speed ²⁾ |
| -10 to -5 | 12 hours | | |
| >-5 to ±0 | 3 hours | 24 hours | |
| >±0 to +5 | 90 | 3 hours | 6 hours |
| >+5 to +10 | 45 | 90 | 3 hours |
| >+10 to +20 | 30 | 60 | 2 hours |
| >+20 to +30 | | 45 | 60 |
| >+30 to +40 | | 35 | 30 |

| System-temperature (mortar) [°C] | Maximum processing time t_{work} [minutes] | | |
|------------------------------------|----------------------------------------------|---------------------|-------------------------------|
| | FIS V High Speed ³⁾ | FIS V ²⁾ | FIS V Low Speed ²⁾ |
| ±0 | 5 | | |
| +5 | 5 | 13 | 20 |
| +10 | 3 | 9 | 20 |
| +20 | 1 | 5 | 10 |
| +30 | | 4 | 6 |
| +40 | | 2 | 4 |

¹⁾ For wet bricks the curing time must be doubled

²⁾ Minimum cartridge temperature +5°C

³⁾ Minimum cartridge temperature ±0°C

fischer injection system FIS V masonry

Intended Use

Steel brush

Maximum processing times and minimum curing times

Annex B 5

Installation instruction part 1

Installation in solid brick and autoclaved aerated concrete (without perforated sleeve)

| | | | | | |
|----------|--|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| 1 | | Drill the hole in hammer drill function. Depth of drill hole h_0 and drill hole diameter d_0 see Table B1; B2 | | | |
| 2 | | | | Blow out the drill hole twice. Brush twice and blow out twice again. | |
| 3 | | Remove the sealing cap. Screw on the static mixer. (the spiral in the static mixer must be clearly visible) | | | |
| 4 | | Place the cartridge into a suitable dispenser | | Press out approximately 10 cm of mortar until the resin is permanently grey in colour. Mortar which is not grey in colour will not cure and must be disposed of. | |
| 5 | | Fill approximately 2/3 of the drill hole with mortar beginning from the bottom of the hole ¹⁾ . Avoid bubbles! | | For push through anchorage fill the annular clearance with mortar. | |
| 6 | | Only use clean and oil-free anchor elements. Mark the threaded rod for setting depth. Insert the anchor or internal threaded anchor FIS E by hand using light turning motions. When reaching the setting depth marking, excess mortar must emerge from the mouth of the drill hole. | | | |
| 7 | | Do not touch. Minimum curing time see Table B6 . | | Mounting the fixture. $T_{inst,max}$ see parameter of brick. | |

¹⁾ Exact volume of mortar see manufacturer's specification.

fischer injection system FIS V masonry







Intended Use

Installation instruction (without perforated sleeve) Part 1

Annex B 6

Installation instruction, part 2

Installation in perforated or solid brick with perforated sleeve (pre-positioned anchorage)

| | | | |
|---|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 |  | Drill the hole (hammer drill). Depth of drill hole h_0 and drill hole diameter d_0 see Table B3 | When install perforated sleeves in solid bricks or solid areas of hollow bricks, also clean the hole by blowing out and brushing. |
| 2 |  | Remove the sealing cap. Screw on the static mixer. (the spiral in the static mixer must be clearly visible) | |
| 3 |  | Place the cartridge into a suitable dispenser |  Press out approximately 10 cm of mortar until the resin is permanently grey in colour. Mortar which is not grey in colour will not cure and must be disposed of. |
| 4 |  | Insert the perforated sleeve flush with the surface of the masonry or plaster |  Fill the perforated sleeve completely with mortar beginning from the bottom of the hole ¹⁾ . |
| 5 |  | Only use clean and oil-free anchor elements. Mark the threaded rod for setting depth. Insert the threaded rod or the internal threaded anchor FIS E by hand using light turning motions until reaching the setting depth marking (threaded rod) or flush with the surface (internal threaded anchor). | |
| 6 |  | Do not touch. Minimum curing time see Table B6 . |  Mounting the fixture. $T_{inst,max}$ see parameter of brick. |

¹⁾ Exact volume of mortar see manufacturer's specification.

fischer injection system FIS V masonry









Intended Use

Installation instruction (with perforated sleeve) Part 2

Annex B 7

Installation instruction, part 3










Installation in perforated or solid brick with perforated sleeve (push through anchorage)
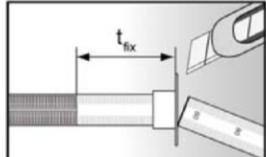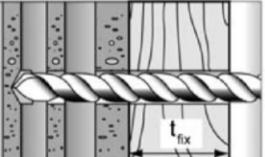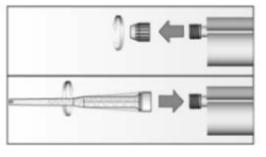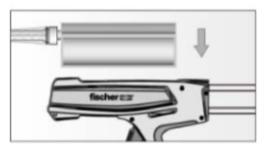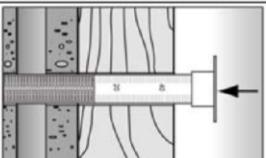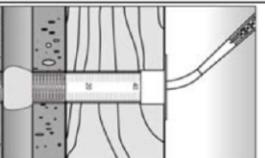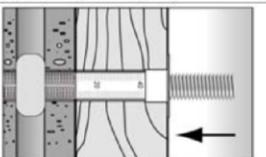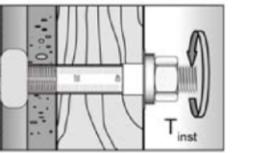
| | | | | |
|---|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 |  | Push the movable stop up to the correct thickness of fixture and cut the overlap. |  | Drill the hole through the fixture. Depth of drill hole ($h_0 + t_{fix}$) and drill hole diameter see Table B4 . |
| 2 |  | Remove the sealing cap. Screw on the static mixer. (the spiral in the static mixer must be clearly visible) | | |
| 3 |  | Place the cartridge into a suitable dispenser |  | Press out approximately 10 cm of mortar until the resin is permanently grey in colour. Mortar which is not grey in colour will not cure and must be disposed of. |
| 4 |  | Insert the perforated sleeve flush with the surface of the fixture into the drill hole. |  | Fill the sleeve with mortar beginning from the bottom of the hole. ¹⁾ For deep drill holes use an extension tube. |
| 5 |  | Only use clean and oil-free anchor elements. Mark the threaded rod for setting depth. Insert the threaded rod or the internal threaded anchor FIS E by hand using light turning motions until reaching the setting depth marking (threaded rod) or flush with the surface (internal threaded anchor). | | |
| 6 |  | Do not touch. Minimum curing time see Table B6 . |  | Mounting the fixture. $T_{inst,max}$ see parameter of brick. |

¹⁾ Exact volume of mortar see manufacturer's specification.

Installation instruction, part 4

Installation in autoclaved aerated concrete with special conic drill bit PBB (pre-positioned anchorage)

| | | | | |
|---|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 |  | Position the movable drill bit arrester on the used drill hole depth. For this, unlock the clamp screw and slide the arrester. Now fix the clamp screw. | | |
| 2 |  | Drill the cylindrical hole with rotating drill until the arrester contact the material surface. | | |
| 3 |  | Deviate the working power drill circulate to generate an conic undercut in the material. | | |
| 4 |  | Blow out the drill hole four times. | | |
| 5 |  | Remove the sealing cap. Screw on the static mixer. (the spiral in the static mixer must be clearly visible) | | |
| 6 |  | Place the cartridge into a suitable dispenser |  | Press out approximately 10 cm of mortar until the resin is permanently grey in colour. Mortar which is not grey in colour will not cure and must be disposed of. |
| 7 |  | Put the center sleeve into the drill hole and adapt the injection adapter onto the static mixer |  | Fill the drill hole with injection mortar. |
| 8 |  |  | Only use clean and oil-free anchor elements. Mark the threaded rod for setting depth. Insert the anchor or internal threaded anchor FIS E by hand using light turning motions. When reaching the setting depth marking, excess mortar must emerge from the mouth of the drill hole. | |
| 9 |  | Do not touch. Minimum curing time see Table B6. |  | Mounting the fixture. $T_{inst,max}$ see parameter of brick. |

fischer injection system FIS V masonry

Intended Use

Installation instruction (without perforated sleeve special conic drill bit PBB) Part 4

Annex B 9

Table B7.1: Summary of German bricks and blocks

| Kind of masonry | Brick format [mm] | Compressive strength | Density [kg/dm ³] | Annex |
|------------------------------------------------------|-----------------------|-----------------------|-------------------------------|-------------|
| Solid bricks | | | | |
| Solid brick Mz EN 771-1 | ≥ 240x115x113 | 10 / 16 | ≥1,8 | C1/C2 |
| Solid brick Mz EN 771-1 | ≥ 240x115x71 | 10 / 20 | ≥1,8 | C3/C4 |
| Solid sand- lime brick KS EN 771-2 | ≥ 250x240x240 | 10 / 20 / 28 | ≥2,0 | C5/C6/C7 |
| Solid light-weight concrete block Vbl | ≥ 372x300x254 | 2 | ≥0,6 | C8/C9 |
| Solid light-weight concrete block Vbl | ≥ 250x240x239 | 4 / 6 / 8 | ≥1,6 | C10/C11/C12 |
| Perforated bricks and hollow blocks | | | | |
| Perforated brick HLz EN 771-1 e.g. Poroton | 500(370)x175(240)x237 | 4 / 6 / 8 / 10 / 12 | ≥1,0 | C13/C14/C15 |
| Perforated brick HLz EN 771-1 | 240x115x113 | 6 / 10 / 16 / 20 / 28 | ≥1,4 | C16/C17/C18 |
| Sand- lime hollow block KSL | 240x175x113 | 8 / 10 / 12 / 16 / 20 | ≥1,4 | C19/C20/C21 |
| Light-weight concrete hollow block Hbl | 362x240x240 | 2 / 4 | ≥1,0 | C22/C23/C24 |

Table B7.2: Summary of French bricks and blocks

| Kind of masonry | Brick format [mm] | Compressive strength | Density [kg/dm ³] | Annex |
|-----------------------------------------------|-------------------|----------------------|-------------------------------|-------------|
| Perforated bricks and hollow blocks | | | | |
| Perforated brick HLz EN 711-1 | 500x200x315 | 4 / 6 / 8 | ≥0,6 | C25/C26/C27 |
| Perforated brick HLz EN 711-1 | 500x200x300 | 4 / 6 / 8 / 10 | ≥0,7 | C28/C29/C30 |
| Perforated brick HLz EN 711-1 | 500x200x315 | 2 / 4 / 6 / 8 | ≥0,7 | C31/C32/C33 |
| Perforated brick HLz EN 711-1 | 520x200x275 | 4 / 6 / 8 | ≥0,7 | C34/C35 |
| Light-weight concrete hollow block Hbl | 500x200x200 | 2 / 4 / 6 | ≥1,0 | C36/C37 |

fischer injection system FIS V masonry

Annex B 10

Intended Use
Summary of especially German and French bricks and blocks

Table B7.3: Summary of Italian bricks

| Kind of masonry | Brick format [mm] | Compressive strength | Density [kg/dm ³] | Annex |
|-----------------------------------------|-------------------|-------------------------|-------------------------------|-------------|
| Solid bricks | | | | |
| Solid brick Mz EN 771-1 | ≥ 245x118x54 | 10 / 20 | ≥1,8 | C38/C39 |
| Perforated bricks | | | | |
| Perforated brick HLz EN 771-1 | 255x120x118 | 2 / 4 / 6 / 8 / 10 / 12 | ≥1,0 | C40/C41/C42 |
| Perforated brick LLz EN 771-1 | 248x78x250 | 2 / 4 / 6 | ≥0,7 | C43/C44 |

Table B7.4: Summary of Spanish and Portuguese bricks

| Kind of masonry | Brick format [mm] | Compressive strength | Density [kg/dm ³] | Annex |
|-----------------------------------------|-------------------|----------------------|-------------------------------|-------------|
| Perforated bricks | | | | |
| Perforated brick HLz EN 771-1 | 275x130x94 | 6 / 8 / 12 / 16 / 20 | ≥0,8 | C45/C46/C47 |
| Perforated bricks | | | | |
| Perforated brick LLz EN 771-1 | 128x88x275 | 2 | ≥0,8 | C48/C49 |
| Perforated brick HLz EN 771-1 | 190x290x220 | 6 / 8 / 10 | ≥0,7 | C50/C51/C52 |

Table B7.5: Summary of Austrian bricks

| Kind of masonry | Brick format [mm] | Compressive strength | Density [kg/dm ³] | Annex |
|-----------------------------------------|-------------------|----------------------|-------------------------------|-------------|
| Perforated bricks | | | | |
| Perforated brick HLz EN 771-1 | 253x300x240 | 2 / 4 / 6 | ≥0,8 | C53/C54/C55 |

Table B7.6: Summary of Irish and English bricks

| Kind of masonry | Brick format [mm] | Compressive strength | Density [kg/dm ³] | Annex |
|-----------------------------------------------|-------------------|----------------------|-------------------------------|-------------|
| Solid blocks | | | | |
| Solid light-weight concrete brick Vbl | ≥ 440x100x215 | 4 / 6 / 8 / 10 | ≥2,0 | C56/C57 |
| Solid light-weight concrete brick Vbl | ≥ 440x95x215 | 6 / 8 / 10 / 12 | ≥2,0 | C58/C59 |
| Perforated blocks | | | | |
| Light-weight concrete hollow block Hbl | 440x215x215 | 4 / 6 / 8 / 10 | ≥1,2 | C60/C61/C62 |

fischer injection system FIS V masonry

Intended Use

Summary of especially Italian, Spanish, Portuguese, Austrian, Irish and English bricks and blocks

Annex B 11

Table B7.7: Summary of Dutch and Danish bricks and blocks

| Kind of masonry | Brick format [mm] | Compressive strength | Density [kg/dm ³] | Annex |
|--------------------------------------|-------------------|----------------------|-------------------------------|-------------|
| Solid bricks | | | | |
| Solid brick Mz EN 771-1 | ≥ 230x108x55 | 10 / 20 | ≥1,8 | C63/C64 |
| Solid sand-lime brick KS EN 771-2 | ≥ 997x214x538 | 10 / 20 / 36 | ≥1,8 | C65/C66/C67 |
| Perforated bricks | | | | |
| Perforated brick HLz EN 771-1 | 230x108x55 | 2 / 4 / 6 / 8 | ≥1,4 | C68/C69/C70 |

Table B7.8: Summary of autoclaved aerated concrete blocks

| Autoclaved aerated concrete | | | |
|-----------------------------|--------------------------------------------|-------------------------------|-------------|
| Property class | | Density [kg/dm ³] | Annex |
| 2 / 4 / 6 | Cylindrical drill hole | 350, 500, 650 | C71/C72/C73 |
| | Conical drill hole (special drill bit PBB) | 350, 500, 650 | C74/C75 |

Kind of masonry: Solid brick Mz, 2 DF

Table C1: Parameters of brick

| Species of brick | Solid brick Mz, 2DF | |
|------------------------------|------------------------------|----------------------------------|
| Density | $\rho \geq [\text{kg/dm}^3]$ | 1.8 |
| Compressive strength | $f_b \geq [\text{N/mm}^2]$ | 10 or 16 |
| Standard or approval | | EN 771-1 |
| Producer | | e.g. Wienerberger |
| Size, dimensions | [mm] | $\geq 240 \times 115 \times 113$ |
| Minimum thickness of masonry | $h_{\min} [\text{mm}]$ | 115 |

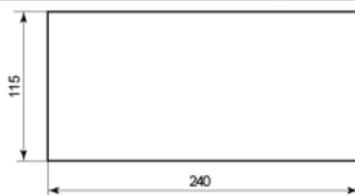


Table C2: Installation parameters for threaded rod and internal threaded anchor without perforated sleeve

| Size of threaded rod | M6 | M8 | M10 | M12 | M16 | 11x85 ¹⁾ M6/M8 | 15x85 M10/M12 |
|-------------------------------------------------------|-----------------------------------|-----|-----|-----|-----|------------------------------|------------------|
| Effective anchorage depth $h_{\text{ef}} [\text{mm}]$ | 50 | 100 | 50 | 100 | 50 | 100 | 50 |
| Edge distance $c_{\min} [\text{mm}]$ | | | | | | 60 | |
| $s_{\min} \parallel [\text{mm}]$ | | | | | | 120 | |
| Spacing | | | | | | 240 | |
| $s_{\text{cr}} \parallel [\text{mm}]$ | | | | | | 115 | |
| $s_{\text{cr}} \perp = s_{\min} \perp [\text{mm}]$ | | | | | | | |
| $\alpha_{g,N} \parallel [-]$ | | | | | | 1,5 | |
| Group-factor | | | | | | 1,4 | |
| $\alpha_{g,V} \parallel [-]$ | | | | | | | |
| $\alpha_{g,N} \perp [-]$ | | | | | | 2,0 | |
| $\alpha_{g,V} \perp [-]$ | | | | | | | |
| Max. installation torque | $T_{\text{inst,max}} [\text{Nm}]$ | 4 | | | | 10 | |

¹⁾ For FIS E 11x85 with screw M6: $T_{\text{inst,max}} = 4 \text{ Nm}$

Table C3: Installation parameters for threaded rod and internal threaded anchor FIS E with perforated sleeve

| Size of perforated sleeve | 16x85 | | | |
|----------------------------------------------------|-----------------------------------|-----|-----|----|
| Size of threaded rod | M8 | M10 | M6 | M8 |
| Size of internal threaded anchor FIS E | FIS E 11x85 | | | |
| Edge distance $c_{\min} [\text{mm}]$ | | | 60 | |
| $s_{\min} \parallel [\text{mm}]$ | | | 120 | |
| Spacing | | | 240 | |
| $s_{\text{cr}} \parallel [\text{mm}]$ | | | 115 | |
| $s_{\text{cr}} \perp = s_{\min} \perp [\text{mm}]$ | | | | |
| $\alpha_{g,N} \parallel [-]$ | | | 1,5 | |
| Group-factor | | | 1,4 | |
| $\alpha_{g,V} \parallel [-]$ | | | | |
| $\alpha_{g,N} \perp [-]$ | | | 2 | |
| $\alpha_{g,V} \perp [-]$ | | | | |
| Max. installation torque | $T_{\text{inst,max}} [\text{Nm}]$ | 10 | 4 | 10 |

fischer injection system FIS V masonry

Performances

Solid brick Mz, 2DF

Species of brick, installation parameters

Annex C 1

Kind of masonry: Solid brick Mz 2 DF

Table C4: Characteristic values of resistance; tension load (N_{Rk})

| Use category | | w/w | | d/d | |
|------------------------------------------------------------------|--------------------------|-------------------------------------|--------|-------|--------|
| Temperature range [°C] | | 50/80 | 72/120 | 50/80 | 72/120 |
| Effective anchorage depth | Anchor size | characteristic values N_{Rk} [kN] | | | |
| Compressive strength $f_b = 10 \text{ N/mm}^2$ | | | | | |
| 50 | M6, M8, M10 | 1,50 | 1,50 | 3,00 | 2,50 |
| | M12, M16 | 2,00 | | | |
| 85 | FIS E 11x85, FIS E 15x85 | | | | |
| 100 | M10 | 3,00 | 2,50 | 4,50 | 4,00 |
| | M12, M16 | 3,50 | | 5,50 | 4,50 |
| Perforated sleeve 16x85 | FIS E 11x85, M8, M10 | 1,50 | 1,20 | 3,00 | 2,50 |
| Compressive strength $f_b = 16 \text{ N/mm}^2$ | | | | | |
| 50 | M6, M8 | 2,50 | 2,00 | 4,50 | 4,00 |
| | M10 | | | | 3,50 |
| | M12, M16 | 3,50 | 2,00 | 5,50 | 4,50 |
| 85 | FIS E 11x85, FIS E 15x85 | | | | |
| 100 | M6, M8 | 4,00 | 3,00 | 7,00 | 5,50 |
| | M10 | 4,50 | 4,00 | 7,50 | 6,50 |
| | M12, M16 | 5,50 | 4,50 | 8,00 | 7,00 |
| Perforated sleeve 16x85 | FIS E 11x85, M8, M10 | 2,50 | 2,00 | 4,50 | 4,00 |

Calculation of pulling out of one brick (tension load): $N_{Rk,pb}$ see ETAG 029, Annex C

Table C5: Characteristic values of resistance; shear load (V_{Rk})

| Use category | | w/w | | d/d | |
|------------------------------------------------------------------|-----------------------|-------------------------------------|--------|-------|--------|
| Temperature range [°C] | | 50/80 | 72/120 | 50/80 | 72/120 |
| Effective anchorage depth | Anchor size | characteristic values V_{Rk} [kN] | | | |
| Compressive strength $f_b = 10 \text{ N/mm}^2$ | | | | | |
| ≥ 50 | M6 | | | | |
| 85 | FIS E 11x85 M6 | | | 2,50 | |
| ≥ 50 | M8 | | | | |
| 85 | FIS E 11x85 M8 | | | 3,00 | |
| ≥ 50 | M10, M12 | | | | |
| 85 | FIS E 15x85, M12, M16 | | | 3,50 | |
| Compressive strength $f_b = 16 \text{ N/mm}^2$ | | | | | |
| ≥ 50 | M6, | | | | |
| 85 | FIS E 11x85 M6 | | | 4,00 | |
| ≥ 50 | M8 | | | | |
| 85 | FIS E 11x85 M8 | | | 5,00 | |
| ≥ 50 | M10 | | | | |
| ≥ 50 | M12 | | | 5,50 | |
| 85 | FIS E 15x85, M12, M16 | | | 5,00 | |

Calculation of pushing out of one brick (shear load): $V_{Rk,pb}$ see ETAG 029, Annex C

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Solid brick Mz, 2DF
Characteristic values

Annex C 2

Kind of masonry: Solid brick Mz, NF

Table C6: Parameters of brick

| Species of brick | Solid brick Mz, NF | |
|------------------------------|------------------------------|---------------------------------|
| Density | $\rho \geq [\text{kg/dm}^3]$ | 1.8 |
| Compressive strength | $f_b \geq [\text{N/mm}^2]$ | 10 or 20 |
| Standard or approval | | EN 771-1 |
| Producer | | e.g. Wienerberger |
| Size, dimensions | [mm] | $\geq 240 \times 115 \times 71$ |
| Minimum thickness of masonry | h_{\min} [mm] | 115 |

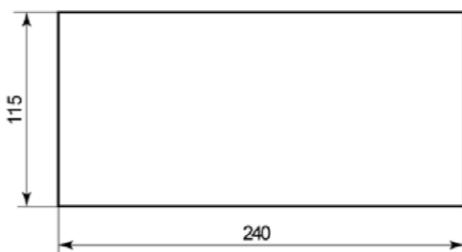


Table C7: Installation parameters (threaded rod and internal threaded anchor without perforated sleeve)

| Size of threaded rod | M6 | M8 | M10 | M12 | 11x85 ¹⁾ M6/M8 | | | | | | | |
|-----------------------------------------------------------------------------------|----|----|-----|-----|------------------------------|----|----|-----|----|----|-----|------------------|
| Effective anchorage depth h_{ef} [mm] | 50 | 80 | 50 | 80 | 200 | 50 | 80 | 200 | 50 | 80 | 200 | 85 |
| Edge distance c_{\min} [mm] | | | | | | | | | | | | 100 |
| Edge distance c_{\min} [mm] $h_{\text{ef}}=200\text{mm}$ | | | | | | | | | | | | 150 |
| Spacing $s_{\min} \parallel, N$ [mm] | | | | | | | | | | | | 60 |
| Spacing $s_{\min} \parallel, N$ [mm] $h_{\text{ef}}=200$ | | | | | | | | | | | | 240 |
| Spacing $s_{\min} \parallel, V$ [mm] | | | | | | | | | | | | 240 |
| Spacing $s_{\text{cr}} \parallel$ [mm] | | | | | | | | | | | | 240 |
| Spacing $s_{\text{cr}} \perp = s_{\min} \perp$ [mm] | | | | | | | | | | | | 75 |
| Group-factor $\alpha_{g,N} \parallel$ [-] | | | | | | | | | | | | 1,5 |
| Group-factor $\alpha_{g,V} \parallel$ [-] | | | | | | | | | | | | 2,0 |
| Group-factor $\alpha_{g,N} \perp$ [-] | | | | | | | | | | | | 2 |
| Group-factor $\alpha_{g,V} \perp$ [-] | | | | | | | | | | | | |
| Max. installation torque $T_{\text{inst,max}}$ [Nm] | 4 | | | | | 10 | | | | | | |
| ¹⁾ For FIS E 11x85 with screw M6: $T_{\text{inst,max}} = 4 \text{ Nm}$ | | | | | | | | | | | | |
| fischer injection system FIS V masonry | | | | | | | | | | | | |
| Performances | | | | | | | | | | | | Annex C 3 |
| Solid brick Mz, NF | | | | | | | | | | | | |
| Species of brick, installation parameters | | | | | | | | | | | | |

Kind of masonry: Solid brick Mz, NF

Table C8: Characteristic values of resistance; tension load (N_{Rk})

| Use category | | w/w | d/d | | |
|------------------------------------------------------------------|--------------------|-------------------------------------|--------|-------|--------|
| Temperature range | [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Effective anchorage depth | Anchor size | characteristic values N_{Rk} [kN] | | | |
| Compressive strength $f_b = 10 \text{ N/mm}^2$ | | | | | |
| 50 | M6 | 2,50 | 2,00 | 4,00 | 3,50 |
| | M8 | 2,50 | 2,00 | 4,00 | 3,00 |
| | M10 | 2,00 | 1,50 | 3,50 | 3,00 |
| 80 | M10 | 3,00 | 2,50 | 5,00 | 4,00 |
| 200 | M10 | 7,50 | 6,50 | 12,00 | 10,50 |
| 50 | M12 | 2,00 | 1,50 | 3,00 | 2,50 |
| 80 | M12 | 3,50 | 3,00 | 5,50 | 4,50 |
| 200 | M12 | 5,00 | 4,00 | 8,00 | 6,50 |
| 85 | FIS E 11x85 M6, M8 | 3,50 | 3,00 | 5,50 | 4,50 |
| Compressive strength $f_b = 20 \text{ N/mm}^2$ | | | | | |
| 50 | M6 | 3,50 | 2,50 | 5,50 | 5,00 |
| | M8 | 3,50 | 2,50 | 5,50 | 4,50 |
| | M10 | 3,00 | 2,50 | 5,00 | 4,00 |
| 80 | M10 | 4,50 | 3,50 | 7,00 | 6,00 |
| 200 | M10 | 11,00 | 9,00 | 12,00 | 12,00 |
| 50 | M12 | 3,00 | 2,50 | 4,50 | 4,00 |
| 80 | M12 | 5,00 | 4,00 | 8,00 | 6,50 |
| 200 | M12 | 7,00 | 6,00 | 11,50 | 9,50 |
| 85 | FIS E 11x85 M6, M8 | 5,00 | 4,00 | 8,00 | 6,50 |

Calculation of pulling out of one brick (tension load): $N_{Rk,pb}$ see ETAG 029, Annex C

Table C9: Characteristic values of resistance; shear load (V_{Rk})

| Use category | | w/w | d/d | | |
|------------------------------------------------------------------|--------------------|-------------------------------------|--------|-------|--------|
| Temperature range | [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Effective anchorage depth | Anchor size | characteristic values V_{Rk} [kN] | | | |
| Compressive strength $f_b = 10 \text{ N/mm}^2$ | | | | | |
| ≥ 50 | M6, M8 | 2,50 | | | |
| | FIS E 11x85 M6, M8 | | | | |
| 85 | | | | | |
| ≥ 50 - 80 | M10 | | | 4,00 | |
| 200 | M10 | | | 8,50 | |
| ≥ 50 | M12 | | | 4,00 | |
| 200 | M12 | | | 11,50 | |
| Compressive strength $f_b = 20 \text{ N/mm}^2$ | | | | | |
| ≥ 50 | M6, M8 | 4,00 | | | |
| | FIS E 11x85 M6/ M8 | | | | |
| 85 | | | | | |
| ≥ 50 - 80 | M10 | | | 6,00 | |
| 200 | M10 | | | 12,00 | |
| ≥ 50 | M12 | | | 5,50 | |
| 200 | M12 | | | 12,00 | |

Calculation of pushing out of one brick (shear load): $V_{Rk,pb}$ see ETAG 029, Annex C

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Solid brick Mz, NF

Characteristic values

Annex C 4

Kind of masonry: Solid sand-lime block

Table C10: Parameters of brick

| Species of brick | Solid sand-lime block | |
|---------------------------|------------------------------|----------------------------------|
| Density | $\rho \geq [\text{kg/dm}^3]$ | 2.0 |
| Compressive strength | $f_b \geq [\text{N/mm}^2]$ | 10, 20 or 28 |
| Standard or approval | | EN 771-1 |
| Producer | | |
| Size, dimensions | [mm] | $\geq 250 \times 240 \times 240$ |
| Minimum thickness of wall | $h_{\min} [\text{mm}]$ | 240 |

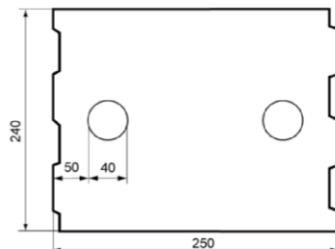


Table C11: Installation parameters for threaded rod and internal threaded anchor without perforated sleeve

| Size of threaded rod | M6 | M8 | M10 | M12 | M16 | FIS E 11x85 ¹⁾ M6/M8 | FIS E 15x85 M10/M12 |
|-------------------------------------------------------|---------------------------------------|-----|-----|-----|-----|------------------------------------|------------------------|
| Effective anchorage depth $h_{\text{ef}} [\text{mm}]$ | 50 | 100 | 50 | 100 | 50 | 100 | 50 |
| Edge distance $c_{\min} [\text{mm}]$ | | | | | 60 | | |
| | $s_{\min} \parallel [\text{mm}]$ | | | | | 80 | |
| Spacing | $s_{\text{cr}} \parallel [\text{mm}]$ | | | | | 250 | |
| | $s_{\min} \perp [\text{mm}]$ | | | | | 80 | |
| Group-factor | $s_{\text{cr}} \perp [\text{mm}]$ | | | | | 240 | |
| | $\alpha_{g,N} \parallel [-]$ | | | | | 1,5 | |
| | $\alpha_{g,V} \parallel [-]$ | | | | | 1,2 | |
| | $\alpha_{g,N} \perp [-]$ | | | | | 1,5 | |
| $\alpha_{g,V} \perp [-]$ | | | | | | 1,2 | |
| Max. installation torque | $T_{\text{inst,max}} [\text{Nm}]$ | 4 | | | 10 | | |

¹⁾ For FIS E 11x85 with screw M6: $T_{\text{inst,max}} = 4 \text{ Nm}$

fischer injection system FIS V masonry

Performances

Solid sand-lime block

Species of brick, installation parameters

Annex C 5

Table C12: Installation parameters for threaded rod and internal threaded anchor with perforated sleeve

| | | | | |
|----------------------------------------|----------------------------------|----|---|----|
| Size of perforated sleeve | 16x85 | | | |
| Size of threaded rod | M8 M10 M6 M8 | | | |
| Size of internal threaded anchor FIS E | 11x85 | | | |
| Edge distance | c_{\min} [mm] 60 | | | |
| Spacing | $s_{\min} \parallel$ [mm] 80 | | | |
| | $s_{cr} \parallel$ [mm] 250 | | | |
| | $s_{\min} \perp$ [mm] 80 | | | |
| | $s_{cr} \perp$ [mm] 240 | | | |
| Group-factor | $\alpha_{g,N} \parallel$ [-] 1,5 | | | |
| | $\alpha_{g,V} \parallel$ [-] 1,2 | | | |
| | $\alpha_{g,N} \perp$ [-] 1,5 | | | |
| | $\alpha_{g,V} \perp$ [-] 1,2 | | | |
| Max. installation torque | $T_{inst,max}$ [Nm] | 10 | 4 | 10 |

fischer injection system FIS V masonry

Performances

Solid sand-lime block

Species of brick, installation parameters

Annex C 6

Kind of masonry: Solid sand-lime block

Table C13: Characteristic values of resistance; tension load (N_{Rk})

| Use category | w/w | d/d | | | |
|------------------------------------------------------------------|---------------------------|--------|-------|--------------------------|-------------------------------------|
| Temperature range [°C] | 50/80 | 72/120 | 50/80 | 72/120 | |
| Effective anchorage depth | Anchor size | | | | characteristic values N_{Rk} [kN] |
| Compressive strength $f_b = 10 \text{ N/mm}^2$ | | | | | |
| ≥50 | M6 | 3,00 | 2,50 | 5,00 | 4,50 |
| 85 | FIS E 11x85 M6 | | | | |
| ≥50 | M8 | 4,00 | 3,50 | 7,00 | 5,50 |
| ≥50 | M10 / M12 | 4,50 | 3,50 | 7,00 | 5,50 |
| 85 | M16 | | | | |
| 85 | FIS E 11x85 M8 | 3,50 | 3,00 | 5,50 | 4,50 |
| 85 | FIS E 15x85 M10 / M12 | | | | |
| Perforated sleeve 16x85 | FIS E 11x85 M6 | 3,00 | 2,50 | 5,00 | 4,50 |
| Perforated sleeve 16x85 | M8 / M10 / FIS E 11x85 M8 | 4,50 | 3,50 | 8,00 | 6,50 |
| Compressive strength $f_b = 20 \text{ N/mm}^2$ | | | | | |
| ≥50 | M6 | 4,50 | 3,50 | 7,50 | 6,50 |
| 85 | FIS E 11x85 M6 | | | | |
| ≥50 | M8 | 6,00 | 5,00 | 10,00 (9,0) ¹ | 8,00 |
| ≥50 | M10 / M12 | 6,00 | 5,00 | 10,00 (9,0) ¹ | 8,00 |
| 85 | M16 | | | | |
| 85 | FIS E 11x85 M8 | 5,00 | 4,00 | 7,50 | 6,50 |
| 85 | FIS E 15x85 M10 / M12 | | | | |
| Perforated sleeve 16x85 | FIS E 11x85 M6 | 4,50 | 3,50 | 7,50 | 6,50 |
| Perforated sleeve 16x85 | M8 / M10 / FIS E 11x85 M8 | 6,50 | 5,00 | 11,00 (9,0) ¹ | 9,00 |
| Compressive strength $f_b = 28 \text{ N/mm}^2$ | | | | | |
| ≥50 | M6 | 5,00 | 4,00 | 8,50 | 8,50 |
| 85 | FIS E 11x85 M6 | | | | |
| ≥50 | M8 | 8,00 | 7,00 | 12,00 (9,0) ¹ | 8,00 |
| ≥50 | M10 / M12 | 8,50 | 7,00 | 12,00 (9,0) ¹ | 11,50 (9,0) |
| 85 | M16 | | | | |
| 85 | FIS E 11x85 M8 | 7,00 | 6,00 | 11,00 (9,0) ¹ | 9,00 |
| 85 | FIS E 15x85 M10 / M12 | | | | |
| Perforated sleeve 16x85 | FIS E 11x85 M6 | 5,00 | 4,00 | 8,50 | 8,50 |
| Perforated sleeve 16x85 | M8 / M10 / FIS E 11x85 M8 | 8,50 | 7,00 | 12,00 (9,0) ¹ | 12,00 (9,0) ¹ |

¹⁾ Characteristic value of pulling out of one brick $N_{Rk,pb} = 9,0 \text{ kN}$

Table C14: Characteristic values of resistance; shear load (V_{Rk})

| Compressive strength [N/mm^2] | 10 | 20 | 28 | |
|------------------------------------------|-----------------------------------------|-------------------------------------|-----|-----|
| Effective anchorage depth | Anchor size | characteristic values V_{Rk} [kN] | | |
| ≥ 50 | M6 | | | |
| 85 | FIS E 11x85 M6 | 2,5 | 4,0 | 5,0 |
| ≥ 50 | M8 / M10 / M12 / M16, | | | |
| 85 | FIS E 11x85 M8 FIS E 15x85 M10 / M12 | 4,5 | 6,5 | 9,0 |
| Perforated sleeve 16x85 | FIS E 11x85 M6 | 2,5 | 4,0 | 5,0 |
| Perforated sleeve 16x85 | M8 / M10 / 11x85 M8 | 4,5 | 6,5 | 9,0 |

Factor for job site tests and displacements see Annex C78.

| | |
|----------------------------------------------------------------|-----------|
| fischer injection system FIS V masonry | Annex C 7 |
| Performances Solid sand-lime block Characteristic values | |

Kind of masonry: Light-weight concrete block Vbl

Table C15: Parameters of brick

| Species of brick | Light-weight concrete block Vbl | |
|----------------------------|---------------------------------|----------------------------------|
| Density | $\rho \geq [\text{kg/dm}^3]$ | 0,6 |
| Compressive strength | $f_b \geq [\text{N/mm}^2]$ | 2 |
| Standard or approval | | EN 771-3 |
| Producer | | e.g. Sepa |
| Size, dimensions | [mm] | $\geq 372 \times 300 \times 254$ |
| Minimum thickness of brick | $h_{\min} [\text{mm}]$ | 300 |

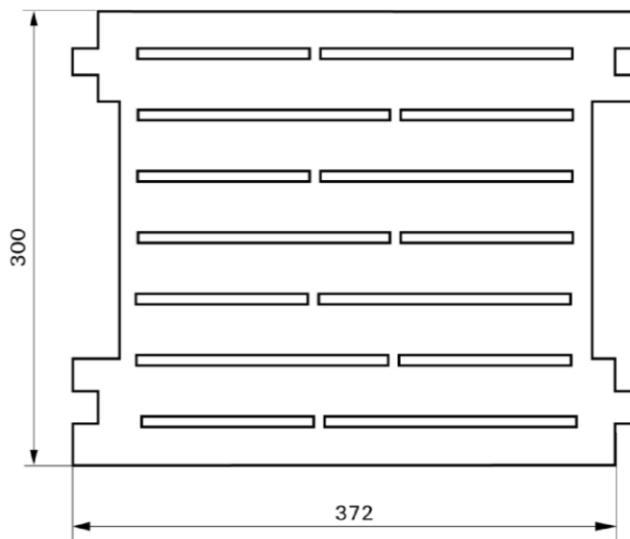


Table C16: Installation parameters for threaded rod with perforated sleeve

| Size of perforated sleeve | 16x130 | 18x130/200 | 20x130 | 22x130/200 | 20x200 |
|---------------------------|----------------------------------------------------------------------------------------------------------------------|------------|-----------|------------|-----------|
| Size of threaded rod | M8 M10 | M10 M12 | M12 M16 | M16 | M12 M16 |
| Edge distance | $c_{\min} [\text{mm}]$ | | | 130 | |
| Spacing | $s_{cr \parallel} = s_{\min \parallel} [\text{mm}]$ | | | 370 | |
| | $s_{cr \perp} = s_{\min \perp} [\text{mm}]$ | | | 250 | |
| Group-factor | $\alpha_{g,N \parallel} [-]$ $\alpha_{g,V \parallel} [-]$ $\alpha_{g,N \perp} [-]$ $\alpha_{g,V \perp} [-]$ | | | 2,0 | |
| Max. installation torque | $T_{inst,max} [\text{Nm}]$ | | | 4 | |

fischer injection system FIS V masonry

Performances

Solid light-weight concrete block Vbl
Species of brick, installation parameters

Annex C 8

Kind of masonry: Solid light-weight concrete block Vbl

Table C17: Characteristic values of resistance; tension load (N_{Rk})

| Use category | w/w | d/d | | |
|-----------------------------------------------------------------|-------------------------------------|--------|-------|--------|
| Temperature range [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Sleeve/anchor combinations | characteristic values N_{Rk} [kN] | | | |
| Compressive strength $f_b = 2 \text{ N/mm}^2$ | | | | |
| 16x130 / M8 / M10 | 18x130/200 / M10 / M12 | 2,00 | 1,50 | 2,00 |
| 20x130 / M12 / M16 | 22x130/200 / M16 | 2,50 | 2,50 | 3,00 |
| 20x200 / M12 / M16 | | 3,50 | 3,00 | 4,00 |
| | | | | 3,00 |

Table C18: Characteristic values of resistance; shear load (V_{Rk})

| Use category | w/w | d/d | | |
|-----------------------------------------------------------------|-------------------------------------|--------|-------|--------|
| Temperature range [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Sleeve/anchor combinations | characteristic values V_{Rk} [kN] | | | |
| Compressive strength $f_b = 2 \text{ N/mm}^2$ | | | | |
| 16x130 / M8 / M10 | 18x130/200 / M10 / M12 | 4,50 | | |
| 20x130 / M12 / M16 | | 6,50 | | |
| 20x200 / M12 / M16 | 22x130/200 / M16 | 6,50 | | |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Solid light-weight concrete block Vbl

Characteristic values

Annex C 9

Kind of masonry: Solid light-weight concrete block Vbl

Table C19: Parameters of brick

| Species of brick | Solid light-weight concrete block Vbl | |
|----------------------------|---------------------------------------|----------------------------------|
| Density | $\rho \geq [\text{kg/dm}^3]$ | 1,6 |
| Compressive strength | $f_b \geq [\text{N/mm}^2]$ | 4, 6 or 8 |
| Standard or approval | | EN 771-3 |
| Producer | | KLB |
| Size, dimensions | [mm] | $\geq 250 \times 240 \times 239$ |
| Minimum thickness of brick | h_{\min} [mm] | 240 |

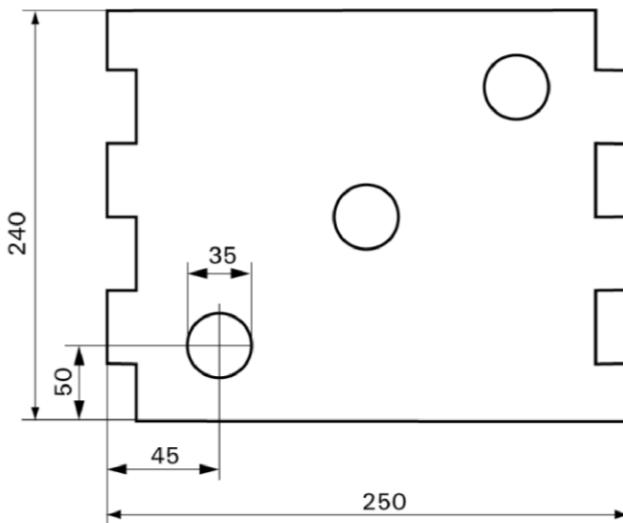


Table C20: Installation parameters for threaded rod with perforated sleeve and internal threaded anchor FIS E with perforated sleeve

| | | | |
|------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|--|-------------------|
| Size of perforated sleeve | 12x50 12x85 16x85 16x130 18x130/200 20x85 20x130 22x130/200 20x200 | | |
| Size of threaded rod | M6 M8 M6 M8 M8 M10 M8 M10 M10 M12 M12 M16 M12 M16 | | |
| Size of internal threaded anchor FIS E | | | |
| Edge distance c_{\min} [mm] | 130 | | |
| Spacing $s_{cr} \parallel = s_{\min} \parallel$ [mm] | 250 | | |
| $s_{cr} \perp = s_{\min} \perp$ [mm] | 250 | | |
| Group-factor | $\alpha_{g,N} \parallel [-]$ $\alpha_{g,V} \parallel [-]$ $\alpha_{g,N} \perp [-]$ $\alpha_{g,V} \perp [-]$ | | |
| Max. installation torque | $T_{inst,max}$ [Nm] | | |
| fischer injection system FIS V masonry | | | |
| Performances | | | Annex C 10 |
| Solid light-weight concrete block Vbl | | | |
| Species of brick, installation parameters | | | |

Kind of masonry: Solid light-weight concrete block Vbl

Table C21: Characteristic values of resistance; tension load (N_{Rk})

| Use category | | | w/w | d/d | |
|-----------------------------------------------------------------|------------------------------------|-------------------------------------|--------|-------|--------|
| Temperature range | [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Sleeve/anchor combinations | Sleeve/anchor combinations | characteristic values N_{Rk} [kN] | | | |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 1,20 | 0,90 | 2,00 | 1,50 |
| 12x85 M6 / M8 | | 2,00 | 1,50 | 3,50 | 3,00 |
| 16x85 M8 / M10 | 16x130 M8 / M10 | 2,50 | 2,00 | 4,00 | 3,50 |
| 16x85 FIS E 11x85 M6 / M8 | 18x130/200 M10 / M12 | | | | |
| 20x85 M12 / M16 | 20x130 M12 / M16 | 3,00 | 2,50 | 5,00 | 4,50 |
| 20x85 FIS E 15x85 M10 / M12 | 20x200 M12 / M16 22x130/200 M16 | | | | |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 1,50 | 1,50 | 3,00 | 2,50 |
| 12x85 M6 / M8 | | 3,00 | 2,50 | 5,00 | 4,00 |
| 16x85 M8 / M10 | 16x130 M8 / M10 | 4,00 | 3,00 | 6,50 | 5,50 |
| 16x85 FIS E 11x85 M6 / M8 | 18x130/200 M10 / M12 | | | | |
| 20x85 M12 / M16 | 20x130 M12 / M16 | 5,00 | 4,00 | 7,50 | 6,50 |
| 20x85 FIS E 15x85 M10 / M12 | 20x200 M12 / M16 22x130/200 M16 | | | | |
| Compressive strength $f_b = 8 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 2,00 | 2,00 | 4,00 | 3,00 |
| 12x85 M6 / M8 | | 4,00 | 3,00 | 7,00 | 5,50 |
| 16x85 M8 / M10 | 16x130 M8 / M10 | 5,00 | 4,00 | 8,50 | 7,00 |
| 16x85 FIS E 11x85 M6 / M8 | 18x130/200 M10 / M12 | | | | |
| 20x85 M12 / M16 | 20x130 M12 / M16 | 6,50 | 5,50 | 9,00 | 8,50 |
| 20x85 FIS E 15x85 M10 / M12 | 20x200 M12 / M16 22x130/200 M16 | | | | |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Solid light-weight concrete block Vbl
Characteristic values tension load

Annex C 11

Kind of masonry: Solid light-weight concrete block Vbl

Table C22: Characteristic values of resistance; shear load (V_{Rk})

| Use category | w/w | d/d | | |
|-----------------------------------------------------------------|--------------------------------------------------------|--------|-------|--------|
| Temperature range [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Sleeve/anchor combinations | characteristic values V_{Rk} [kN] | | | |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | | | |
| 12x50 M6 12x85 M6 | 16x85 / FIS E 11x85 M6 | | 2,00 | |
| 12x50 M8 | 12x85 M8 | | 3,00 | |
| 16x85 M8 / M10 FIS E 11x85 M8 | 16x130 M8 / M10 18x130/200 M10 / M12 | | 3,50 | |
| 20x85 M12 / M16 FIS E 15x85 M10 / M12 | 20x130 M12 / M16 20x200 M12 / M16 22x130/200 M16 | | 4,50 | |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | |
| 12x50 M6 12x85 M6 | 16x85 / FIS E 11x85 M6 | | 3,00 | |
| 12x50 M8 | 12x85 M8 | | 4,50 | |
| 16x85 M8 / M10 FIS E 11x85 M8 | 16x130 M8 / M10 18x130/200 M10 / M12 | | 5,50 | |
| 20x85 M12 / M16 FIS E 15x85 M10 / M12 | 20x130 M12 / M16 20x200 M12 / M16 22x130/200 M16 | | 6,50 | |
| Compressive strength $f_b = 8 \text{ N/mm}^2$ | | | | |
| 12x50 M6 12x85 M6 | 16x85 / FIS E 11x85 M6 | | 4,00 | |
| 12x50 M8 | 12x85 M8 | | 6,00 | |
| 16x85 M8 / M10 FIS E 11x85 M8 | 16x130 M8 / M10 18x130/200 M10 / M12 | | 7,00 | |
| 20x85 M12 / M16 FIS E 15x85 M10 / M12 | 20x130 M12 / M16 20x200 M12 / M16 22x130/200 M16 | | 8,50 | |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Solid light-weight concrete block Vbl
Characteristic values shear load

Annex C 12

Kind of masonry: Perforated block form B, HLz

Table C23: Parameters of brick

| Species of brick | Perforated block form B, HLz | |
|----------------------------|------------------------------|----------------------------|
| Density | $\rho \geq [\text{kg/dm}^3]$ | 1,0 |
| Compressive strength | $f_b \geq [\text{N/mm}^2]$ | 4, 6, 8, 10 or 12 |
| Standard or approval | | EN 771-1 |
| Producer | | e.g. Wienerberger, Poroton |
| Size, dimensions | [mm] | 500(370)x175(240)x237 |
| Minimum thickness of brick | h_{\min} [mm] | 175(240) |

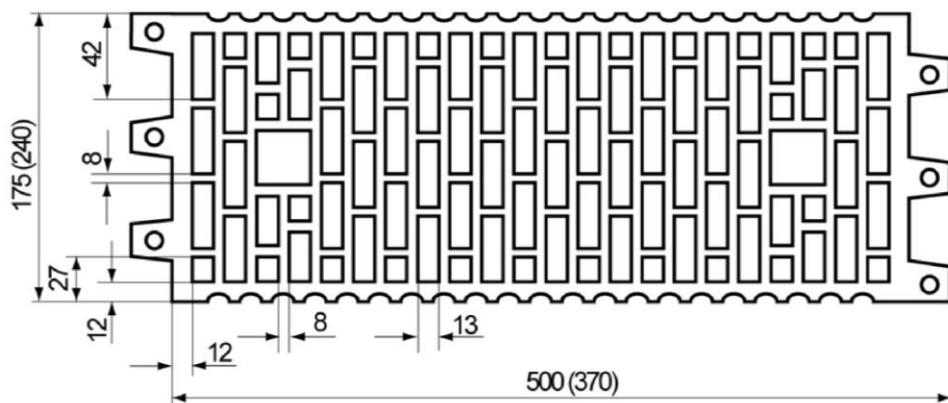


Table C24: Installation parameters for threaded rod with perforated sleeve and internal threaded anchor FIS E with perforated sleeve

| Size of perforated sleeve | 12x50 | 12x85 | 16x85 | 16x130 | 20x85 | 20x130 |
|----------------------------------------------|-------|-------|----------------|--------|------------------|---------|
| Size of threaded rod | M6 M8 | M6 M8 | M8 M10 | M8 M10 | M12 M16 | M12 M16 |
| Size of internal threaded anchor FIS E | | | 11x85 M6/M8 | | 15x85 M10/M12 | |
| Edge distance c_{\min} [mm] | | | 100 | | | |
| Spacing $s_{\min \parallel}$ [mm] | | | 100 | | | |
| $s_{cr \parallel}$ [mm] | | | 500 (370) | | | |
| $s_{\min \perp}$ [mm] | | | 100 | | | |
| $s_{cr \perp}$ [mm] | | | 240 | | | |
| Group-factor $\alpha_{g,N \parallel}$ [-] | | | | 1 | | |
| $\alpha_{g,V \parallel}$ [-] | | | | | | |
| $\alpha_{g,N \perp}$ [-] | | | | | | |
| $\alpha_{g,V \perp}$ [-] | | | | | | |
| Max. installation torque $T_{inst,max}$ [Nm] | | | 2 | | | |

fischer injection system FIS V masonry

Performances

Perforated block form B, HLz
Species of brick, installation parameters

Annex C 13

Kind of masonry: Perforated block form B, HLz

Table C25: Characteristic values of resistance; tension load (N_{Rk})

| Use category | | | w/w | d/d | |
|------------------------------------------------------------------|-----------------------------|-------------------------------------|--------|-------|--------|
| Temperature range | [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Sleeve/anchor combinations | Sleeve/anchor combinations | characteristic values N_{Rk} [kN] | | | |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | | | | |
| 12x50 M6/M8 | 12x85 M6/M8 | 0,30 | - | 0,40 | 0,30 |
| 16x85 M8 / M10 | 20x85 M12 / M16 | 0,90 | 0,75 | 0,90 | 0,90 |
| 16x85 FIS E 11x85 / M6 / M8 | 20x 85 FIS E15x85 M10 / M12 | | | | |
| 16x130 M8/ M10 | | | | | |
| 20x130 M12/M16 | | 1,20 | 0,90 | 1,20 | 1,20 |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | | |
| 12x50 M6/M8 | 12x85 M6/M8 | 0,50 | 0,40 | 0,60 | 0,50 |
| 16x85 M8 / M10 | 20x85 M12 / M16 | 1,50 | 1,20 | 1,50 | 1,20 |
| 16x85 FIS E 11x85 / M6 / M8 | 20x 85 FIS E15x85 M10 / M12 | | | | |
| 16x130 M8/ M10 | | | | | |
| 20x130 M12/M16 | | 2,0 | 1,5 | 2,0 | 1,5 |
| Compressive strength $f_b = 8 \text{ N/mm}^2$ | | | | | |
| 12x50 M6/M8 | 12x85 M6/M8 | 0,75 | 0,60 | 0,75 | 0,60 |
| 16x85 M8 / M10 | 20x85 M12 / M16 | 2,00 | 1,50 | 2,00 | 1,50 |
| 16x85 FIS E 11x85 / M6 / M8 | 20x 85 FIS E15x85 M10 / M12 | | | | |
| 16x130 M8/ M10 | | | | | |
| 20x130 M12/M16 | | 2,50 | 2,00 | 2,50 | 2,00 |
| Compressive strength $f_b = 10 \text{ N/mm}^2$ | | | | | |
| 12x50 M6/M8 | 12x85 M6/M8 | 0,90 | 0,75 | 0,90 | 0,75 |
| 16x85 M8 / M10 | 20x85 M12 / M16 | 2,50 | 2,00 | 2,50 | 2,00 |
| 16x85 FIS E 11x85 / M6 / M8 | 20x 85 FIS E15x85 M10 / M12 | | | | |
| 16x130 M8/ M10 | | | | | |
| 20x130 M12/M16 | | 3,00 | 2,50 | 3,50 | 3,00 |
| Compressive strength $f_b = 12 \text{ N/mm}^2$ | | | | | |
| 12x50 M6/M8 | 12x85 M6/M8 | 0,90 | 0,90 | 1,20 | 0,90 |
| 16x85 M8 / M10 | 20x85 M12 / M16 | 3,00 | 2,50 | 3,00 | 2,50 |
| 16x85 FIS E 11x85 / M6 / M8 | 20x 85 FIS E15x85 M10 / M12 | | | | |
| 16x130 M8/ M10 | | | | | |
| 20x130 M12/M16 | | 3,50 | 3,00 | 4,00 | 3,50 |

Factor for job site tests and displacements see Annex C78.

| | |
|-------------------------------------------------------------------------------------------|-------------------|
| fischer injection system FIS V masonry | Annex C 14 |
| Performances Perforated block form B, HLz Characteristic values tension load | |

Kind of masonry: Perforated block form B, HLz

Table C26: Characteristic values of resistance; shear load (V_{Rk})

| Use category | w/w | d/d | | |
|------------------------------------------------------------------|-------------------------------------|--------|-------|--------|
| Temperature range [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Sleeve/anchor combinations | characteristic values N_{Rk} [kN] | | | |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | | | |
| 12x50 M6/M8 | 12x85 M6 / M8 | 0,50 | | |
| 16x85 M8 / M10 | 20x85 M12 / M16 | | | |
| 16x85 FIS E 11x85 / M6 / M8 | 20x 85 FIS E15x85 M10 / M12 | | | |
| 16x130 M8/10 | 20x130 M12/16 | | 0,60 | |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | |
| 12x50 M6/M8 | 12x85 M6 / M8 | 0,75 | | |
| 16x85 M8 / M10 | 20x85 M12 / M16 | | | |
| 16x85 FIS E 11x85 / M6 / M8 | 20x 85 FIS E15x85 M10 / M12 | | | |
| 16x130 M8/10 | 20x130 M12/16 | | 0,90 | |
| Compressive strength $f_b = 8 \text{ N/mm}^2$ | | | | |
| 12x50 M6/M8 | 12x85 M6 / M8 | 0,90 | | |
| 16x85 M8 / M10 | 20x85 M12 / M16 | | | |
| 16x85 FIS E 11x85 / M6 / M8 | 20x 85 FIS E15x85 M10 / M12 | | | |
| 16x130 M8/10 | 20x130 M12/16 | | 1,20 | |
| Compressive strength $f_b = 10 \text{ N/mm}^2$ | | | | |
| 12x50 M6/M8 | 12x85 M6 / M8 | 1,20 | | |
| 16x85 M8 / M10 | 20x85 M12 / M16 | | | |
| 16x85 FIS E 11x85 / M6 / M8 | 20x 85 FIS E15x85 M10 / M12 | | | |
| 16x130 M8/10 | 20x130 M12/16 | | 1,50 | |
| Compressive strength $f_b = 12 \text{ N/mm}^2$ | | | | |
| 12x50 M6/M8 | 12x85 M6 / M8 | 1,5 | | |
| 16x85 M8 / M10 | 20x85 M12 / M16 | | | |
| 16x85 FIS E 11x85 / M6 / M8 | 20x 85 FIS E15x85 M10 / M12 | | | |
| 16x130 M8/10 | 20x130 M12/16 | | 2,00 | |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Annex C 15

Performances

Perforated block form B, HLz
Characteristic values shear load

Kind of masonry: Perforated brick HLz, 2DF

Table C27: Parameters of brick

| Species of brick | Perforated brick HLz | |
|----------------------------|------------------------------|---------------------|
| Density | $\rho \geq [\text{kg/dm}^3]$ | 1,4 |
| Compressive strength | $f_b \geq [\text{N/mm}^2]$ | 6, 10, 16, 20 or 28 |
| Standard or approval | | EN 771-1 |
| Producer | | e.g. Wienerberger |
| Size, dimensions | [mm] | 240x115x113 |
| Minimum thickness of brick | $h_{\min} [\text{mm}]$ | 115 |

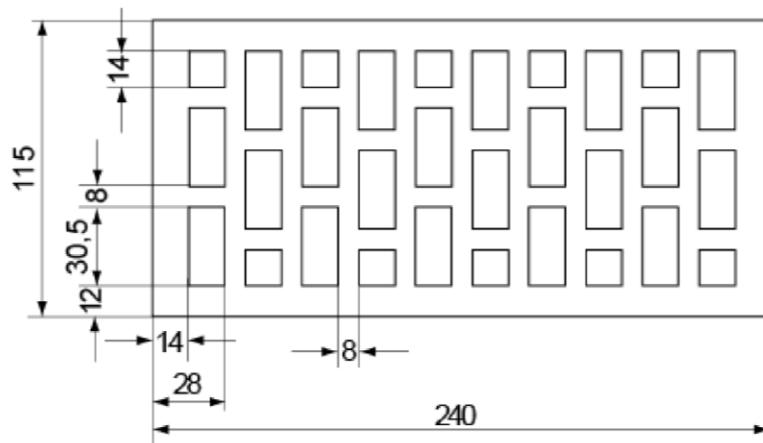


Table C28: Installation parameters for threaded rod with perforated sleeves

and internal threaded anchor FIS E with perforated sleeve

| Size of perforated sleeve | 12x50 | | 12x85 | | 16x85 | | 20x85 | |
|----------------------------------------|-----------------------------------------------------|----|-------|----|-------|-----|---------|-----|
| Size of threaded rod | M6 | M8 | M6 | M8 | M8 | M10 | M12 | M16 |
| Size of internal threaded anchor FIS E | | | | | 11x85 | | 15x85 | |
| Edge distance $c_{\min} [\text{mm}]$ | | | | | M6/M8 | | M10/M12 | |
| Spacing | $s_{cr \parallel} = s_{\min \parallel} [\text{mm}]$ | | 240 | | | | | |
| | $s_{cr \perp} = s_{\min \perp} [\text{mm}]$ | | 115 | | | | | |
| Group-factor | $\alpha_{g,N} \parallel [-]$ | | | | 2,0 | | | |
| | $\alpha_{g,V} \parallel [-]$ | | | | | | | |
| | $\alpha_{g,N} \perp [-]$ | | | | | | | |
| | $\alpha_{g,V} \perp [-]$ | | | | | | | |
| Max. installation torque | $T_{inst,max} [\text{Nm}]$ | | 2 | | | | | |

fischer injection system FIS V masonry

Performances

Perforated brick HLz, 2DF

Species of brick, installation parameters

Annex C 16

Kind of masonry: Perforated brick HLz, 2DF

Table C29: Characteristic values of resistance; tension load (N_{Rk})

| Use category | | | w/w | d/d | |
|------------------------------------------------------------------|-----------------------------|-------------------------------------|--------|-------|--------|
| Temperature range | [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Sleeve/anchor combinations | Sleeve/anchor combinations | characteristic values N_{Rk} [kN] | | | |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 0,75 | 0,60 | 0,75 | 0,60 |
| 12x85 M6 / M8 | | 0,90 | 0,90 | 1,20 | 0,90 |
| 16x85 M8 / M10 | 16x85 FIS E 11x85 M6 / M8 | 0,75 | 0,60 | 0,75 | 0,60 |
| 20x85 M12 / M16 | 20x85 FIS E 15x85 M10 / M12 | 0,90 | 0,75 | 0,90 | 0,75 |
| Compressive strength $f_b = 10 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 1,20 | 0,90 | 1,20 | 0,90 |
| 12x85 M6 / M8 | | 1,50 | 1,50 | 2,00 | 1,50 |
| 16x85 M8 / M10 | 16x85 FIS E 11x85 M6 / M8 | 1,20 | 0,90 | 1,20 | 1,20 |
| 20x85 M12 / M16 | 20x85 FIS E 15x85 M10 / M12 | 1,50 | 1,20 | 1,50 | 1,20 |
| Compressive strength $f_b = 16 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 2,00 | 1,50 | 2,00 | 1,50 |
| 12x85 M6 / M8 | | 2,50 | 2,00 | 3,00 | 2,50 |
| 16x85 M8 / M10 | 16x85 FIS E 11x85 M6 / M8 | 2,00 | 1,50 | 2,00 | 1,50 |
| 20x85 M12 / M16 | 20x85 FIS E 15x85 M10 / M12 | 2,00 | 2,00 | 2,50 | 2,00 |
| Compressive strength $f_b = 20 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 2,50 | 2,00 | 2,50 | 2,00 |
| 12x85 M6 / M8 | | 3,50 | 3,00 | 4,00 | 3,00 |
| 16x85 M8 / M10 | 16x85 FIS E 11x85 M6 / M8 | 2,50 | 2,00 | 2,50 | 2,00 |
| 20x85 M12 / M16 | 20x85 FIS E 15x85 M10 / M12 | 3,00 | 2,50 | 3,00 | 2,50 |
| Compressive strength $f_b = 28 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 3,00 | 2,50 | 3,50 | 3,00 |
| 12x85 M6 / M8 | | 5,00 | 4,00 | 5,50 | 4,50 |
| 16x85 M8 / M10 | 16x85 FIS E 11x85 M6 / M8 | 3,50 | 3,00 | 3,50 | 3,00 |
| 20x85 M12 / M16 | 20x85 FIS E 15x85 M10 / M12 | 4,00 | 3,50 | 4,50 | 3,50 |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Perforated brick HLz

Characteristic values tension load

Annex C 17

Kind of masonry: Perforated brick, HLz, 2DF

Table C30: Characteristic values of resistance; shear load (V_{Rk})

| Use category | | w/w | d/d |
|------------------------------------------------------------------|-----------------------------|-------------------------------------|--------|
| Temperature range | [°C] | 50/80 | 72/120 |
| Sleeve/anchor combinations | Sleeve/anchor combinations | characteristic values V_{Rk} [kN] | |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | |
| 12x50 M6 | 16x85 FIS E 11x85 M6 | 1,2 | |
| 12x85 M6 | | | |
| 12x85 M8 | | 2,0 | |
| 16x85 M8 / M10 | 16x85 FIS E 11x85 M8 | 1,5 | |
| 12x50 M8 | | | |
| 20x85 M12 / M16 | 20x85 FIS E 15x85 M10 / M12 | 2,5 | |
| Compressive strength $f_b = 10 \text{ N/mm}^2$ | | | |
| 12x50 M6 | 16x85 FIS E 11x85 M6 | 2,0 | |
| 12x85 M6 | | | |
| 12x85 M8 | | 4,0 | |
| 16x85 M8 / M10 | 16x85 FIS E 11x85 M8 | 2,5 | |
| 12x50 M8 | | | |
| 20x85 M12 / M16 | 20x85 FIS E 15x85 M10 / M12 | 4,5 | |
| Compressive strength $f_b = 16 \text{ N/mm}^2$ | | | |
| 12x50 M6 | 16x85 FIS E 11x85 M6 | 3,0 | |
| 12x85 M6 | | | |
| 12x85 M8 | | 6,0 (5,5) ¹⁾ | |
| 16x85 M8 / M10 | 16x85 FIS E 11x85 M8 | 3,5 | |
| 12x50 M8 | | | |
| 20x85 M12 / M16 | 20x85 FIS E 15x85 M10 / M12 | 7,0 (5,5) ¹⁾ | |
| Compressive strength $f_b = 20 \text{ N/mm}^2$ | | | |
| 12x50 M6 | 16x85 FIS E 11x85 M6 | 4,0 | |
| 12x85 M6 | | | |
| 12x85 M8 | | 7,5 (5,5) ¹⁾ | |
| 16x85 M8 / M10 | 16x85 FIS E 11x85 M8 | 4,5 | |
| 12x50 M8 | | | |
| 20x85 M12 / M16 | 20x85 FIS E 15x85 M10 / M12 | 8,5 (5,5) ¹⁾ | |
| Compressive strength $f_b = 28 \text{ N/mm}^2$ | | | |
| 12x50 M6 | 16x85 FIS E 11x85 M6 | 5,0 | |
| 12x85 M6 | | | |
| 12x85 M8 | | 9,5 (5,5) ¹⁾ | |
| 16x85 M8 / M10 | 16x85 FIS E 11x85 M8 | 6,5 (5,5) ¹⁾ | |
| 12x50 M8 | | | |
| 20x85 M12 / M16 | 20x85 FIS E 15x85 M10 / M12 | 12,0 (5,5) ¹⁾ | |

¹⁾ Characteristic value of pushing out of one brick $V_{Rk,pb} = 5,5 \text{ kN}$

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Perforated brick HLz


Characteristic values shear load

Annex C 18

Kind of masonry: Sand-lime hollow brick KSL

Table C31: Parameters of brick

| Species of brick | Sand-lime hollow brick KSL |
|----------------------------|------------------------------|
| Density | $\rho \geq [\text{kg/dm}^3]$ |
| Compressive strength | $f_b \geq [\text{N/mm}^2]$ |
| Standard or approval | EN 771-2 |
| Producer | e.g. KS Wemding |
| Size, dimensions | [mm] |
| Minimum thickness of brick | h_{\min} [mm] |

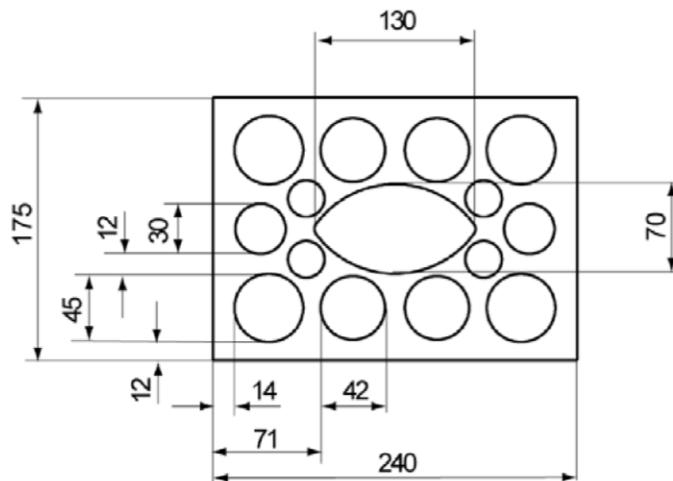

**Table C32: Installation parameters for threaded rod with perforated sleeve
and internal threaded anchor FIS E with perforated sleeve**

| | | | | | | | | |
|-------------------------------------------|--------------------------------------|-------|-------|--------|------------|-------|--------|------------|
| Size of perforated sleeve | 12x50 | 12x85 | 16x85 | 16x130 | 18x130/200 | 20x85 | 20x130 | 22x130/200 |
| Size of threaded rod | M6 | M8 | M6 | M8 | M8 | M10 | M10 | M12 |
| Size of internal threaded anchor FIS E | | | | 11x85 | | 15x85 | | |
| Edge distance | c_{\min} [mm] | 60 | | | | 80 | | |
| Spacing | $s_{\min} \parallel$ [mm] | | | | 100 | | | |
| | $s_{cr} \parallel$ [mm] | | | | 240 | | | |
| | $s_{cr} \perp = s_{\min} \perp$ [mm] | | | | 115 | | | |
| Group-factor | $\alpha_{g,N} \parallel [-]$ | | | | | 1,5 | | |
| | $\alpha_{g,V} \parallel [-]$ | | | | | | | |
| | $\alpha_{g,N} \perp [-]$ | | | | | 2,0 | | |
| | $\alpha_{g,V} \perp [-]$ | | | | | | | |
| Max. installation torque | $T_{inst,max}$ [Nm] | | | | | 2 | | |

fischer injection system FIS V masonry

Performances

Sand-lime hollow brick KSL

Species of brick, installation parameters

Annex C 19

Kind of masonry: Sand-lime hollow brick KSL

Table C33: Characteristic values of resistance; tension load (N_{Rk})

| Use category | | | w/w | d/d | |
|--------------------------------------------------------------------------|------------------------------------|-------------------------------------|--------|-------|--------|
| Temperature range | [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Sleeve/anchor combinations | Sleeve/anchor combinations | characteristic values N_{Rk} [kN] | | | |
| Compressive strength $f_b = 8 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | 12x85 M6 / M8 | 1,50 | 1,20 | 1,50 | 1,50 |
| 16x85 M8 / M10 | 11x85 M6 / M8 | 2,00 | 1,50 | 2,00 | 1,50 |
| 16x130 M8 / M10 18x 130 /200 M10 / M12 20x85 FIS E 15x85 M10 / M12 | 20x130 M12 / M16 22x130/200 M16 | 2,00 | 1,50 | 2,50 | 2,00 |
| Compressive strength $f_b = 10 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | 12x85 M6 / M8 | 2,00 | 1,50 | 2,00 | 2,00 |
| 16x85 M8 / M10 | 11x85 M6 / M8 | 2,00 | 2,00 | 2,50 | 2,50 |
| 16x130 M8 / M10 18x 130 /200 M10 / M12 20x85 FIS E 15x85 M10 / M12 | 20x130 M12 / M16 22x130/200 M16 | 2,50 | 2,00 | 3,00 | 2,50 |
| Compressive strength $f_b = 12 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | 12x85 M6 / M8 | 2,50 | 2,00 | 2,50 | 2,00 |
| 16x85 M8 / M10 | 11x85 M6 / M8 | 2,50 | 2,00 | 3,00 | 2,50 |
| 16x130 M8 / M10 18x 130 /200 M10 / M12 20x85 FIS E 15x85 M10 / M12 | 20x130 M12 / M16 22x130/200 M16 | 3,00 | 2,50 | 3,50 | 3,00 |
| Compressive strength $f_b = 16 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | 12x85 M6 / M8 | 3,00 | 2,50 | 3,50 | 3,00 |
| 16x85 M8 / M10 | 11x85 M6 / M8 | 3,50 | 3,00 | 4,00 | 3,50 |
| 16x130 M8 / M10 18x 130 /200 M10 / M12 20x85 FIS E 15x85 M10 / M12 | 20x130 M12 / M16 22x130/200 M16 | 4,50 | 3,50 | 4,50 | 4,00 |
| Compressive strength $f_b = 20 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | 12x85 M6 / M8 | 4,00 | 3,50 | 4,50 | 3,50 |
| 16x85 M8 / M10 | 11x85 M6 / M8 | 4,50 | 4,00 | 5,00 | 4,00 |
| 16x130 M8 / M10 18x 130 /200 M10 / M12 20x85 FIS E 15x85 M10 / M12 | 20x130 M12 / M16 22x130/200 M16 | 5,50 | 4,50 | 6,00 | 5,00 |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Sand-lime hollow brick KSL

Characteristic values tension load

Annex C 20

Kind of masonry: Sand-lime hollow brick KSL

Table C34: Characteristic values of resistance; shear load (V_{Rk})

| Use category | w/w | d/d | | |
|------------------------------------------------------------------|--------------------------------------------------------------------------------|--------|-------------------------------------|--------|
| Temperature range [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Sleeve/anchor combinations | Sleeve/anchor combinations | | characteristic values V_{Rk} [kN] | |
| Compressive strength $f_b = 8 \text{ N/mm}^2$ | | | | |
| 12x50 M6 / 12x85 M6 | 16x85 FIS E 11x85 M6 | 1,50 | | |
| 12x50 M8 / 12x85 M8 | | 1,50 | | |
| 16x85 M8 / M10 16x85 FIS E 11x85 M8 16x130 M10 / M12 | 18x130/200 M10 / M12 20x85 M12 20x85 FIS E 15x85 M10 / M12 20x130 M12 | | 3,00 | |
| 20x85 M16 20x130 M16 | 22x130/200 M16 | | 2,50 | |
| Compressive strength $f_b = 10 \text{ N/mm}^2$ | | | | |
| 12x50 M6 / 12x85 M6 | 16x85 FIS E 11x85 M6 | 2,00 | | |
| 12x50 M8 / 12x85 M8 | | 2,00 | | |
| 16x85 M8 / M10 16x85 FIS E 11x85 M8 16x130 M10 / M12 | 18x130/200 M10 / M12 20x85 M12 20x85 FIS E 15x85 M10 / M12 20x130 M12 | | 3,50 | |
| 20x85 M16 20x130 M16 | 22x130/200 M16 | | 3,50 | |
| Compressive strength $f_b = 12 \text{ N/mm}^2$ | | | | |
| 12x50 M6 / 12x85 M6 | 16x85 FIS E 11x85 M6 | 2,50 | | |
| 12x50 M8 / 12x85 M8 | | 2,50 | | |
| 16x85 M8 / M10 16x85 FIS E 11x85 M8 16x130 M10 / M12 | 18x130/200 M10 / M12 20x85 M12 20x85 FIS E 15x85 M10 / M12 20x130 M12 | | 4,50 | |
| 20x85 M16 20x130 M16 | 22x130/200 M16 | | 4,00 | |
| Compressive strength $f_b = 16 \text{ N/mm}^2$ | | | | |
| 12x50 M6 / 12x85 M6 | 16x85 FIS E 11x85 M6 | 3,00 | | |
| 12x50 M8 / 12x85 M8 | | 3,50 | | |
| 16x85 M8 / M10 16x85 FIS E 11x85 M8 16x130 M10 / M12 | 18x130/200 M10 / M12 20x85 M12 20x85 FIS E 15x85 M10 / M12 20x130 M12 | | 6,00 | |
| 20x85 M16 20x130 M16 | 22x130/200 M16 | | 5,50 | |
| Compressive strength $f_b = 20 \text{ N/mm}^2$ | | | | |
| 12x50 M6 / 12x85 M6 | 16x85 FIS E 11x85 M6 | 4,00 | | |
| 12x50 M8 / 12x85 M8 | | 4,50 | | |
| 16x85 M8 / M10 16x85 FIS E 11x85 M8 16x130 M10 / M12 | 18x130/200 M10 / M12 20x85 M12 20x85 FIS E 15x85 M10 / M12 20x130 M12 | | 7,50 | |
| 20x85 M16 20x130 M16 | 22x130/200 M16 | | 6,50 | |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Sand-lime hollow brick KSL

Characteristic values shear load

Annex C 21

Kind of masonry: Light-weight concrete hollow block Hbl

Table C35: Parameters of brick

| Species of brick | Light-weight concrete hollow block Hbl | |
|----------------------------|----------------------------------------|-------------|
| Density | $\rho \geq [\text{kg/dm}^3]$ | 1,0 |
| Compressive strength | $f_b \geq [\text{N/mm}^2]$ | 2 or 4 |
| Standard or approval | | EN 771-3 |
| Producer | | |
| Size, dimensions | [mm] | 362x240x240 |
| Minimum thickness of brick | $h_{\min} [\text{mm}]$ | 240 |

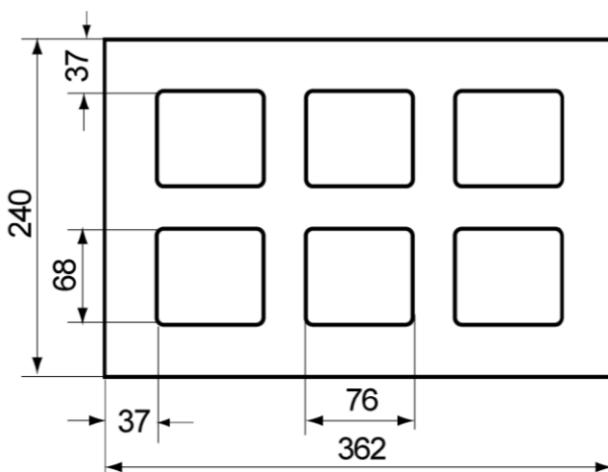


Table C36: Installation parameters for threaded rod with perforated sleeve and internal threaded anchor FIS E with perforated sleeve

| | | | | | | | | | |
|------------------------------------------|------------------------------|-------|----------------|--------|------------|------------------|--------|------------|--------|
| Size of perforated sleeve | 12x50 | 12x85 | 16x85 | 16x130 | 18x130/200 | 20x85 | 20x130 | 22x130/200 | 20x200 |
| Size of threaded rod | M6 | M8 | M6 | M8 | M10 | M8 | M10 | M12 | M16 |
| Size of internal threaded anchor FIS E | | | 11x85 M6/M8 | | | 15x85 M10/M12 | | | |
| Edge distance $c_{\min} [\text{mm}]$ | | | | | | 60 | | | |
| Spacing $s_{\min} \parallel [\text{mm}]$ | | | | | | 100 | | | |
| Spacing $s_{cr} \parallel [\text{mm}]$ | | | | | | 362 | | | |
| | | | | | | 240 | | | |
| Group-factor | $\alpha_{g,N} \parallel [-]$ | | | | | 1,2 | | | |
| | $\alpha_{g,V} \parallel [-]$ | | | | | 1,1 | | | |
| | $\alpha_{g,N} \perp [-]$ | | | | | | 2,0 | | |
| | $\alpha_{g,V} \perp [-]$ | | | | | | | | |
| Max. installation torque | $T_{inst,max} [\text{Nm}]$ | | | | | 2 | | | |
| fischer injection system FIS V masonry | | | | | | | | | |

Performances

Light-weight concrete hollow block Hbl
Species of brick, installation parameters

Annex C 22

Kind of masonry: Light-weight concrete hollow block Hbl

Table C37: Characteristic values of resistance; tension load (N_{Rk})

| Use category | | w/w | | d/d | |
|-----------------------------------------------------------------|----------------------------------------------------------------------------------------|-------------------------------------|--------|-------|--------|
| Temperature range [°C] | | 50/80 | 72/120 | 50/80 | 72/120 |
| Sleeve/anchor combinations | Sleeve/anchor combinations | characteristic values N_{Rk} [kN] | | | |
| Compressive strength $f_b = 2 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 1,20 | 0,90 | 1,20 | 0,90 |
| 12x85 M6 16x130 M8 / M10 | 18x130/200 M10 / M12 | 1,50 | 1,20 | 1,50 | 1,20 |
| 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 | 20x85 M12 / M16 20x85 / FIS E 15x85 M10 / M12 20x130 M12 / M16 22x130/200 M16 | 1,50 | 1,20 | 1,50 | 1,20 |
| 20x200 M12 / M16 | | 2,50 | 2,00 | 2,50 | 2,00 |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 2,00 | 2,00 | 2,50 | 2,00 |
| 12x85 M6 16x130 M8 / M10 | 18x130/200 M10 / M12 | 3,00 | 2,50 | 3,00 | 2,50 |
| 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 | 20x85 M12 / M16 20x85 / FIS E 15x85 M10 / M12 20x130 M12 / M16 22x130/200 M16 | 3,00 | 2,50 | 3,00 | 2,50 |
| 20x200 M12 / M16 | | 5,00 | 4,00 | 5,50 | 4,50 |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Light-weight concrete hollow block Hbl
Characteristic values tension load

Annex C 23

Kind of masonry: Light-weight concrete hollow block Hbl

Table C38: Characteristic values of resistance; shear load (V_{Rk})

| Use category | w/w | d/d |
|-----------------------------------------------|-------------------------------------|--------|
| Temperature range [°C] | 50/80 | 72/120 |
| Sleeve/anchor combinations | characteristic values V_{Rk} [kN] | |
| Compressive strength $f_b = 2 \text{ N/mm}^2$ | | |
| All sizes | 0,90 | |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | |
| All sizes | 2,00 | |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Light-weight concrete hollow block Hbl

Characteristic values shear load

Annex C 24

Kind of masonry: Perforated block form B, HLz

Table C39: Parameters of brick

| Species of brick | Perforated block form B, HLz | |
|----------------------------|------------------------------|--------------------|
| Density | $\rho \geq [\text{kg/dm}^3]$ | 0,6 |
| Compressive strength | $f_b \geq [\text{N/mm}^2]$ | 4, 6, 8 |
| Standard or approval | | EN 771-1 |
| Producer | | e.g. Bouyer Leroux |
| Size, dimensions | [mm] | 500x200x315 |
| Minimum thickness of brick | $h_{\min} [\text{mm}]$ | 200 |

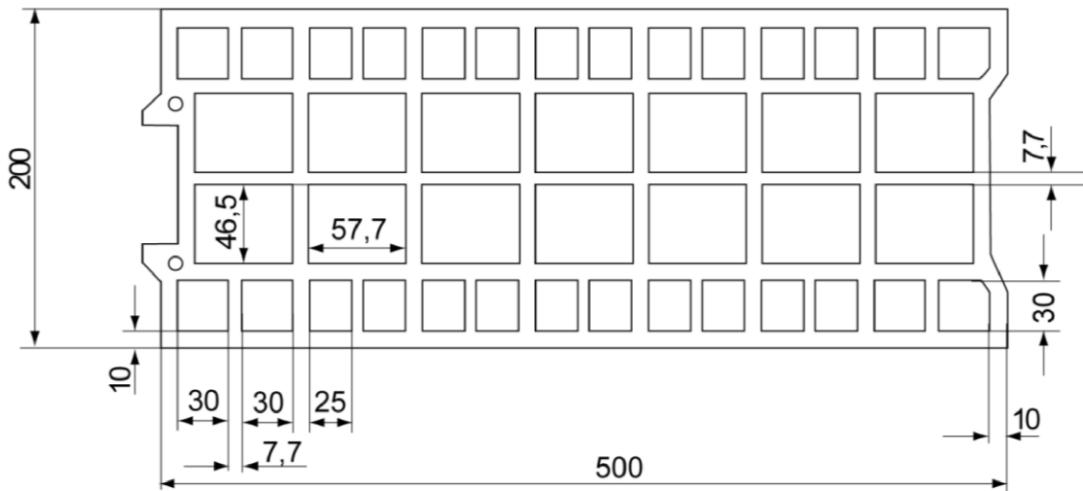


Table C40: Installation parameters for threaded rod with perforated sleeve and internal threaded anchor FIS E with perforated sleeve

| | | | | | | | | |
|------------------------------------------------------------|-------|-------|-------|--------|------------|-------|-------------|------------|
| Size of perforated sleeve | 12x50 | 12x85 | 16x85 | 16x130 | 18x130/200 | 20x85 | 20x130 | 22x130/200 |
| Size of threaded rod | M6 | M8 | M6 | M8 | M8 | M10 | M10 | M12 |
| Size of internal threaded anchor FIS E | | | | 11x85 | | | 15x85 | |
| | | | | M6/M8 | | | M10/ M12 | |
| Edge distance $c_{\min} [\text{mm}]$ | | | | | | 120 | | |
| Spacing $s_{\min} \parallel [\text{mm}]$ | | | | | | 120 | | |
| | | | | | | 500 | | |
| | | | | | | 315 | | |
| Group-factor $\alpha_{g,N} \parallel [-]$ | | | | | | 1,3 | | |
| | | | | | | 1,7 | | |
| | | | | | | 2,0 | | |
| Max. installation torque $T_{\text{inst,max}} [\text{Nm}]$ | | | | | | 2 | | |

fischer injection system FIS V masonry

Performances

Perforated block form B, HLz
Species of brick, installation parameters

Annex C 25

Kind of masonry: Perforated block form B, HLz

Table C41: Characteristic values of resistance; tension load (N_{Rk})

| Use category | | | w/w | d/d | |
|-----------------------------------------------------------------|-------------------------------|-------------------------------------|--------|-------|--------|
| Temperature range | [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Sleeve/anchor combinations | Sleeve/anchor combinations | characteristic values N_{Rk} [kN] | | | |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 0,50 | 0,40 | 0,60 | 0,50 |
| 12x85 M6 / M8 | 20x85 M12 / M16 | | | | |
| 16x85 M8 / M10 | 20x85 / FIS E 15x85 M10 / M12 | 1,50 | 1,20 | 1,50 | 1,20 |
| 16x85 / FIS E 11x85 M6 / M8 | | | | | |
| 16x130 M8 / M10 | | 0,75 | 0,60 | 0,90 | 0,75 |
| 18x130/200 M8 / M10 | | | | | |
| 20x130 M16 | | 1,50 | 1,20 | 2,00 | 1,50 |
| 22x130/200 M16 | | | | | |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 0,75 | 0,60 | 0,90 | 0,75 |
| 12x85 M6 / M8 | 20x85 M12 / M16 | | | | |
| 16x85 M8 / M10 | 20x85 / FIS E 15x85 M10 / M12 | 2,00 | 2,00 | 2,50 | 2,00 |
| 16x85 / FIS E 11x85 M6 / M8 | | | | | |
| 16x130 M8 / M10 | | 1,20 | 0,90 | 1,20 | 1,20 |
| 18x130/200 M8 / M10 | | | | | |
| 20x130 M12 / M16 | | 2,50 | 2,00 | 2,50 | 2,00 |
| 22x130/200 M16 | | | | | |
| Compressive strength $f_b = 8 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 0,90 | 0,90 | 1,20 | 0,90 |
| 12x85 M6 / M8 | 20x85 M12 / M16 | | | | |
| 16x85 M8 / M10 | 20x85 / FIS E 15x85 M10 / M12 | 3,00 | 2,50 | 3,00 | 2,50 |
| 16x85 / FIS E 11x85 M6 / M8 | | | | | |
| 16x130 M8 / M10 | | 1,50 | 1,20 | 2,00 | 1,50 |
| 18x130/200 M8 / M10 | | | | | |
| 20x130 M12 / M16 | | 3,50 | 2,50 | 3,50 | 3,00 |
| 22x130/200 M16 | | | | | |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Perforated block form B, HLz
Characteristic values tension load

Annex C 26

Kind of masonry: Perforated block form B, HLz

Table C42: Characteristic values of resistance; shear load (V_{Rk})

| Use category | | w/w | d/d |
|-----------------------------------------------------------------|-----------------------------|-------------------------------------|--------|
| Temperature range | [°C] | 50/80 | 72/120 |
| Sleeve/anchor combinations | Sleeve/anchor combinations | characteristic values V_{Rk} [kN] | |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | | |
| 12x50 M6 / M8 | 16x85 / FIS E 11x85 M6 / M8 | | |
| 12x85 M6 / M8 | 20x85 / FIS E 15x85 M10/M12 | | |
| 16x85 M8 / M10 | 20x85 M12 | | 1,50 |
| 20x85 M16 | | | 2,50 |
| 16x130 M8 / M10 | 18x130/200 M10 / M12 | | |
| 20x130 M12 / M16 | 22x130/200 M16 | | 0,90 |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | |
| 12x50 M6 / M8 | 16x85 / FIS E 11x85 M6 / M8 | | |
| 12x85 M6 / M8 | 20x85 / FIS E 15x85 M10/M12 | | 2,50 |
| 16x85 M8 / M10 | 20x85 M12 | | |
| 20x85 M16 | | | 3,50 |
| 16x130 M8 / M10 | 18x130/200 M10 / M12 | | |
| 20x130 M12 / M16 | 22x130/200 M16 | | 1,50 |
| Compressive strength $f_b = 8 \text{ N/mm}^2$ | | | |
| 12x50 M6 / M8 | 16x85 / FIS E 11x85 M6 / M8 | | |
| 12x85 M6 / M8 | 20x85 / FIS E 15x85 M10/M12 | | 3,50 |
| 16x85 M8 / M10 | 20x85 M12 | | |
| 20x85 M16 | | | 4,50 |
| 16x130 M8 / M10 | 18x130/200 M10 / M12 | | |
| 20x130 M12 / M16 | 22x130/200 M16 | | 2,00 |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances


Perforated block form B, HLz
Characteristic values shear load

Annex C27

Kind of masonry: Perforated block form B, HLz

Table C43: Parameters of brick

| Species of brick | Perforated block form B, HLz |
|----------------------------|------------------------------|
| Density | $\rho \geq [\text{kg/dm}^3]$ |
| Compressive strength | $f_b \geq [\text{N/mm}^2]$ |
| Standard or approval | EN 771-1 |
| Producer | e.g. Wienerberger |
| Size, dimensions | [mm] |
| Minimum thickness of brick | $h_{\min} [\text{mm}]$ |
| | 500x200x300 |
| | 200 |

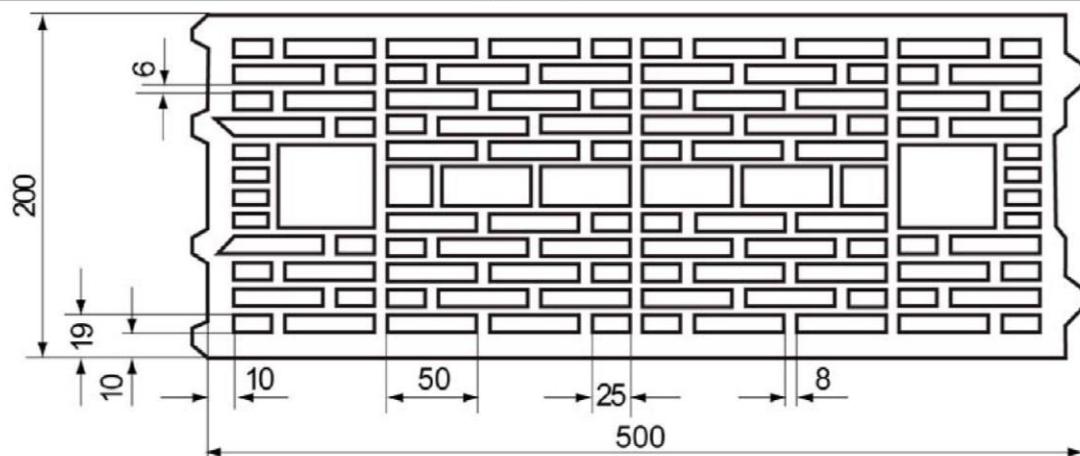

**Table C44: Installation parameters for threaded rod with perforated sleeve
and internal threaded anchor FIS E with perforated sleeve**

| Size of perforated sleeve | 12x50 | 12x85 | 16x85 | 16x130 | 18x130/200 | 20x85 | 20x130 | 22x130/200 |
|------------------------------------------------------------|-------|-------|-------|----------------|------------|-------|------------------|-------------------|
| Size of threaded rod | M6 | M8 | M6 | M8 | M8 | M10 | M10 | M12 |
| Size of internal threaded anchor FIS E | | | | 11x85 M6/M8 | | | 15x85 M10/M12 | |
| Edge distance $c_{\min} [\text{mm}]$ | | 50 | | | 80 | 50 | | 80 |
| Spacing $s_{\min} \parallel [\text{mm}]$ | | | | | 100 | | | |
| Spacing $s_{\text{cr}} \parallel [\text{mm}]$ | | | | | 500 | | | |
| Spacing $s_{\text{cr}} \perp = s_{\min} \perp [\text{mm}]$ | | | | | 300 | | | |
| Group-factor $\alpha_{g,N} \parallel [-]$ | | | | | 1,4 | | | |
| Group-factor $\alpha_{g,V} \parallel [-]$ | | | | | | | | |
| Group-factor $\alpha_{g,N} \perp [-]$ | | | | | 2,0 | | | |
| Group-factor $\alpha_{g,V} \perp [-]$ | | | | | | | | |
| Max. installation torque $T_{\text{inst,max}} [\text{Nm}]$ | | | | | 2 | | | |
| fischer injection system FIS V masonry | | | | | | | | |
| Performances | | | | | | | | Annex C 28 |
| Perforated block form B, HLz | | | | | | | | |
| Species of brick, installation parameters | | | | | | | | |

Kind of masonry: Perforated block form B, HLz

Table C45: Characteristic values of resistance; tension load (N_{Rk})

| Use category | | | w/w | d/d | |
|------------------------------------------------------------------|-------------------------------|-------------------------------------|--------|-------|--------|
| Temperature range | [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Sleeve/anchor combinations | Sleeve/anchor combinations | characteristic values N_{Rk} [kN] | | | |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | 12x85 M6 / M8 | 0,50 | 0,40 | 0,60 | 0,50 |
| 16x85 M8 / M10 | 16x85 / FIS E 11x85 M6 / M8 | 0,60 | 0,50 | 0,75 | 0,60 |
| 20x85 M12 / M16 | 20x85 / FIS E 15x85 M10 / M12 | 0,75 | 0,60 | 0,90 | 0,75 |
| 16x130 M8 / M10 | 18x130/200 M10 / M12 | 1,20 | 0,90 | 1,20 | 0,90 |
| 20x130 M12 / M16 | 22x130/200 M16 | 1,50 | 1,20 | 1,50 | 1,20 |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | 12x85 M6 / M8 | 0,75 | 0,60 | 0,90 | 0,75 |
| 16x85 M8 / M10 | 16x85 / FIS E 11x85 M6 / M8 | 0,90 | 0,75 | 1,20 | 0,90 |
| 20x85 M12 / M16 | 20x85 / FIS E 15x85 M10 / M12 | 1,20 | 0,90 | 1,20 | 1,20 |
| 16x130 M8 / M10 | 18x130/200 M10 / M12 | 1,50 | 1,20 | 2,00 | 1,50 |
| 20x130 M12 / M16 | 22x130/200 M16 | 2,00 | 1,50 | 2,50 | 2,00 |
| Compressive strength $f_b = 8 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | 12x85 M6 / M8 | 0,90 | 0,90 | 1,20 | 0,90 |
| 16x85 M8 / M10 | 16x85 / FIS E 11x85 M6 / M8 | 1,20 | 1,20 | 1,50 | 1,20 |
| 20x85 M12 / M16 | 20x85 / FIS E 15x85 M10 / M12 | 1,50 | 1,20 | 1,50 | 1,50 |
| 16x130 M8 / M10 | 18x130/200 M10 / M12 | 2,00 | 2,00 | 2,50 | 2,00 |
| 20x130 M12 / M16 | 22x130/200 M16 | 2,50 | 2,50 | 3,00 | 2,50 |
| Compressive strength $f_b = 10 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | 12x85 M6 / M8 | 1,20 | 0,90 | 1,50 | 1,2 |
| 16x85 M8 / M10 | 16x85 / FIS E 11x85 M6 / M8 | 1,50 | 1,20 | 2,00 | 1,50 |
| 20x85 M12 / M16 | 20x85 / FIS E 15x85 M10 / M12 | 2,00 | 1,50 | 2,00 | 2,00 |
| 16x130 M8 / M10 | 18x130/200 M10 / M12 | 2,50 | 2,00 | 3,00 | 2,50 |
| 20x130 M12 / M16 | 22x130/200 M16 | 3,50 | 3,00 | 4,00 | 3,00 |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Perforated block form B, HLz

Characteristic values tension load

Annex C 29

Kind of masonry: Perforated block form B, HLz

Table C46: Characteristic values of resistance; shear load (V_{Rk})

| Use category | | | w/w | d/d | |
|------------------------------------------------------------------|------------------------------------|-------------------------------------|--------|-------|--------|
| Temperature range | [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Sleeve/anchor combinations | Sleeve/anchor combinations | characteristic values V_{Rk} [kN] | | | |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 | 16x85 / FIS E 11x85 M6 | | | 0,90 | |
| 12x50 M8 12x85 M6 / M8 | 16x85 / FIS E 11x85 M8 | | | 1,20 | |
| 20x85 M12 / M16 | 20x85 /FIS E 15x85 M10 / M12 | | | 2,00 | |
| 16x130 M8 / M10 18x130/200 M10 / M12 | 20x130 M12 / M16 22x130/200 M16 | | | 0,60 | |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 | 16x85 / FIS E 11x85 M6 | | | 1,20 | |
| 12x50 M8 12x85 M6 / M8 | 16x85 / FIS E 11x85 M8 | | | 1,50 | |
| 20x85 M12 / M16 | 20x85 /FIS E 15x85 M10 / M12 | | | 3,00 | |
| 16x130 M8 / M10 18x130/200 M10 / M12 | 20x130 M12 / M16 22x130/200 M16 | | | 0,90 | |
| Compressive strength $f_b = 8 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 | 16x85 / FIS E 11x85 M6 | | | 1,50 | |
| 12x50 M8 12x85 M6 / M8 | 16x85 / FIS E 11x85 M8 | | | 2,00 | |
| 20x85 M12 / M16 | 20x85 /FIS E 15x85 M10 / M12 | | | 4,00 | |
| 16x130 M8 / M10 18x130/200 M10 / M12 | 20x130 M12 / M16 22x130/200 M16 | | | 1,20 | |
| Compressive strength $f_b = 10 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 | 16x85 / FIS E 11x85 M6 | | | 2,00 | |
| 12x50 M8 12x85 M6 / M8 | 16x85 / FIS E 11x85 M8 | | | 3,00 | |
| 20x85 M12 / M16 | 20x85 /FIS E 15x85 M10 / M12 | | | 5,00 | |
| 16x130 M8 / M10 18x130/200 M10 / M12 | 20x130 M12 / M16 22x130/200 M16 | | | 1,50 | |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Perforated block form B, HLz
Characteristic values shear load

Annex C 30

Kind of masonry: Perforated block form B, HLz

Table C47: Parameters of brick

| Species of brick | Perforated block form B, HLz |
|----------------------------|------------------------------|
| Density | $\rho \geq [\text{kg/dm}^3]$ |
| Compressive strength | $f_b \geq [\text{N/mm}^2]$ |
| Standard or approval | EN 771-1 |
| Producer | e.g. Terreal |
| Size, dimensions | [mm] |
| Minimum thickness of brick | $h_{\min} [\text{mm}]$ |
| | 500x200x315 |
| | 200 |

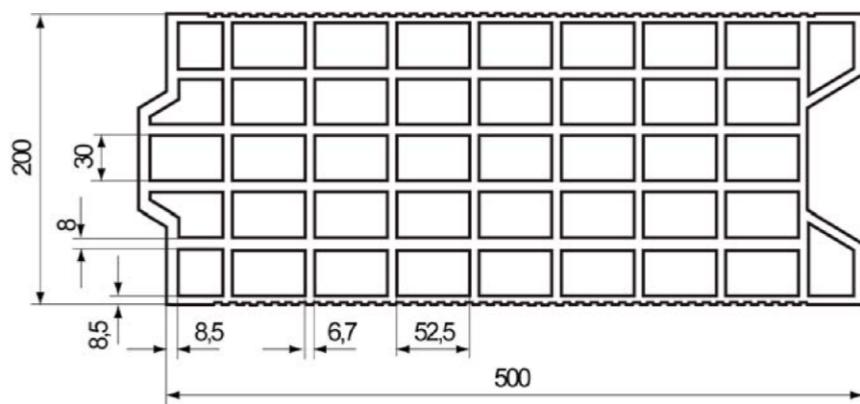


Table C48: Installation parameters for threaded rod with perforated sleeve and internal threaded anchor FIS E with perforated sleeve

| Size of perforated sleeve | 12x50 | 12x85 | 16x85 | 16x130 | 18x130/200 | 20x85 | 20x130 | 22x130/200 |
|----------------------------------------|---------------------------------------|-------|-------|--------|------------|-------|--------|------------|
| Size of threaded rod | M6 | M8 | M6 | M8 | M8 | M10 | M10 | M12 |
| Size of internal threaded anchor FIS E | | | | 11x85 | | | 15x85 | |
| Edge distance | $c_{\min} [\text{mm}]$ | 50 | | | 80 | | 50 | 80 |
| Spacing | $s_{\min} \parallel [\text{mm}]$ | | | | 100 | | | |
| | $s_{\text{cr}} \parallel [\text{mm}]$ | | | | 500 | | | |
| | $s_{\min} \perp [\text{mm}]$ | | | | 100 | | | |
| | $s_{\text{cr}} \perp [\text{mm}]$ | | | | 315 | | | |
| Group-factor | $\alpha_{g,N} \parallel [-]$ | | | | 1,1 | | | |
| | $\alpha_{g,V} \parallel [-]$ | | | | 1,2 | | | |
| | $\alpha_{g,N} \perp [-]$ | | | | 1,1 | | | |
| | $\alpha_{g,V} \perp [-]$ | | | | 1,2 | | | |
| Max. installation torque | $T_{\text{inst,max}} [\text{Nm}]$ | | | | 2 | | | |

fischer injection system FIS V masonry

Performances

Perforated block form B, HLz
Species of brick, installation parameters

Annex C 31

Kind of masonry: Perforated block form B, HLz

Table C49: Characteristic values of resistance; tension load (N_{Rk})

| Use category | | | w/w | d/d | |
|-----------------------------------------------------------------|--------------------------------------------------------------------------------------------------|-------------------------------------|--------|-------|--------|
| Temperature range | [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Sleeve/anchor combinations | Sleeve/anchor combinations | characteristic values N_{Rk} [kN] | | | |
| Compressive strength $f_b = 2 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 0,50 | 0,40 | 0,50 | 0,40 |
| 12x85 M6 / M8 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 20x85 M12 / M16 20x85 /FIS E 15x85 M10 / M12 | 0,50 | 0,40 | 0,50 | 0,40 |
| 20x130 M12 / M16 22x130/200 M16 | 16x130 M8 / M10 18x130/200 M10 / M12 | 0,50 | 0,40 | 0,60 | 0,50 |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 0,90 | 0,75 | 0,90 | 0,90 |
| 12x85 M6 / M8 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 20x85 M12 / M16 20x85 /FIS E 15x85 M10 / M12 | 0,90 | 0,75 | 1,20 | 0,90 |
| 20x130 M12 / M16 22x130/200 M16 | 16x130 M8 / M10 18x130/200 M10 / M12 | 0,90 | 0,90 | 1,20 | 0,90 |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 1,50 | 1,20 | 1,50 | 1,20 |
| 12x85 M6 / M8 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 20x85 M12 / M16 20x85 /FIS E 15x85 M10 / M12 | 1,50 | 1,20 | 1,50 | 1,20 |
| 20x130 M12 / M16 22x130/200 M16 | 16x130 M8 / M10 18x130/200 M10 / M12 | 1,50 | 1,20 | 1,50 | 1,50 |
| Compressive strength $f_b = 8 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 2,00 | 1,50 | 2,00 | 1,50 |
| 12x85 M6 / M8 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 20x85 M12 / M16 20x85 /FIS E 15x85 M10 / M12 | 2,00 | 1,50 | 2,00 | 2,00 |
| 20x130 M12 / M16 22x130/200 M16 | 16x130 M8 / M10 18x130/200 M10 / M12 | 2,00 | 1,50 | 2,00 | 2,00 |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Perforated block form B, HLz
Characteristic values tension load

Annex C 32

Kind of masonry: Perforated block form B, HLz

Table C50: Characteristic values of resistance; shear load (V_{Rk})

| Use category | w/w | d/d | | |
|-----------------------------------------------|-------------------------------------|--------|-------|--------|
| Temperature range [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Sleeve/anchor combinations | characteristic values V_{Rk} [kN] | | | |
| Compressive strength $f_b = 2 \text{ N/mm}^2$ | | | | |
| 12x50 M6 | 16x85 / FIS E 11x85 M6 | | 0,30 | |
| 12x50 M8 | 16x85 M8 | | 0,60 | |
| 12x85 M6 / M8 | 16x85 / FIS E 11x85 M8 | | | |
| 20x85 M12 / M16 | 20x85 / FIS E 15x85 M10 / M12 | | 0,90 | |
| 16x130 M8 / M10 | 18x130/200 M10 / M12 | | 0,60 | |
| 20x130 M12 / M16 | 22x130/200 M16 | | 0,75 | |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | | | |
| 12x50 M6 | 16x85 / FIS E 11x85 M6 | | 0,75 | |
| 12x50 M8 | 16x85 M8 | | 1,20 | |
| 12x85 M6 / M8 | 16x85 / FIS E 11x85 M8 | | | |
| 20x85 M12 / M16 | 20x85 / FIS E 15x85 M10 / M12 | | 2,00 | |
| 16x130 M8 / M10 | 18x130/200 M10 / M12 | | 1,20 | |
| 20x130 M12 / M16 | 22x130/200 M16 | | 1,50 | |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | |
| 12x50 M6 | 16x85 / FIS E 11x85 M6 | | 0,90 | |
| 12x50 M8 | 16x85 M8 | | 2,00 | |
| 12x85 M6 / M8 | 16x85 / FIS E 11x85 M8 | | | |
| 20x85 M12 / M16 | 20x85 / FIS E 15x85 M10 / M12 | | 3,00 | |
| 16x130 M8 / M10 | 18x130/200 M10 / M12 | | 1,50 | |
| 20x130 M12 / M16 | 22x130/200 M16 | | 2,00 | |
| Compressive strength $f_b = 8 \text{ N/mm}^2$ | | | | |
| 12x50 M6 | 16x85 / FIS E 11x85 M6 | | 1,50 | |
| 12x50 M8 | 16x85 M8 | | 2,50 | |
| 12x85 M6 / M8 | 16x85 / FIS E 11x85 M8 | | | |
| 20x85 M12 / M16 | 20x85 / FIS E 15x85 M10 / M12 | | 4,00 | |
| 16x130 M8 / M10 | 18x130/200 M10 / M12 | | 2,00 | |
| 20x130 M12 / M16 | 22x130/200 M16 | | 3,00 | |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Perforated block form B, HLz
Characteristic values shear load

Annex C 33

Kind of masonry: Perforated block form B, HLz

Table C51: Parameters of brick

| Species of brick | Perforated block form B, HLz |
|----------------------------|------------------------------|
| Density | $\rho \geq [\text{kg/dm}^3]$ |
| Compressive strength | $f_b \geq [\text{N/mm}^2]$ |
| Standard or approval | EN 771-1 |
| Producer | e.g. Imery |
| Size, dimensions | [mm] |
| Minimum thickness of brick | $h_{\min} [\text{mm}]$ |
| | 500x200x275 |
| | 200 |

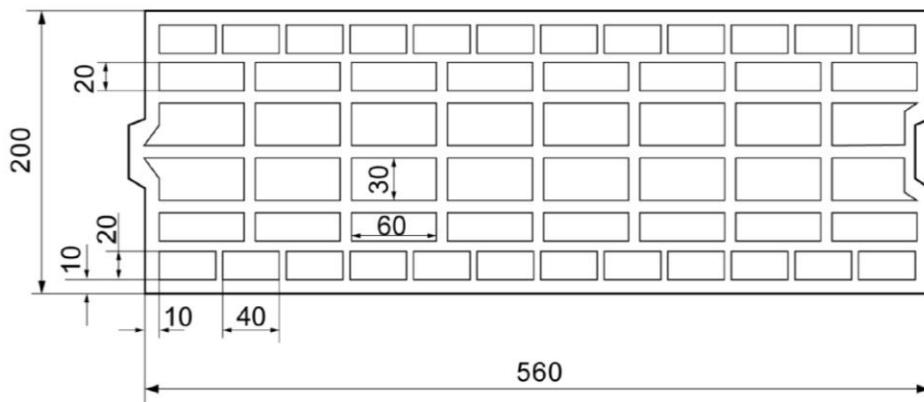


Table C52: Installation parameters for threaded rod with perforated sleeve

| Size of perforated sleeve | 16x130 | 18x130/200 | 20x130 | 22x130/200 |
|---------------------------|-------------------------------------------------|------------|--------|------------|
| Size of threaded rod | M8 | M10 | M10 | M12 |
| Edge distance | $c_{\min} [\text{mm}]$ | | 80 | |
| Spacing | $s_{cr} \parallel = s_{\min} \perp [\text{mm}]$ | | 560 | |
| | $s_{cr} \perp = s_{\min} \perp [\text{mm}]$ | | 275 | |
| Group-factor | $\alpha_{g,N} \parallel [-]$ | | | |
| | $\alpha_{g,V} \parallel [-]$ | | | |
| | $\alpha_{g,N} \perp [-]$ | | 2,0 | |
| | $\alpha_{g,V} \perp [-]$ | | | |
| Max. installation torque | $T_{\text{inst,max}} [\text{Nm}]$ | | 2 | |

fischer injection system FIS V masonry

Performances

Perforated block form B, HLz
Species of brick, installation parameters

Annex C 34

Kind of masonry: Perforated block form B, HLz

Table C53: Characteristic values of resistance; tension load (N_{Rk})

| Use category | | | w/w | d/d | |
|-----------------------------------------------------------------|----------------------------|-------------------------------------|--------|-------|--------|
| Temperature range | [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Sleeve/anchor combinations | Sleeve/anchor combinations | characteristic values N_{Rk} [kN] | | | |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | | | | |
| 16x130 M8 / M10 | 18x130/200 M10 / M12 | 0,90 | 0,90 | 1,20 | 0,90 |
| 20x130 M12 / M16 | 22x130/200 M16 | 1,20 | 1,20 | 1,50 | 1,20 |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | | |
| 16x130 M8 / M10 | 18x130/200 M10 / M12 | 1,50 | 1,20 | 1,50 | 1,50 |
| 20x130 M12 / M16 | 22x130/200 M16 | 2,00 | 1,50 | 2,00 | 2,00 |
| Compressive strength $f_b = 8 \text{ N/mm}^2$ | | | | | |
| 16x130 M8 / M10 | 18x130/200 M10 / M12 | 2,00 | 1,50 | 2,50 | 2,00 |
| 20x130 M12 / M16 | 22x130/200 M16 | 2,50 | 2,00 | 3,00 | 2,50 |

Table C54: Characteristic values of resistance; shear load (V_{Rk})

| Use category | | | w/w | d/d | |
|-----------------------------------------------------------------|------------------------------------|-------------------------------------|--------|-------|--------|
| Temperature range | [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Sleeve/anchor combinations | Sleeve/anchor combinations | characteristic values V_{Rk} [kN] | | | |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | | | | |
| 16x130 M8 / M10 18x130/200 M10 / M12 | 20x130 M12 / M16 22x130/200 M16 | | | 0,90 | |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | | |
| 16x130 M8 / M10 18x130/200 M10 / M12 | 20x130 M12 / M16 22x130/200 M16 | | | 1,50 | |
| Compressive strength $f_b = 8 \text{ N/mm}^2$ | | | | | |
| 16x130 M8 / M10 18x130/200 M10 / M12 | 20x130 M12 / M16 22x130/200 M16 | | | 2,00 | |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Perforated block form B, HLz
Characteristic values

Annex C 35

Kind of masonry: Light-weight concrete hollow block Hbl

Table C55: Parameters of brick

| Species of brick | Light-weight concrete hollow block Hbl | |
|----------------------------|----------------------------------------|-------------|
| Density | $\rho \geq [\text{kg/dm}^3]$ | 1,0 |
| Compressive strength | $f_b \geq [\text{N/mm}^2]$ | 2, 4 or 6 |
| Standard or approval | | EN 771-1 |
| Producer | | e.g. Sepa |
| Size, dimensions | [mm] | 500x200x200 |
| Minimum thickness of brick | $h_{\min} [\text{mm}]$ | 200 |

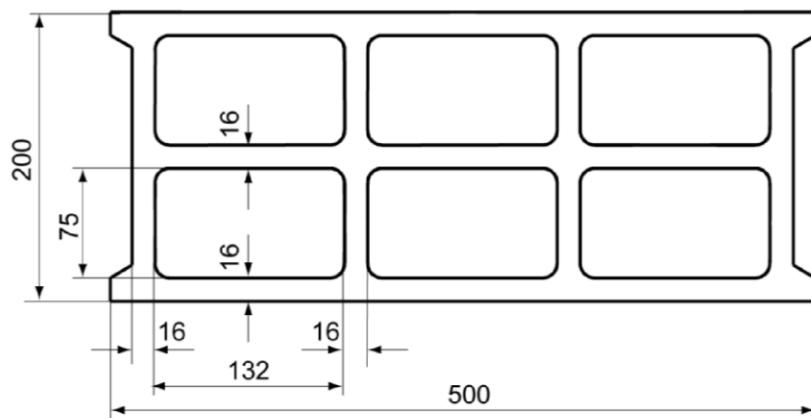


Table C56: Installation parameters for threaded rod with perforated sleeve

| Size of perforated sleeve | 12x50 | 12x85 | 16x85 | 16x130 | 18x130/200 | 20x85 |
|-------------------------------------------------------------|------------------------------|------------------------------|--------------------------|--------------------------|------------|-------|
| Size of threaded rod | M6 | M8 | M6 | M8 | M8 | M10 |
| Size of internal threaded anchor FIS E | | | | 11x85 | | |
| | | | | M6/M8 | | |
| Edge distance $c_{\min} [\text{mm}]$ | | | | 100 | | |
| Spacing $s_{cr \parallel} = s_{\min \parallel} [\text{mm}]$ | | | | 500 | | |
| | | | | 200 | | |
| Group-factor | $\alpha_{g,N} \parallel [-]$ | $\alpha_{g,V} \parallel [-]$ | $\alpha_{g,N} \perp [-]$ | $\alpha_{g,V} \perp [-]$ | 2,0 | |
| Max. installation torque | $T_{inst,max} [\text{Nm}]$ | 1 | | | 2 | |

fischer injection system FIS V masonry

Performances

Light-weight concrete hollow block

Species of brick, installation parameters

Annex C 36

Kind of masonry: Light-weight concrete hollow block Hbl

Table C57: Characteristic values of resistance; tension load (N_{Rk})

| Use category | | w/w | d/d | | |
|-----------------------------------------------|-----------|-------------------------------------|--------|-----------------|--|
| Temperature range | [°C] | 50/80 | 72/120 | 50/80 72/120 | |
| Sleeve/anchor combinations | | characteristic values N_{Rk} [kN] | | | |
| Compressive strength $f_b = 2 \text{ N/mm}^2$ | All sizes | 0,40 | 0,40 | 0,50 0,40 | |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | | | | |
| | All sizes | 0,90 | 0,75 | 0,90 0,75 | |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | All sizes | 1,20 | 1,20 | 1,50 1,20 | |

Table C58: Characteristic values of resistance; shear load (V_{Rk})

| Use category | | w/w | d/d | | |
|-----------------------------------------------|-----------|-------------------------------------|--------|-----------------|--|
| Temperature range | [°C] | 50/80 | 72/120 | 50/80 72/120 | |
| Sleeve/anchor combinations | | characteristic values V_{Rk} [kN] | | | |
| Compressive strength $f_b = 2 \text{ N/mm}^2$ | All sizes | 0,90 | | | |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | | | | |
| | All sizes | 1,50 | | | |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | All sizes | 2,50 | | | |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Light-weight concrete hollow block Hbl

Characteristic values

Annex C 37

Kind of masonry: Solid brick Mz

Table C59: Parameters of brick

| Species of brick | Solid brick Mz |
|----------------------------|------------------------------|
| Density | $\rho \geq [\text{kg/dm}^3]$ |
| Compressive strength | $f_b \geq [\text{N/mm}^2]$ |
| Standard or approval | EN 771-1 |
| Producer | e.g. Nigra |
| Size, dimensions | [mm] |
| Minimum thickness of brick | $h_{\min} [\text{mm}]$ |
| | 118 |

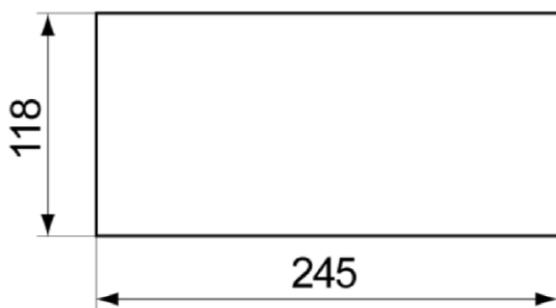


Table C60: Installation parameters for threaded rod and internal threaded anchor without perforated sleeve

| Size of threaded rod | M6 | M8 | M10 | M12 | M16 | 11x85 ¹⁾ M6/M8 | 15x85 M10/M12 |
|--------------------------------------------------------------------|------------------------------|------------------------------|--------------------------|--------------------------|-----|------------------------------|------------------|
| Effective anchorage depth $h_{\text{ef}} [\text{mm}]$ | 50 | 100 | 50 | 100 | 50 | 100 | 50 |
| Edge distance $c_{\min} [\text{mm}]$ | | | | | | 60 | |
| Spacing $s_{\text{cr}} \parallel = s_{\min} \parallel [\text{mm}]$ | | | | | | 245 | |
| | | | | | | 60 | |
| Group-factor | $\alpha_{g,N} \parallel [-]$ | $\alpha_{g,V} \parallel [-]$ | $\alpha_{g,N} \perp [-]$ | $\alpha_{g,V} \perp [-]$ | | 2,0 | |
| Max. installation torque $T_{\text{inst,max}} [\text{Nm}]$ | 4 | | | | | 10 | |

¹⁾ For FIS E 11x85 with screw M6: $T_{\text{inst,max}} = 4 \text{ Nm}$

fischer injection system FIS V masonry

Performances

Solid brick Mz

Species of brick, installation parameters

Annex C 38

Kind of masonry: Solid brick Mz

Table C61: Characteristic values of resistance; tension load (N_{Rk})

| Use category | | w/w | d/d | | |
|------------------------------------------------------------------|-----------------------|-------------------------------------|--------|-------|--------|
| Temperature range | [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Effective anchorage depth | Anchor size | characteristic values N_{Rk} [kN] | | | |
| Compressive strength $f_b = 10 \text{ N/mm}^2$ | | | | | |
| ≥ 50 | M6 | 0,60 | 0,50 | 1,20 | 0,9 |
| 85 | FIS E 11x85 M6 | | | | |
| ≥ 50 | M8 | 0,90 | 0,90 | 1,50 | 1,50 |
| 85 | FIS E 11x85 M8 | | | | |
| ≥ 50 | M10 / M12 / M16 | 0,75 | 0,60 | 1,20 | 1,20 |
| 85 | FIS E 15x85 M10 / M12 | | | | |
| Compressive strength $f_b = 20 \text{ N/mm}^2$ | | | | | |
| ≥ 50 | M6 | 0,90 | 0,75 | 1,50 | 1,20 |
| 85 | FIS E 11x85 M6 | | | | |
| ≥ 50 | M8 | 1,50 | 1,20 | 2,50 | 2,00 |
| 85 | FIS E 11x85 M8 | | | | |
| ≥ 50 | M10 / M12 / M16 | 1,20 | 0,90 | 2,00 | 1,50 |
| 85 | FIS E 15x85 M10 / M12 | | | | |

Table C62: Characteristic values of resistance; shear load (V_{Rk})

| Use category | | w/w | d/d | | |
|------------------------------------------------------------------|-----------------|-------------------------------------|--------|--------------------------|--------|
| Temperature range | [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Effective anchorage depth | Anchor size | characteristic values V_{Rk} [kN] | | | |
| Compressive strength $f_b = 10 \text{ N/mm}^2$ | | | | | |
| ≥ 50 | M6 | | | 2,00 | |
| 85 | FIS E 11x85 M6 | | | | |
| ≥ 50 | M8 | | | 3,00 | |
| 85 | FIS E 11x85 M8 | | | | |
| ≥ 50 | M10 | | | 4,00 | |
| 85 | FIS E 15x85 M10 | | | | |
| ≥ 50 | M12 | | | 4,50 | |
| 85 | FIS E 15x85 M12 | | | | |
| ≥ 50 | M16 | | | 5,50 | |
| Compressive strength $f_b = 20 \text{ N/mm}^2$ | | | | | |
| ≥ 50 | M6 | | | 2,50 | |
| 85 | FIS E 11x85 M6 | | | | |
| ≥ 50 | M8 | | | 4,00 | |
| 85 | FIS E 11x85 M8 | | | | |
| ≥ 50 | M10 | | | 5,50 | |
| 85 | FIS E 15x85 M10 | | | | |
| ≥ 50 | M12 | | | 6,00 (5,50) ¹ | |
| 85 | FIS E 15x85 M12 | | | | |
| ≥ 50 | M16 | | | 8,00 (5,50) ¹ | |

¹⁾ Characteristic value pushing out of one brick $V_{Rk,pb} = 5,50 \text{ kN}$
Factor for job site tests and displacements see Annex C78

fischer injection system FIS V masonry

Annex C 39

Performances

Solid brick Mz

Characteristic values

Kind of masonry: Perforated brick HLz

Table C63: Parameters of brick

| Species of brick | Perforated brick HLz |
|----------------------------|------------------------------|
| Density | $\rho \geq [\text{kg/dm}^3]$ |
| Compressive strength | $f_b \geq [\text{N/mm}^2]$ |
| Standard or approval | EN 771-1 |
| Producer | e.g. Wienerberger |
| Size, dimensions | [mm] |
| Minimum thickness of brick | $h_{\min} [\text{mm}]$ |
| | 255x120x118 |
| | 120 |

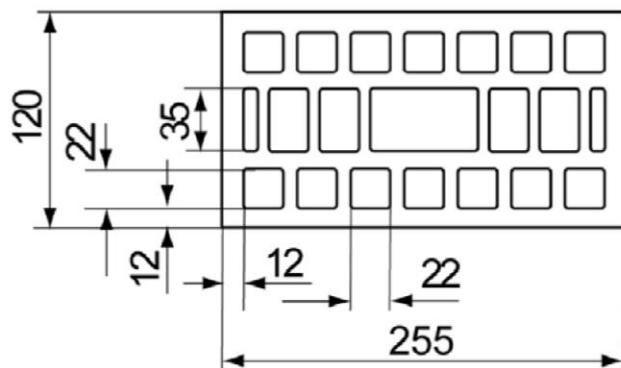


Table C64: Installation parameters for threaded rod with perforated sleeve and internal threaded anchor FIS E with perforated sleeve

| Size of perforated sleeve | 12x50 | 12x85 | 16x85 | 20x85 |
|-------------------------------------------------------------|---------------------------------------------|------------------------------|--------------------------|--------------------------|
| Size of threaded rod | M6 | M8 | M8 | M10 |
| Size of internal threaded anchor FIS E | | | 11x85 M6/M8 | 15x85 M10/M12 |
| Edge distance $c_{\min} [\text{mm}]$ | | | 60 | |
| Spacing $s_{cr \parallel} = s_{\min \parallel} [\text{mm}]$ | | | 255 | |
| | $s_{cr \perp} = s_{\min \perp} [\text{mm}]$ | | 120 | |
| Group-factor | $\alpha_{g,N \parallel} [-]$ | $\alpha_{g,V \parallel} [-]$ | $\alpha_{g,N \perp} [-]$ | $\alpha_{g,V \perp} [-]$ |
| | | | | 2,0 |
| Max. installation torque | $T_{inst,max} [\text{Nm}]$ | | 2 | |

fischer injection system FIS V masonry

Performances

Perforated brick HLz

Species of brick, installation parameters

Annex C 40

Kind of masonry: Perforated brick HLz

Table C65: Characteristic values of resistance; tension load (N_{Rk})

| Use category | | | w/w | d/d | |
|------------------------------------------------------------------|-----------------------------------------------|-------------------------------------|--------|-------|--------|
| Temperature range [°C] | | 50/80 | 72/120 | 50/80 | 72/120 |
| Sleeve/anchor combinations | Sleeve/anchor combinations | characteristic values N_{Rk} [kN] | | | |
| Compressive strength $f_b = 2 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 0,40 | 0,30 | 0,50 | 0,40 |
| 12x85 M6 / M8 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 | 0,50 | 0,40 | 0,50 | 0,50 |
| 20x85 M12 / M16 | 20x85 / FIS E 15x85 M10 / M12 | -- | -- | -- | -- |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 0,90 | 0,75 | 0,90 | 0,75 |
| 12x85 M6 / M8 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 | 0,90 | 0,90 | 1,20 | 0,90 |
| 20x85 M12 / M16 | 20x85 / FIS E 15x85 M10 / M12 | 0,50 | 0,40 | 0,50 | 0,40 |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 1,20 | 0,90 | 1,50 | 1,20 |
| 12x85 M6 / M8 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 | 1,50 | 1,20 | 1,50 | 1,50 |
| 20x85 M12 / M16 | 20x85 / FIS E 15x85 M10 / M12 | 0,75 | 0,60 | 0,75 | 0,60 |
| Compressive strength $f_b = 8 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 1,50 | 1,50 | 2,00 | 1,50 |
| 12x85 M6 / M8 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 | 2,00 | 1,50 | 2,00 | 2,00 |
| 20x85 M12 / M16 | 20x85 / FIS E 15x85 M10 / M12 | 0,90 | 0,75 | 0,90 | 0,90 |
| Compressive strength $f_b = 10 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 2,00 | 1,50 | 2,50 | 2,00 |
| 12x85 M6 / M8 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 | 2,50 | 2,00 | 2,50 | 2,50 |
| 20x85 M12 / M16 | 20x85 / FIS E 15x85 M10 / M12 | 1,20 | 0,90 | 1,20 | 1,20 |
| Compressive strength $f_b = 12 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 2,50 | 2,00 | 3,00 | 2,50 |
| 12x85 M6 / M8 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 | 3,00 | 2,50 | 3,50 | 2,50 |
| 20x85 M12 / M16 | 20x85 / FIS E 15x85 M10 / M12 | 1,50 | 1,20 | 1,50 | 1,20 |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Perforated brick HLz

Characteristic values tension load

Annex C 41

Kind of masonry: Perforated brick HLz

Table C66: Characteristic values of resistance; shear load (V_{Rk})

| Use category | w/w | d/d | | |
|------------------------------------------------------------------|-------------------------------------|--------|-------|--------|
| Temperature range [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Sleeve/anchor combinations | characteristic values V_{Rk} [kN] | | | |
| Compressive strength $f_b = 2 \text{ N/mm}^2$ | | | | |
| 12x50 M6 | 12x85 M6 | | 0,60 | |
| 12x50 M8 | 12x85 M8 | | 0,75 | |
| 20x85 M12 / M16 | 16x85 M8 / M10 | | | |
| 20x85 / FIS E 15x85 M10 / M12 | 16x85 / FIS E 11x85 M6 / M8 | | 0,90 | |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | | | |
| 12x50 M6 | 12x85 M6 | | 1,20 | |
| 12x50 M8 | 12x85 M8 | | 1,50 | |
| 20x85 M12 / M16 | 16x85 M8 / M10 | | | |
| 20x85 / FIS E 15x85 M10 / M12 | 16x85 / FIS E 11x85 M6 / M8 | | 2,00 | |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | |
| 12x50 M6 | 12x85 M6 | | 2,00 | |
| 12x50 M8 | 12x85 M8 | | 2,00 | |
| 20x85 M12 / M16 | 16x85 M8 / M10 | | | |
| 20x85 / FIS E 15x85 M10 / M12 | 16x85 / FIS E 11x85 M6 / M8 | | 2,50 | |
| Compressive strength $f_b = 8 \text{ N/mm}^2$ | | | | |
| 12x50 M6 | 12x85 M6 | | 2,50 | |
| 12x50 M8 | 12x85 M8 | | 3,00 | |
| 20x85 M12 / M16 | 16x85 M8 / M10 | | | |
| 20x85 / FIS E 15x85 M10 / M12 | 16x85 / FIS E 11x85 M6 / M8 | | 3,50 | |
| Compressive strength $f_b = 10 \text{ N/mm}^2$ | | | | |
| 12x50 M6 | 12x85 M6 | | 3,00 | |
| 12x50 M8 | 12x85 M8 | | 3,50 | |
| 20x85 M12 / M16 | 16x85 M8 / M10 | | | |
| 20x85 / FIS E 15x85 M10 / M12 | 16x85 / FIS E 11x85 M6 / M8 | | 4,50 | |
| Compressive strength $f_b = 12 \text{ N/mm}^2$ | | | | |
| 12x50 M6 | 12x85 M6 | | 4,00 | |
| 12x50 M8 | 12x85 M8 | | 4,50 | |
| 20x85 M12 / M16 | 16x85 M8 / M10 | | | |
| 20x85 / FIS E 15x85 M10 / M12 | 16x85 / FIS E 11x85 M6 / M8 | | 5,50 | |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Perforated brick HLz

Characteristic values shear load

Annex C 42

Kind of masonry: Perforated brick LLz

Table C67: Parameters of brick

| Species of brick | Perforated brick LLz |
|----------------------------|--------------------------------------|
| Density | $\rho \geq [\text{kg/dm}^3]$ 0,7 |
| Compressive strength | $f_b \geq [\text{N/mm}^2]$ 2, 4 or 6 |
| Standard or approval | EN 771-1 |
| Producer | |
| Size, dimensions | [mm] 248x78x248 |
| Minimum thickness of brick | $h_{\min} [\text{mm}]$ 80 |

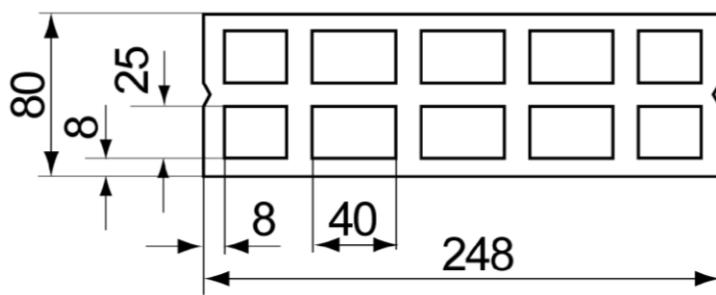


Table C68: Installation parameters for threaded rod with perforated

| | |
|---------------------------|--------------------------------------------------------|
| Size of perforated sleeve | 12x50 |
| Size of threaded rod | M6 M8 |
| Edge distance | $c_{\min} [\text{mm}]$ 100 |
| | $s_{\min} \parallel [\text{mm}]$ 75 |
| Spacing | $s_{\text{cr}} \parallel [\text{mm}]$ 250 |
| | $s_{\text{cr}} \perp = s_{\min} \perp [\text{mm}]$ 250 |
| | $\alpha_{g,N} \parallel [-]$ 1,6 |
| Group-factor | $\alpha_{g,V} \parallel [-]$ 1,1 |
| | $\alpha_{g,N} \perp [-]$ 2,0 |
| | $\alpha_{g,V} \perp [-]$ |
| Max. installation torque | $T_{\text{inst,max}} [\text{Nm}]$ 2 |

fischer injection system FIS V masonry

Performances

Perforated brick LLz

Species of brick, installation parameters

Annex C 43

Kind of masonry: Perforated brick LLz

Table C69: Characteristic values of resistance; tension load (N_{Rk})

| Use category | | w/w | d/d | |
|-----------------------------------------------------------------|----------------------------|-------------------------------------|--------|-------|
| Temperature range | [°C] | 50/80 | 72/120 | 50/80 |
| Sleeve/anchor combinations | Sleeve/anchor combinations | characteristic values N_{Rk} [kN] | | |
| Compressive strength $f_b = 2 \text{ N/mm}^2$ | | | | |
| 12x50 M6 / M8 | | 0,50 | 0,40 | 0,60 |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | | | |
| 12x50 M6 / M8 | | 0,90 | 0,90 | 1,20 |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | |
| 12x50 M6 / M8 | | 1,50 | 1,20 | 1,50 |
| | | | | 1,50 |

Table C70: Characteristic values of resistance; shear load (V_{Rk})

| Use category | | w/w | d/d | |
|-----------------------------------------------------------------|----------------------------|-------------------------------------|--------|-------|
| Temperature range | [°C] | 50/80 | 72/120 | 50/80 |
| Sleeve/anchor combinations | Sleeve/anchor combinations | characteristic values V_{Rk} [kN] | | |
| Compressive strength $f_b = 2 \text{ N/mm}^2$ | | | | |
| 12x50 M6 / M8 | | | | 0,50 |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | | | |
| 12x50 M6 / M8 | | | | 0,90 |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | |
| 12x50 M6 / M8 | | | | 1,50 |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Perforated brick LLz
Characteristic values

Annex C 44

Kind of masonry: Perforated brick HLz

Table C71: Parameters of brick

| Species of brick | Perforated brick HLz | |
|----------------------------|------------------------------|-----------------------------|
| Density | $\rho \geq [\text{kg/dm}^3]$ | 0,8 |
| Compressive strength | $f_b \geq [\text{N/mm}^2]$ | 6, 8, 12, 16 or 20 |
| Standard or approval | | EN 771-1 |
| Producer | | e.g. Cermanica Farreny S.A. |
| Size, dimensions | [mm] | 275x130x94 |
| Minimum thickness of brick | $h_{\min} [\text{mm}]$ | 130 |

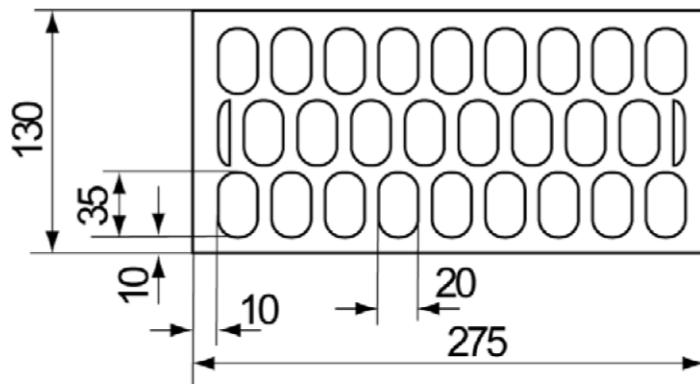


Table C72: Installation parameters for threaded rod with perforated sleeve and internal threaded anchor FIS E with perforated sleeve

| Size of perforated sleeve | 12x50 | | 12x85 | | 16x85 | | 20x85 | |
|----------------------------------------|-----------------------------------------------------|----|-------|----|----------------|-----|------------------|-----|
| Size of threaded rod | M6 | M8 | M6 | M8 | M8 | M10 | M12 | M16 |
| Size of internal threaded anchor FIS E | | | | | 11x85 M6/M8 | | 15x85 M10/M12 | |
| Edge distance $c_{\min} [\text{mm}]$ | | | 100 | | | | 120 | |
| Spacing | $s_{cr} \parallel = s_{\min} \parallel [\text{mm}]$ | | 275 | | | | | |
| | $s_{cr} \perp = s_{\min} \perp [\text{mm}]$ | | 95 | | | | | |
| Group-factor | $\alpha_{g,N} \parallel [-]$ | | | | | | 2,0 | |
| | $\alpha_{g,V} \parallel [-]$ | | | | | | | |
| | $\alpha_{g,N} \perp [-]$ | | | | | | | |
| | $\alpha_{g,V} \perp [-]$ | | | | | | | |
| Max. installation torque | $T_{inst,max} [\text{Nm}]$ | | 2 | | | | | |

fischer injection system FIS V masonry

Performances

Perforated brick HLz

Species of brick, installation parameters

Annex C 45

Kind of masonry: Perforated brick HLz

Table C73: Characteristic values of resistance; tension load (N_{Rk})

| Use category | w/w | | d/d | | |
|------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|-------------------------------------|--------|-------|--------|
| Temperature range | [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Sleeve/anchor combinations | Sleeve/anchor combinations | characteristic values N_{Rk} [kN] | | | |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 0,40 | 0,30 | 0,40 | 0,40 |
| 12x85 M6 / M8 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 20x85 M12 / M16 20x85 / FIS E 15x85 M10 / M12 | 0,90 | 0,75 | 0,90 | 0,75 |
| Compressive strength $f_b = 8 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 0,50 | 0,40 | 0,60 | 0,50 |
| 12x85 M6 / M8 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 20x85 M12 / M16 20x85 / FIS E 15x85 M10 / M12 | 1,20 | 0,90 | 1,20 | 0,90 |
| Compressive strength $f_b = 12 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 0,75 | 0,60 | 0,90 | 0,75 |
| 12x85 M6 / M8 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 20x85 M12 / M16 20x85 / FIS E 15x85 M10 / M12 | 1,50 | 1,50 | 2,00 | 1,50 |
| Compressive strength $f_b = 16 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 0,90 | 0,90 | 1,20 | 0,90 |
| 12x85 M6 / M8 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 20x85 M12 / M16 20x85 / FIS E 15x85 M10 / M12 | 2,00 | 2,00 | 2,50 | 2,00 |
| Compressive strength $f_b = 20 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 1,20 | 1,20 | 1,50 | 1,20 |
| 12x85 M6 / M8 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 20x85 M12 / M16 20x85 / FIS E 15x85 M10 / M12 | 3,00 | 2,50 | 3,00 | 2,50 |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Perforated brick HLz

Characteristic values tension load

Annex C 46

Kind of masonry: Perforated brick HLz

Table C74: Characteristic values of resistance; shear load (V_{Rk})

| Use category | | w/w | d/d |
|------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|-------------------------------------|--------|
| Temperature range | [°C] | 50/80 | 72/120 |
| Sleeve/anchor combinations | Sleeve/anchor combinations | characteristic values V_{Rk} [kN] | |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | |
| 12x50 M6 / M8 | | 1,2 | |
| 12x85 M6 / M8 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 20x85 M12 / M16 20x85 / FIS E 15x85 M10 / M12 | 1,2 | |
| Compressive strength $f_b = 8 \text{ N/mm}^2$ | | | |
| 12x50 M6 / M8 | | 1,5 | |
| 12x85 M6 / M8 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 20x85 M12 / M16 20x85 / FIS E 15x85 M10 / M12 | 1,5 | |
| Compressive strength $f_b = 12 \text{ N/mm}^2$ | | | |
| 12x50 M6 / M8 | | 2,0 | |
| 12x85 M6 / M8 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 20x85 M12 / M16 20x85 / FIS E 15x85 M10 / M12 | 2,5 | |
| Compressive strength $f_b = 16 \text{ N/mm}^2$ | | | |
| 12x50 M6 / M8 | | 3,0 | |
| 12x85 M6 / M8 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 20x85 M12 / M16 20x85 / FIS E 15x85 M10 / M12 | 3,0 | |
| Compressive strength $f_b = 20 \text{ N/mm}^2$ | | | |
| 12x50 M6 / M8 | | 4,0 | |
| 12x85 M6 / M8 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 20x85 M12 / M16 20x85 / FIS E 15x85 M10 / M12 | 4,0 | |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Perforated brick HLz

Characteristic values shear load

Annex C 47

Kind of masonry: Perforated brick LLz

Table C75: Parameters of brick

| Species of brick | Perforated brick LLz |
|----------------------------|------------------------------|
| Density | $\rho \geq [\text{kg/dm}^3]$ |
| Compressive strength | $f_b \geq [\text{N/mm}^2]$ |
| Standard or approval | EN 771-1 |
| Producer | e.g. Cermanica Farreny S.A. |
| Size, dimensions | [mm] |
| Minimum thickness of brick | $h_{\min} [\text{mm}]$ |

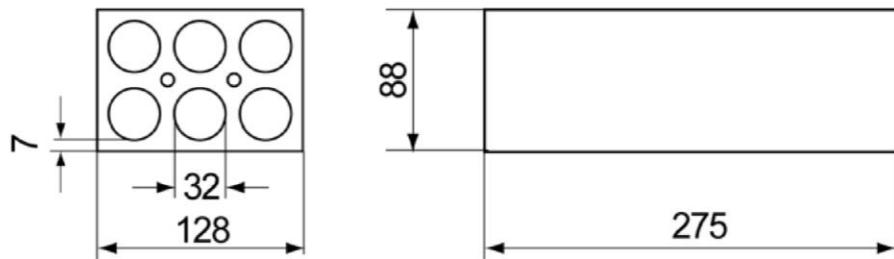


Table C76: Installation parameters for threaded rod with perforated sleeve

| | | |
|---------------------------|----------------------------------|-----|
| Size of perforated sleeve | 12x50 | |
| Size of threaded rod | M6 | M8 |
| Edge distance | $c_{\min} [\text{mm}]$ | 60 |
| | $s_{\min} \parallel [\text{mm}]$ | 75 |
| Spacing | $s_{cr} \parallel [\text{mm}]$ | 275 |
| | $s_{\min} \perp [\text{mm}]$ | 75 |
| | $s_{cr} \perp [\text{mm}]$ | 130 |
| Group-factor | $\alpha_{g,N} \parallel [-]$ | 1,3 |
| | $\alpha_{g,V} \parallel [-]$ | 1,5 |
| | $\alpha_{g,N} \perp [-]$ | 1,3 |
| | $\alpha_{g,V} \perp [-]$ | 1,5 |
| Max. installation torque | $T_{inst,max} [\text{Nm}]$ | 2 |

fischer injection system FIS V masonry

Performances

Perforated brick LLz

Species of brick, installation parameters

Annex C 48

Kind of masonry: Perforated brick LLz

Table C77: Characteristic values of resistance; tension load (N_{Rk})

| Use category | w/w | | d/d | |
|-----------------------------------------------|----------------------------|--------|-------------------------------------|--------|
| Temperature range [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Sleeve/anchor combinations | Sleeve/anchor combinations | | characteristic values N_{Rk} [kN] | |
| Compressive strength $f_b = 2 \text{ N/mm}^2$ | | | | |
| 12x50 M6 / M8 | | 1,50 | 1,20 | 1,50 |

Table C78: Characteristic values of resistance; shear load (V_{Rk})

| Use category | w/w | | d/d | |
|-----------------------------------------------|----------------------------|--------|-------------------------------------|--------|
| Temperature range [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Sleeve/anchor combinations | Sleeve/anchor combinations | | characteristic values V_{Rk} [kN] | |
| Compressive strength $f_b = 2 \text{ N/mm}^2$ | | | | |
| 12x50 M6 / M8 | | | 1,20 | |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Perforated brick LLz

Characteristic values

Annex C 49

Kind of masonry: Perforated brick HLz

Table C79: Parameters of brick

| Species of brick | Perforated brick HLz |
|----------------------------|------------------------------|
| Density | $\rho \geq [\text{kg/dm}^3]$ |
| Compressive strength | $f_b \geq [\text{N/mm}^2]$ |
| Standard or approval | EN 771-1 |
| Producer | e.g. Perceram |
| Size, dimensions | [mm] |
| Minimum thickness of brick | $h_{\min} [\text{mm}]$ |
| | 220x190x290 |
| | 190 |

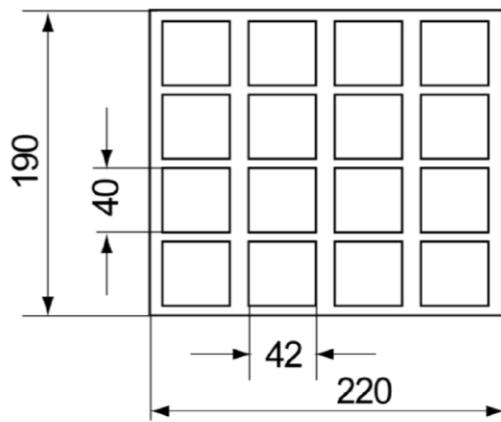


Table C80: Installation parameters for threaded rod with perforated sleeve and internal threaded anchor FIS E with perforated sleeve

| | | | | | | | | |
|-------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|-------|-------|--------|----------------|-------|------------------|------------|
| Size of perforated sleeve | 12x50 | 12x85 | 16x85 | 16x130 | 18x130/200 | 20x85 | 20x130 | 22x130/200 |
| Size of threaded rod | M6 | M8 | M6 | M8 | M8 | M10 | M8 | M10 |
| Size of internal threaded anchor FIS E | | | | | 11x85 M6/M8 | | 15x85 M10/M12 | |
| Edge distance $c_{\min} [\text{mm}]$ | | | | | | 110 | | |
| Spacing $s_{cr} \parallel = s_{\min} \parallel [\text{mm}]$ | | | | | | 220 | | |
| $s_{cr} \perp = s_{\min} \perp [\text{mm}]$ | | | | | | 290 | | |
| Group-factor | $\alpha_{g,N} \parallel [-]$ $\alpha_{g,V} \parallel [-]$ $\alpha_{g,N} \perp [-]$ $\alpha_{g,V} \perp [-]$ | | | | | 2,0 | | |
| Max. installation torque | $T_{\text{inst,max}} [\text{Nm}]$ | | | | | 2 | | |

fischer injection system FIS V masonry

Performances
Perforated brick HLz
Species of brick, installation parameters

Annex C 50

Kind of masonry: Perforated brick HLz

Table C81: Characteristic values of resistance; tension load (N_{Rk})

| Use category | | w/w | | d/d | |
|------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|-------------------------------------|--------|-------|--------|
| Temperature range [°C] | | 50/80 | 72/120 | 50/80 | 72/120 |
| Sleeve/anchor combinations | Sleeve/anchor combinations | characteristic values N_{Rk} [kN] | | | |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 0,30 | -- | 0,40 | 0,30 |
| 12x85 M6 / M8 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 20x85 M12 / M16 20x85 / FIS E 15x85 M10 / M12 | 1,20 | 1,20 | 1,50 | 1,20 |
| 20x130 M12 / M16 22x130/200 M16 | 16x130 M8 / M10 18x130/200 M10 / M12 | 1,50 | 1,20 | 1,50 | 1,50 |
| Compressive strength $f_b = 8 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 0,50 | 0,40 | 0,50 | 0,40 |
| 12x85 M6 / M8 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 20x85 M12 / M16 20x85 / FIS E 15x85 M10 / M12 | 1,50 | 1,50 | 2,00 | 1,50 |
| 20x130 M12 / M16 22x130/200 M16 | 16x130 M8 / M10 18x130/200 M10 / M12 | 2,00 | 1,50 | 2,50 | 2,00 |
| Compressive strength $f_b = 10 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 0,60 | 0,50 | 0,60 | 0,50 |
| 12x85 M6 / M8 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 20x85 M12 / M16 20x85 / FIS E 15x85 M10 / M12 | 2,00 | 2,00 | 2,50 | 2,00 |
| 20x130 M12 / M16 22x130/200 M16 | 16x130 M8 / M10 18x130/200 M10 / M12 | 2,50 | 2,00 | 3,00 | 2,00 |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Perforated brick HLz

Characteristic values tension load

Annex C 51

Kind of masonry: Perforated brick HLz

Table C82: Characteristic values of resistance; shear load (V_{Rk})

| Use category | w/w | d/d | | | |
|------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|--------|-------|--------|------|
| Temperature range [°C] | 50/80 | 72/120 | 50/80 | 72/120 | |
| Sleeve/anchor combinations | characteristic values V_{Rk} [kN] | | | | |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | | | 1,50 | |
| 12x85 M6 / M8 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 20x85 M12 / M16 20x85 / FIS E 15x85 M10 / M12 | | | | 1,50 |
| 16x130 M8 / M10 | | | | 2,50 | |
| 20x130 M12 / M16 | 22x130/200 M16 18x130/200 M10 / M12 | | | | 2,00 |
| Compressive strength $f_b = 8 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | | | 2,00 | |
| 12x85 M6 / M8 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 20x85 M12 / M16 20x85 / FIS E 15x85 M10 / M12 | | | | 2,00 |
| 16x130 M8 / M10 | | | | 3,50 | |
| 20x130 M12 / M16 | 22x130/200 M16 18x130/200 M10 / M12 | | | | 3,00 |
| Compressive strength $f_b = 10 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | | | 2,50 | |
| 12x85 M6 / M8 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 20x85 M12 / M16 20x85 / FIS E 15x85 M10 / M12 | | | | 3,00 |
| 16x130 M8 / M10 | | | | 4,50 | |
| 20x130 M12 / M16 | 22x130/200 M16 18x130/200 M10 / M12 | | | | 3,50 |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Perforated brick HLz

Characteristic values shear load

Annex C 52

Kind of masonry: Perforated brick HLz

Table C83: Parameters of brick

| pecies of brick | Perforated brick HLz |
|---------------------------------------------------|------------------------|
| Density $\rho \geq [\text{kg/dm}^3]$ | 0,8 |
| Compressive strength $f_b \geq [\text{N/mm}^2]$ | 2, 4 or 6 |
| Standard or approval | EN 771-1 |
| Producer | e.g. Ziegelwerk Brenna |
| Size, dimensions [mm] | 253x300x240 |
| Minimum thickness of brick $h_{\min} [\text{mm}]$ | 300 |

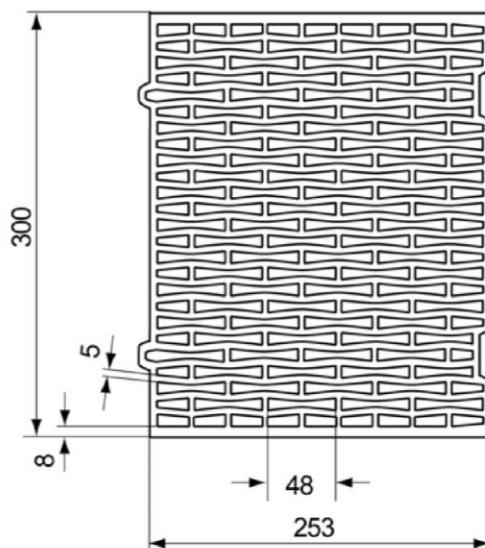


Table C84: Installation parameters for threaded rod with perforated sleeve

and internal threaded anchor FIS E with perforated sleeve

| | | | | | | | | |
|-------------------------------------------------------------|------------------------------|------------------------------|--------------------------|--------------------------|------------|-------|--------|------------|
| Size of perforated sleeve | 12x50 | 12x85 | 16x85 | 16x130 | 18x130/200 | 20x85 | 20x130 | 22x130/200 |
| Size of threaded rod | M6 | M8 | M6 | M8 | M8 | M10 | M10 | M12 |
| Size of internal threaded anchor FIS E | | | 11x85 | | | 15x85 | | |
| Edge distance $c_{\min} [\text{mm}]$ | | | | | | 60 | | |
| Spacing $s_{cr \parallel} = s_{\min \parallel} [\text{mm}]$ | | | | | | 255 | | |
| $s_{cr \perp} = s_{\min \perp} [\text{mm}]$ | | | | | | 240 | | |
| Group-factor | $\alpha_{g,N \parallel} [-]$ | $\alpha_{g,V \parallel} [-]$ | $\alpha_{g,N \perp} [-]$ | $\alpha_{g,V \perp} [-]$ | | 2,0 | | |
| Max. installation torque | $T_{inst,max} [\text{Nm}]$ | | | | | 2 | | |

fischer injection system FIS V masonry

Performances

Perforated brick HLz

Species of brick, installation parameters

Annex C 53

Kind of masonry: Perforated brick HLz

Table C85: Characteristic values of resistance; tension load (N_{RK})

| Use category | | w/w | d/d | | |
|-----------------------------------------------------------------|---------------------------------------------------------------------------------------------------|-------------------------------------|--------|-------|--------|
| Temperature range [°C] | | 50/80 | 72/120 | 50/80 | 72/120 |
| Sleeve/anchor combinations | Sleeve/anchor combinations | characteristic values N_{RK} [kN] | | | |
| Compressive strength $f_b = 2 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | -- | -- | 0,30 | -- |
| 12x85 M6 / M8 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 20x85 M12 / M16 20x85 / FIS E 15x85 M10 / M12 | 0,50 | 0,40 | 0,50 | 0,40 |
| 20x130 M12 / M16 22x130/200 / M16 | 16x130 M8 / M10 18x130/200 M10 / M12 | 0,40 | 0,30 | 0,50 | 0,40 |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 0,50 | 0,40 | 0,60 | 0,50 |
| 12x85 M6 / M8 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 20x85 M12 / M16 20x85 / FIS E 15x85 M10 / M12 | 0,90 | 0,75 | 0,90 | 0,90 |
| 20x130 M12 / M16 22x130/200 / M16 | 16x130 M8 / M10 18x130/200 M10 / M12 | 0,90 | 0,75 | 0,90 | 0,75 |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 0,75 | 0,60 | 0,90 | 0,75 |
| 12x85 M6 / M8 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 20x85 M12 / M16 20x85 / FIS E 15x85 M10 / M12 | 1,50 | 1,20 | 1,50 | 1,20 |
| 20x130 M12 / M16 22x130/200 / M16 | 16x130 M8 / M10 18x130/200 M10 / M12 | 1,20 | 0,90 | 1,50 | 1,20 |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Perforated brick HLz

Characteristic values tension load

Annex C 54

Kind of masonry: Perforated brick HLz

Table C86: Characteristic values of resistance; shear load (V_{Rk})

| Use category | | | w/w | d/d | |
|-----------------------------------------------------------------|---------------------------------------------------------------------------------------------------|-------------------------------------|--------|-------|--------|
| Temperature range | [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Sleeve/anchor combinations | Sleeve/anchor combinations | characteristic values V_{Rk} [kN] | | | |
| Compressive strength $f_b = 2 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | | 0,50 | | |
| 12x85 M6 / M8 16x130 M8 / M10 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 18x130/200 M10 / M 12 20x85 / FIS E 15x85 M10 | | 0,50 | | |
| 20x130 M12 / M16 22x130/200 M16 | 20x85 M12 / M16 20 x 85, FIS E 15x85 M12 | | 0,60 | | |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | | 0,90 | | |
| 12x85 M6 / M8 16x130 M8 / M10 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 18x130/200 M10 / M 12 20x85 / FIS E 15x85 M10 | | 0,90 | | |
| 20x130 M12 / M16 22x130/200 M16 | 20x85 M12 / M16 20x85 / FIS E 15x85 M12 | | 1,20 | | |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | | 1,50 | | |
| 12x85 M6 / M8 16x130 M8 / M10 | 16x85 M8 / M10 16x85 / FIS E 11x85 M6 / M8 18x130/200 M10 / M 12 20x85 / FIS E 15x85 M10 | | 1,50 | | |
| 20x130 M12 / M16 22x130/200 M16 | 20x85 M12 / M16 20x85 / FIS E 15x85 M12 | | 1,50 | | |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Perforated brick HLz

Characteristic values shear load

Annex C 55

Kind of masonry: Solid light-weight concrete block Vbl

Table C87: Parameters of brick

| Species of brick | Solid light-weight concrete block Vbl | |
|----------------------------|---------------------------------------|----------------------------------|
| Density | $\rho \geq [\text{kg/dm}^3]$ | 2,0 |
| Compressive strength | $f_b \geq [\text{N/mm}^2]$ | 4, 6, 8 or 10 |
| Standard or approval | | |
| Producer | | e.g. Roadstone wood |
| Size, dimensions | [mm] | $\geq 440 \times 100 \times 215$ |
| Minimum thickness of brick | $h_{\min} [\text{mm}]$ | 100 |

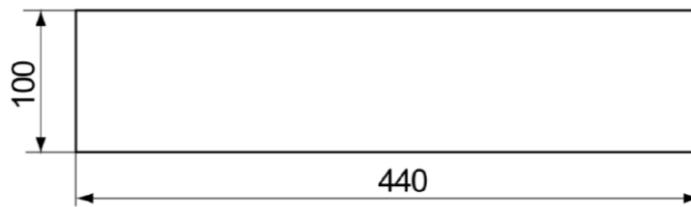


Table C88: Installation parameters for threaded rod without perforated

| Size of threaded rod | M6 | M8 | M10 | M12 | M16 |
|------------------------------------------------------------|---------------------------------------|----|-----|-----|-----|
| Effective anchorage depth $h_{\text{ef}} [\text{mm}]$ | 50 | 70 | 50 | 70 | 50 |
| Edge distance $c_{\min} [\text{mm}]$ | | | 100 | | |
| Spacing | $s_{\min} \parallel [\text{mm}]$ | | 75 | | |
| | $s_{\text{cr}} \parallel [\text{mm}]$ | | 440 | | |
| | $s_{\min} \perp [\text{mm}]$ | | 75 | | |
| | $s_{\text{cr}} \perp [\text{mm}]$ | | 215 | | |
| Group-factor | $\alpha_{g,N} \parallel [-]$ | | 1,6 | | |
| | $\alpha_{g,V} \parallel [-]$ | | 1,3 | | |
| | $\alpha_{g,N} \perp [-]$ | | 1,4 | | |
| | $\alpha_{g,V} \perp [-]$ | | 1,3 | | |
| Max. installation torque $T_{\text{inst,max}} [\text{Nm}]$ | 4 | | 10 | | |

fischer injection system FIS V masonry

Performances

Solid light-weight concrete block Vbl

Species of brick, installation parameters

Annex C 56

Kind of masonry: Solid light-weight concrete block Vbl

Table C89: Characteristic values of resistance; tension load (N_{Rk})

| Use category | | w/w | d/d | | |
|------------------------------------------------------------------|----------------------|-------------------------------------|--------|-------|--------|
| Temperature range | [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Effective anchorage depth | Anchor size | characteristic values N_{Rk} [kN] | | | |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | | | | |
| ≥ 50 | M6 | 1,20 | 0,90 | 2,00 | 1,50 |
| | M8 / M10 / M12 / M16 | 1,20 | 1,20 | 2,00 | 2,00 |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | | |
| ≥ 50 | M6 | 1,50 | 1,50 | 3,00 | 2,50 |
| | M8 / M10 / M12 / M16 | 2,00 | 1,50 | 3,50 | 2,50 |
| Compressive strength $f_b = 8 \text{ N/mm}^2$ | | | | | |
| ≥ 50 | M6 | 2,00 | 2,00 | 4,00 | 3,00 |
| | M8 / M10 / M12 / M16 | 2,50 | 2,00 | 4,50 | 3,50 |
| Compressive strength $f_b = 10 \text{ N/mm}^2$ | | | | | |
| ≥ 50 | M6 | 3,00 | 2,50 | 5,00 | 4,00 |
| | M8 / M10 / M12 / M16 | 3,50 | 2,50 | 5,50 | 4,50 |

Table C89: Characteristic values of resistance; shear load (V_{Rk})

| Use category | | w/w | d/d | | |
|------------------------------------------------------------------|-------------|-------------------------------------|--------|-------|--------|
| Temperature range | [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Effective anchorage depth | Anchor size | characteristic values V_{Rk} [kN] | | | |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | | | | |
| ≥ 50 | M6 | 1,20 | | | |
| | M8 | 1,50 | | | |
| | M10 / M12 | 1,50 | | | |
| | M16 | 1,50 | | | |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | | |
| ≥ 50 | M6 | 2,00 | | | |
| | M8 | 2,00 | | | |
| | M10 / M12 | 2,50 | | | |
| | M16 | 2,50 | | | |
| Compressive strength $f_b = 8 \text{ N/mm}^2$ | | | | | |
| ≥ 50 | M6 | 2,50 | | | |
| | M8 | 2,50 | | | |
| | M10 / M12 | 3,00 | | | |
| | M16 | 3,50 | | | |
| Compressive strength $f_b = 10 \text{ N/mm}^2$ | | | | | |
| ≥ 50 | M6 | 3,00 | | | |
| | M8 | 3,50 | | | |
| | M10 / M12 | 4,00 | | | |
| | M16 | 4,50 | | | |

Factor for job site tests and displacements see Annex C78.

| | |
|---------------------------------------------------------------------------------------|-------------------|
| fischer injection system FIS V masonry | Annex C 57 |
| Performances Solid light-weight concrete block Vbl Characteristic values | |

Kind of masonry: Solid light-weight concrete block Vbl

Table C90: Parameters of brick

| Species of brick | Solid light-weight concrete block Vbl | |
|----------------------------|---------------------------------------|---------------------------------|
| Density | $\rho \geq [\text{kg/dm}^3]$ | 2,0 |
| Compressive strength | $f_b \geq [\text{N/mm}^2]$ | 6, 8 ,10 or 12 |
| Standard or approval | | |
| Producer | | e.g. Tramac |
| Size, dimensions | [mm] | $\geq 440 \times 95 \times 215$ |
| Minimum thickness of brick | $h_{\min} [\text{mm}]$ | 95 |

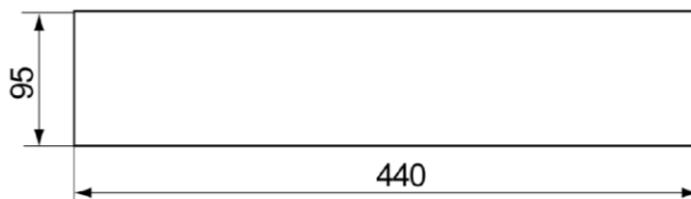


Table C91: Installation parameters for threaded rod without perforated sleeve

| Size of threaded rod | M6 | M8 | M10 | M12 | M16 |
|------------------------------------------------------------|----|----|------------------------------|-----|-----|
| Effective anchorage depth $h_{\text{ef}} [\text{mm}]$ | 50 | 70 | 50 | 70 | 50 |
| Edge distance $c_{\min} [\text{mm}]$ | | | 60 | | |
| Spacing $s_{\min} \parallel [\text{mm}]$ | | | 75 | | |
| | | | | 440 | |
| | | | | 75 | |
| | | | | 215 | |
| Group-factor | | | | | |
| | | | $\alpha_{g,N} \parallel [-]$ | 1,9 | |
| | | | $\alpha_{g,V} \parallel [-]$ | 1,4 | |
| | | | $\alpha_{g,N} \perp [-]$ | 1,9 | |
| | | | $\alpha_{g,V} \perp [-]$ | 1,4 | |
| Max. installation torque $T_{\text{inst,max}} [\text{Nm}]$ | 4 | | | 10 | |

fischer injection system FIS V masonry

Performances

Solid light-weight concrete block Vbl

Species of brick, installation parameters

Annex C 58

Kind of masonry: Solid light-weight concrete block Vbl

Table C92: Characteristic values of resistance; tension load (N_{Rk})

| Use category | w/w | | d/d | | |
|------------------------------------------------------------------|---------------------------|-------------------------------------|--------|-------|--------|
| Temperature range | [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Effective anchorage depth | Anchor size | characteristic values N_{Rk} [kN] | | | |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | | |
| 50 | M6 / M8 / M10 / M12 / M16 | 1,50 | 1,20 | 2,50 | 2,00 |
| 70 | M6 / M8 | 2,00 | 1,50 | 3,50 | 3,00 |
| | M10 / M12 / M16 | 2,00 | 2,00 | 3,50 | 3,00 |
| Compressive strength $f_b = 8 \text{ N/mm}^2$ | | | | | |
| 50 | M6 / M8 / M10 / M12 / M16 | 2,00 | 1,50 | 3,50 | 3,00 |
| 70 | M6 / M8 | 2,50 | 2,00 | 4,50 | 4,00 |
| | M10 / M12 / M16 | 3,00 | 2,50 | 5,00 | 4,00 |
| Compressive strength $f_b = 10 \text{ N/mm}^2$ | | | | | |
| 50 | M6 / M8 / M10 / M12 / M16 | 2,50 | 2,00 | 4,50 | 3,50 |
| 70 | M6 / M8 | 3,50 | 3,00 | 6,00 | 5,00 |
| | M10 / M12 / M16 | 3,50 | 3,00 | 6,00 | 5,00 |
| Compressive strength $f_b = 12 \text{ N/mm}^2$ | | | | | |
| 50 | M6 / M8 / M10 / M12 / M16 | 3,00 | 2,50 | 5,00 | 4,50 |
| 70 | M6 / M8 | 4,00 | 3,50 | 7,00 | 6,00 |
| | M10 / M12 / M16 | 4,50 | 3,50 | 7,50 | 6,00 |

Table C93: Characteristic values of resistance; shear load (V_{Rk})

| Use category | w/w | | d/d | | |
|------------------------------------------------------------------|-------------|-------------------------------------|--------|-------|--------|
| Temperature range | [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Effective anchorage depth | Anchor size | characteristic values V_{Rk} [kN] | | | |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | | |
| ≥ 50 | M6 / M8 | 2,00 | | | |
| | M10 | 2,00 | | | |
| | M12 / M16 | 1,50 | | | |
| Compressive strength $f_b = 8 \text{ N/mm}^2$ | | | | | |
| ≥ 50 | M6 / M8 | 2,50 | | | |
| | M10 | 3,00 | | | |
| | M12 / M16 | 2,50 | | | |
| Compressive strength $f_b = 10 \text{ N/mm}^2$ | | | | | |
| ≥ 50 | M6 / M8 | 3,50 | | | |
| | M10 | 4,00 | | | |
| | M12 / M16 | 3,00 | | | |
| Compressive strength $f_b = 12 \text{ N/mm}^2$ | | | | | |
| ≥ 50 | M6 / M8 | 4,00 | | | |
| | M10 | 4,50 | | | |
| | M12 / M16 | 3,50 | | | |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Solid light-weight concrete block Vbl

Characteristic values

Annex C 59

Kind of masonry: Light-weight concrete hollow block Hbl

Table C94: Parameters of brick

| Species of brick | Light-weight concrete hollow block Hbl | |
|----------------------------|----------------------------------------|---------------|
| Density | $\rho \geq [\text{kg/dm}^3]$ | 1,2 |
| Compressive strength | $f_b \geq [\text{N/mm}^2]$ | 4, 6, 8 or 10 |
| Standard or approval | EN771-3 | |
| Producer | e.g. Roadstone wood | |
| Size, dimensions | [mm] | |
| Minimum thickness of brick | $h_{\min} [\text{mm}]$ | 215 |

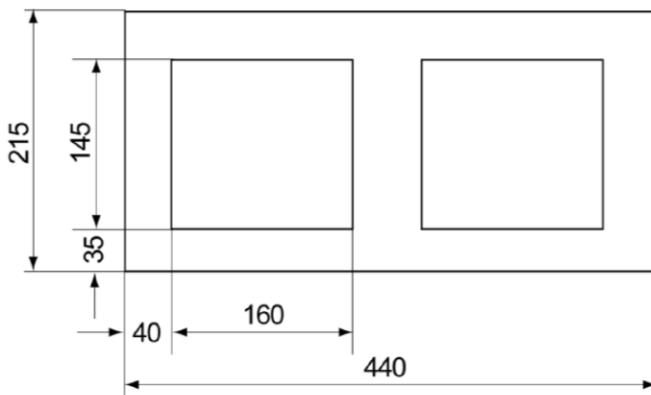


Table C95: Installation parameters for threaded rod and internal threaded anchor FIS E with perforated sleeve

| | |
|----------------------------------------|-----------------------------------------------------------------------------|
| Size of perforated sleeve | 12x50 12x85 16x85 16x130 18x130/200 20x85 20x130 22x130/200 |
| Size of threaded rod | M6 M8 M6 M8 M8 M10 M8 M10 M10 M12 M12 M16 M16 M16 |
| Size of internal threaded anchor FIS E | |
| Edge distance $c_{\min} [\text{mm}]$ | 110 |
| Spacing | $s_{\min} \parallel [\text{mm}]$ |
| | 100 |
| | $s_{cr} \parallel [\text{mm}]$ |
| | 440 |
| Group-factor | $s_{\min} \perp [\text{mm}]$ |
| | 100 |
| | $s_{cr} \perp [\text{mm}]$ |
| | 215 |
| | $\alpha_{g,N} \parallel [-]$ |
| | 1,4 |
| | $\alpha_{g,V} \parallel [-]$ |
| | 2,0 |
| | $\alpha_{g,N} \perp [-]$ |
| | 1,4 |
| | $\alpha_{g,V} \perp [-]$ |
| | 1,2 |
| Max. installation torque | $T_{inst,max} [\text{Nm}]$ |
| | 2 |

fischer injection system FIS V masonry

Performances

Light-weight concrete hollow block Hbl
Species of brick, installation parameters

Annex C 60

Kind of masonry: Light-weight concrete hollow block Hbl

Table C96: Characteristic values of resistance; tension load (N_{RK})

| Use category | | w/w | d/d | | |
|------------------------------------------------------------------|-----------------------------|-------------------------------------|--------|-------|--------|
| Temperature range [°C] | | 50/80 | 72/120 | 50/80 | 72/120 |
| Sleeve/anchor combinations | Sleeve/anchor combinations | characteristic values N_{RK} [kN] | | | |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | 12x85 M6 / M8 | 0,90 | 0,90 | 1,20 | 0,90 |
| 16x85 M8 / M10 | 16x130 M8 / M10 | | | | |
| 16x85 / FIS E 11x85 M6 / M8 | 18x130/200 M10 / M12 | 1,20 | 0,90 | 1,50 | 1,20 |
| 20x85 M12 / M16 | 22x130/200 M16 | | | | |
| 20x130 M12 / M16 | 20x85 FIS E 15x85 M10 /M 12 | 2,00 | 1,50 | 2,00 | 1,50 |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | 12x85 M6 / M8 | 1,50 | 1,20 | 1,50 | 1,50 |
| 16x85 M8 / M10 | 16x130 M8 / M10 | | | | |
| 16x85 / FIS E 11x85 M6 / M8 | 18x130/200 M10 / M12 | 2,00 | 1,50 | 2,00 | 1,50 |
| 20x85 M12 / M16 | 22x130/200 M16 | | | | |
| 20x130 M12 / M16 | 20x85 FIS E 15x85 M10 /M 12 | 3,00 | 2,50 | 3,00 | 2,50 |
| Compressive strength $f_b = 8 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | 12x85 M6 / M8 | 2,00 | 1,50 | 2,00 | 2,00 |
| 16x85 M8 / M10 | 16x130 M8 / M10 | | | | |
| 16x85 / FIS E 11x85 M6 / M8 | 18x130/200 M10 / M12 | 2,50 | 2,00 | 3,00 | 2,50 |
| 20x85 M12 / M16 | 22x130/200 M16 | | | | |
| 20x130 M12 / M16 | 20x85 FIS E 15x85 M10 /M 12 | 3,50 | 3,00 | 4,00 | 3,50 |
| Compressive strength $f_b = 10 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | 12x85 M6 / M8 | 2,50 | 2,00 | 3,00 | 2,50 |
| 16x85 M8 / M10 | 16x130 M8 / M10 | | | | |
| 16x85 / FIS E 11x85 M6 / M8 | 18x130/200 M10 / M12 | 3,00 | 2,50 | 3,50 | 3,00 |
| 20x85 M12 / M16 | 22x130/200 M16 | | | | |
| 20x130 M12 / M16 | 20x85 FIS E 15x85 M10 /M 12 | 4,50 | 4,00 | 5,00 | 4,50 |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Light-weight concrete hollow block Hbl
Characteristic values tension load

Annex C 61

Kind of masonry: Light-weight concrete hollow block Hbl

Table C97: Characteristic values of resistance; shear load (V_{Rk})

| Use category | | w/w | d/d | | |
|------------------------------------------------------------------|-----------------------------|-------|--------|-------------------------------------------------------|--------|
| Temperature range [°C] | | 50/80 | 72/120 | 50/80 | 72/120 |
| Sleeve/anchor combinations | | | | characteristic values V_{Rk} [kN] | |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 | 16x85 / FIS E 11x85 M6 | | | 0,75 | |
| 12x85 M6 | | | | | |
| 12x50 M8 | 20x85 M12 / M16 | | | | |
| 12x85 M8 | 20x85 FIS E 15x85 M10 / M12 | | | | |
| 16x85 M8 / M10 | 20x130 M12 / M16 | | | 1,20 | |
| 16x85 / FIS E 11x85 M8 | 18x130/200 M12 | | | | |
| 16x130 M8 / M10 | 22x130/200 M16 | | | | |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 | 16x85 / FIS E 11x85 M6 | | | 1,20 | |
| 12x85 M6 | | | | | |
| 12x50 M8 | 20x85 M12 / M16 | | | | |
| 12x85 M8 | 20x85 FIS E 15x85 M10 / M12 | | | | |
| 16x85 M8 / M10 | 20x130 M12 / M16 | | | 2,00 | |
| 16x85 / FIS E 11x85 M8 | 18x130/200 M12 | | | | |
| 16x130 M8 / M10 | 22x130/200 M16 | | | | |
| Compressive strength $f_b = 8 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 | 16x85 / FIS E 11x85 M6 | | | 1,50 | |
| 12x85 M6 | | | | | |
| 12x50 M8 | 20x85 M12 / M16 | | | | |
| 12x85 M8 | 20x85 FIS E 15x85 M10 / M12 | | | | |
| 16x85 M8 / M10 | 20x130 M12 / M16 | | | 2,50 | |
| 16x85 / FIS E 11x85 M8 | 18x130/200 M12 | | | | |
| 16x130 M8 / M10 | 22x130/200 M16 | | | | |
| Compressive strength $f_b = 10 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 | 16x85 / FIS E 11x85 M6 | | | 2,00 | |
| 12x85 M6 | | | | | |
| 12x50 M8 | 20x85 M12 / M16 | | | | |
| 12x85 M8 | 20x85 FIS E 15x85 M10 / M12 | | | | |
| 16x85 M8 / M10 | 20x130 M12 / M16 | | | 3,00 | |
| 16x85 / FIS E 11x85 M8 | 18x130/200 M12 | | | | |
| 16x130 M8 / M10 | 22x130/200 M16 | | | | |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Light-weight concrete hollow block Hbl

Characteristic values shear load

Annex C 62

Kind of masonry: Solid brick Mz

Table C98: Parameters of brick

| Species of brick | Solid brick Mz | |
|----------------------------|------------------------------|---------------------------------|
| Density | $\rho \geq [\text{kg/dm}^3]$ | 1,8 |
| Compressive strength | $f_b \geq [\text{N/mm}^2]$ | 10 or 20 |
| Standard or approval | | EN 771-2 |
| Producer | | e.g. Wienerberger |
| Size, dimensions | [mm] | $\geq 228 \times 108 \times 54$ |
| Minimum thickness of brick | h_{\min} [mm] | 108 |

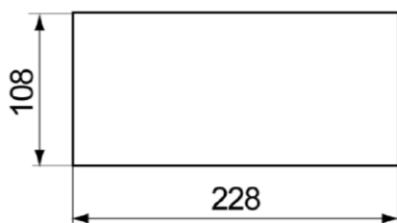


Table C99: Installation parameters for threaded rod and internal threaded anchor without perforated sleeve

| Size of threaded rod | M6 | M8 | M10 | M12 | M16 | 11x85 ¹⁾ M6/M8 | 15x85 M10/M12 |
|-------------------------------------------------------------|------------------------------|------------------------------|--------------------------|--------------------------|-----|------------------------------|------------------|
| Effective anchorage depth h_{ef} [mm] | 50 | 90 | 50 | 90 | 50 | 90 | 50 |
| Edge distance c_{\min} [mm] | | | | | 60 | | |
| Spacing $s_{\text{cr}} \parallel = s_{\min} \parallel$ [mm] | | | | | 230 | | |
| $s_{\text{cr}} \perp = s_{\min} \perp$ [mm] | | | | | 60 | | |
| Group-factor | $\alpha_{g,N} \parallel [-]$ | $\alpha_{g,V} \parallel [-]$ | $\alpha_{g,N} \perp [-]$ | $\alpha_{g,V} \perp [-]$ | 2,0 | | |
| Max. installation torque | $T_{\text{inst,max}}$ [Nm] | 4 | | | 10 | | |

¹⁾ For FIS E 11x85 with screw M6: $T_{\text{inst,max}} = 4 \text{ Nm}$

fischer injection system FIS V masonry

Performances

Solid brick Mz

Characteristic values

Annex C 63

Kind of masonry: Solid brick Mz

Table C100: Characteristic values of resistance; tension load (N_{Rk})

| Use category | | w/w | d/d | | |
|------------------------------------------------------------------|----------------------------------------------|-------------------------------------|--------|-------|--------|
| Temperature range | [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Effective anchorage depth | Anchor size | characteristic values N_{Rk} [kN] | | | |
| Compressive strength $f_b = 10 \text{ N/mm}^2$ | | | | | |
| ≥ 50 | M6 | 0,60 | 0,50 | 1,20 | 0,90 |
| ≥ 50 | M8 | 0,90 | 0,90 | 1,50 | 1,50 |
| ≥ 50 | M10 / M12 / M16 | 0,75 | 0,60 | 1,20 | 1,20 |
| 85 | FIS E 11x85 M6 / M8 FIS E 15x85 M10 / M12 | | | | |
| Compressive strength $f_b = 20 \text{ N/mm}^2$ | | | | | |
| ≥ 50 | M6 | 0,90 | 0,75 | 1,50 | 1,20 |
| ≥ 50 | M8 | 1,50 | 1,20 | 2,50 | 2,00 |
| ≥ 50 | M10 / M12 / M16 | 1,20 | 0,90 | 2,00 | 1,50 |
| 85 | FIS E 11x85 M6 / M8 FIS E 15x85 M10 / M12 | | | | |

Table C101: Characteristic values of resistance; shear load (V_{Rk})

| Use category | | w/w | d/d | | |
|------------------------------------------------------------------|-----------------|-------------------------------------|-------------------------|-------------------------|-------------------------|
| Temperature range | [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Effective anchorage depth | Anchor size | characteristic values V_{Rk} [kN] | | | |
| Compressive strength $f_b = 10 \text{ N/mm}^2$ | | | | | |
| ≥ 50 | M6 | 2,00 | 3,00 | 4,00 | 4,50 |
| 85 | FIS E 11x85 M6 | | | | |
| ≥ 50 | M8 | 3,00 | 4,00 | 4,50 | 5,50 |
| 85 | FIS E 11x85 M8 | | | | |
| ≥ 50 | M10 | 4,00 | 4,50 | 5,50 | 6,00 (5,5) ¹ |
| 85 | FIS E 15x85 M10 | | | | |
| ≥ 50 | M12 | 4,50 | 5,50 | 6,00 (5,5) ¹ | 8,00 (5,5) ¹ |
| 85 | FIS E 15x85 M12 | | | | |
| ≥ 50 | M16 | | | | |
| Compressive strength $f_b = 20 \text{ N/mm}^2$ | | | | | |
| ≥ 50 | M6 | 2,50 | 4,00 | 5,50 | 6,00 (5,5) ¹ |
| 85 | FIS E 11x85 M6 | | | | |
| ≥ 50 | M8 | 4,00 | 5,50 | 6,00 (5,5) ¹ | 8,00 (5,5) ¹ |
| 85 | FIS E 11x85 M8 | | | | |
| ≥ 50 | M10 | 5,50 | 6,00 (5,5) ¹ | 6,00 (5,5) ¹ | 8,00 (5,5) ¹ |
| 85 | FIS E 15x85 M10 | | | | |
| ≥ 50 | M12 | 6,00 (5,5) ¹ | 6,00 (5,5) ¹ | 6,00 (5,5) ¹ | 8,00 (5,5) ¹ |
| 85 | FIS E 15x85 M12 | | | | |
| ≥ 50 | M16 | | | | |

¹⁾ Characteristic value pushing out of one brick $V_{Rk,pb} = 5,50 \text{ kN}$

Factor for job site tests and displacements see Annex C78

fischer injection system FIS V masonry

Performances

Solid brick Mz

Characteristic values

Annex C 64

Kind of masonry: Solid sand-lime block KS

Table C102: Parameters of brick

| Species of brick | Solid sand-lime block KS | |
|----------------------------|------------------------------------------|---------------------|
| Density | $\rho \geq [\text{kg/dm}^3]$ | 1,8 |
| Compressive strength | $f_b \geq [\text{N/mm}^2]$ | 2,2 10, 20 36 |
| Standard or approval | EN 771-2 | |
| Producer | e.g. Calduran | |
| Size, dimensions | [mm] $\geq 997 \times 214 \times 538$ | |
| Minimum thickness of brick | $h_{\min} [\text{mm}]$ | 214 |

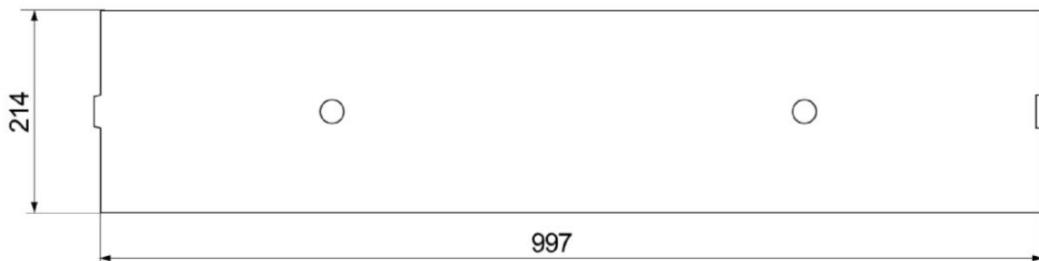


Table C103: Installation parameters for threaded rod and internal threaded anchor without perforated sleeve

| Size of threaded rod | M6 | M8 | M10 | M12 | M16 | 11x85 ¹⁾ M6/M8 | 15x85 M10/M12 |
|-----------------------------------------------------------|---------------------------------------------------|-----|-----|-----|-----|------------------------------|------------------|
| Effective anchorage depth $h_{\text{ef}} [\text{mm}]$ | 50 | 100 | 50 | 100 | 50 | 100 | 50 |
| Edge distance $c_{\min} [\text{mm}]$ | | | | | | 75 | |
| Spacing $s_{\min \parallel} = s_{\min \perp} [\text{mm}]$ | | | | | | 300 | |
| | $s_{\min \perp} = s_{\min \parallel} [\text{mm}]$ | | | | | 300 | |
| Group-factor | $\alpha_{g,N \parallel} [-]$ | | | | | 2,0 | |
| | $\alpha_{g,V \parallel} [-]$ | | | | | | |
| | $\alpha_{g,N \perp} [-]$ | | | | | | |
| | $\alpha_{g,V \perp} [-]$ | | | | | | |
| Max. installation torque | $T_{\text{inst,max}} [\text{Nm}]$ | 4 | | | | 10 | |

¹⁾ FOR FIS E 11x85 with screw M6: $T_{\text{inst,max}} = 4 \text{ Nm}$

fischer injection system FIS V masonry

Performances

Solid sand-lime block KS

Species of brick, installation parameters

Annex C 65

Kind of masonry: Solid sand-lime block KS

Table C104: Characteristic values of resistance; tension load (N_{Rk})

| Temperature range | Use category | w/w | | d/d | |
|------------------------------------------------------------------|---------------------------|-------------------------------------|-------|--------|-------|
| | | [°C] | 50/80 | 72/120 | 50/80 |
| Effective anchorage depth | Anchor size | characteristic values N_{Rk} [kN] | | | |
| Compressive strength $f_b = 10 \text{ N/mm}^2$ | | | | | |
| 50, 100 | M6 | 4,00 | 3,00 | 7,00 | 5,50 |
| 50 | M8 | 4,00 | 3,50 | 7,00 | 6,00 |
| 100 | M8 | 7,00 | 6,00 | 12,00 | 10,00 |
| 50 | M10 | 5,00 | 4,00 | 8,00 | 7,00 |
| 100 | M10 | 6,00 | 5,00 | 9,50 | 8,00 |
| 50 | M12 | 5,00 | 4,00 | 8,00 | 6,50 |
| 100 | M12 | 6,00 | 5,00 | 10,00 | 8,00 |
| ≥50 | M16 | 5,50 | 4,50 | 9,00 | 7,50 |
| 85 | FIS E 11x85 / FIS E 15x85 | | | | |
| 100 | M16 | 7,50 | 6,00 | 11,50 | 9,50 |
| Compressive strength $f_b = 20 \text{ N/mm}^2$ | | | | | |
| 50, 100 | M6 | 5,50 | 4,50 | 8,50 | 8,00 |
| 50 | M8 | 6,00 | 5,00 | 10,50 | 8,50 |
| 100 | M8 | 10,00 | 8,50 | 12,00 | 12,00 |
| 50 | M10 | 7,00 | 6,00 | 11,50 | 10,00 |
| 100 | M10 | 8,5 | 7,00 | 12,00 | 10,00 |
| 50 | M12 | 7,00 | 6,00 | 11,00 | 9,50 |
| 100 | M12 | 9,00 | 7,50 | 12,00 | 12,00 |
| ≥50 | M16 | 8,00 | 7,00 | 12,00 | 10,50 |
| 85 | FIS E 11x85 / FIS E 15x85 | | | | |
| 100 | M16 | 11,00 | 9,00 | 12,00 | 12,00 |
| Compressive strength $f_b = 36 \text{ N/mm}^2$ | | | | | |
| 50, 100 | M6 | 4,50 | 3,50 | 8,00 | 6,50 |
| 50 | M8 | 8,00 | 6,50 | 12,00 | 11,00 |
| 100 | M8 | 12,00 | 12,00 | 12,00 | 12,00 |
| 50 | M10 | 11,50 | 9,50 | 12,00 | 12,00 |
| 100 | M10 | 12,00 | 12,00 | 12,00 | 12,00 |
| 50 | M12 | 12,00 | 11,50 | 12,00 | 12,00 |
| 100 | M12 | 12,00 | 12,00 | 12,00 | 12,00 |
| ≥50 | M16 | 12,00 | 12,00 | 12,00 | 12,00 |
| 85 | FIS E 11x85 / FIS E 15x85 | | | | |
| 100 | M16 | 12,00 | 12,00 | 12,00 | 12,00 |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Solid sand-lime block KS

Characteristic values tension load

Annex C 66

Kind of masonry: Solid sand-lime block KS

Table C105: Characteristic values of resistance; shear load (V_{Rk})

| Use category | | w/w | d/d | | |
|------------------------------------------------------------------|-----------------|-------------------------------------|--------|-------|--------|
| Temperature range | [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Effective anchorage depth | | characteristic values V_{Rk} [kN] | | | |
| Compressive strength $f_b = 10 \text{ N/mm}^2$ | | | | | |
| ≥50 | M6 | | | | |
| 85 | FIS E 11x85 M6 | | | | 3,00 |
| ≥50 | M8 | | | | |
| 85 | FIS E 11x85 M8 | | | | 5,00 |
| ≥50 | M10 | | | | |
| 85 | FIS E 15x85 M10 | | | | 5,50 |
| ≥50 | M12 / M16 | | | | |
| 85 | FIS E 15x85 M12 | | | | 4,00 |
| Compressive strength $f_b = 20 \text{ N/mm}^2$ | | | | | |
| ≥50 | M6 | | | | |
| 85 | FIS E 11x85 M6 | | | | 4,50 |
| ≥50 | M8 | | | | |
| 85 | FIS E 11x85 M8 | | | | 7,00 |
| ≥50 | M10 | | | | |
| 85 | FIS E 15x85 M10 | | | | 7,50 |
| ≥50 | M12 / M16 | | | | |
| 85 | FIS E 15x85 M12 | | | | 6,00 |
| Compressive strength $f_b = 36 \text{ N/mm}^2$ | | | | | |
| ≥50 | M6 | | | | |
| 85 | FIS E 11x85 M6 | | | | 4,50 |
| ≥50 | M8 | | | | |
| 85 | FIS E 11x85 M8 | | | | 9,00 |
| ≥50 | M10 | | | | |
| 85 | FIS E 15x85 M10 | | | | 11,00 |
| ≥50 | M12 / M16 | | | | |
| 85 | FIS E 15x85 M12 | | | | 12,00 |

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Solid sand-lime block KS

Characteristic values shear load

Annex C 67

Kind of masonry: Perforated brick HLz

Table C106: Parameters of brick

| Species of brick | Perforated brick HLz |
|----------------------------|------------------------------|
| Density | $\rho \geq [\text{kg/dm}^3]$ |
| Compressive strength | $f_b \geq [\text{N/mm}^2]$ |
| Standard or approval | EN 771-1 |
| Producer | e.g. Wienerberger |
| Size, dimensions | [mm] |
| Minimum thickness of brick | $h_{\min} [\text{mm}]$ |
| | 230x108x55 |
| | 108 |

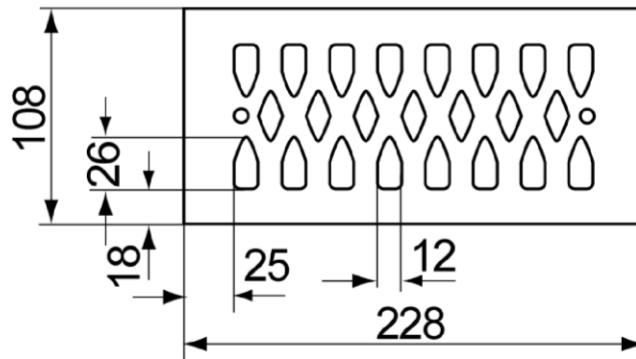


Table C107: Installation parameters for threaded rod with perforated sleeve and internal threaded anchor FIS E with perforated sleeve

| Size of perforated sleeve | 12x50 | 12x85 | 16x85 | 20x85 |
|----------------------------------------|----------------------------------|-------|----------------|------------------|
| Size of threaded rod | M6 M8 | M6 M8 | M8 M10 | M12 M16 |
| Size of internal threaded anchor FIS E | | | 11x85 M6/M8 | 15x85 M10/M12 |
| Edge distance | $c_{\min} [\text{mm}]$ | | 60 | |
| Spacing | $s_{\min \parallel} [\text{mm}]$ | | 80 | |
| | $s_{cr \parallel} [\text{mm}]$ | | 230 | |
| | $s_{\min \perp} [\text{mm}]$ | | 60 | |
| Group-factor | $\alpha_{g,N \parallel} [-]$ | | | |
| | $\alpha_{g,V \parallel} [-]$ | | | |
| | $\alpha_{g,N \perp} [-]$ | | 2,0 | |
| | $\alpha_{g,V \perp} [-]$ | | | |
| Max. installation torque | $T_{inst,max} [\text{Nm}]$ | | 2 | |

fischer injection system FIS V masonry

Performances

Perforated brick HLz

Species of brick, installation parameters

Annex C 68

Kind of masonry: Perforated brick HLz

Table C108: Characteristic values of resistance; tension load (N_{Rk})¹⁾

| Use category | | w/w | d/d | | |
|-----------------------------------------------------------------|-------------------------------|-------------------------------------|--------|-------|--------|
| Temperature range | [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Sleeve/anchor combinations | Sleeve/anchor combinations | characteristic values N_{Rk} [kN] | | | |
| Compressive strength $f_b = 2 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 0,30 | -- | 0,30 | 0,30 |
| 12x85 M6 / M8 | | 0,90 | 0,75 | 0,90 | 0,75 |
| 16x85 M8 / M10 | 16x85 / FIS E 11x85 M6 / M8 | 0,75 | 0,60 | 0,90 | 0,75 |
| 20x85 M12 / M16 | 20x85 / FIS E 15x85 M10 / M12 | 0,50 | 0,40 | 0,60 | 0,50 |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 0,60 | 0,50 | 0,75 | 0,60 |
| 12x85 M6 / M8 | | 1,50 | 1,50 | 2,00 | 1,50 |
| 16x85 M8 / M10 | 16x85 / FIS E 11x85 M6 / M8 | 1,50 | 1,20 | 1,50 | 1,50 |
| 20x85 M12 / M16 | 20x85 / FIS E 15x85 M10 / M12 | 0,90 | 0,90 | 1,20 | 0,90 |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 0,90 | 0,75 | 0,90 | 0,90 |
| 12x85 M6 / M8 | | 2,50 | 2,00 | 3,00 | 2,50 |
| 16x85 M8 / M10 | 16x85 / FIS E 11x85 M6 / M8 | 2,50 | 2,00 | 2,50 | 2,00 |
| 20x85 M12 / M16 | 20x85 / FIS E 15x85 M10 / M12 | 1,50 | 1,20 | 1,50 | 1,50 |
| Compressive strength $f_b = 8 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | | 1,20 | 0,90 | 1,50 | 1,20 |
| 12x85 M6 / M8 | | 3,50 | 3,00 | 4,00 | 3,00 |
| 16x85 M8 / M10 | 16x85 / FIS E 11x85 M6 / M8 | 3,00 | 2,50 | 3,50 | 3,00 |
| 20x85 M12 / M16 | 20x85 / FIS E 15x85 M10 / M12 | 2,00 | 1,50 | 2,50 | 2,00 |

¹⁾ If the fixing is in a solid area, for w/w, the characteristic values shall be reduced with the factor 0,64.

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Perforated brick HLz

Characteristic values tension load

Annex C 69

Kind of masonry: Perforated brick HLz

Table C109: Characteristic values of resistance; shear load (V_{Rk})

| Use category | | | w/w | d/d | |
|-----------------------------------------------------------------|-------------------------------|-------------------------------------|--------|-------|--------|
| Temperature range | [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Sleeve/anchor combinations | Sleeve/anchor combinations | characteristic values V_{Rk} [kN] | | | |
| Compressive strength $f_b = 2 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | 16x85 M8 / M10 | | | 0,6 | |
| 12x85 M6 / M8 | 16x85 FIS E 11x85 M6 / M8 | | | | |
| 20x85 M12 / M16 | 20x85 / FIS E 15x85 M10 / M12 | | | 0,4 | |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | 16x85 M8 / M10 | | | 1,2 | |
| 12x85 M6 / M8 | 16x85 FIS E 11x85 M6 / M8 | | | | |
| 20x85 M12 / M16 | 20x85 / FIS E 15x85 M10 / M12 | | | 0,9 | |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | 16x85 M8 / M10 | | | 1,5 | |
| 12x85 M6 / M8 | 16x85 FIS E 11x85 M6 / M8 | | | | |
| 20x85 M12 / M16 | 20x85 / FIS E 15x85 M10 / M12 | | | 1,2 | |
| Compressive strength $f_b = 8 \text{ N/mm}^2$ | | | | | |
| 12x50 M6 / M8 | 16x85 M8 / M10 | | | 2,5 | |
| 12x85 M6 / M8 | 16x85 FIS E 11x85 M6 / M8 | | | | |
| 20x85 M12 / M16 | 20x85 / FIS E 15x85 M10 / M12 | | | 1,5 | |

Factor for job site tests and displacements see Annex C78.

Kind of masonry: Autoclaved aerated concrete

Cylindrical drill hole

Table C110: Parameters of brick

| Species of brick | Autoclaved aerated concrete | | |
|-------------------------------------------------|-----------------------------|-----|-----|
| Density $\rho \geq [\text{kg/dm}^3]$ | 350 | 500 | 650 |
| Compressive strength $f_b \geq [\text{N/mm}^2]$ | 2 | 4 | 6 |
| Standard | EN 771-4 | | |
| Producer | e.g. Ytong | | |

Table C111: Installation parameters for threaded rod and internal threaded anchor without perforated sleeve

| Size of threaded rod | M6 | M8 | M10 | M12 | M16 | FIS E 11x85 M6 / M8 | FIS E 15x85 M10/ M12 |
|--------------------------------------------------------------------|----------------------------------------------------|----|-----|-----|-----|---------------------------|----------------------------|
| Effective anchorage depth $h_{\text{ef}} [\text{mm}]$ | | | 100 | | | 85 | |
| Edge distance $c_{\min} [\text{mm}]$ | | | 100 | | | | |
| Spacing $s_{\text{cr}} \parallel = s_{\min} \parallel [\text{mm}]$ | | | 250 | | | | |
| | $s_{\text{cr}} \perp = s_{\min} \perp [\text{mm}]$ | | 250 | | | | |
| Group-factor | $\alpha_{g,N} \parallel [-]$ | | | | | | |
| | $\alpha_{g,V} \parallel [-]$ | | | | | | |
| | $\alpha_{g,N} \perp [-]$ | | | 2,0 | | | |
| | $\alpha_{g,V} \perp [-]$ | | | | | | |
| Max. installation torque $T_{\text{inst,max}} [\text{Nm}]$ | 1 | | 2 | | | 1 | 2 |

fischer injection system FIS V masonry

Performances

Autoclaved aerated concrete
Cylindrical drill hole
Installation parameters

Annex C 71

Kind of masonry: Autoclaved aerated concrete (cylindrical drill hole)

Table C112: Characteristic values of resistance; tension load (N_{Rk})

| | | Use category | w/w | | d/d | |
|-----------------------------------------------------------------|------------------------|-------------------------------------|-------|--------|-------|--------|
| Temperature range | | [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Effective anchorage depth | Anchor size | characteristic values N_{Rk} [kN] | | | | |
| Compressive strength $f_b = 2 \text{ N/mm}^2$ | | | | | | |
| 100 | M6 | 1,20 | | | 1,50 | |
| | M8 | 1,50 | | | 1,50 | |
| | M10 | 1,50 | | | 1,50 | |
| | M12 | 1,50 | | | 2,00 | |
| | M16 | 2,00 | | | 2,00 | |
| 85 | FIS E 11x85 M6 / M 8 | 1,50 | | | 1,50 | |
| | FIS E 15x85 M10 / M 12 | 1,50 | | | 1,50 | |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | | | | | |
| 100 | M6 | 1,20 | | | 1,50 | |
| | M8 | 2,00 | | | 2,00 | |
| | M10 | 2,50 | | | 3,00 | |
| | M12 | 2,50 | | | 2,50 | |
| | M16 | 2,00 | | | 2,00 | |
| 85 | FIS E 11x85 M6 / M 8 | 2,00 | | | 2,00 | |
| | FIS E 15x85 M10 / M 12 | 1,50 | | | 1,50 | |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | | | |
| 100 | M6 | 1,50 | | | 1,50 | |
| | M8 | 3,00 | | | 3,50 | |
| | M10 | 4,50 | | | 5,00 | |
| | M12 | 4,50 | | | 5,00 | |
| | M16 | 3,00 | | | 3,00 | |
| 85 | FIS E 11x85 M6 / M 8 | 3,50 | | | 3,50 | |
| | FIS E 15x85 M10 / M 12 | 2,50 | | | 2,50 | |

Calculation of pulling out of one brick (tension load): $N_{Rk,pb}$ see ETAG 029, Annex C

Factor for job site tests and displacements see Annex C78.

| | |
|--------------------------------------------------------------------------------------------------------------------|-------------------|
| fischer injection system FIS V masonry | Annex C 72 |
| Performances Autoclaved aerated concrete Cylindrical drill hole Characteristic values tension load | |

Kind of masonry: Autoclaved aerated concrete (cylindrical drill hole)

Table C113: Characteristic values of resistance; shear load (V_{Rk})

| | | Use category | w/w | | d/d | |
|-----------------------------------------------------------------|-----------------------------------------------------|--------------|-------------------------------------|--------|-------|--------|
| Temperature range | | [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Effective anchorage depth | | Anchor size | characteristic values V_{Rk} [kN] | | | |
| Compressive strength $f_b = 2 \text{ N/mm}^2$ | | | | | | |
| 85 | FIS E 11x85 M6 FIS E 11x85 M8 FIS E 15x85 M10 | | | | 1,20 | |
| 85 | FIS E 15x85 M12 | | | | 1,50 | |
| 100 | M12 | | | | 1,50 | |
| 100 | M6, M8, M10, M16 | | | | 1,20 | |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | | | | | |
| 85 | FIS E 11x85 M6 FIS E 11x85 M8 FIS E 15x85 M10 | | | | 2,00 | |
| 85 | FIS E 15x85 M12 | | | | 2,50 | |
| 100 | M8, M12 | | | | 2,50 | |
| 100 | M6, M10, M16 | | | | 2,00 | |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | | | |
| 85 | FIS E 11x85 M6 FIS E 11x85 M8 FIS E 15x85 M10 | | | | 2,50 | |
| 85 | FIS E 15x85 M12 | | | | 3,50 | |
| 100 | M6 | | | | 2,5 | |
| 100 | M8, M10 | | | | 3,0 | |
| 100 | M12 | | | | 3,50 | |
| 100 | M16 | | | | 4,50 | |

Calculation of pushing out of one brick (shear load): $V_{Rk,pb}$ see ETAG 029, Annex C

Factor for job site tests and displacements see Annex C78.

fischer injection system FIS V masonry

Performances

Autoclaved aerated concrete
Cylindrical drill hole
Characteristic values shear load

Annex C 73

Kind of masonry: Autoclaved aerated concrete

Conical drill hole (with special drill bit PBB)

Table C114: Parameters of brick

| Species of brick | Autoclaved aerated concrete | | |
|-------------------------------------------------|-----------------------------|-----|-----|
| Density $\rho \geq [\text{kg/dm}^3]$ | 350 | 500 | 650 |
| Compressive strength $f_b \geq [\text{N/mm}^2]$ | 2 | 4 | 6 |
| Standard or approval | EN 771-4 | | |
| Producer | e.g. Ytong | | |

Table C115: Installation parameters for threaded rod and internal threaded anchor without perforated sleeve

| Size of threaded rod | M8 | M10 | M12 | M8 | M10 | M12 | FIS E 11x85 M6/M8 |
|--------------------------------------------------------------------|----------------------------------------------------|-----|-----|-----|-----|-----|----------------------|
| Effective anchorage depth $h_{\text{ef}} [\text{mm}]$ | 75 | | | 95 | | | 85 |
| Edge distance $c_{\min} [\text{mm}]$ | 120 | | | 150 | | | |
| Spacing $s_{\text{cr}} \parallel = s_{\min} \parallel [\text{mm}]$ | 240 | | | 300 | | | |
| | $s_{\text{cr}} \perp = s_{\min} \perp [\text{mm}]$ | 240 | | 250 | | | |
| Group-factor | $\alpha_{g,N} \parallel [-]$ | | | | | | |
| | $\alpha_{g,V} \parallel [-]$ | | | 2,0 | | | |
| | $\alpha_{g,N} \perp [-]$ | | | | | | |
| | $\alpha_{g,V} \perp [-]$ | | | | | | |
| Max. installation torque | $T_{\text{inst,max}} [\text{Nm}]$ | | | 2 | | | |

fischer injection system FIS V masonry

Performances

Autoclaved aerated concrete
Conical drill hole with drill bit PBB
Installation parameters

Annex C 74

Kind of masonry: Autoclaved aerated concrete

Conical drill hole (with special drill bit PBB)

Table C116: Characteristic values of resistance; tension load (N_{Rk})

| | | Use category | w/w | | d/d | |
|-----------------------------------------------------------------|---------------------|-------------------------------------|-------|--------|-------|--------|
| Temperature range | | [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Effective anchorage depth | Anchor size | characteristic values N_{Rk} [kN] | | | | |
| Compressive strength $f_b = 2 \text{ N/mm}^2$ | | | | | | |
| 75 | M8 / M10 / M12 | 2,00 | 1,50 | 2,00 | 2,00 | 2,00 |
| 95 | M8 / M10 / M12 | 2,50 | 2,00 | 2,50 | 2,50 | 2,50 |
| 85 | FIS E 11x85 M6 / M8 | 2,00 | 1,50 | 2,00 | 2,00 | 2,00 |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | | | | | |
| 75 | M8 / M10 / M12 | 3,00 | 2,50 | 3,00 | 2,50 | 2,50 |
| 95 | M8 / M10 / M12 | 3,50 | 3,00 | 3,50 | 3,00 | 3,00 |
| 85 | FIS E 11x85 M6 / M8 | 3,00 | 2,50 | 3,00 | 2,50 | 2,50 |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | | | |
| 75 | M8 / M10 / M12 | 3,50 | 3,00 | 4,00 | 3,50 | 3,50 |
| 95 | M8 / M10 / M12 | 4,00 | 4,00 | 4,50 | 4,00 | 4,00 |
| 85 | FIS E 11x85 M6 / M8 | 3,50 | 3,00 | 4,00 | 3,50 | 3,50 |

Calculation of pulling out of one brick (tension load): $N_{Rk,pb}$ see ETAG 029, Annex C

Table C117: Characteristic values of resistance; shear load (V_{Rk})

| | | Use category | w/w | | d/d | |
|-----------------------------------------------------------------|-------------|-------------------------------------|-------|--------|-------|--------|
| Temperature range | | [°C] | 50/80 | 72/120 | 50/80 | 72/120 |
| Effective anchorage depth | Anchor size | characteristic values V_{Rk} [kN] | | | | |
| Compressive strength $f_b = 2 \text{ N/mm}^2$ | | | | | | |
| 75, 95, 85 | all sizes | | | | 2,50 | |
| Compressive strength $f_b = 4 \text{ N/mm}^2$ | | | | | | |
| 75, 95, 85 | all sizes | | | | 4,50 | |
| Compressive strength $f_b = 6 \text{ N/mm}^2$ | | | | | | |
| 75, 95, 85 | all sizes | | | | 6,00 | |

Calculation of pushing out of one brick (shear load): $V_{Rk,pb}$ see ETAG 029, Annex C

Factor for job site tests and displacements see Annex C78

fischer injection system FIS V masonry

Performances

Autoclaved aerated concrete
Conical drill hole with drill bit PBB
Characteristic values

Annex C 75


Table C118: Characteristic bending moments for threaded rods

| Size | | | M6 | M8 | M10 | M12 | M16 |
|-------------------------------------------|----------------------------------|----------------|-----------------------|----|-----|-----|-----|
| Characteristic bending moments $M_{Rk,s}$ | zinc plated steel | Property class | 5.8 [Nm] | 8 | 19 | 37 | 65 |
| | | | 8.8 [Nm] | 12 | 30 | 60 | 105 |
| | stainless steel A4 | Property class | 50 [Nm] | 8 | 19 | 37 | 65 |
| | | | 70 [Nm] | 11 | 26 | 52 | 92 |
| | | | 80 [Nm] | 12 | 30 | 60 | 105 |
| | high corrosion resistant steel C | Property class | 50 [Nm] | 8 | 19 | 37 | 65 |
| | | | 70 ¹⁾ [Nm] | 11 | 26 | 52 | 92 |
| | | | 80 [Nm] | 12 | 30 | 60 | 105 |

¹⁾ $f_{uk} = 700 \text{ N/mm}^2$; $f_{yk} = 560 \text{ N/mm}^2$

Table C119: Characteristic bending moments for internal threaded anchors FIS E

| Size FIS E | | | 11x85 M6 | 11x85 M8 | 15x85 M10 | 15x85 M12 |
|-------------------------------------------|----------------------------------|-------------------------|----------|----------|-----------|-----------|
| Characteristic bending moments $M_{Rk,s}$ | zinc plated steel, | Property class of screw | 5.8 [Nm] | 8 | 19 | 37 |
| | | | 8.8 [Nm] | 12 | 30 | 60 |
| | stainless steel A4 | Property class of screw | 70 [Nm] | 11 | 26 | 52 |
| | | | 70 [Nm] | 11 | 26 | 52 |
| | high corrosion resistant steel C | Property class of screw | 70 [Nm] | | | 92 |
| | | | 70 [Nm] | | | 92 |

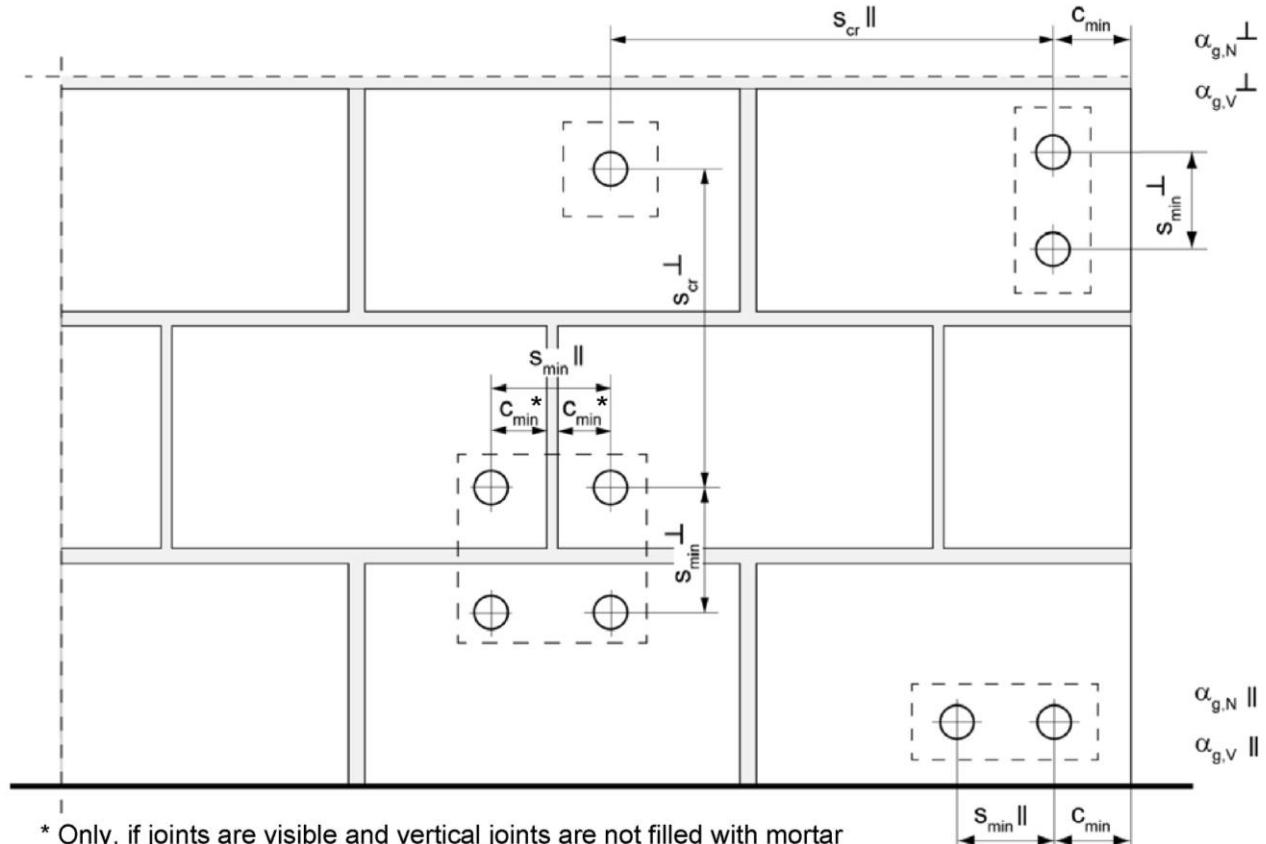

$s_{\min} \parallel$ = Minimum spacing parallel to bed joint
 $s_{\min} \perp$ = Minimum spacing vertical to bed joint
 $s_{cr} \parallel$ = Characteristic spacing parallel to bed joint
 $s_{cr} \perp$ = Characteristic spacing vertical to bed joint
 $c_{cr} = c_{\min}$ = Edge distance
 $\alpha_{g,N} \parallel$ = Group factor for tension load parallel to bed joint
 $\alpha_{g,V} \parallel$ = Group factor for shear load parallel to bed joint
 $\alpha_{g,N} \perp$ = Group factor for tension load vertical to bed joint
 $\alpha_{g,V} \perp$ = Group factor for shear load vertical to bed joint

For $s > s_{cr}$ $\alpha_g = 2$

For $s_{\min} \leq s \leq s_{cr}$ α_g according to installation parameters of brick

$$N_{Rk}^g = \alpha_{g,N} \cdot N_{Rk}; \quad V_{Rk}^g = \alpha_{g,V} \cdot V_{Rk} \quad (\text{Group of 2 anchors})$$

$$N_{Rk}^g = \alpha_{g,N} \parallel \cdot \alpha_{g,N} \perp \cdot N_{Rk}; \quad V_{Rk}^g = \alpha_{g,V} \parallel \cdot \alpha_{g,V} \perp \cdot V_{Rk} \quad (\text{Group of 4 anchors})$$

fischer injection system FIS V masonry

Performances

Definition of minimum edge distance, minimum spacing and group factors

Annex C 77

Table C120: β- factors for job site tests

Tension load

| Use category | | w/w | | d/d | |
|----------------------------------------------------------|--------------------|-------|--------|-------|--------|
| Temperature range | | 50/80 | 72/120 | 50/80 | 72/120 |
| Material | Size | | | | |
| solid units | M6 | 0,55 | 0,46 | 0,96 | 0,80 |
| | M8 | 0,57 | 0,51 | | |
| | M10 | 0,59 | 0,52 | | |
| | M12 FIS E 11x85 | 0,60 | 0,54 | | |
| | M16 FIS E 15x85 | 0,62 | 0,52 | | |
| | 16x85 | 0,55 | 0,46 | | |
| hollow units | all size | 0,86 | 0,72 | 0,96 | 0,80 |
| Autoclaved aerated concrete, cylindrical drill | all size | 0,73 | 0,73 | 0,81 | 0,81 |
| Autoclaved aerated concrete, conical drill hole | all size | 0,66 | 0,59 | 0,73 | 0,66 |

Table C121: Displacements

| Material | N [kN] | δN_0 [mm] | δN^∞ [mm] | V [kN] | δV_0 [mm] | δV^∞ [mm] |
|---------------------------------------------------|------------------------------|----------------------|---------------------------|------------------------------|----------------------|---------------------------|
| solid units and autoclaved aerated concrete | N_{Rk} $1,4 * \gamma_M$ | 0,03 | 0,06 | V_{Rk} $1,4 * \gamma_M$ | 0,59 | 0,88 |
| hollow units | N_{Rk} $1,4 * \gamma_M$ | 0,03 | 0,06 | V_{Rk} $1,4 * \gamma_M$ | 1,71 | 2,56 |
| brick Annex C36/37 | N_{Rk} $1,4 * \gamma_M$ | 0,03 | 0,06 | V_{Rk} $1,4 * \gamma_M$ | 6,44 | 9,66 |

fischer injection system FIS V masonry

Performances

β- factors for job site tests,
Displacements

Annex C 78