

Approval body for construction products  
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and  
Laender Governments



## European Technical Assessment

**ETA-15/0259**  
**of 21 July 2015**

English translation prepared by DIBt - Original version in German language

### General Part

Technical Assessment Body issuing the  
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Hilti ETICS anchors D8-FV H and HTH

Product family  
to which the construction product belongs

Screwed-in plastic anchor for fixing of external thermal  
insulation composite systems with rendering in concrete  
and masonry

Manufacturer

HILTI Corporation  
Feldkircherstraße 100  
9494 SCHAAN  
FÜRSTENTUM LIECHTENSTEIN

Manufacturing plant

Hilti Werke  
Hilti manufacturing plant

This European Technical Assessment  
contains

17 pages including 3 annexes which form an integral part  
of this assessment

This European Technical Assessment is  
issued in accordance with Regulation (EU)  
No 305/2011, on the basis of

Guideline for European technical approval of "Plastic  
anchors for fixing of external thermal insulation composite  
systems with rendering", ETAG 014, February 2011,  
used as European Assessment Document (EAD)  
according to Article 66 Paragraph 3 of Regulation (EU)  
No 305/2011.

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

## Specific part

### 1 Technical description of the product

The Hilti ETICS screwed-in anchors D8-FV H and HTH with a helix consist of a plastic part made of polypropylene and an accompanying specific screw of galvanised steel.

The description of the product is given in Annex A.

### 2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 25 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Mechanical resistance and stability (BWR 1)

The essential characteristics regarding mechanical resistance and stability are included under the Basic Works Requirement Safety in use.

#### 3.2 Hygiene, health and the environment (BWR 3)

Regarding dangerous substances there may be requirements (e.g. transposed European legislation and national laws, regulations and administrative provisions) applicable to the products falling within the scope of this European Technical Assessment. In order to meet the provisions of Regulation (EU) No 305/2011, these requirements need also to be complied with, when and where they apply.

#### 3.3 Safety and accessibility in use (BWR 4)

Essential characteristic	Performance
Characteristic resistance	See Annex C 1
Edge distances and spacing	See Annex B 3
Point thermal transmittance	See Annex C 2
Displacements	See Annex C 2

#### 3.4 Sustainable use of natural resources (BWR 7)

For the sustainable use of natural resources no performance was determined for this product.

English translation prepared by DIBt

**4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base**

In accordance with guideline for European technical approval ETAG 014, February 2011 used as European Assessment Document (EAD) according to Article 66 Paragraph 3 of Regulation (EU) No 305/2011 the applicable European legal act is: 97/463/EC.

The system to be applied is: 2+

**5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable EAD**

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.


Issued in Berlin on 21 July 2015 by Deutsches Institut für Bautechnik

Uwe Bender  
Head of Department

*beglaubigt:*  
Ziegler

### Hilti ETICS anchor D8-FV H

**Intended use:** Fixing of external thermal insulation composite systems in concrete, masonry, lightweight aggregate concrete and autoclaved aerated concrete

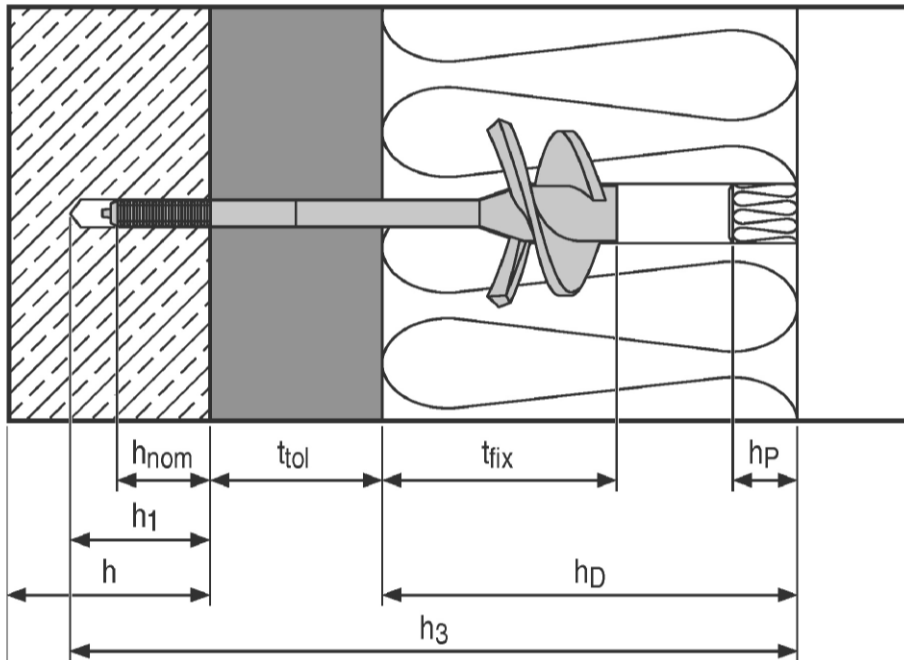

**Legend:**

- $h$  = thickness of member (wall)
- $h_1$  = depth of drilled hole in base material to deepest point
- $h_3$  = total length of borehole from insulation material surface to deepest point
- $h_{nom}$  = overall plastic anchor embedment depth in the base material
- $h_D$  = thickness of insulation material
- $h_P$  = thickness of plug
- $t_{fix}$  = thickness of fixture
- $t_{tol}$  = thickness of equalizing layer for compensation of tolerances or non-loadbearing layer


**Hilti ETICS anchors D8-FV H and HTH**

**Product description**  
Installed condition D8-FV H

**Annex A 1**

## Hilti ETICS anchor HTH

**Intended use:** Fixing of external thermal insulation composite systems in concrete, masonry, lightweight aggregate concrete and autoclaved aerated concrete

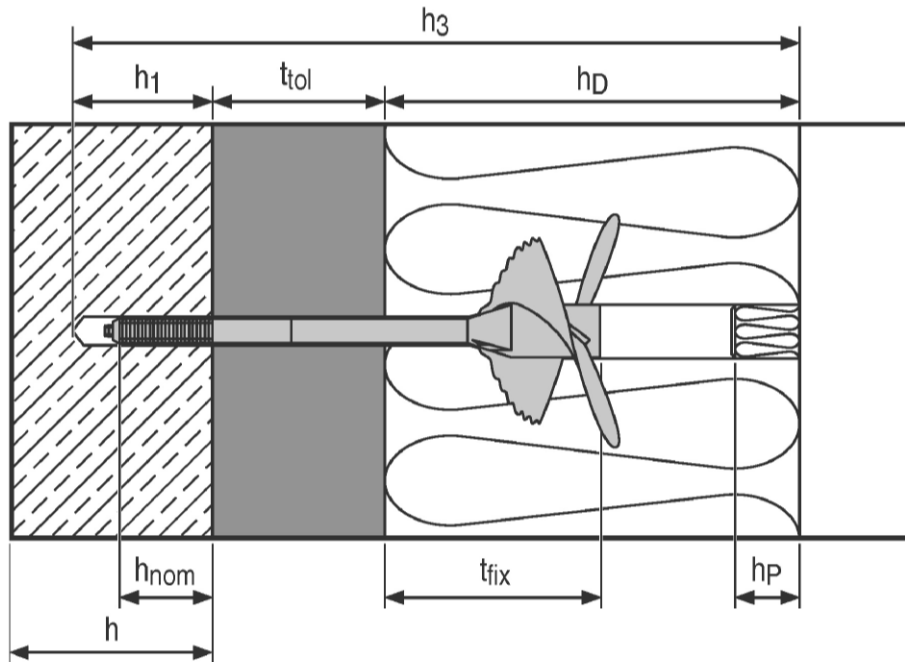

### Legend:

- $h$  = thickness of member (wall)
- $h_1$  = depth of drilled hole to deepest point
- $h_3$  = total length of borehole from insulation material surface to deepest point
- $h_{nom}$  = overall plastic anchor embedment depth in the base material
- $h_D$  = thickness of insulation material
- $h_p$  = thickness of plug
- $t_{fix}$  = thickness of fixture
- $t_{tol}$  = thickness of equalizing layer for compensation of tolerances or non-loadbearing layer


**Hilti ETICS anchors D8-FV H and HTH**

**Product description**  
Installed condition HTH


**Annex A 2**

Use in different insulation material thickness



Minimum thickness

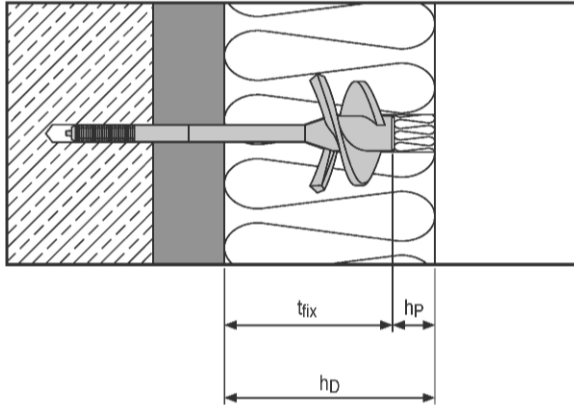

Maximum thickness

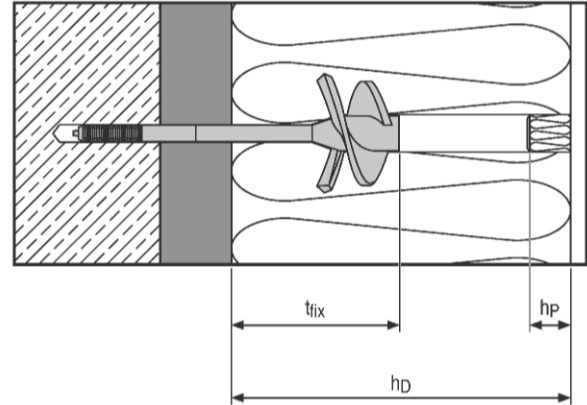

Use in different thickness of equalizing or non-loadbearing layer

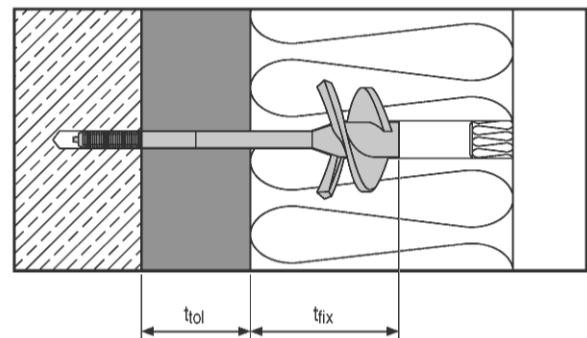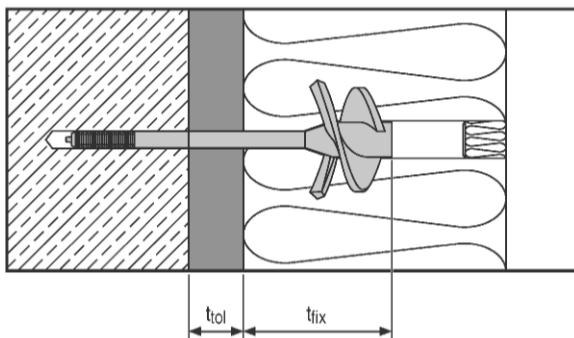

**Legend:**

$h_D$  = thickness of insulation material

$h_P$  = thickness of plug

$t_{fix}$  = thickness of fixture


$t_{tol}$  = thickness of equalizing layer for compensation of tolerances or non-loadbearing layer

**Hilti ETICS anchors D8-FV H and HTH**


**Product description**  
Different installed conditions

**Annex A 3**


### Anchor sleeve D8-FV H

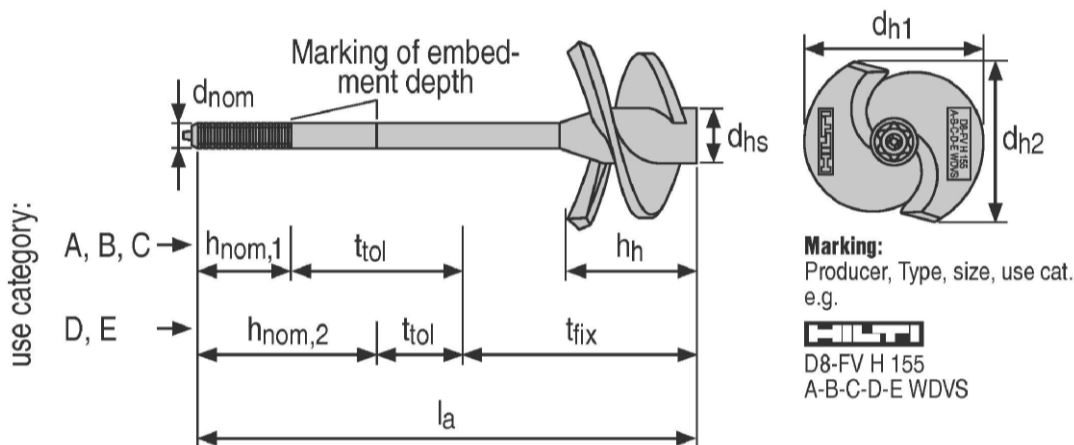


### Anchor sleeve HTH

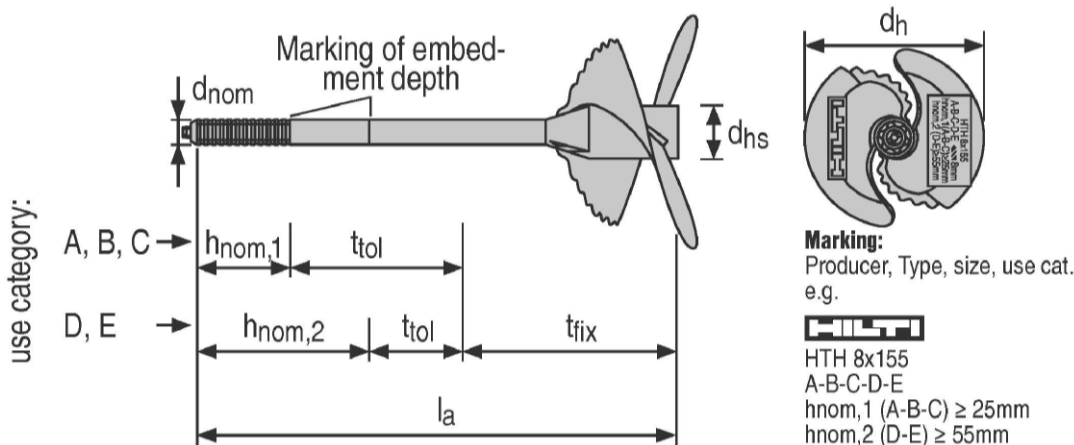

### Screw for D8-FV H, HTH

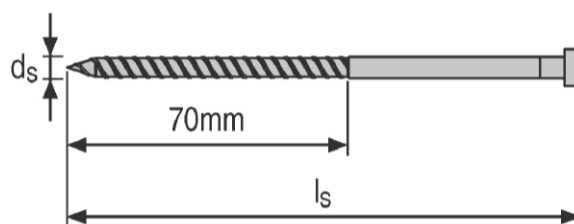

### Plug for D8-FV H, HTH



Note: PU-Foam with specifications according to Table A5 can be used alternatively

### Hilti ETICS anchors D8-FV H and HTH

#### Product description


Dimensions and marking of the anchor sleeve D8-FV H and HTH expansion element, plug

### Annex A 4




## Setting tools

### Setting tool D8-SW 1 or setting tool D8-SW 2 suitable for D8-FV H and HTH

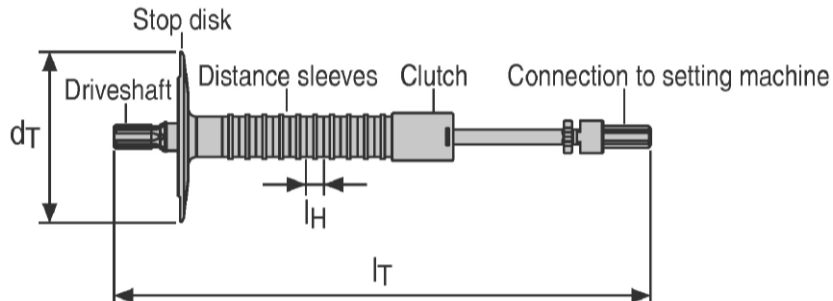

### Setting tool HTH-SW 1 or setting tool HTH-SW 2 suitable for D8-FV H and HTH

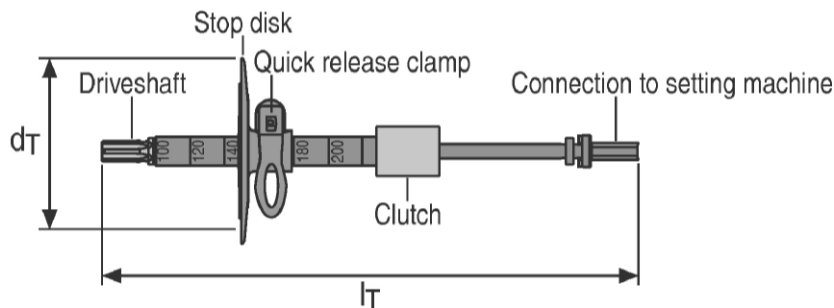

**Table A1 Dimensions for setting tool types D8-SW 1 and D8-SW 2**

Setting tool type		D8-SW 1	D8-SW 2
Diameter of disk	$d_T$ [mm]	100	
Length of the tool	$l_T$ [mm]	310	477
Length of distance sleeve (insulation thickness increment)	$l_H$ [mm]	10	
Applicable insulation thickness	$h_{D,min}$ [mm]	100 <sup>1)</sup>	200
	$h_{D,max}$ [mm]	200	360

<sup>1)</sup> This value applies for  $t_{fix} = 80$  mm (for  $t_{fix} = 110$  mm:  $h_{D,min} = 130$  mm).

**Table A2 Dimensions for setting tool types HTH-SW 1 and HTH-SW 2**

Setting tool type		HTH-SW 1	HTH-SW 2
Diameter of disk	$d_T$ [mm]	100	
Length of the tool	$l_T$ [mm]	310	477
Applicable insulation thickness	$h_{D,min}$ [mm]	100 <sup>1)</sup>	200
	increment [mm]	10	
	$h_{D,max}$ [mm]	200	360

<sup>1)</sup> This value applies for  $t_{fix} = 80$  mm (for  $t_{fix} = 110$  mm:  $h_{D,min} = 130$  mm).

## Hilti ETICS anchors D8-FV H and HTH

### Product description Setting tools

## Annex A 5

**Table A3 Anchor types and dimensions of D8-FV H**

Anchor type			D8-FV H 125	D8-FV H 155	D8-FV H 215
Plastic sleeve	Sleeve diameter	$d_{nom}$ [mm]	8		
	Length of sleeve	$\ell_a$ [mm]	125	155	215
	Height of helix	$h_h$ [mm]	40		
	Diameter of helix centre	$d_{hs}$ [mm]	17		
	Diameter 1 of helix	$d_{h1}$ [mm]	65		
	Diameter 2 of helix	$d_{h2}$ [mm]	58		
Special screw	Screw diameter	$d_s$ [mm]	5,35		
	Length of screw	$\ell_s$ [mm]	94	124	184

**Table A4 Anchor types and dimensions of HTH**

Anchor type			HTH 8x125	HTH 8x155	HTH 8x215
Plastic sleeve	Sleeve diameter	$d_{nom}$ [mm]	8		
	Length of sleeve	$\ell_a$ [mm]	125	155	215
	Diameter of helix centre	$d_{hs}$ [mm]	17		
	Diameter of helix	$d_h$ [mm]	75		
Special screw	Screw diameter	$d_s$ [mm]	5,35		
	Length of screw	$\ell_s$ [mm]	94	124	184

**Table A5 Materials of D8-FV H and HTH**

Element	Material
Anchor sleeve	Polypropylene, colour: black
Screw	Steel, galvanised $\geq 5 \mu\text{m}$ , $f_{yk} = 480 \text{ N/mm}^2$ , $f_{uk} = 600 \text{ N/mm}^2$
Plug	EPS or mineral wool
PU-Foam	Polyurethane, thermal conductivity $\leq 0,045 \text{ W/(mK)}$ Remark: use of foam only in accordance with ETICS system suppliers

**Hilti ETICS anchors D8-FV H and HTH**

**Product description**  
Dimensions and Materials

**Annex A 6**

## Specifications of intended use

### Anchorage subject to:

- The anchor may only be used for transmission of wind suction loads and shall not be used for the transmission of dead loads of the thermal insulation composite system.

### Base materials:

- Normal weight concrete (use category A) according to Annex C 1
- Solid masonry (use category B), according to Annex C 1
- Hollow or perforated masonry (use category C), according to Annex C 1
- Lightweight aggregate concrete (use category D), according to Annex C 1
- Autoclaved aerated concrete (use category E), according to Annex C 1
- For other base materials of the use categories A, B, C, D or E the characteristic resistance of the anchor may be determined by job site tests according to ETAG 014 Edition February 2011, Annex D.

### Temperature Range:

- 0°C to +40°C (max. short term temperature +40°C and max. long term temperature +24°C)

### Design:

- The anchorages are designed in accordance with the ETAG 014 Edition February 2011 under the responsibility of an engineer experienced in anchorages and masonry work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored.
- Fasteners are only to be used for multiple fixings of thermal insulation composite systems.

### Installation:

- Hole drilling by the drill modes according to Annex C 1
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- Installation temperature from 0°C to +40°C
- Exposure to UV due to solar radiation of the anchor not protected by rendering ≤ 6 weeks

Hilti ETICS anchors D8-FV H and HTH

Intended use  
Specifications

Annex B 1

**Table B1 Installation parameters for use in concrete and solid masonry (use category A, B)**

Anchor type		D8-FV H 125	D8-FV H 155	D8-FV H 215	
		HTH 8x125	HTH 8x155	HTH 8x215	HTH 8x215
Drill hole diameter	$d_0 = [\text{mm}]$	8			
Cutting diameter of drill bit	$d_{\text{cut}} \leq [\text{mm}]$	8,45			
Minimum depth of drilled hole to deepest point	$h_1 \geq [\text{mm}]$	45			
Overall plastic anchor embedment depth in the base material	$h_{\text{nom},1} \geq [\text{mm}]$	25			
Thickness of fixture	$t_{\text{fix}} = [\text{mm}]$	80	80	80	110
Thickness of equalizing layer for compensation of tolerances or non-loadbearing layer	$t_{\text{tol},\text{min}} = [\text{mm}]$	0	0	50	20
	$t_{\text{tol},\text{max}} = [\text{mm}]$	20	50	110 <sup>1)</sup>	80 <sup>1)</sup>
Total length of borehole	$h_3 \geq [\text{mm}]$	$h_D+65$	$h_D+95$	$h_D+155$	$h_D+125$

<sup>1)</sup> If  $t_{\text{tol},\text{max}}$  exceeds 50 mm it has to be ensured that the material  $t_{\text{tol}}$  has enough capability to carry the dead load of the ETICS. This can be considered as given if  $t_{\text{tol}}$  consists of plaster, old insulation or shells of jacket blocks.

**Table B2 Installation parameters for use in thin concrete members (e.g. weather resistant skin of external wall panels) and hollow masonry (use category C)**

Anchor type		D8-FV H 125	D8-FV H 155	D8-FV H 215	
		HTH 8x125	HTH 8x155	HTH 8x215	HTH 8x215
Drill hole diameter	$d_0 = [\text{mm}]$	8			
Cutting diameter of drill bit	$d_{\text{cut}} \leq [\text{mm}]$	8,45			
Minimum depth of drilled hole to deepest point	$h_1 \geq [\text{mm}]$	45			
Overall plastic anchor embedment depth in the base material	$h_{\text{nom},1} \geq [\text{mm}]$	25			
Thickness of fixture	$t_{\text{fix}} = [\text{mm}]$	80	80	80	110
Thickness of equalizing layer for compensation of tolerances or non-loadbearing layer	$t_{\text{tol},\text{min}} = [\text{mm}]$	0	20 <sup>1)</sup>	80 <sup>1)</sup>	50 <sup>1)</sup>
	$t_{\text{tol},\text{max}} = [\text{mm}]$	20	50	110 <sup>2)</sup>	80 <sup>2)</sup>
Total length of borehole	$h_3 \geq [\text{mm}]$	$h_D+65$	$h_D+95$	$h_D+155$	$h_D+125$

<sup>1)</sup>  $t_{\text{tol},\text{min}}$  may be lower if the anchor performance is tested on site.

<sup>2)</sup> If  $t_{\text{tol},\text{max}}$  exceeds 50 mm it has to be ensured that the material  $t_{\text{tol}}$  has enough capability to carry the dead load of the ETICS. This can be considered as given if  $t_{\text{tol}}$  consists of plaster, old insulation or shells of jacket blocks.

**Hilti ETICS anchors D8-FV H and HTH**

**Intended use**  
Installation parameters – use categories A, B, C

**Annex B 2**

**Table B3 Installation parameters for use in lightweight aggregate concrete and autoclaved aerated concrete (use category D, E)**


Anchor type		D8-FV H 125 HTH 8x125	D8-FV H 155 HTH 8x155	D8-FV H 215 HTH 8x215	
Drill hole diameter	$d_0 =$ [mm]	-	8		
Cutting diameter of drill bit	$d_{cut} \leq$ [mm]		8,45		
Minimum depth of drilled hole to deepest point	$h_1 \geq$ [mm]		75		
Overall plastic anchor embedment depth in the base material	$h_{nom,2} \geq$ [mm]		55		
Thickness of fixture	$t_{fix} =$ [mm]	80	80	110	
Thickness of equalizing layer for compensation of tolerances or non-loadbearing layer	$t_{tol,min} =$ [mm]	0	0	0	
	$t_{tol,max} =$ [mm]	20	80 <sup>1)</sup>	50	
Total length of borehole	$h_3 \geq$ [mm]	$h_D+95$	$h_D+155$	$h_D+125$	

<sup>1)</sup> If  $t_{tol,max}$  exceeds 50 mm it has to be ensured that the material  $t_{tol}$  has enough capability to carry the dead load of the ETICS. This can be considered as given if  $t_{tol}$  consists of plaster, old insulation or shells of jacket blocks.

**Table B4 Minimum thickness of base material, edge distance and anchor spacing**

			D8-FV H HTH
Minimum thickness of the base material	concrete, masonry, lightweight aggregate concrete and autoclaved aerated concrete	$h_{min}$ [mm]	100
	thin concrete members (e.g. weather resistant skin of external wall panels)	$h_{min}$ [mm]	40
Minimum allowable spacing		$s_{min}$ [mm]	100
Minimum allowable edge distance		$c_{min}$ [mm]	100

Scheme of minimum thickness of base material, edge distances and anchor spacings

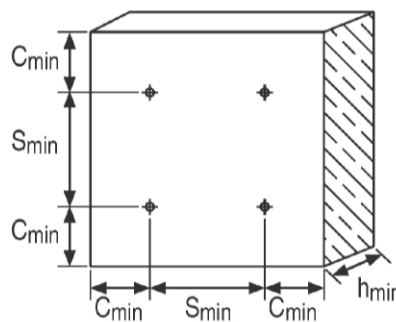


**Hilti ETICS anchors D8-FV H and HTH**

**Intended use**  
Installation parameters – use categories D, E  
Minimum thickness of base material, distances and spacings




**Annex B 3**



## Installation instructions of D8-FV H








Example given for anchor size D8-FV H 155



D8-FV 155

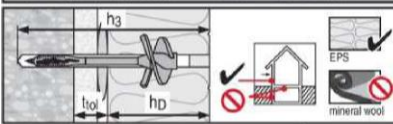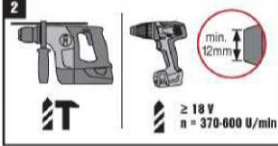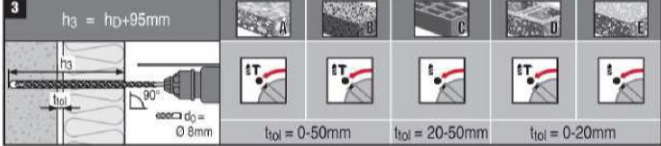- 1**  $h_3 = h_D + 95\text{mm}$      $h_D = 100\text{-}360\text{mm}$   

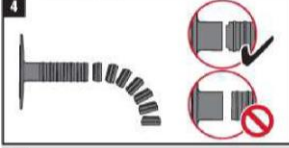- 2** 
- 3**  $h_3 = h_D + 95\text{mm}$   

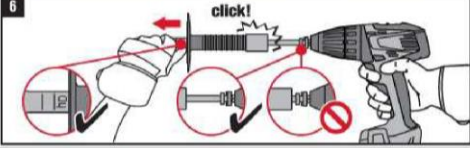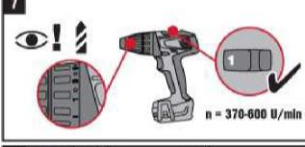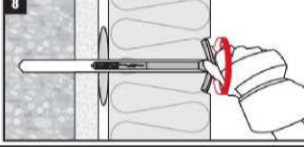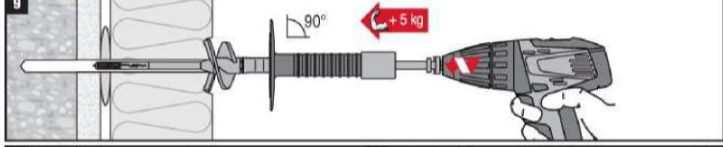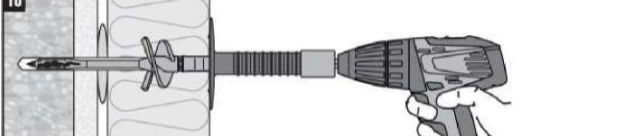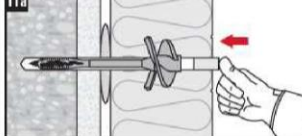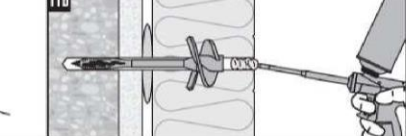
$t_{D1} = 0\text{-}50\text{mm}$	$t_{D1} = 20\text{-}50\text{mm}$	$t_{D1} = 0\text{-}20\text{mm}$
---------------------------------	----------------------------------	---------------------------------
- 4** 
- 5** 

$h_D$	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
360mm																
350mm																
340mm																
330mm																
320mm																
310mm																
300mm																
290mm																
280mm																
270mm																
260mm																
250mm																
240mm																
230mm																
220mm																
210mm																
200mm																
- 6** 
- 7** 
- 8** 
- 9** 
- 10** 
- 11a** 
- 11b** 

Hilti ETICS anchors D8-FV H and HTH

Intended use  
Installation instructions for D8-FV H

Annex B 4

### Installation instructions of HTH

**1**  $h_D = 100-360\text{mm}$

**2**

**3**

HTH Type	Substrate A	Substrate B	Substrate C	Substrate D	Substrate E
HTH 8 x 125 $h_3 = h_D + 55\text{mm}$					
$t_{tol} = 0-20\text{mm}$					
HTH 8 x 155 $h_3 = h_D + 95\text{mm}$					
$t_{tol} = 0-50\text{mm}$		$t_{tol} = 20-50\text{mm}$		$t_{tol} = 0-20\text{mm}$	
HTH 8 x 215 $h_3 = h_D + 155\text{mm}$					
$t_{tol} = 50-110\text{mm}$		$t_{tol} = 80-110\text{mm}$		$t_{tol} = 0-80\text{mm}$	

**4**

$h_D = 100 - 200\text{ mm} \rightarrow$  HTH-SW 1  
 $h_D = 200 - 360\text{ mm} \rightarrow$  HTH SW 2

**5**

**6**

**7**

**8**

**9**

**10a**

**10b**

Hilti ETICS anchors D8-FV H and HTH

Intended use  
Installation instructions for HTH

Annex B 5

**Table C1 Characteristic resistance to tension loads  $N_{Rk}$  in concrete, masonry, lightweight aggregate concrete and autoclaved aerated concrete for single anchor**

Base material	Use cat. <sup>3)</sup>	Bulk density class $\rho$ [kg/dm <sup>3</sup> ]	Compressive strength class $f_b$ [N/mm <sup>2</sup> ]	Remarks	Drill method	$N_{Rk}$ [kN]
Concrete C12/15 – C50/60 EN 206-1:2000	A	-	-	-	hammer	1,2
Thin concrete members (e.g. weather resistant skins of external wall panels) C16/20 – C50/60 EN 206-1:2000	A	-	-	Thickness of the thin skin $h \geq 40\text{mm}$	hammer	1,2
Clay brick, Mz e.g. according to DIN 105-100:2012-01 / EN 771-1:2011	B	2,0	20	Cross section reduced up to 15% by perforation vertically to the resting area	hammer	1,2
Sand-lime solid brick, KS e.g. according to DIN V 106:2005-10 / EN 771-2:2011	B	2,0	20	Cross section reduced up to 15% by perforation vertically to the resting area	hammer	1,2
Vertically perforated clay brick, Hlz e.g. according to DIN 105-100:2012-01 / EN 771-1:2011	C	1,2	12	Cross section reduced more than 15% and less than 50% by perforation vertically to the resting area <sup>1)</sup>	rotary	1,2
Vertically perforated sand-lime brick, KSL e.g. according to DIN V 106:2005-10 / EN 771-2:2011	C	1,4	12	Cross section reduced more than 15% and less than 50% by perforation vertically to the resting area <sup>2)</sup>	rotary	1,2
Lightweight aggregate concrete, LAC e.g. according to EN 1520:2011 / EN 771-3:2011	D	0,9	2 4	-	hammer	0,6 1,2
Autoclaved aerated concrete, AAC e.g. according to DIN V 4165-100:2005-11 / EN 771-4:2011	E	0,5	4	-	rotary	0,9

<sup>1)</sup> The value applies only for outer web thickness  $\geq 12\text{ mm}$

<sup>2)</sup> The value applies only for outer web thickness  $\geq 23\text{ mm}$

<sup>3)</sup> Different installation parameters for use categories A, B, C and use categories D, E and thin concrete members to be considered (see Annex B 2 and B 3)

} Otherwise the characteristic resistance shall be determined by job-site pull-out tests

**Hilti ETICS anchors D8-FV H and HTH**

**Performance**  
Characteristic resistance

**Annex C 1**



**Table C2 Point thermal transmittance acc. EOTA Technical Report TR 025:2007-06**

Anchor type	Insulation thickness $h_D$ [mm]	Point thermal transmittance $\chi$ [W/K]	
		Hole filled with EPS plug	Hole filled with PUR spray foam
D8-FV H 125 D8-FV H 155 D8-FV H 215	$t_{fix}=80\text{mm}$ $100 \leq h_D \leq 150$	0,001	0,001
	$150 < h_D \leq 360$	0,001	0,000
D8-FV H 155 D8-FV H 215	$t_{fix}=110\text{mm}$ $130 \leq h_D \leq 150$	0,002	0,002
	$150 < h_D \leq 360$	0,001	0,001
HTH 125 HTH 155 HTH 215	$t_{fix}=80\text{mm}$ $100 \leq h_D \leq 150$	0,001	0,001
	$150 < h_D \leq 360$	0,000	0,000
HTH 155 HTH 215	$t_{fix}=110\text{mm}$ $130 \leq h_D \leq 150$	0,001	0,001
	$150 < h_D \leq 360$	0,001	0,001
HTH 215	$t_{fix}=140\text{mm}$ $160 \leq h_D \leq 360$	0,002	0,002

**Table C3 Displacements**

Base material	Bulk density class $\rho$ [kg/dm <sup>3</sup> ]	Compressive strength class $f_b$ [N/mm <sup>2</sup> ]	Tension load N [kN]	$\delta_m(N)$ [mm]
Concrete, C12/15 – C50/60 (EN 206-1:2000)	-	-	0,40	< 0,6
Thin concrete members, C16/20 – C50/60 (EN 206-1:2000)	-	-	0,40	< 0,5
Clay brick, Mz (DIN 105-100:2012-01 / EN 771-1:2011)	2,0	20	0,40	< 0,5
Sand-lime solid brick, KS (DIN V 106:2005-10 / EN 771-2:2011)	2,0	20	0,40	< 0,5
Vertically perforated clay brick, HLz (DIN 105-100:2012-01 / EN 771-1:2011)	1,2	12	0,40	< 0,5
Vertically perforated sand-lime brick, KSL (DIN V 106:2005-10 / EN 771-2:2011)	1,4	12	0,40	< 0,5
Lightweight aggregate concrete, LAC (EN 1520:2011 / EN 771-3:2011)	0,9	2 4	0,20 0,40	< 0,5 < 0,5
Autoclaved aerated concrete, AAC (DIN V 4165-100:2005-11 / EN 771-4:2011)	0,5	4	0,30	< 0,7

**Hilti ETICS anchors D8-FV H and HTH**

**Performance**  
Point thermal transmittance and displacements

**Annex C 2**