

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments



European Technical Assessment

ETA-06/0047
of 8 February 2016

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Hilti push-in anchor HKD

Product family
to which the construction product belongs

Deformation-controlled expansion anchor of sizes M6,
M8, M10, M12 and M16 for multiple use for non-structural
applications in concrete

Manufacturer

Hilti Aktiengesellschaft
9494 SCHAAN
FÜRSTENTUM LIECHTENSTEIN

Manufacturing plant

Hilti Werke

This European Technical Assessment
contains

19 pages including 3 annexes which form an integral part
of this assessment

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

Guideline for European technical approval of "Metal
anchors for use in concrete", ETAG 001 Part 6: "Anchors
for multiple use for non-structural applications",
April 2013,
used as European Assessment Document (EAD)
according to Article 66 Paragraph 3 of Regulation (EU)
No 305/2011.

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The Hilti push-in anchor HKD is an anchor made of galvanized or stainless steel which is placed into a drilled hole and anchored by deformation-controlled expansion.

The fixture shall be anchored with a fastening screw or threaded rod according to Annex B 2.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance for static and quasi-static loading, displacements	See Annex C 1 to C 3

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for Class A1
Resistance to fire	See Annex C 4

3.4 Safety in use (BWR 4)

The essential characteristics regarding Safety in use are included under the Basic Works Requirement Mechanical resistance and stability.

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with guideline for European technical approval ETAG 001, April 2013 used as European Assessment Document (EAD) according to Article 66 Paragraph 3 of Regulation (EU) No 305/2011 the applicable European legal act is: [97/161/EC].

The system to be applied is: 2+

English translation prepared by DIBt

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable EAD

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.

Issued in Berlin on 8 February 2016 Deutsches Institut für Bautechnik

Uwe Bender
Head of Department

beglaubigt:
Lange

Installed condition

multiple use for non-structural applications only

Figure A1:

Hilti push-in anchor HKD with screw

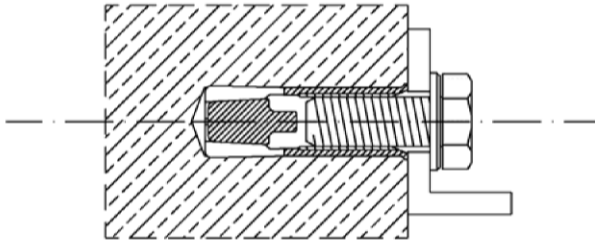


Figure A2:

Hilti push-in anchor HKD with threaded rod, washer and nut


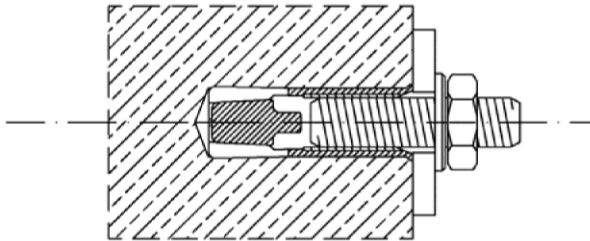


Figure A3:

Hilti push-in anchor HKD in precast prestressed hollow core slabs ($w/e \leq 4,2$)

- w core width
- e web thickness
- d_b bottom flange thickness
 $\geq 35 \text{ mm}$ for M6x25 and M8x25
 $\geq 40 \text{ mm}$ for M10x25
- h_{ef} embedment depth
- t_{fix} thickness of fixture
- c edge distance

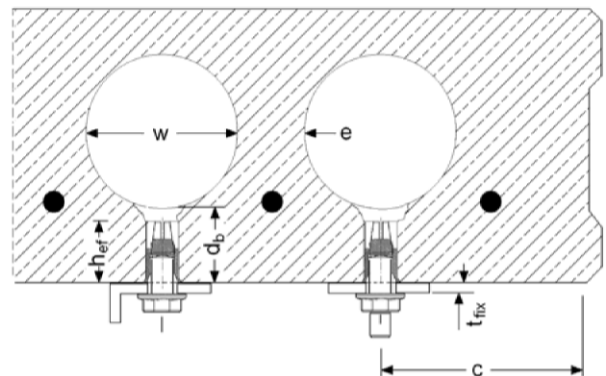


Hilti push-in anchor HKD


Product description
Installed condition

Annex A1


**Product description: Hilti push-in anchor HKD
multiple use for non-structural applications only**

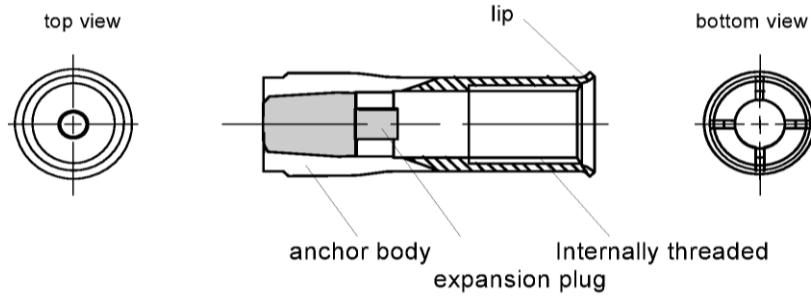


Marking:

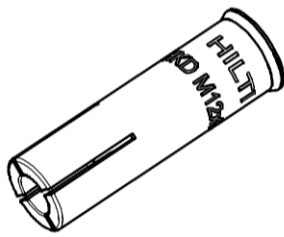


HKD

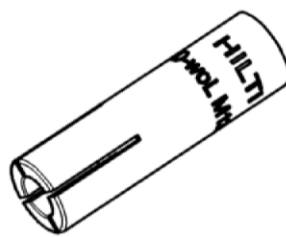

HKD-woL

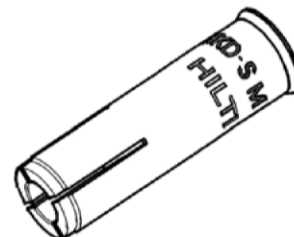

**HKD-S /
HKD-SR**

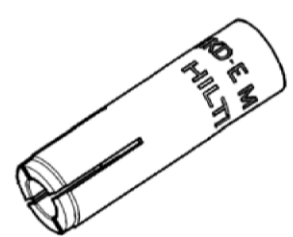

**HKD-E /
HKD-ER**

HKD

- HKD M6 x 25
- HKD M8 x 25
- HKD M8 x 30
- HKD M8 x 40
- HKD M10 x 25
- HKD M10 x 30
- HKD M10 x 40
- HKD M12 x 25
- HKD M12 x 50
- HKD M16 x 65

HKD-woL

- HKD-woL M6 x 25
- HKD-woL M8 x 25
- HKD-woL M8 x 30
- HKD-woL M8 x 40
- HKD-woL M10 x 25
- HKD-woL M10 x 30
- HKD-woL M10 x 40
- HKD-woL M12 x 25
- HKD-woL M12 x 50
- HKD-woL M16 x 65

HKD-S

- HKD-S M6 x 30 ø8
- HKD-S M8 x 30 ø10
- HKD-S M8 x 40 ø10
- HKD-S M10 x 30 ø12
- HKD-S M10 x 40 ø12
- HKD-S M12 x 50 ø15

HKD-SR

- HKD-SR M6 x 30 ø8
- HKD-SR M8 x 30 ø10
- HKD-SR M10 x 40 ø12
- HKD-SR M12 x 50 ø15

HKD-E

- HKD-E M6 x 30 ø8
- HKD-E M8 x 30 ø10
- HKD-E M8 x 40 ø10
- HKD-E M10 x 30 ø12
- HKD-E M10 x 40 ø12
- HKD-E M12 x 50 ø15

HKD-ER

- HKD-ER M6 x 30 ø8
- HKD-ER M8 x 30 ø8
- HKD-ER M10 x 40 ø12
- HKD-ER M12 x 50 ø15

Hilti push-in anchor HKD





















Product description
Anchor types / Marking

Annex A2


Identification after installation

each anchor can be identified with setting tool after installation

Table A1: Identification HKD and HKD-woL

Size		Setting tool	Top view
HKD M6x25		HSD-G M6 x 25	
HKD M8x25		HSD-G M8 x 25/30	
HKD M8x30		HSD-G M8 x 25/30	
HKD M8x40		HSD-G M8 x 40	
HKD M10x25		HSD-G M10 x 25/30	
HKD M10x30		HSD-G M10 x 25/30	
HKD M10x40		HSD-G M10 x 40	
HKD M12x25		HSD-G M12 x 25	
HKD M12x50		HSD-G M12 x 50	
HKD M16x65		HSD-G M16 x 65	

Identification HKD-E(R) and HKD-S(R)

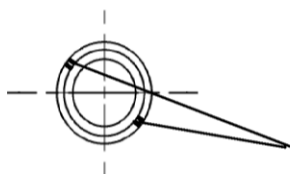

additional marking on end-face for M8x40 and M10x40

Hilti push-in anchor HKD

Product description
Identification after installation


Annex A3

Anchor materials and anchor dimensions

Table A2: Materials

Designation	Material
HKD; HKD-woL	
Anchor body	cold formed steel – galvanized to $\geq 5 \mu\text{m}$
expansion plug	cold formed steel
HKD-S; HKD-E	
Anchor body	Steel Fe/Zn5 (galvanized $\geq 5 \mu\text{m}$)
expansion plug	cold formed steel
HKD-SR; HKD-ER	
Anchor body	stainless steel,, 1.4401, 1.4404 or 1.4571 EN 10088-3:2014
expansion plug	

Anchor body

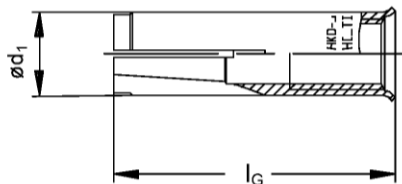

Expansion plug

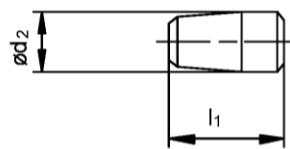


Table A3: Dimensions

Anchor size		[mm]	M6x25	M6x30	M8x25	M8x30	M8x40	M10x25	M10x30	M10x40	M12x25	M12x50	M16x65
			l_G	$\varnothing d_1$	$\varnothing d_2$	l_1							
Anchor length	l_G	[mm]	25	30	25	30	40	25	30	40	25	50	65
Anchor diameter	$\varnothing d_1$	[mm]	7,9	8	9,95	9,95	9,95	11,9	11,8	11,95	14,9	14,9	19,75
Plug diameter	$\varnothing d_2$	[mm]	5,1	5	6,35	6,5	6,35	8,1	8,2	8,2	9,7	10,3	13,8
Plug length	l_1	[mm]	10	15	7	12	16	7	12	16	7,2	20	29

Hilti push-in anchor HKD

Product description
Anchor materials and anchor dimensions

Annex A4


Specifications of intended use

multiple use for non-structural applications only

Base material:

- Reinforced or unreinforced normal weight concrete according to EN 206-1:2013.
- Strength classes C20/25 to C50/60 according to EN 206:2013.
- Cracked and non-cracked concrete.
- Fire resistance: M6 to M16

Table B1: Specifications of intended use

Anchorage subject to:	HKD / HKD-woL / HKD-E(R) and HKD-S(R) witt ... Threaded rods or screws
Hammer drilling 	✓
Static and quasi static loading in cracked and non-cracked concrete	M6 to M16 Table: C1, C2, C3 und C4
Fire resistance	M6 to M16 Table: C5 und C6

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (zinc coated steel, stainless steel or high corrosion resistant steel).
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal conditions, if no particular aggressive conditions exist (stainless steel or high corrosion resistant steel).

Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e. g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages under static or quasi-static loading are designed in accordance with: "ETAG 001, Annex C, design methode B, Edition August 2010"
- Anchorages for multiple use for non-structural applications only according to ETAG 001 Part 6, Edition August 2010

Installation:

- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- The anchor may only be set once.
- Overhead installation is admissible

Hilti push-in anchor HKD


Intended use
Specifications

Annex B1

Table B2: Installation parameters

HKD		M6x25	M6x30	M8x25 ¹⁾	M8x30	M8x40	M10x25 ¹⁾	M10x30 ¹⁾	M10x40	M12x25 ¹⁾	M12x50	M16x65
Diameter of drill bit	d_0 [mm]	8	8	10	10	10	12	12	12	15	15	20
Thread diameter	d [mm]	6	6	8	8	8	10	10	10	12	12	16
drill hole depth	h_1 [mm]	27	32	27	33	43	27	33	43	27	54	70
Effective embedment depth	h_{ef} [mm]	25	30	25	30	40	25	30	40	25	50	65
Maximum screwing depth	$l_{s,max}$ [mm]	12	12,5	11,5	14,5	17,5	12	12,7	18	12	23,5	30,5
Minimum screwing depth	$l_{s,min}$ [mm]	6	6	8	8	8	10	10	10	12	12	16
Maximum torque moment	T_{inst} [Nm]	≤ 4	≤ 4	≤ 8	≤ 8	≤ 8	≤ 15	≤ 15	≤ 15	≤ 35	≤ 35	≤ 60
Maximum diameter of clearance hole in the fixture	d_f [mm]	7	7	9	9	9	12	12	12	14	14	18

¹⁾ with anchor size M8x25, M10x25, M10x30 and M12x25 only threaded rod are to be used

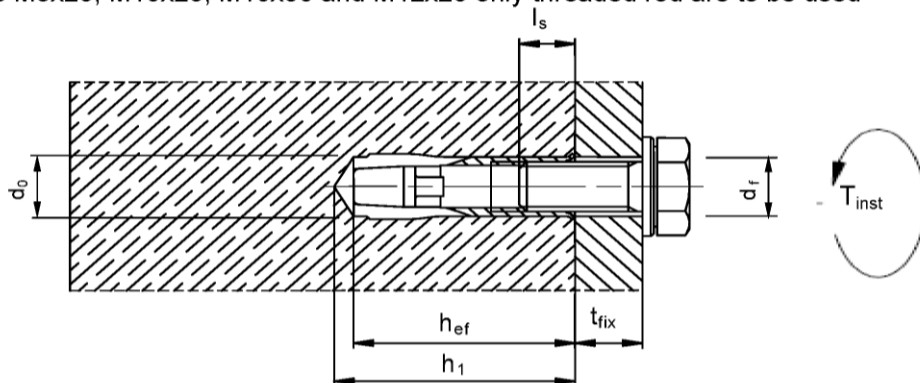

Requirements for fastening screw or threaded rod:

For anchors made of galvanized steel (HKD, HKD-woL, HKD-E and HKD-S) fastening screws or threaded rods of steel grade 4.6 / 5.6 / 5.8 or 8.8 according to EN ISO 898-1:2013 shall be specified.
For anchors made of stainless steel (HKD-ER and HKD-SR) fastening screw or threaded rod of steel grade 70 according to EN ISO 3506:2009 shall be specified..

Minimum screw depth $l_{s,min}$:

The length of the screw shall be determined depending on thickness of fixture t_{fix} , admissible tolerances and available thread length $l_{s,max}$ as well as minimum screw depth $l_{s,min}$ according table B2

Hilti push-in anchor HKD

Intended use
Installation parameters


Annex B2

Admissible anchor positions in precast pre-stressed hollow core slabs ($w/e \leq 4,2$)

core distance:
 $l_c \geq 100 \text{ mm}$


pre-stressing steel distance:
 $l_p \geq 100 \text{ mm}$

distance between anchor
position and pre-stressing steel:
 $a_p \geq 50 \text{ mm}$

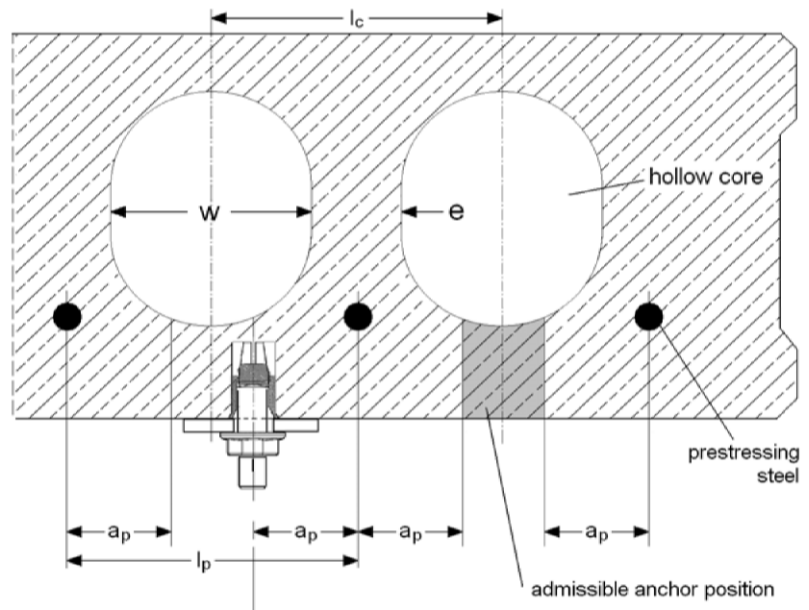

Minimum spacing and edge distance of anchors and distance between anchor groups in precast pre-stressed hollow core slabs


c_1, c_2 edge distance
 s_1, s_2 anchor spacing
 a_1, a_2 distances between
anchor groups

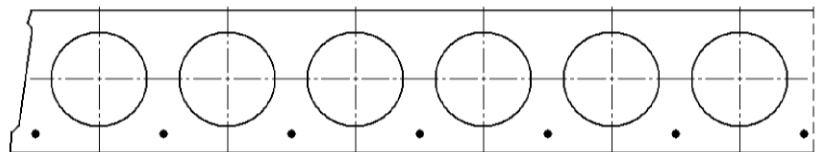

Minimum edge distance
 $c_{\min} \geq 200 \text{ mm}$

Minimum anchor spacing
 $s_{\min} \geq 400 \text{ mm}$

Minimum distance between
anchor groups
 $a_{\min} \geq 400 \text{ mm}$

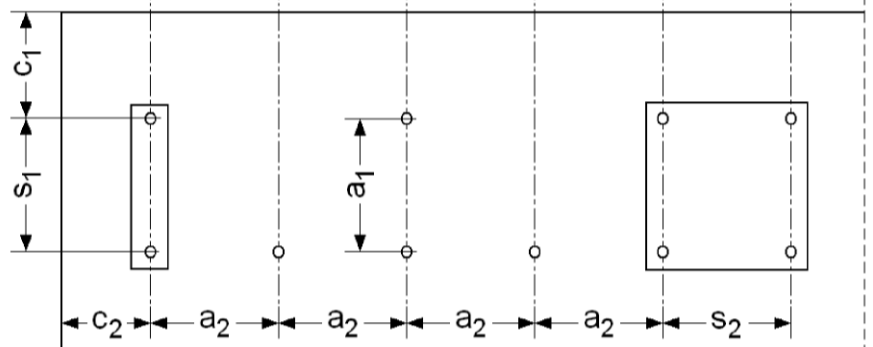

The maximum shear load of an anchor group is restricted to $\max. V = 25 \text{ kN}$.

Hilti push-in anchor HKD


Intended use
Installation data for precast pre-stressed hollow core slabs

Annex B3

Table B3: Minimum spacing and minimum edge distance

HKD-S(R), HKD-E(R)		M6x30 M8x30 M10x30	M8x40 M10x40	M12x50
Minimum spacing and minimum edge distance				
Minimum thickness of concrete member	h_{min} [mm]	100	100	100
Minimum spacing	s_{min} [mm]	60	80	125
Minimum edge distance	c_{min} [mm]	105	140	175
Minimum thickness of concrete member				
Minimum thickness of concrete member	h_{min} [mm]	80	80	
Minimum spacing	s_{min} [mm]	200	200	
Minimum edge distance	c_{min} [mm]	150	150	

HKD, HKD-woL		M6x25 M8x25 M10x25 M12x25	M8x30 M10x30	M8x40 M10x40	M12x50	M16x65
Minimum spacing and minimum edge distance						
Minimum thickness of concrete member	h_{min} [mm]	100	100	100	100	120
Minimum spacing	s_{min} [mm]	80	60	80	125	130
	for $c \geq$ [mm]	140	105	140	175	230
Minimum edge distance	c_{min} [mm]	100	80	140	175	230
	for $s \geq$ [mm]	150	120	80	125	130
Minimum thickness of concrete member						
Minimum thickness of concrete member	h_{min} [mm]	80	80	80	-	-
Minimum spacing	s_{min} [mm]	200	200	200	-	-
Minimum edge distance	c_{min} [mm]	150	150	150	-	-

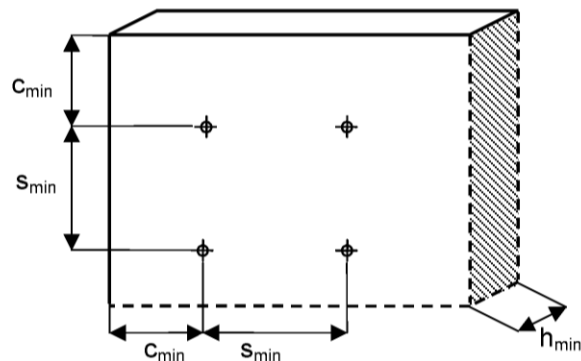

Hilti push-in anchor HKD



Intended use
Minimum spacing and minimum edge distance

Annex B4

Table B4: Dimensions of the setting tools

Setting tool HSD / HSG		M6x25 M6x30	M8x25 M8x30	M8x40	M10x25 M10x30	M10x40	M12x25	M12x50	M16x65
Diameter	d_1 [mm]	7,5	9,5	9,5	11,5	11,5	14,5	14,5	18
Diameter	d_2 [mm]	5	6,5	6,5	8	8	10,2	10,2	13,5
Length	l_1 [mm]	15	18	28	18	24	18	30	36

Manual setting tool HSD-G M.. x h_{ef} (e.g. HSD-G M8 x 30)

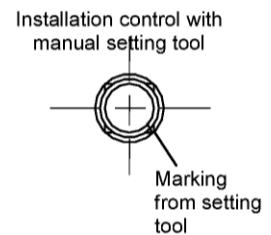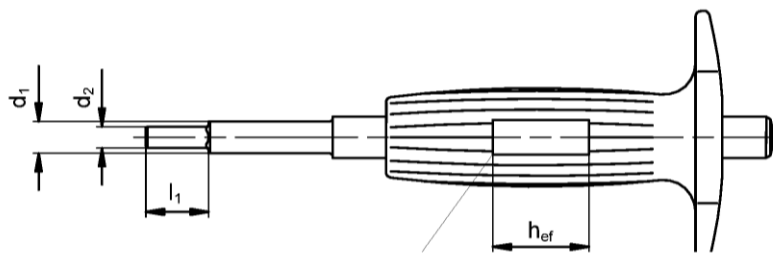


anchor gauge with marking M..x h_{ef} (assigned anchor)
the recess length corresponds to the anchor length h_{ef}

Machine setting tool HSD-M M.. x h_{ef} (e.g. HSD-M M8 x 30)



marking HSD-M M..x h_{ef} (assigned anchor)

Machine setting tool HSD-TE CX M.. x h_{ef} (z.B. HSD-TE-CX M8 x 30)

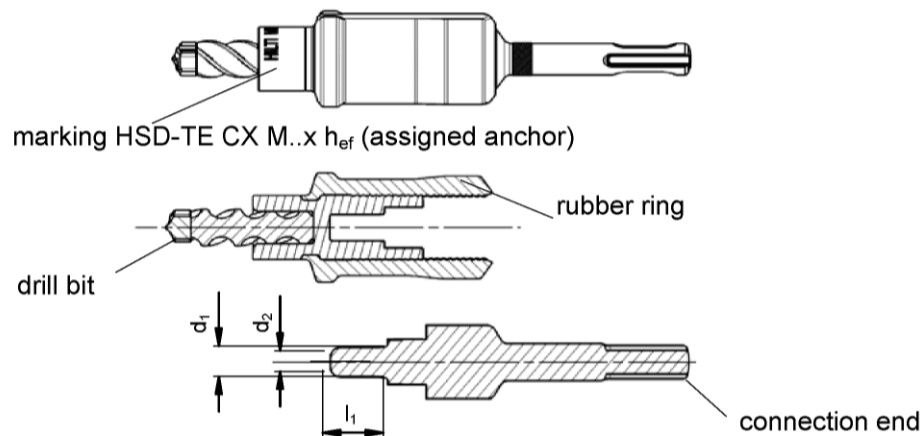

marking HSD-TE CX M..x h_{ef} (assigned anchor)

drill bit

rubber ring


connection end

Hilti push-in anchor HKD

Intended use
Setting tools

Annex B5

Installation instructions










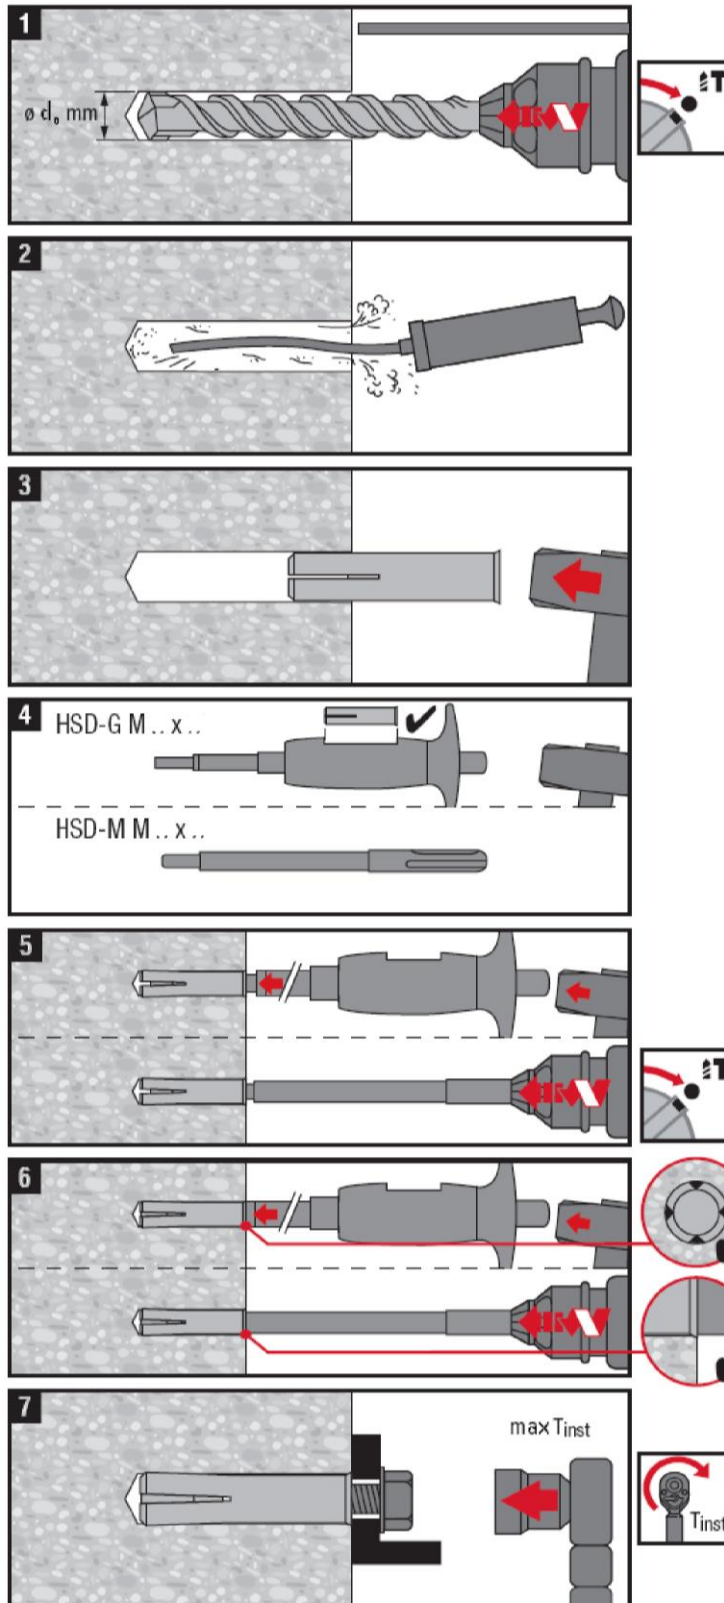


Hilti push-in anchor HKD

Intended use
Installation instructions

Annex B6

Installation instructions

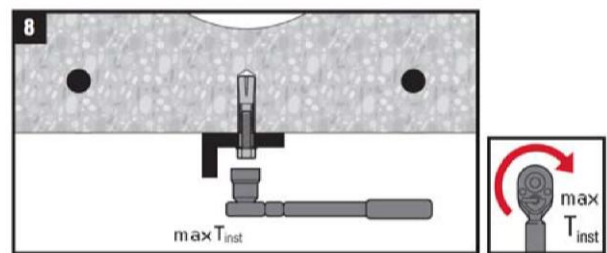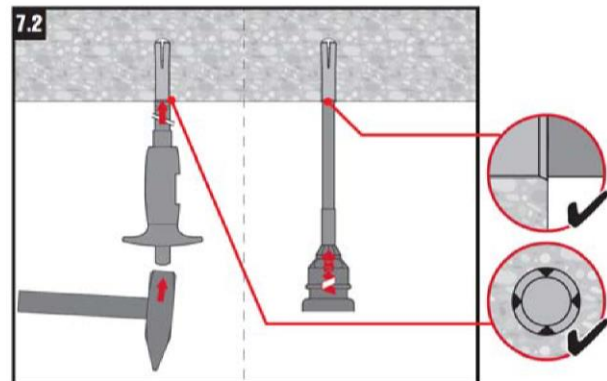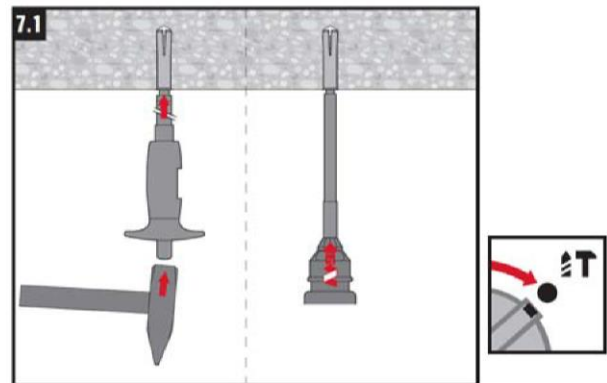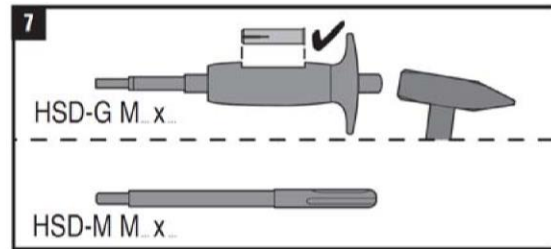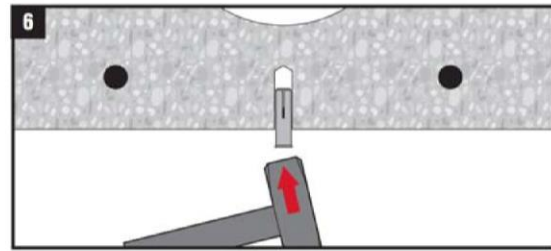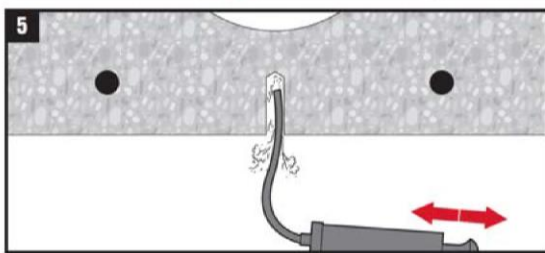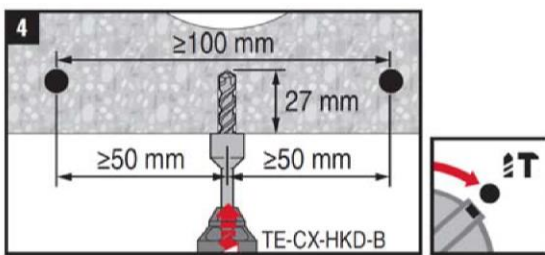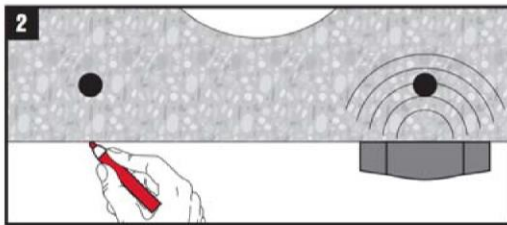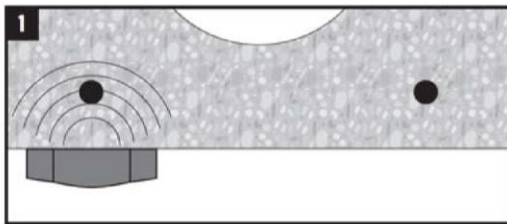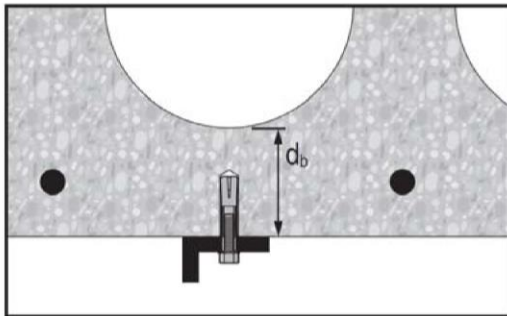

Installation with the stop drill bit TE-CX-HKD only

Hilti push-in anchor HKD

Intended use
Installation instructions in precast pre-stressed hollow core slabs

Annex B7

Table C1: Characteristic values of resistance for Hilti push-in anchor HKD-S(R) and HKD-E(R)

HKD-S, HKD-E HKD-SR, HKD-ER		M6x30 ²⁾	M8x30 ²⁾	M8x40	M10x30 ²⁾	M10x40	M12x50
Installation safety factor γ_2		1,0					
All load directions							
Characteristic resistance in C20/25 to C50/60	F_{Rk}^0 [kN]	3	3	5	4	6	6
Characteristic spacing	s_{cr} [mm]	90	90	120	90	120	150
Characteristic edge distance	c_{cr} [mm]	45	45	60	45	60	75
Shear load with lever arm							
Steel grade 4.6	$M_{Rk,s}^0$ [Nm]	6	15	15	30	30	52
Partial safety factor	γ_{Ms}^1	1,67					
Steel grade 5.6	$M_{Rk,s}^0$ [Nm]	8	19	19	37	37	65
Partial safety factor	γ_{Ms}^1	1,67					
Steel grade 5.8	$M_{Rk,s}^0$ [Nm]	8	19	19	37	37	65
Partial safety factor	γ_{Ms}^1	1,25					
Steel grade 8.8	$M_{Rk,s}^0$ [Nm]	12	30	30	60	60	105
Partial safety factor	γ_{Ms}^1	1,25					
Steel grade 70	$M_{Rk,s}^0$ [Nm]	11	26	-	-	52	92
Partial safety factor	γ_{Ms}^1	1,56		-		1,56	

¹⁾ In absence of other national regulations.

²⁾ Characteristic bending moment $M_{Rk,s}^0$ for equation (5.5) in ETAG 001, Annex C.

The anchor is to be used only for multiple use for non-structural applications, the definition of multiple use according to the member states is given in the informative Annex 1 of ETAG 001, part 6.

Hilti push-in anchor HKD

Performances

Characteristic values of resistance for Hilti push-in anchor HKD-S (R) and HKD-E (R)

Annex C1

Table C2: Characteristic values of resistance for Hilti push-in anchor HKD and HKD-woL

HKD HKD-woL		M6x25	M8x25	M8x30	M8x40	M10x25	M10x30	M10x40	M12x25	M12x50	M16x65
Installation safety factor	γ_2	1,0		1,2	1,0	1,2	1,0				
All load directions											
Characteristic resistance in C20/25 to C50/60	F_{Rk}^0 [kN]	2	3	5	5	4	5	7,5	4	9	16
Characteristic spacing	s_{cr} [mm]	80	80	90	120	80	90	120	80	150	200
Characteristic edge distance	c_{cr} [mm]	40	40	45	60	40	45	60	40	75	100
Shear load with lever arm											
Steel grade 4.6	$M_{Rk,s}^0$ [Nm]	6	15		30			52		133	
Partial safety factor	γ_{Ms}^1	1,67									
Steel grade 5.6	$M_{Rk,s}^0$ [Nm]	8	19		37			65		166	
Partial safety factor	γ_{Ms}^1	1,67									
Steel grade 5.8	$M_{Rk,s}^0$ [Nm]	8	19		37			65		166	
Partial safety factor	γ_{Ms}^1	1,25									
Steel grade 8.8	$M_{Rk,s}^0$ [Nm]	12	30		60			105		266	
Partial safety factor	γ_{Ms}^1	1,25									

¹⁾ In absence of other national regulations.

²⁾ Characteristic bending moment $M_{Rk,s}^0$ for equation (5.5) in ETAG 001, Annex C.

The anchor is to be used only for multiple use for non-structural applications, the definition of multiple use according to the member states is given in the informative Annex 1 of ETAG 001, part 6.

Hilti push-in anchor HKD

Performances

Characteristic values of resistance for Hilti push-in anchor HKD and HKD-woL

Annex C2

Table C3: Characteristic values of resistance for Hilti push-in anchor in precast pre-stressed hollow core slabs C30/37 to C50/60

HKD HKD-woL		M6x25	M8x25	M10x25
Installation safety factor	γ_2	1,0		1,2
All load directions				
bottom flange thickness	d_b [mm]	≥ 35	≥ 35	≥ 40
Characteristic resistance in C20/25 to C50/60	F_{Rk}^0 [kN]	2	3	4
Characteristic spacing	s_{cr} [mm]	400		
Characteristic edge distance	c_{cr} [mm]	200		
Shear load with lever arm				
Steel grade 4.6	$M_{Rk,s}^0$ [Nm]	6	15	30
Partial safety factor	γ_{Ms}^1	1,67		
Steel grade 5.6	$M_{Rk,s}^0$ [Nm]	8	19	37
Partial safety factor	γ_{Ms}^1	1,67		
Steel grade 5.8	$M_{Rk,s}^0$ [Nm]	8	19	37
Partial safety factor	γ_{Ms}^1	1,25		
Steel grade 8.8	$M_{Rk,s}^0$ [Nm]	12	30	60
Partial safety factor	γ_{Ms}^1	1,25		

¹⁾ In absence of other national regulations.

²⁾ Characteristic bending moment $M_{Rk,s}^0$ for equation (5.5) in ETAG 001, Annex C.

The anchor is to be used only for multiple use for non-structural applications, the definition of multiple use according to the member states is given in the informative Annex 1 of ETAG 001, part 6.

Hilti push-in anchor HKD

Performances

Characteristic values of resistance for Hilti push-in anchor in precast pre-stressed hollow core slabs

Annex C3

Table C4: Characteristic values of resistance for Hilti push-in anchor HKD-SR and HKD-ER under fire exposure in concrete C20/25 to C50/60 for all load directions

Fire resistance class	HKD-SR, HKD-ER		M6x30	M8x30	M10x40	M12x50
R 30	Characteristic resistance	$F_{Rk,fi}^0$ [kN]	0,5	0,9	1,8	2,3
R 60	Characteristic resistance	$F_{Rk,fi}^0$ [kN]	0,5	0,9	1,8	2,3
R 90	Characteristic resistance	$F_{Rk,fi}^0$ [kN]	0,5	0,9	1,8	2,3
R 120	Characteristic resistance	$F_{Rk,fi}^0$ [kN]	0,3	0,7	1,5	1,8
R 30 to R 120	Spacing	$s_{cr,fi}$ [mm]	120	120	160	200
	Edge distance	$c_{cr,fi}$ [mm]	105	105	140	175

In case of fire attack from more than one side, the minimum edge distance shall be ≥ 300 mm. The anchorage depth has to be increased for wet concrete by at least 30 mm compared to the given value

¹⁾ In absence of other national regulations the partial safety factor for resistance under fire exposure $\gamma_{m,fi} = 1,0$ is recommended.

Table C5: Characteristic values of resistance for Hilti push-in anchor HKD and HKD-woL under fire exposure in concrete C20/25 to C50/60 for all load directions

Fire resistance class	HKD, HKD-woL		M6x25	M8x25	M8x30	M8x40	M10x25	M10x30	M10x40	M12x25	M12x50	M16x65
R 30	Characteristic resistance	$F_{Rk,fi}^0$ [kN]	0,5	0,6	0,9	1,3	0,6	0,9	1,8	0,6	2,3	4,0
R 60	Characteristic resistance	$F_{Rk,fi}^0$ [kN]	0,4	0,6	0,9	1,3	0,6	0,9	1,8	0,6	2,3	4,0
R 90	Characteristic resistance	$F_{Rk,fi}^0$ [kN]	0,3	0,6	0,9	1,3	0,6	0,9	1,8	0,6	2,3	4,0
R 120	Characteristic resistance	$F_{Rk,fi}^0$ [kN]	0,2	0,5	0,7	0,7	0,5	0,7	1,5	0,5	1,8	3,2
R 30 to R 120	Spacing	$s_{cr,fi}$ [mm]	160	160	120	160	120	120	160	160	200	260
	Edge distance	$c_{cr,fi}$ [mm]	140	140	105	140	105	105	140	140	175	230

In case of fire attack from more than one side, the minimum edge distance shall be ≥ 300 mm. The anchorage depth has to be increased for wet concrete by at least 30 mm compared to the given value

¹⁾ In absence of other national regulations the partial safety factor for resistance under fire exposure $\gamma_{m,fi} = 1,0$ is recommended.

²⁾ The fire resistance data is only valid for concrete C20/25 to C50/60 with a minimum slab thickness of 80 mm. The data is **not** valid for precast pre-stressed hollow core slabs.

Hilti push-in anchor HKD

Performances

Characteristic values of resistance for Hilti push-in anchor under fire exposure

Annex C4