

Approval body for construction products  
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and  
Laender Governments



## European Technical Assessment

ETA-13/0440  
of 21 October 2016

English translation prepared by DIBt - Original version in German language

### General Part

Technical Assessment Body issuing the  
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

SFS intec expansion anchor SFS EX, SFS EX-S,  
SFS EX-S-H

Product family  
to which the construction product belongs

Torque controlled expansion anchor for use in concrete

Manufacturer

SFS intec OY  
Ratastie 18  
03100 NUMMELA  
FINNLAND

Manufacturing plant

Plant Germany

This European Technical Assessment  
contains

13 pages including 3 annexes which form an integral part  
of this assessment

This European Technical Assessment is  
issued in accordance with Regulation (EU)  
No 305/2011, on the basis of

Guideline for European technical approval of "Metal  
anchors for use in concrete", ETAG 001 Part 2: "Torque  
controlled expansion anchors", April 2013,  
used as European Assessment Document (EAD)  
according to Article 66 Paragraph 3 of Regulation (EU)  
No 305/2011.

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

## Specific Part

### 1 Technical description of the product

The SFS intec expansion anchor SFS EX, SFS EX-S and SFS EX-S-H is an anchor in the sizes M8, M10, M12 and M16 made of galvanised steel (SFS EX), stainless steel (SFS EX-S) or high corrosion resistant steel (SFS EX-S-H). The anchor is placed into a drilled hole and anchored by torque-controlled expansion.

Product and product description is given in Annex A.

### 2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance for tension and shear loads as well as bending moments in concrete	See Annex C 1 and C 2
Edge distances and spacing	See Annex C 1
Displacements under tension and shear loads	See Annex C 1 and C 2

#### 3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for Class A1
Resistance to fire	See Annex C 3

#### 3.3 Safety in use (BWR 4)

The essential characteristics regarding Safety in use are included under the Basic Works Requirement Mechanical resistance and stability.

### 4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with guideline for European technical approval ETAG 001, April 2013, used as European Assessment Document (EAD) according to Article 66 Paragraph 3 of Regulation (EU) No 305/2011, the applicable European legal act is: [96/582/EC].

The system to be applied is: 1


**5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document**

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.

Uwe Bender  
Head of Department

*beglaubigt:*  
Baderschneider


Installed condition of the anchor

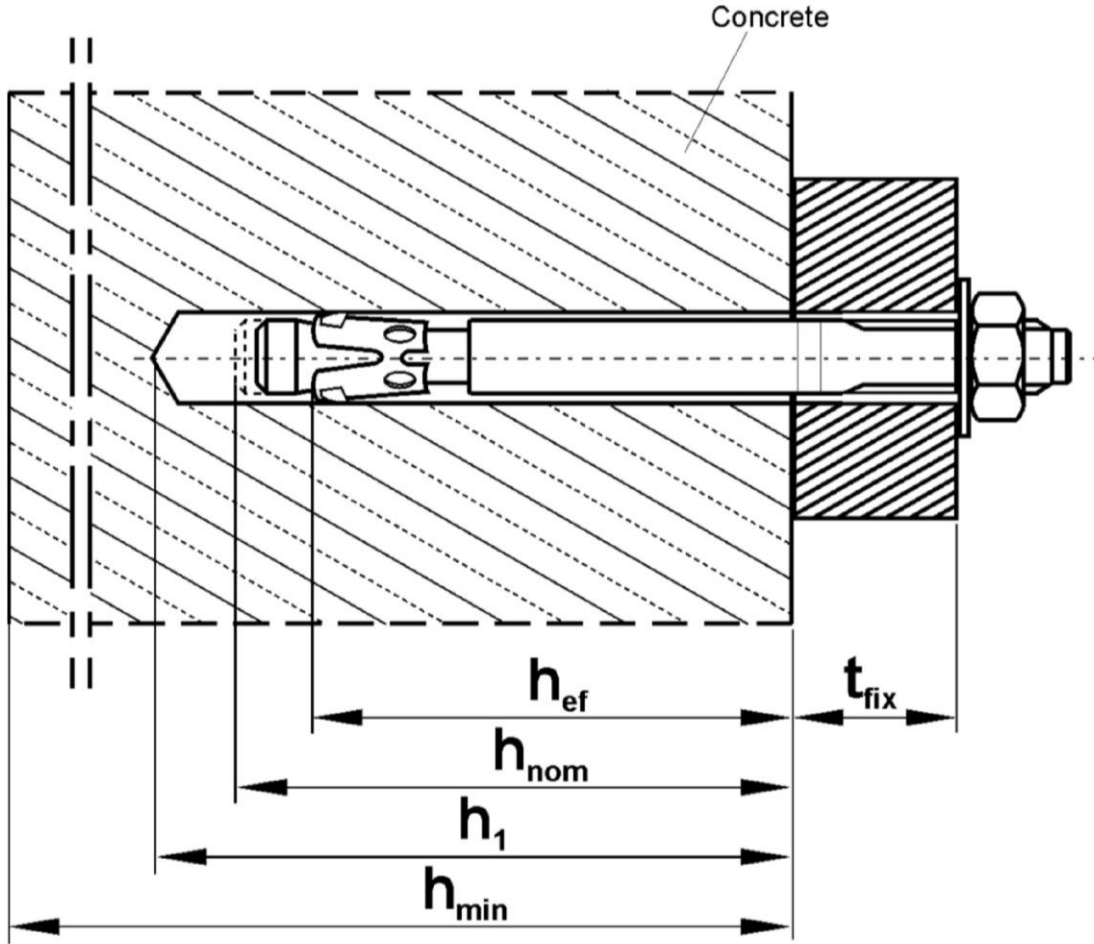

SFS intec Wedge anchor SFS EX, SFS EX-S, SFS EX-S-H

**Product description**  
Installed condition of the anchor

Annex A 1

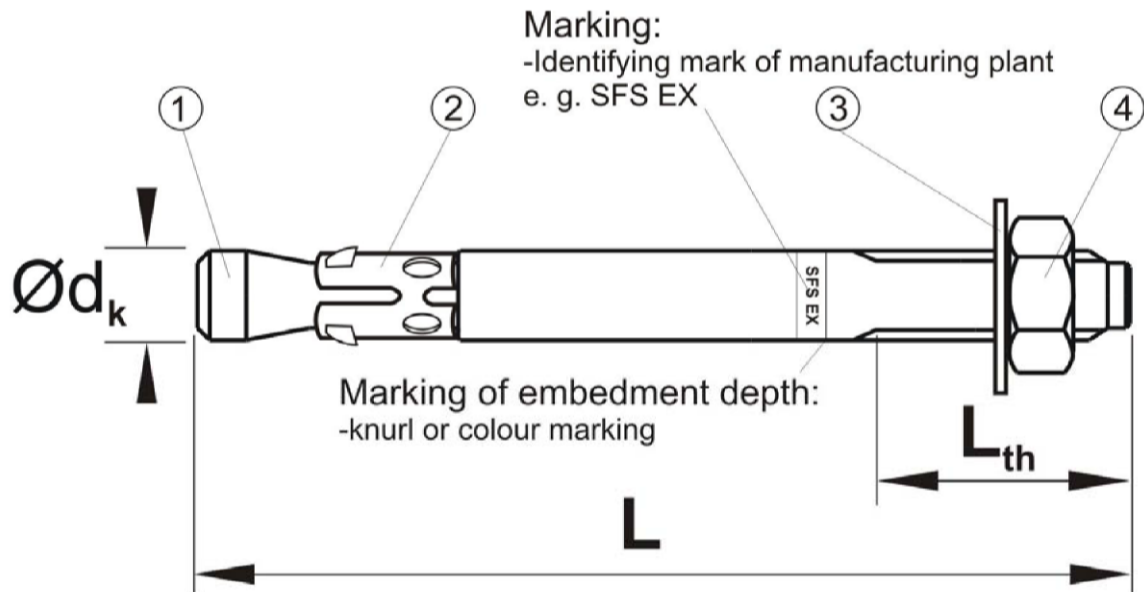

**Table A1: Dimensions**

Anchor Size	L [mm]		Threat		Ø dk
	min.	max.	Size	L <sub>th</sub>	
M8	65	350	M8	25-120	8
M10	70	410	M10	30-120	10
M12	95	555	M12	35-120	12
M16	115	515	M16	40-120	16


**SFS intec Wedge anchor SFS EX, SFS EX-S, SFS EX-S-H**

**Product description**  
Marking, Dimensions

Annex A 2

**Table A2: Materials**

Part	Designation	Material
<b>Version SFS EX – Zinc coated Steel <math>\geq 5\mu\text{m}</math> (galvanized) EN ISO 4042:1999</b>		
1	Conical Bolt	Steel according to EN 10277-3:2008 or EN 10263-4:2001
2	Expansion Clip	Steel according to EN 10149-2:2013
3	Washer	Steel according to EN 10025-2:2004
4	Hexagon nut (EN ISO 4032:2012)	Property Class 8 according to EN ISO 898-2:2012
<b>Version SFS EX-S – Stainless Steel A4</b>		
1	Conical Bolt	Stainless Steel 1.4401; 1.4404; 1.4571, 14578 according to EN 10088:2014; Property Class 70 according to EN ISO 3506-1:2009
2	Expansion Clip	Stainless Steel 1.4401; 1.4404; 1.4571 according to EN 10088:2014
3	Washer	Stainless Steel 1.4401; 1.4404; 1.4571 according to EN 10088:2014
4	Hexagon nut	Stainless Steel 1.4401; 1.4404; 1.4571 according to EN 10088:2014; Property Class 70 according to EN ISO 3506-2:2009
<b>Version SFS EX-S-H – High Corrosion Resistant Steel (HCR)</b>		
1	Conical Bolt	Stainless Steel 1.4529; 1.4565 according to EN 10088:2014; Property Class according to 70 EN ISO 3506-1:2009
2	Expansion Clip	Stainless Steel 1.4401; 1.4404; 1.4571 according to EN 10088:2014;
3	Washer	Stainless Steel 1.4529 according to EN 10088:2014
4	Hexagon nut	Stainless Steel 1.4529 according to EN 10088:2014; Property Class 70 according to EN ISO 3506-2:2009

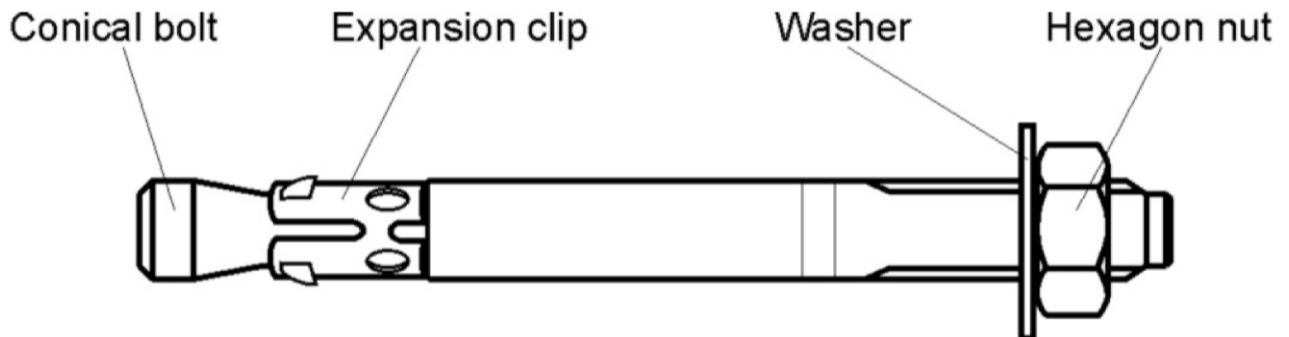

Anchor Size		M 8	M 10	M 12	M 16	
Nominal characteristic steel ultimate strength	$f_{uk}$ [N/mm <sup>2</sup> ]	SFS-EX	740	740	740	740
		SFS-EX-S, SFS-EX-H	700	700	700	700
Nominal characteristic steel yield strength	$f_{yk}$ [N/mm <sup>2</sup> ]	SFS-EX	620	620	620	620
		SFS-EX-S, SFS-EX-H	450	450	450	450

**SFS intec Wedge anchor SFS EX, SFS EX-S, SFS EX-S-H**

**Product description**  
Materials

Annex A 3

## Specification of Intended Use

### Anchorage subject to:

- Static or Quasi-static load
- Fire exposure

### Base Materials:

- Reinforced or Unreinforced normal weight concrete according to EN 206-1:2000-12
- Strength Class C20/25 to C50/60 according to EN 206-1:2000-12
- Cracked and Non-Cracked concrete

### Use Condition (Environmental Conditions):

- Structures Subject to dry internal conditions  
(zinc coated steel, Stainless Steel, High Corrosion resistant Steel)
- Structures Subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist  
(Stainless Steel, High Corrosion resistant Steel)
- Structures Subject to external atmospheric exposure and to permanently damp internal condition, if particular aggressive conditions exist  
(High Corrosion resistant Steel)

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used).

### Design Installation:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to the reinforcement or to supports, etc.)
- Anchorages under static or quasi-static actions are designed in accordance with:
  - ETAG001, Annex C, Design Method A, August 2010
- Anchorages under fire exposure are designed in accordance with:
  - ETAG 001, Annex C, design method A, Edition August 2010 and EOTA Technical Report TR 020, Edition May 2004 or
  - It must be ensured that local spalling of the concrete cover does not occur

### Installation:

- Hole drilling by Hammer drilling
- Anchor installation carried out by appropriately qualified person and the supervision of the person responsible for technical matters of the side
- Use of the anchor only as supplied by the manufacturer without exchanging the components of the anchor,

**SFS intec Wedge anchor SFS EX, SFS EX-S, SFS EX-S-H**

**Intended Use  
Specifications**

Annex B 1



**Table B1: Installation Parameters**

Anchor Size			M8	M10	M12	M16
Nominal drill hole diameter	$d_0 =$	mm	8	10	12	16
Cutting Diameter of the drill bit	$d_{cut} \leq$	mm	8,45	10,45	12,5	16,5
Depth of drill hole	$h_1 \geq$	mm	65	70	90	110
Anchor embedment depth	$h_{nom}$	mm	55	60	80	100
Effective anchorage depth	$h_{ef}$	mm	45	50	65	80
Thickness of the Fixture	$t_{fix}$	mm	1-285	1-340	1-460	1-400
Diameter of clearance hole in the fixture	$d_f \leq$	mm	9	12	14	18
Torque moment for non-cracked concrete	$T_{inst} =$	Nm	15	30	50	100
Torque moment for cracked concrete	$T_{inst} =$	Nm	20	40	65	130

**Table B2: Minimum thickness of the concrete member, minimum spacing and minimum edge distance**

Anchor Size			M8	M10	M12	M16
<b>Non cracked concrete</b>						
Minimum thickness of the concrete member	$h_{min}$	mm	100	100	120	160
Minimum spacing	$s_{min}$	mm	50	55	100	90
Minimum edge distance	$c_{min}$	mm	60	100	150	110

**SFS intec Wedge anchor SFS EX, SFS EX-S, SFS EX-S-H**

**Intended Use**

Installation parameters, minimum thickness, minimum spacing and edge distance


Annex B 2

## Blow pump ABK



### Installation Instructions

- Drill the hole
- Clean the drill hole.
- Set KDK through the fixture and hit it into the drill hole.
- Tight the nut with a torque moment wrench

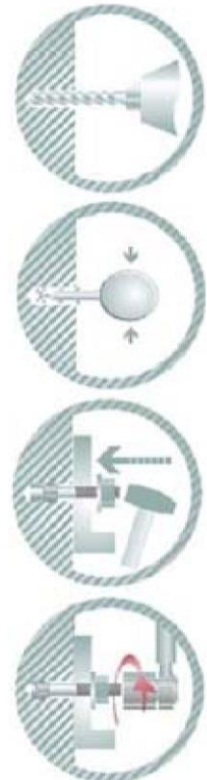

SFS intec Wedge anchor SFS EX, SFS EX-S, SFS EX-S-H

**Intended Use**  
Installation Instructions

Annex B 3

**Table C1: Characteristic values for tension loads**

Anchor Size			M8	M10	M12	M16
<b>Steel Failure – Version SFS EX</b>						
Characteristic resistance	$N_{Rk,S}$	[kN]	18	29	39	73
<b>Steel Failure – Version SFS EX-S / SFS EX-S-H</b>						
Characteristic resistance	$N_{Rk,S}$	[kN]	17	28	40	74
<b>Pullout Failure</b>						
Characteristic resistance $N_{Rk,p}$ In cracked concrete	C20/25	[kN]	3	6	7,5	12
Characteristic resistance $N_{Rk,p}$ In non-cracked concrete	C20/25	[kN]	9	12	16	20
Installation Safety Factor	$\gamma_2$	[-]	1,2			
Increasing Factors for $N_{Rk,p}$ for Cracked and non-cracked concrete	$\psi_c$	[-]	1,22			
	C30/37		1,41			
	C40/50		1,55			
<b>Concrete Cone and Splitting Failure</b>						
Effective anchorage depth	$h_{ef}$	[mm]	45	50	65	80
Spacing	$s_{cr,N}$	[mm]	3 x $h_{ef}$			
	$s_{cr,sp}$	[mm]	220	240	320	400
Edge Distance	$c_{cr,N}$	[mm]	1,5 x $h_{ef}$			
	$c_{cr,sp}$	[mm]	110	120	160	200
Installation safety Factor	$\gamma_2$	[-]	1,2			

**Table C2: Displacement under tension loads**

Anchor Size			M8	M10	M12	M16
Tension Load in non-cracked concrete	N	[kN]	1,6	3,0	3,6	6,3
Displacement	$\delta_{N0}$	[mm]	0,4	0,5	0,7	0,7
	$\delta_{N\infty}$	[mm]	0,5	1,0	1,5	1,4

**SFS intec Wedge anchor SFS EX, SFS EX-S, SFS EX-S-H**

**Performance**  
Characteristic values for tension loads and displacements

Annex C 1

**Table C3: Characteristic values for shear loads**

Anchor Size			M8	M10	M12	M16
<b>Steel Failure without lever arm – Version SFS EX</b>						
Characteristic resistance	$V_{Rk,s}$	[kN]	7	15	20	36
<b>Steel Failure without lever arm – Version SFS EX-S / SFS EX-S-H</b>						
Characteristic resistance	$V_{Rk,s}$	[kN]	8	14	20	37
<b>Steel Failure with lever arm – Version SFS EX</b>						
Characteristic Bending Moment	$M_{Rk,s}^0$	[Nm]	28	55	90	229
<b>Steel Failure with lever arm – Version SFS EX-S / SFS EX-S-H</b>						
Characteristic Bending Moment	$M_{Rk,s}^0$	[Nm]	26	52	92	233
<b>Concrete Pryout Failure</b>						
Factor k in equation (5.6) of ETAG 001, Annex C, Section 5.2.3.3	k	[-]	1,0		2,0	
Installation Safety Factor	$\gamma_2$	[-]	1,0			
<b>Concrete Edge Failure</b>						
Effective length of anchor in shear loading	$l_f$	[mm]	45	50	65	80
Effective outside Diameter of the anchor	$d_{nom}$	[mm]	8	10	12	16
Installation Safety Factor	$\gamma_2$	[-]	1,0			

**Table C4: Displacement under shear load**

Anchor Size			M8	M10	M12	M16
Shear Load in non-cracked concrete	V	[kN]	3,2	7,0	9,3	17,4
Displacement	$\delta_{v0}$	[mm]	0,8	1,3	1,5	3,1
	$\delta_{v\infty}$	[mm]	1,2	2,0	2,3	4,7

**SFS intec Wedge anchor SFS EX, SFS EX-S, SFS EX-S-H**

**Performance**  
Characteristic values for shear loads and displacements

Annex C 2

**Table C5: Characteristic tension loads under fire exposure in cracked and non-cracked concrete C20/25 to C50/60**

Anchor Size	SFS EX, SFS EX-S, SFS EX-S-H															
	M8				M10				M12				M16			
Fire Resistance duration R... [min]	30	60	90	120	30	60	90	120	30	60	90	120	30	60	90	120
<b>Steel Failure</b>																
Characteristic Resistance [kN] $N_{Rk,fi} = N_{Rk,s,fi} = N_{Rk,p,fi}$	0,2	0,2	0,2	0,1	0,6	0,5	0,4	0,3	1,1	0,8	0,7	0,6	2,1	1,6	1,4	1,0
Spacing $s_{cr,N,fi}$ [mm]	4 x $h_{ef}$															
Edge Distance $c_{cr,N,fi}$ [mm]	2 x $h_{ef}$															
	If fire attack is form more than one side, the edge distance of the anchor has to be $\geq 300$ mm.															

**SFS intec Wedge anchor SFS EX, SFS EX-S, SFS EX-S-H**

**Performance**  
Characteristic values for tension loads under fire exposure

Annex C 3