

Approval body for construction products  
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and  
Laender Governments



## European Technical Assessment

**ETA-13/0490**  
**of 17 October 2016**

English translation prepared by DIBt - Original version in German language

### General Part

Technical Assessment Body issuing the  
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Würth Ceiling Anchor W-DS/S

Product family  
to which the construction product belongs

Deformation controlled expansion anchor made of  
galvanised steel  
for multiple use for non-structural applications in concrete

Manufacturer

Adolf Würth GmbH & Co. KG  
Reinhold-Würth-Straße 12-17  
74653 Künzelsau  
DEUTSCHLAND

Manufacturing plant

Herstellwerk 9

This European Technical Assessment  
contains

9 pages including 3 annexes which form an integral part  
of this assessment

This European Technical Assessment is  
issued in accordance with Regulation (EU)  
No 305/2011, on the basis of

Guideline for European technical approval of "Metal  
anchors for use in concrete", ETAG 001 Part 6: "Anchors  
for multiple use for non-structural applications",  
August 2010,  
used as European Assessment Document (EAD)  
according to Article 66 Paragraph 3 of Regulation (EU)  
No 305/2011.

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

## Specific Part

### 1 Technical description of the product

The Würth Ceiling Anchor W-DS/S is an anchor made of galvanized steel which is placed into a drilled hole and anchored by deformation-controlled expansion.

Product and product description is given in Annex A.

### 2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Mechanical resistance and stability (BWR 1)

The essential characteristics regarding mechanical resistance and stability are included under the Basic Works Requirement Safety in use.

#### 3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for Class A1
Resistance to fire	No performance assessed

#### 3.3 Safety in use (BWR 4)

Essential characteristic	Performance
Characteristic resistance for tension and shear loads	See Annex C 1

### 4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with guideline for European technical approval ETAG 001, April 2013 used as European Assessment Document (EAD) according to Article 66 Paragraph 3 of Regulation (EU) No 305/2011 the applicable European legal act is: [97/161/EC].

The system to be applied is: 2+

English translation prepared by DIBt

**5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document**

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.


Issued in Berlin on 17 October 2016 by Deutsches Institut für Bautechnik

Uwe Bender  
Head of Department

*beglaubigt:*  
Tempel

**product and installation condition**

installed anchor

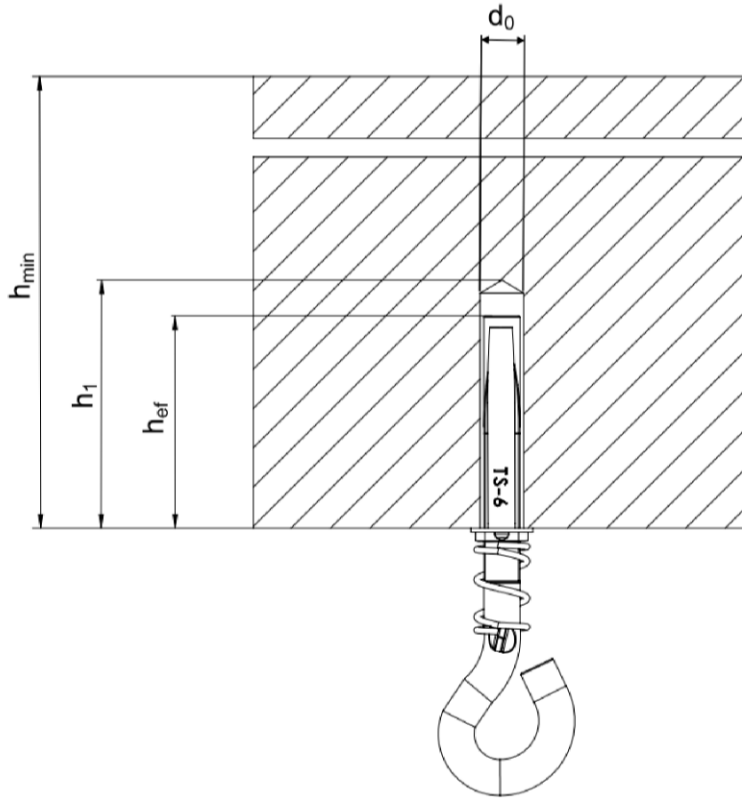


$h_{ef}$  = effective anchorage depth  
 $h_1$  = depth of the drill hole  
 $h_{min}$  = thickness of member

**Würth Ceiling Anchor W-DS/S**

**Product description**

Installation conditions

**Annex A 1**

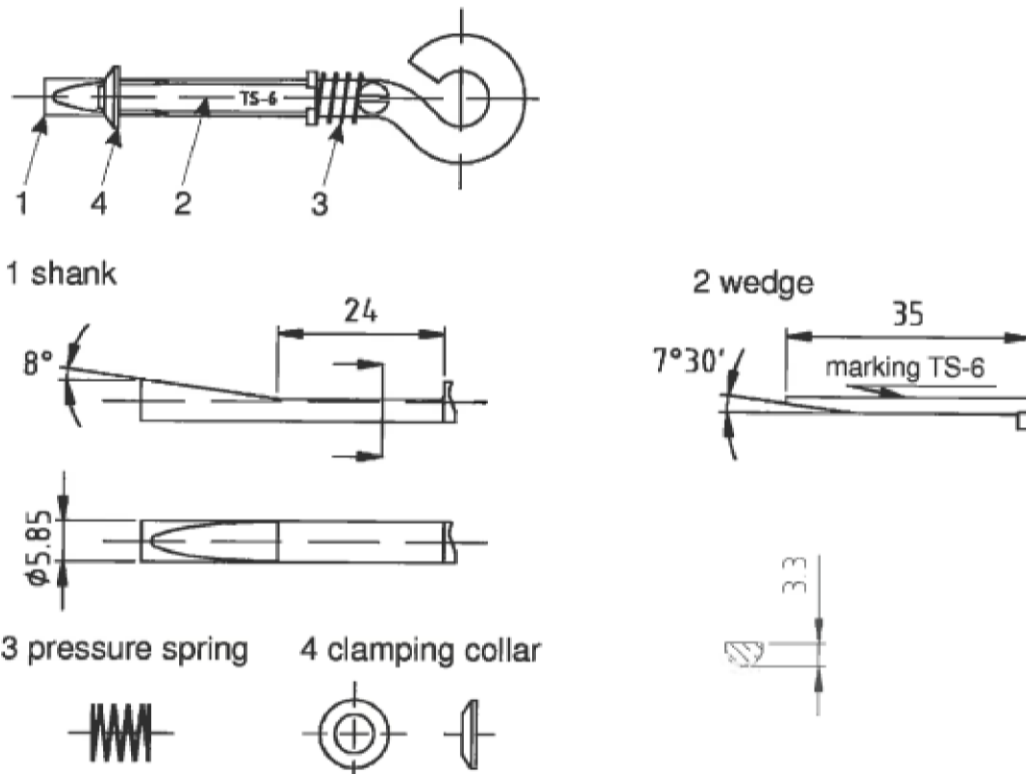

**Table A 1: Materials**

Material			
Steel EN 10263-2 galvanized according to EN ISO 4042			
nominal characteristic steel yield strength	$f_{yk}$	[N/mm <sup>2</sup> ]	150
nominal characteristic steel ultimate strength	$f_{uk}$	[N/mm <sup>2</sup> ]	300

**Table A 2: Dimensions**

Anchorsize		W-DS/S 6
Length of the wedge	[mm]	35
Length of the shaft	[mm]	85

**Würth Ceiling Anchor W-DS/S**

**Product description**  
Material and variants

**Annex A 2**

## Intended use

### Anchorage subject to:

- static and quasi static loads

### Base materials:

- reinforced and unreinforced concrete according to EN 206-1:2000
- strength classes C20/25 to C50/60 according to EN 206-1:2000
- cracked and uncracked concrete
- only for multiple use of non structural applications

### Use conditions (Environmental conditions):

- anchorage subject to dry internal conditions

### Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages under static or quasi-static actions are designed for design method C in accordance with:
  - ETAG 001, Annex C, Edition August 2010 or
  - CEN/TS 1992-4:2009.

### Installation:

- Hammer drilling only.
- Anchor installation carried out by appropriately qualified personal and under the supervision of the person responsible for technical matters of the site.

**Würth Ceiling Anchor W-DS/S**


**Intended use**

Specifications


**Annex B 1**

**Table B 1: Installation parameters**

Anchorsize			W-DS/S 6
nominal drill bit diameter	$d_0$	[mm]	6,0
cutting diameter of drill bit	$d_{cut} \leq$	[mm]	6.40
depth of drill hole	$h_1 \geq$	[mm]	40
effective anchorage depth	$h_{ef} \geq$	[mm]	33
Minimum thickness of member	$h_{min}$	[mm]	80
Minimum edge distance	$c_{min}$	[mm]	100
Minimum spacing	$s_{min}$	[mm]	200

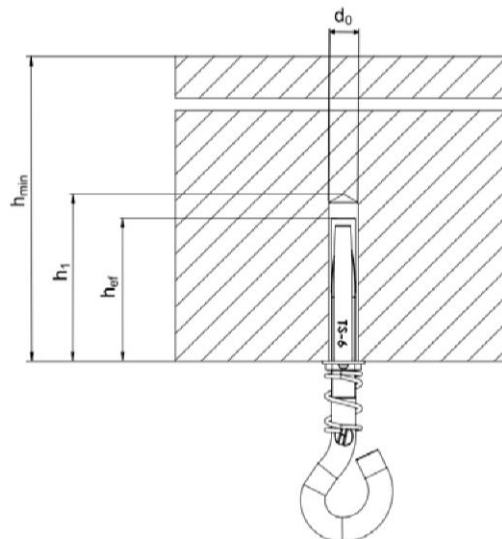

**Installation Instructions**

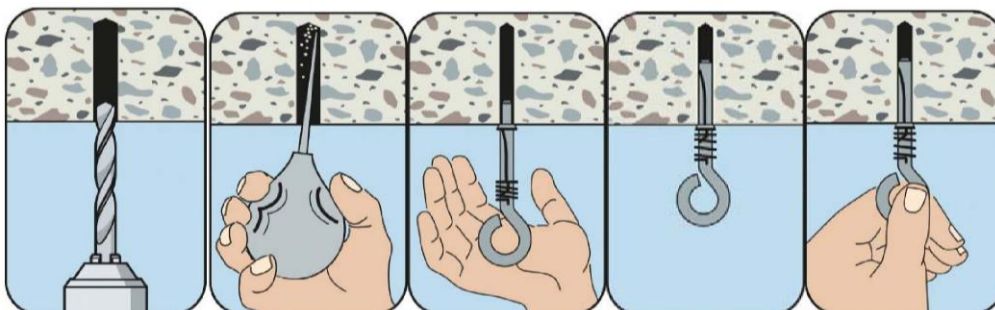

**Würth Ceiling Anchor W-DS/S**

**Intended use**

Installation parameters

**Annex B 2**



**Table C 1: Characteristic values for design method C according to ETAG 001, Annex C or for design method C according to CEN/TS 1992-4**

Anchorsize			W-DS/S
<b>For all load directions and for all failures</b>			
Characteristic resistance in cracked and uncracked concrete C20/25 to C50/60	$F_{Rk}$	[kN]	1.1
Edge distance	$c_{cr,N} = c_{min} \geq$	[mm]	100
Spacing	$s_{cr,N} = s_{min} \geq$	[mm]	200
Partial safety factor	$\gamma_2^{1)} = \gamma_{inst}^{2)}$	[-]	1.0

<sup>1)</sup> Parameter relevant only for design according to ETAG 001, Annex C

<sup>2)</sup> Parameter relevant only for design according to CEN/TS 1992-4:2009

**Würth Ceiling Anchor W-DS/S**

**Performances**

Characteristic values according to ETAG 001, Annex C or CEN/TS 1992-4

**Annex C 1**