

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments



European Technical Assessment

ETA-12/0502
of 6 December 2017

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

EJOT SDP-S-10G and EJOT SDP-KB-10G

Product family
to which the construction product belongs

Plastic anchor for multiple use in autoclaved aerated
concrete for non-structural applications

Manufacturer

EJOT Baubefestigungen GmbH
In der Stockwiese 35
57334 Bad Laasphe
DEUTSCHLAND

Manufacturing plant

EJOT Herstellwerk 1, 2, 3 und 4

This European Technical Assessment
contains

12 pages including 3 annexes which form an integral part
of this assessment

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

ETAG 020, edition March 2012,
used as EAD according to Article 66 Paragraph 3 of
Regulation (EU) No 305/2011

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The EJOT SDP-S and EJOT SDP-KB for use in autoclaved aerated concrete is a plastic anchor consisting of a plastic sleeve made of polyamide and an accompanying specific screw of zinc coated carbon steel or stainless steel.

The plastic sleeve is expanded by screwing in the specific screw which presses the sleeve against the wall of the drilled hole.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchors of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

The essential characteristics regarding mechanical resistance and stability are included under the Basic Works Requirement Safety in use.

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for Class A 1
Resistance to fire	No performance assessed

3.3 Safety and accessibility (BWR 4)

Essential characteristic	Performance
Characteristic resistance for tension and shear loads	See Annex C 1
Characteristic resistance for bending moments	See Annex C 1
Displacements under shear and tension loads	See Annex C 2
Anchor distances and dimensions of members	See Annex B 3

3.4 General aspects

The verification of durability is part of testing the essential characteristics. Durability is only ensured if the specifications of intended use according to Annex B are taken into account.

English translation prepared by DIBt

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with guideline for European technical approval ETAG 020, March 2012 used as European Assessment Document (EAD) according to Article 66 Paragraph 3 of Regulation (EU) No 305/2011 the applicable European legal act is: 97/463/EC.

The system to be applied is: 2+

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.


Issued in Berlin on 6 December 2017 by Deutsches Institut für Bautechnik

BD Dipl.-Ing. Andreas Kummerow
Head of Department


beglaubigt:
Ziegler

Intended use

Anchorage in autoclaved aerated concrete (AAC)

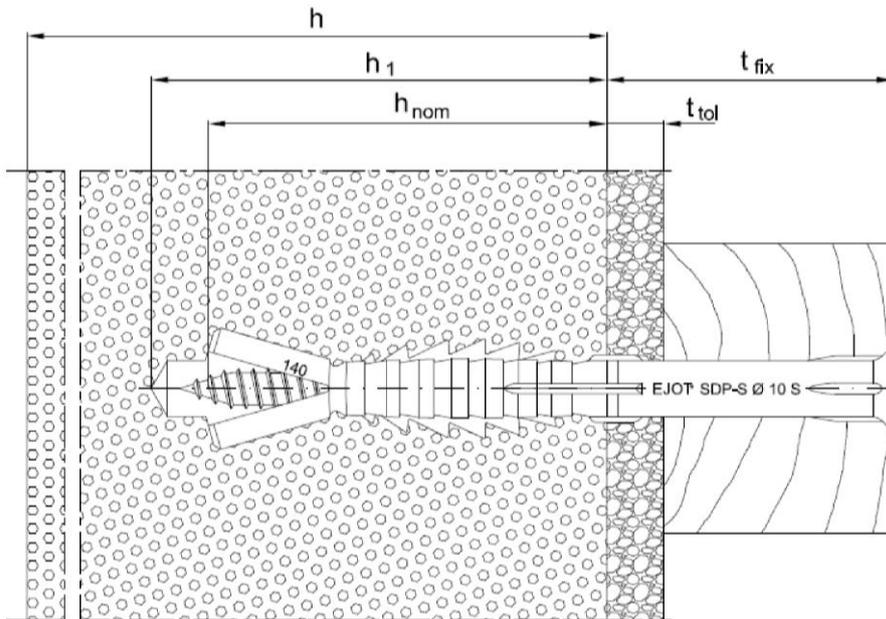

Picture 1: Intended use SDP-S-10G
Screw head-type: countersunk (S)

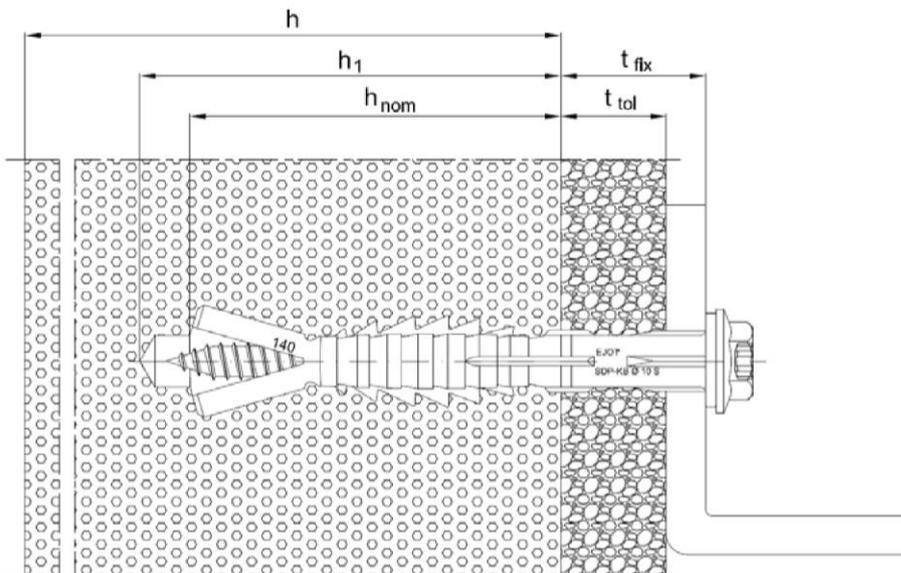

Picture 2: Intended use SDP-KB-10G
Screw head-type: collar head (KB)

Legende


- h = Thickness of member
- h_1 = Depth of drilled hole to deepest point
- h_{nom} = Overall plastic anchor embedment depth (setting depth)
- t_{tol} = Thickness of equalizing layer or non-load bearing coating
- t_{fix} = t_{tol} + thickness of fixture

EJOT SDP-S-10G and EJOT SDP-KB-10G

Product description
Installed condition

Annex A 1

Anchor unit SDP-S-10G

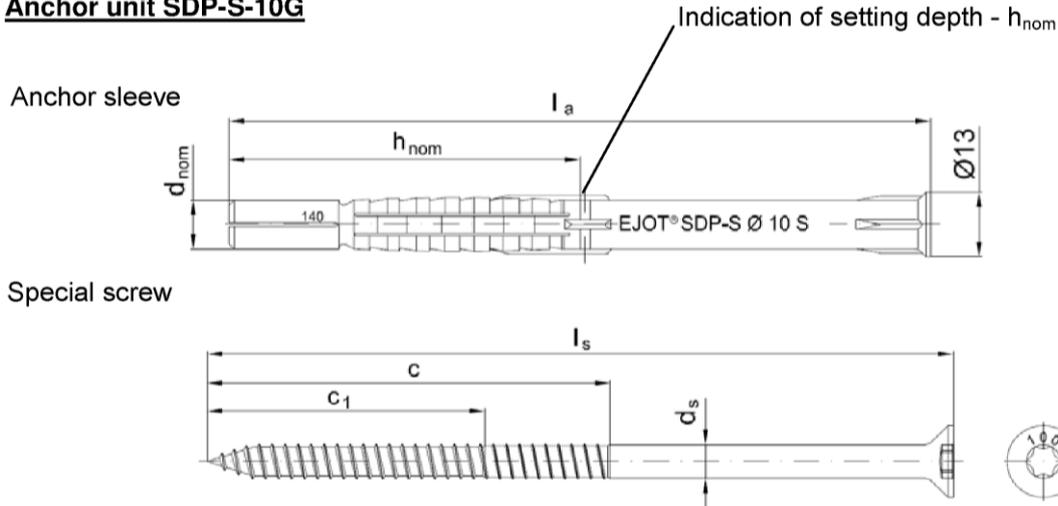


Picture 3: Dowel type countersunk (S)

Marking of anchor sleeve:
Manufacturer, anchor type incl. head type
diameter, length
Example: EJOT SDP-S-10G x 140

Marking of special screw:
Anchor length (e.g. 140)

Anchor unit SDP-KB-10G

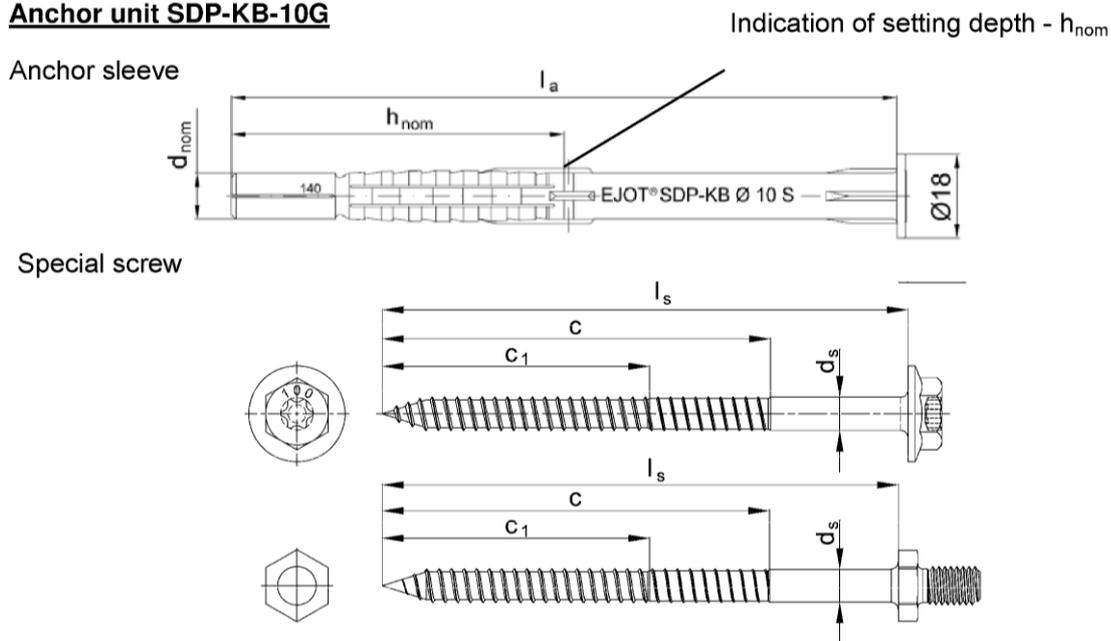

Picture 4: Dowel type collar head (KB)

Marking of anchor sleeve:
Manufacturer, anchor type incl. head type
diameter, length (marking at the tip of the sleeve)
Example: EJOT SDP-KB-10G x 140

Marking of special screw:
Anchor length (e.g. 140)

EJOT SDP-S-10G and EJOT SDP-KB-10G

Product description
Anchor types, marking of anchor sleeve and special screw

Annex A 2

Product designation key

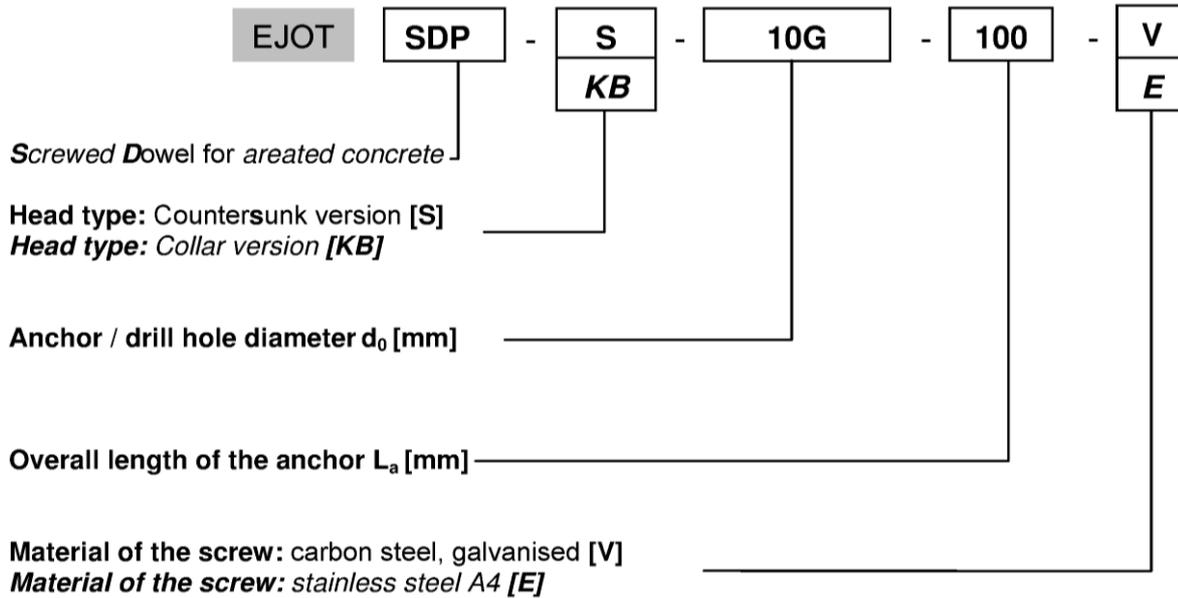


Table 1: Dimensions [mm]

Anchor type	Anchor sleeve							Special screw		
	Farbe	d_{nom}	h_{nom}	min _{tfix}	max _{tfix}	min _{l_a}	max _{l_a}	d_s	c_1	c
SDP-KB-10G	orange	10	70	10	150	80	220	7,0	55	80
SDF-S-10G	orange	10	70	10	150	80	220	7,0	55	80

(Designations: see Annex A 2)

Table 2: Material

Element	Material
Anchor sleeve	Polyamide PA6, colour orange
Special screw	Carbon steel, galvanized > 5 μ m acc. EN ISO 4042:1999, blue passivated, coated
	Stainless steel acc. EN 10088-3:2012, z.B. 1.4401 / 1.4571

EJOT SDP-S-10G and EJOT SDP-KB-10G

Product description
Product designation key, dimensions, material

Annex A 3

Specifications of intended use

Anchorage is subject to:

- Static and quasi-static loads
- Multiple fixing of non-structural applications

Base materials:

- Autoclaved aerated concrete (use category d)
- For other base materials of the use category d the characteristic resistance of the anchor may be determined by job site tests according to ETAG 020, Annex B edition March 2012

Temperature Range:

- b: -40°C to 80°C (max. short term temperature + 80°C and max. long term temperature +50°C)

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (zinc coated steel, stainless steel).
- The specific screw made of galvanized steel may also be used in structures subject to external atmospheric exposure, if the area of the head of the screw is protected against moisture and driving rain after mounting of the fixing unit in this way, that intrusion of moisture into the anchor shaft is prevented. Therefor there shall be an external cladding or a ventilated rainscreen mounted in front of the head of the screw and the head of the screw itself shall be coated with a soft plastic, permanently elastic bitumen-oil-combination coating (e. g. undercoating or body cavity protection for cars).
- Structures subject to external atmospheric exposure (including industrial and marine environment) and permanently damp internal condition, if no particular aggressive conditions exist (stainless steel).
- Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used).

Design:

- The anchorages are designed in accordance with the ETAG 020, Annex C Edition March 2012 under the responsibility of an engineer experienced in anchorages and masonry work.
- Verifiable calculation notes and drawings shall be prepared taking account of the loads to be anchored, the nature and strength of the base materials and the dimensions of the anchorage members as well as of the relevant tolerances. The position of the anchor is indicated on the design drawings.
- Fasteners are only to be used for multiple use for non-structural application, according to ETAG 020 Edition March 2012.

Installation:

- Hole drilling by the drill modes acc. to Annex C 1 for use category d.
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- Installation temperature from -10°C to +40°C
- Exposure to UV due to solar radiation of anchor not protected ≤ 6 weeks

EJOT SDP-S-10G and EJOT SDP-KB-10G

Intended use
Specifications

Annex B 1

Table 3: Installation parameters

Anchor type		SDP-KB-10G SDP-S-10G
Use category ¹⁾		d
Drill hole diameter	d_0 [mm] =	10
Cutting diameter of drill bit	d_{cut} [mm] ≤	10,45
Depth of the drill hole to deepest point	h_1 [mm] ≥	80
Overall plastic anchor embedment depth	h_{nom} [mm] ≥	70
Diameter of the clearance hole in the fixture	d_f [mm] ≤	10,5
Minimum installation temperature	[°C]	-10
Temperature range (b)	[°C]	+50 till +80

¹⁾ Use category: a = concrete, b = solid masonry, c = hollow or perforated masonry,
d = autoclaved aerated concrete

EJOT SDP-S-10G and EJOT SDP-KB-10G


Intended use
Installation parameters use category d

Annex B 2

Table 4: Minimum member thickness, spacing and edge distance in autoclaved aerated concrete (use category d)

SDP-10G		$f_b \geq 2 \text{ N/mm}^2$	$f_b \geq 6 \text{ N/mm}^2$
Single anchor			
Overall plastic anchor embedment depth	h_{nom} [mm]	70	
Minimum member thickness	h_{min} [mm]	115	175
Minimum edge distance	c_{min} [mm]	100	120
Minimum spacing	a_{min} [mm]	250	
Anchor group			
Minimum member thickness	h_{min} [mm]	115	175
Minimum edge distance	$c_{1,\text{min}}$ [mm]	100	120
Minimum edge distance (perpendicular to $c_{1,\text{min}}$)	$c_{2,\text{min}}$ [mm]	100	130
Minimum spacing perpendicular to free edge	$s_{1,\text{min}}$ [mm]	80	95
Minimum spacing parallel to free edge	$s_{2,\text{min}}$ [mm]	80	95

Scheme of spacing and edge distances in autoclaved aerated concrete

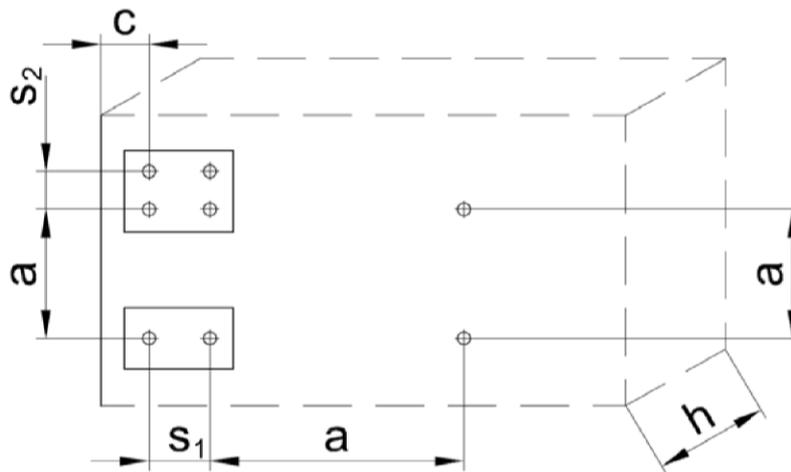

- h = member thickness
- c = edge distance
- a = spacing between anchor groups
- s_1 = spacing (perpendicular to the free edge) within an anchor group
- s_2 = spacing (parallel to the free edge) within an anchor group


EJOT SDP-S-10G and EJOT SDP-KB-10G

Intended use
Minimum member thickness, spacing and edge distance in autoclaved aerated concrete


Annex B 3

**Installation instructions
(exemplary for the fixing of a pre-drilled metal attachment part)**


1. Drill the hole \varnothing 10 mm using the drill method described in Annex C

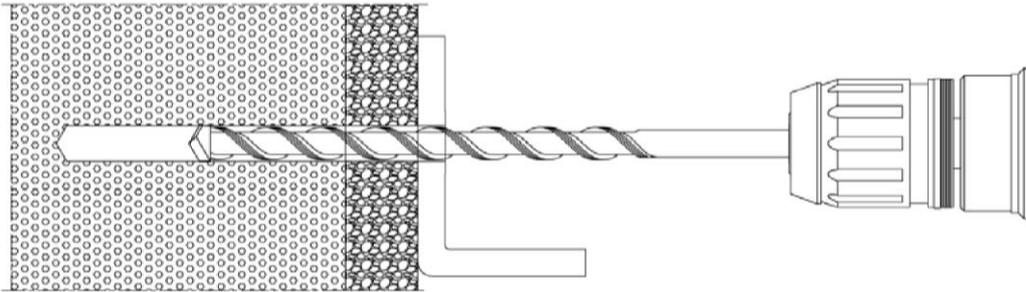


2. Cleaning of the hole
Insert the assembled anchor (screw and sleeve) using a hammer, until the plastic sleeve is flush with surface of fixture

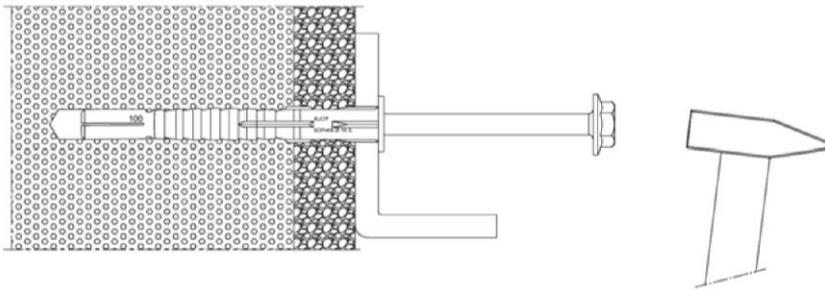

3. Screw in the screw until the head is rested on the plastic sleeve

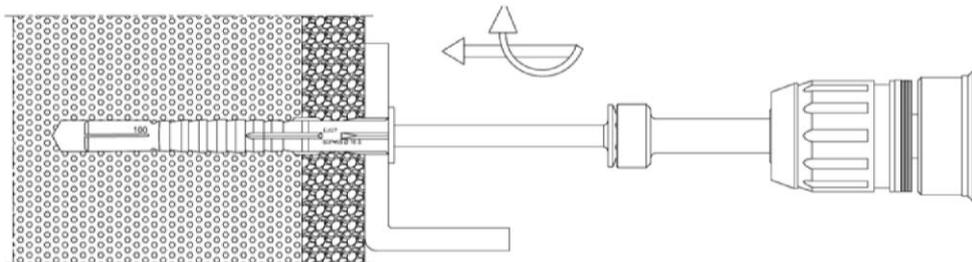

4. Correctly installed anchor

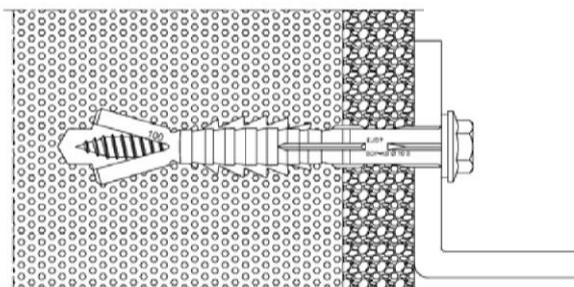

EJOT SDP-S-10G and EJOT SDP-KB-10G

Intended use
Installation instructions

Annex B 4

Table 5: Characteristic bending moment of the screw (use category d)

Anchor type	SDP-10G	
Material	Steel, galvanized	Stainless steel A4
Characteristic bending moment $M_{Rk,s}$ [Nm]	17,7	20,6
Partial safety factor γ_{Ms} ¹⁾	1,5	1,87

Table 6: Characteristic resistance F_{Rk} ²⁾ use in autoclaved aerated concrete

Anchor type	SDP-10G	
Compressive strength for autoclaved aerated concrete acc. EN 771-4:2011	$f_b \geq 2$ N/mm ²	$f_b \geq 6$ N/mm ²
Characteristic resistance F_{Rk} ³⁾ [kN]	0,75	3,0
Partial safety factor γ_{MAAC} ¹⁾	2,0	2,0

1) In the absence of other national regulations

2) Drilling method = Rotary drilling

3) Characteristic load-bearing capacity for tension, shear or combined tension and shear loading.
The characteristic resistance is valid for single anchors or for a group of two or four anchors with a spacing equal or larger than the minimum spacing s_{min} according to Table 4.

Table 7: Displacements ¹⁾ under tension and shear loads (use category d)

Anchor type	Displacements under tension			Displacements under shear		
	F [kN]	δ_{N0} [mm]	$\delta_{N\infty}$ [mm]	F [kN]	δ_{V0} [mm]	$\delta_{V\infty}$ [mm]
SDP-10G	0,27	0,18	0,36	0,27	0,54	0,81

1) Intermediate values can be interpolated

EJOT SDP-S-10G and EJOT SDP-KB-10G

Performance
Characteristic resistance, displacements under tension and shear loads

Annex C 1