

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments

★ ★ ★
★ Designated
according to
Article 29 of Regula-
tion (EU) No 305/2011
and member of EOTA
(European Organi-
sation for Technical
Assessment)
★ ★ ★
★ ★

European Technical Assessment

ETA-13/0271
of 11 July 2017

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Multi-axis concealed hinge assemblies TECTUS TE...

Product family
to which the construction product belongs

Multi-axis concealed hinge assemblies
TECTUS TE 235 3D, TECTUS TE 240 3D, TECTUS TE
340 3D, TECTUS TE 340 3D FR, TECTUS TE 540 3D,
TECTUS TE 540 3D FR, TECTUS TE 540 3D A8,
TECTUS TE 540 3D A8 FR, TECTUS TE 640 3D,
TECTUS TE 640 3D FR

Manufacturer

SIMONSWERK GmbH
Bosfelder Weg 5
33378 Rheda-Wiedenbrück
DEUTSCHLAND

Manufacturing plant

SIMONSWERK GmbH
Bosfelder Weg 5
33378 Rheda-Wiedenbrück
DEUTSCHLAND
SIMONSWERK GmbH & Co. KG
Liesebühl 20
37308 Heiligenstadt

This European Technical Assessment
contains

16 pages including 11 annexes which form an integral
part of this assessment

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

European Assessment Document (EAD)
020001-01-0405

This version replaces

ETA-13/0271 issued on 9 April 2013

European Technical Assessment
ETA-13/0271
English translation prepared by DIBt

Page 2 of 16 | 11 July 2017

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part**1 Technical description of the product**

This European Technical Assessment applies to the variable concealed multi-axis hinges made of aluminium and zinc diecasting with the designation "TECTUS TE 235 3D, TECTUS TE 240 3D, TECTUS TE 340 3D, TECTUS TE 340 3D FR, TECTUS TE 540 3D, TECTUS TE 540 3D FR, TECTUS TE 540 3D A8, TECTUS TE 540 3D A8 FR, TECTUS TE 640 3D, TECTUS TE 640 3D FR".

Each product consists of three parts, one part a mounting plate for the door frame, one part a mounting plate for the door leaf with segmented plates connected laterally in such a way as to allow the door to swing freely and to maintain the leaf in the same horizontal and vertical plane during the full operational cycle. Between the two mounting plates provide a variable geometry moving axis within a concealed unsprung hinge assembly.

The system setup of the product is given in Annexes 1 to 10.

The further labelling of some hinges is according to Annex 11.

2 Specification of the intended use in accordance with the applicable European assessment Document

The hinges are intended for use on doors of timber and metal. The doors could be made of synthetic materials if there is no requirement on resistance to fire.

They are invisible (concealed) hinges to allow single and double swing door leafs to be mounted flush to its door leaf and frame, forming a flush panel surface when the door is closed, and allowing the door to open to 180°.

The hinges are available for use on doors with door mass up to 40 kg (TECTUS TE 235 3D, TECTUS TE 240 3D), 80 kg (TECTUS TE 340 3D, TECTUS TE 340 3D FR), 100 kg (TECTUS TE 540 3D A8, TECTUS TE 540 3D A8 FR), 120 kg (TECTUS TE 540 3D, TECTUS TE 540 3D FR) or 160 kg (TECTUS TE 640 3D, TECTUS TE 640 3D FR) each door leaf.

The verifications and assessment methods on which this European Technical Assessment is based lead the assumption of working life of the hinges of 10 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment**3.1 Mechanical resistance and stability (BWR 1)**

Not applicable

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	EI ₂ 30

3.3 Hygiene, health and the environment (BWR 3)

Not applicable

3.4 Safety and accessibility (BWR 4)

Not applicable

3.5 Protection against noise (BWR 5)

Not applicable

3.6 Energy economy and heat retention (BWR 6)

Not applicable

3.7 Sustainable use of natural resources (BWR 7)

For the sustainable use of natural resources no performance was investigated for this product.

3.8 General aspects

The verification of durability is part of testing the essential characteristics.

Essential characteristic	Performance
Category of use	Grade 2 - TECTUS TE 235 3D, TECTUS TE 240 3D Grade 3 - TECTUS TE 340 3D, TECTUS TE 340 3D FR Grade 4 - TECTUS TE 540 3D, TECTUS TE 540 3D FR, TECTUS TE 540 3D A8, TECTUS TE 540 3D A8 FR, TECTUS TE 640 3D, TECTUS TE 640 3D FR
Durability	Grade 7
Test door mass	Grade 2 - TECTUS TE 235 3D, TECTUS TE 240 3D Grade 4 - TECTUS TE 340 3D, TECTUS TE 340 3D FR Grade 5 - TECTUS TE 540 3D A8, TECTUS TE 540 3D A8 FR Grade 6 - TECTUS TE 540 3D, TECTUS TE 540 3D FR, TECTUS TE 640 3D, TECTUS TE 640 3D FR
Fire resistance	Grade 0 - TECTUS TE 235 3D, TECTUS TE 240 3D, TECTUS TE 540 3D A8, TECTUS TE 540 3D A8 FR Grade 1 - TECTUS TE 340 3D, TECTUS TE 340 3D FR, TECTUS TE 540 3D, TECTUS TE 540 3D FR, TECTUS TE 640 3D, TECTUS TE 640 3D FR
Safety	Grade 1
Corrosion resistance	Grade 3 - TECTUS TE 235 3D, TECTUS TE 240 3D, Grade 4 - TECTUS TE 340 3D, TECTUS TE 340 3D FR, TECTUS TE 540 3D, TECTUS TE 540 3D FR, TECTUS TE 540 3D A8, TECTUS TE 540 3D A8 FR TECTUS TE 640 3D, TECTUS TE 640 3D FR
Security	Grade 0 - TECTUS TE 235 3D, TECTUS TE 240 3D, TECTUS TE 340 3D, TECTUS TE 340 3D FR Grade 1 - TECTUS TE 540 3D, TECTUS TE 540 3D FR, TECTUS TE 540 3D A8, TECTUS TE 540 3D A8 FR TECTUS TE 640 3D, TECTUS TE 640 3D FR
Hinge grade	Grade 7 - TECTUS TE 235 3D, TECTUS TE 240 3D, Grade 11 - TECTUS TE 340 3D, TECTUS TE 340 3D FR Grade 12 - TECTUS TE 540 3D A8, TECTUS TE 540 3D A8 FR Grade 13 - TECTUS TE 540 3D, TECTUS TE 540 3D FR Grade 14 - TECTUS TE 640 3D, TECTUS TE 640 3D FR

European Technical Assessment**ETA-13/0271**

English translation prepared by DIBt

Page 5 of 16 | 11 July 2017

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

According to Decision of the Commission 1999/93/EC (OJ L 29/51 of 26.01.1999 p. 51), as amended by Decision of the Commission 2011/246/EU (Letter of the European commission of 15/10/2004), the system of assessment and verification of constancy of performance (see Annex V and Article 65 Paragraph 2 to Regulation (EU) No 305/2011) given in the following table applies.

Product	Intended use	Level or Grade	System
TECTUS TE 235 3D, TECTUS TE 240 3D, TECTUS TE 340 3D, TECTUS TE 340 3D FR, TECTUS TE 540 3D, TECTUS TE 540 3D FR, TECTUS TE 540 3D A8, TECTUS TE 540 3D A8 FR, TECTUS TE 640 3D, TECTUS TE 640 3D FR	fire/smoke compartmentation and on escape routes		1


5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable EAD

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.

Issued in Berlin on 11 July 2017 by Deutsches Institut für Bautechnik

Maja Tiemann
p. p. Head of department


beglaubigt:
Pritzkow

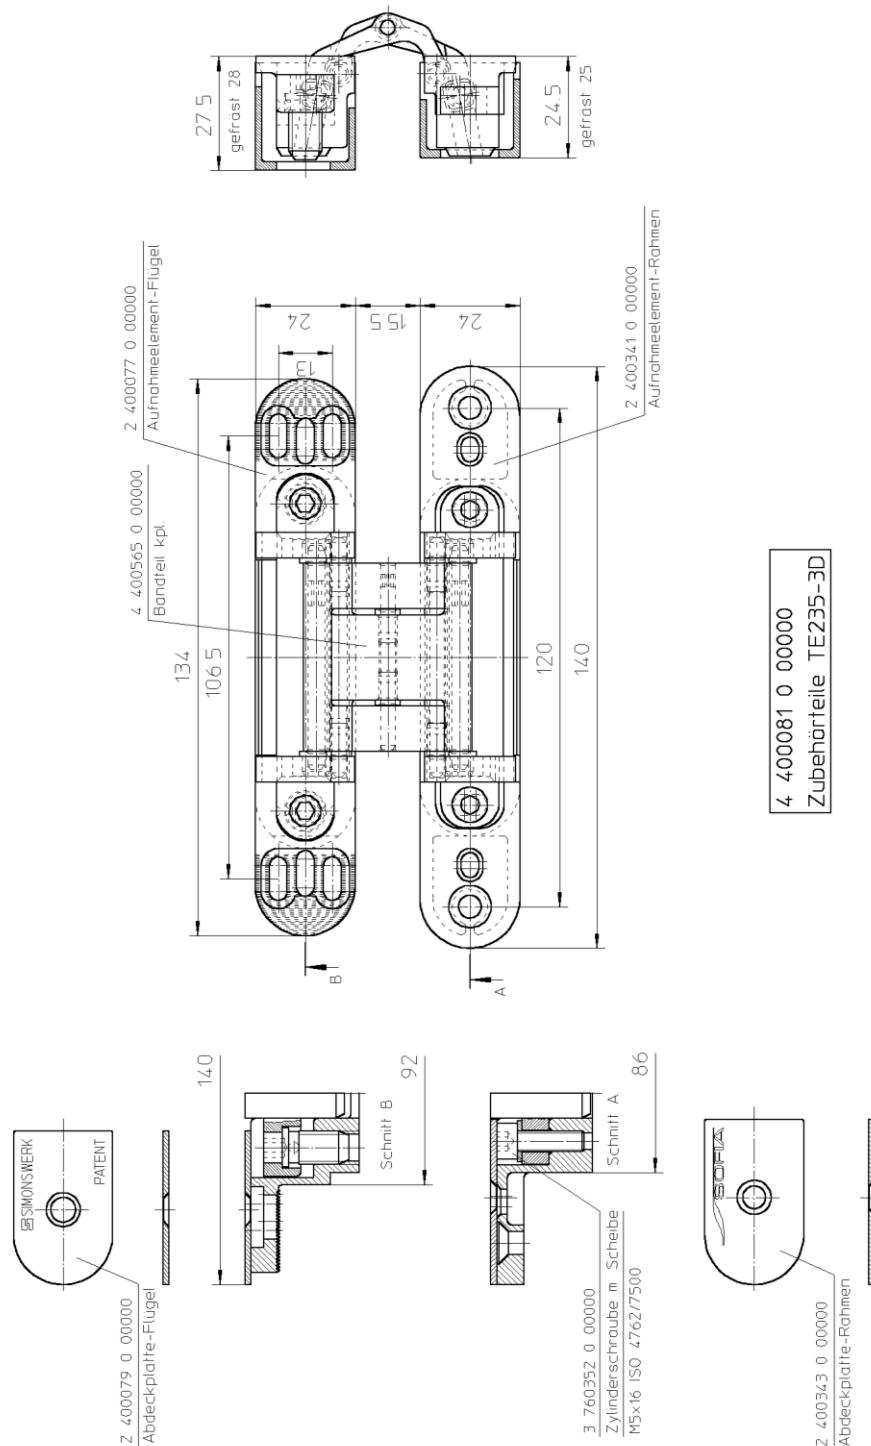



Multi-axis concealed hinge assemblies TECTUS TE 235 3D


Construction

Annex 1

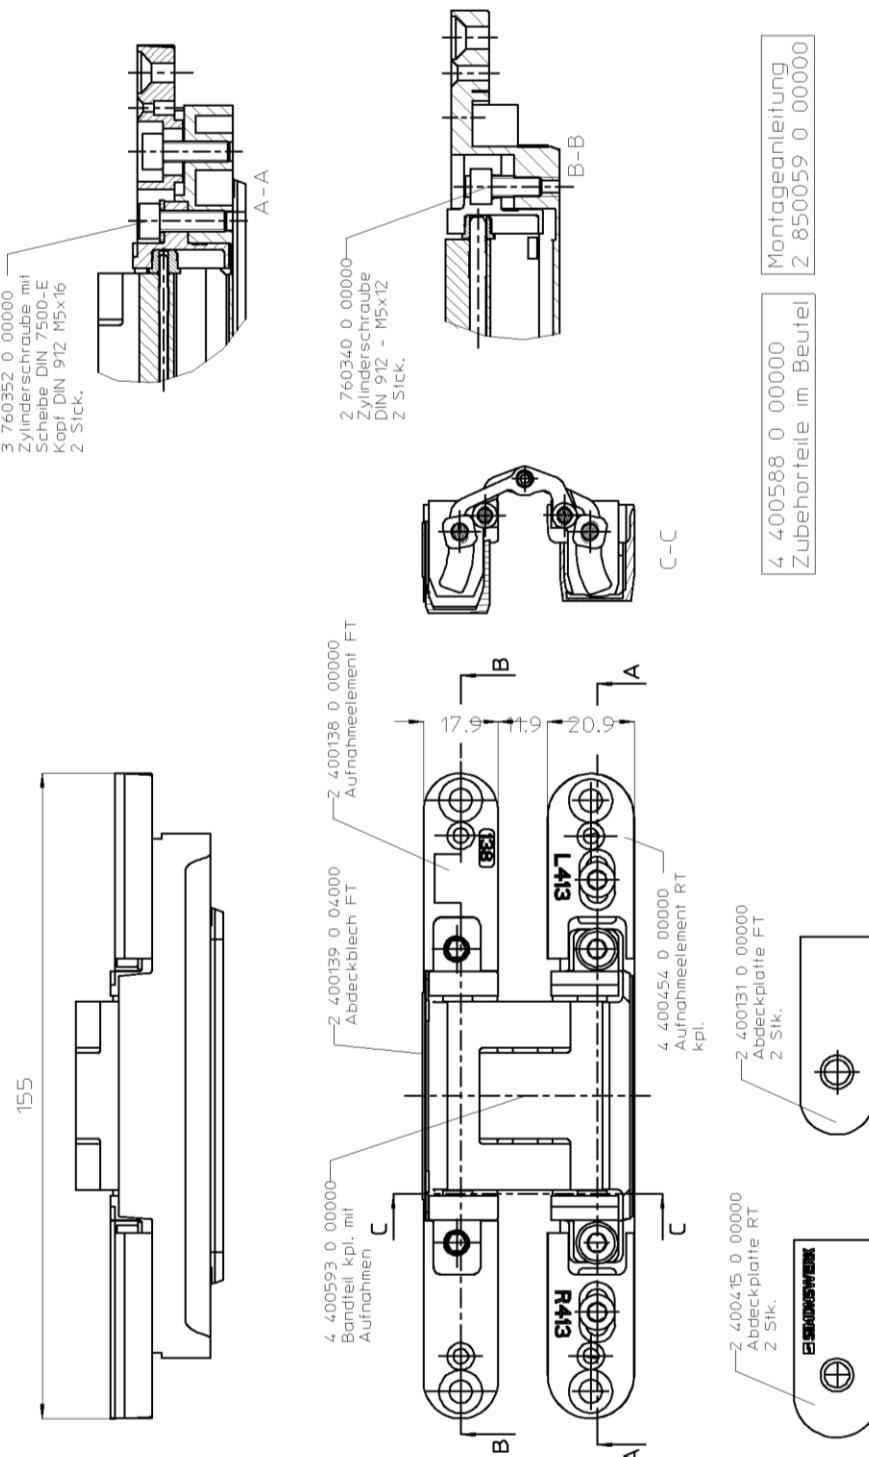

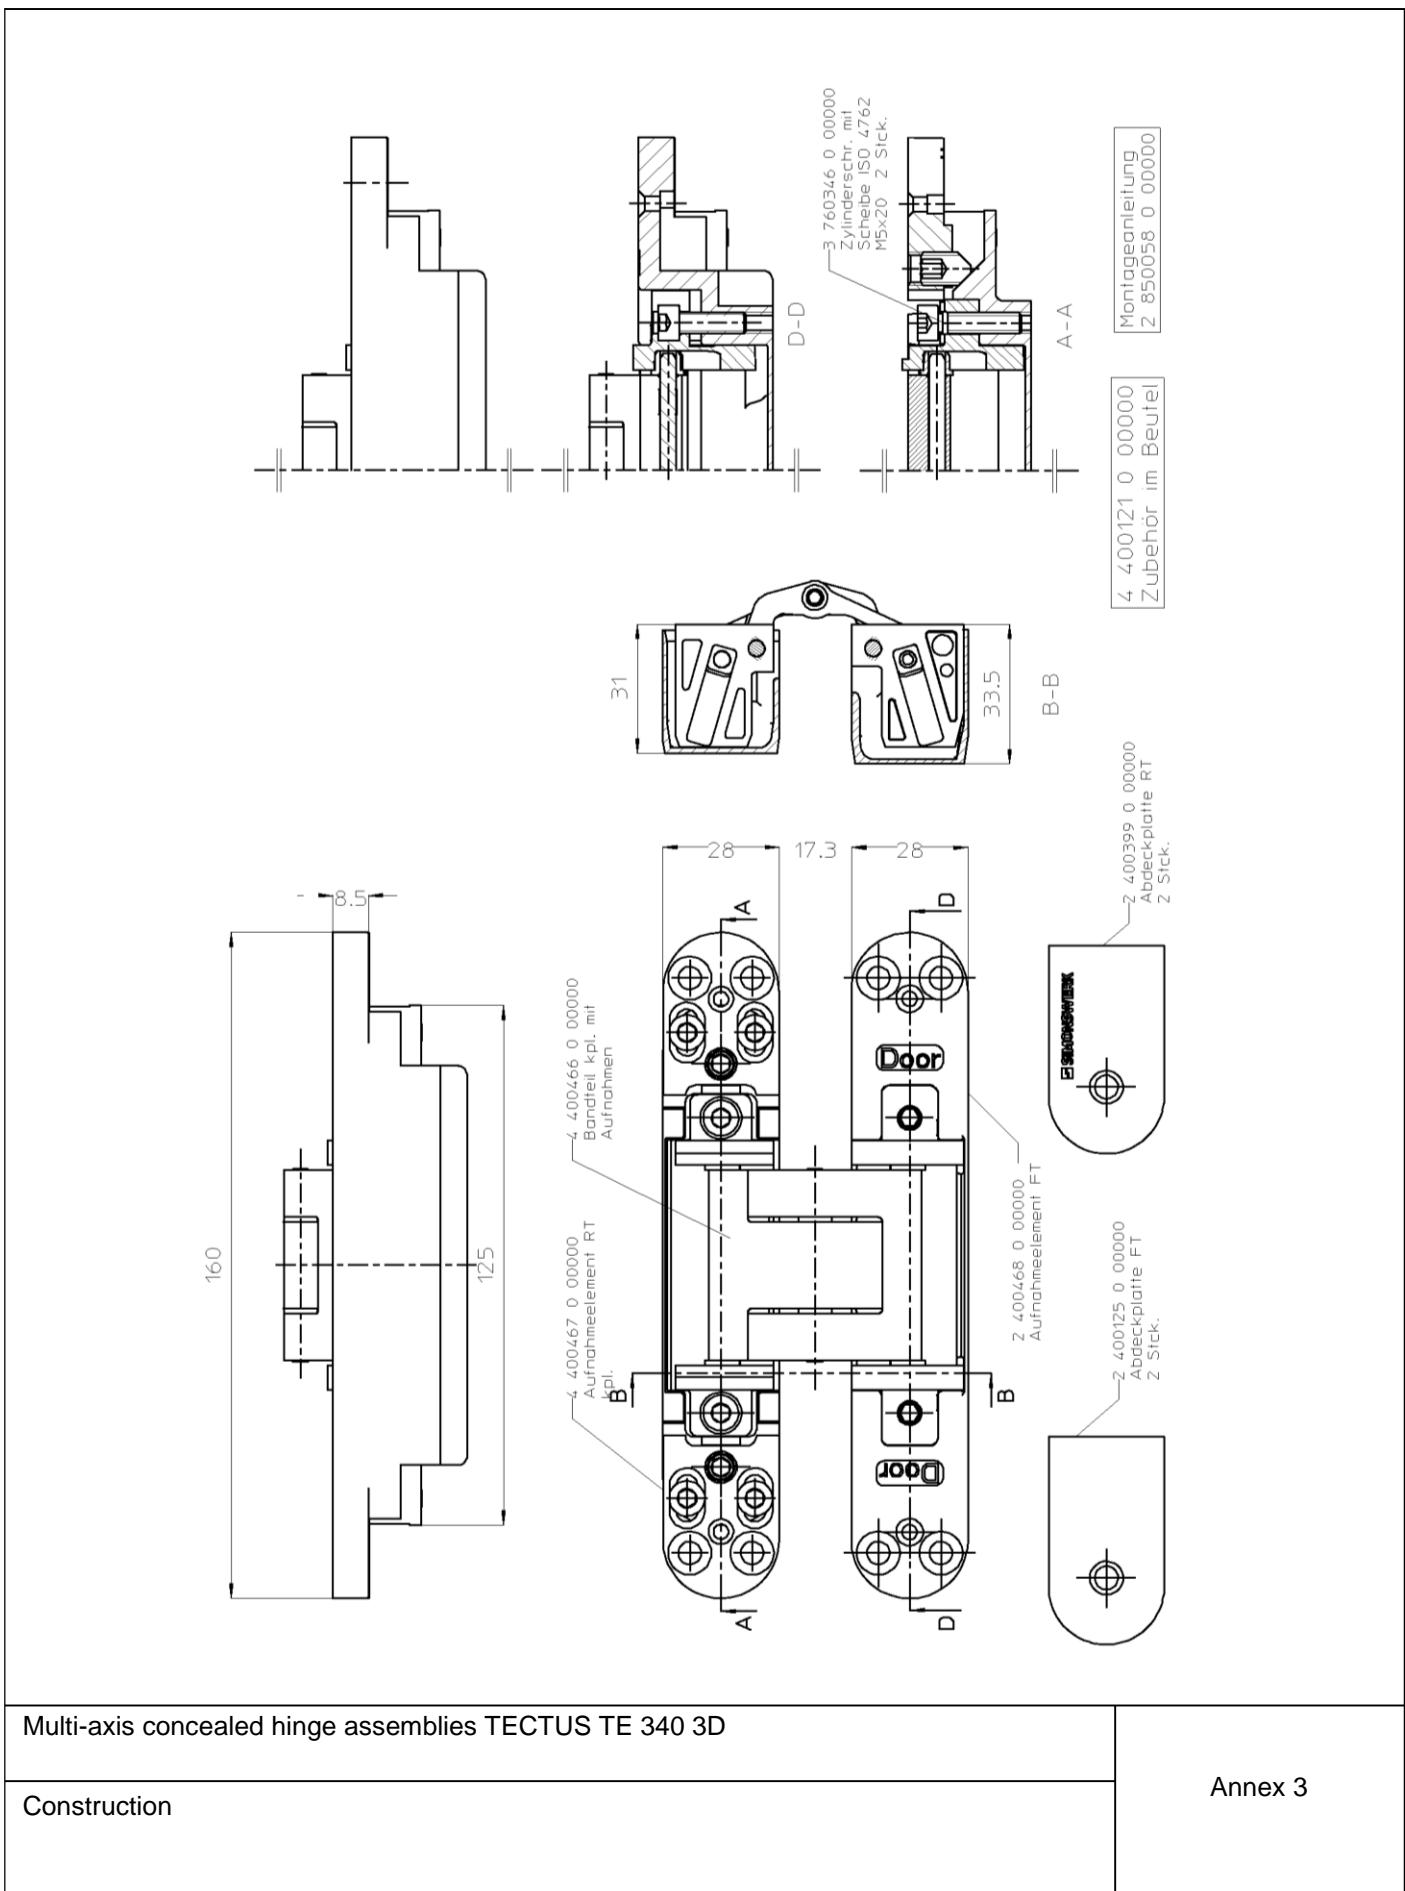

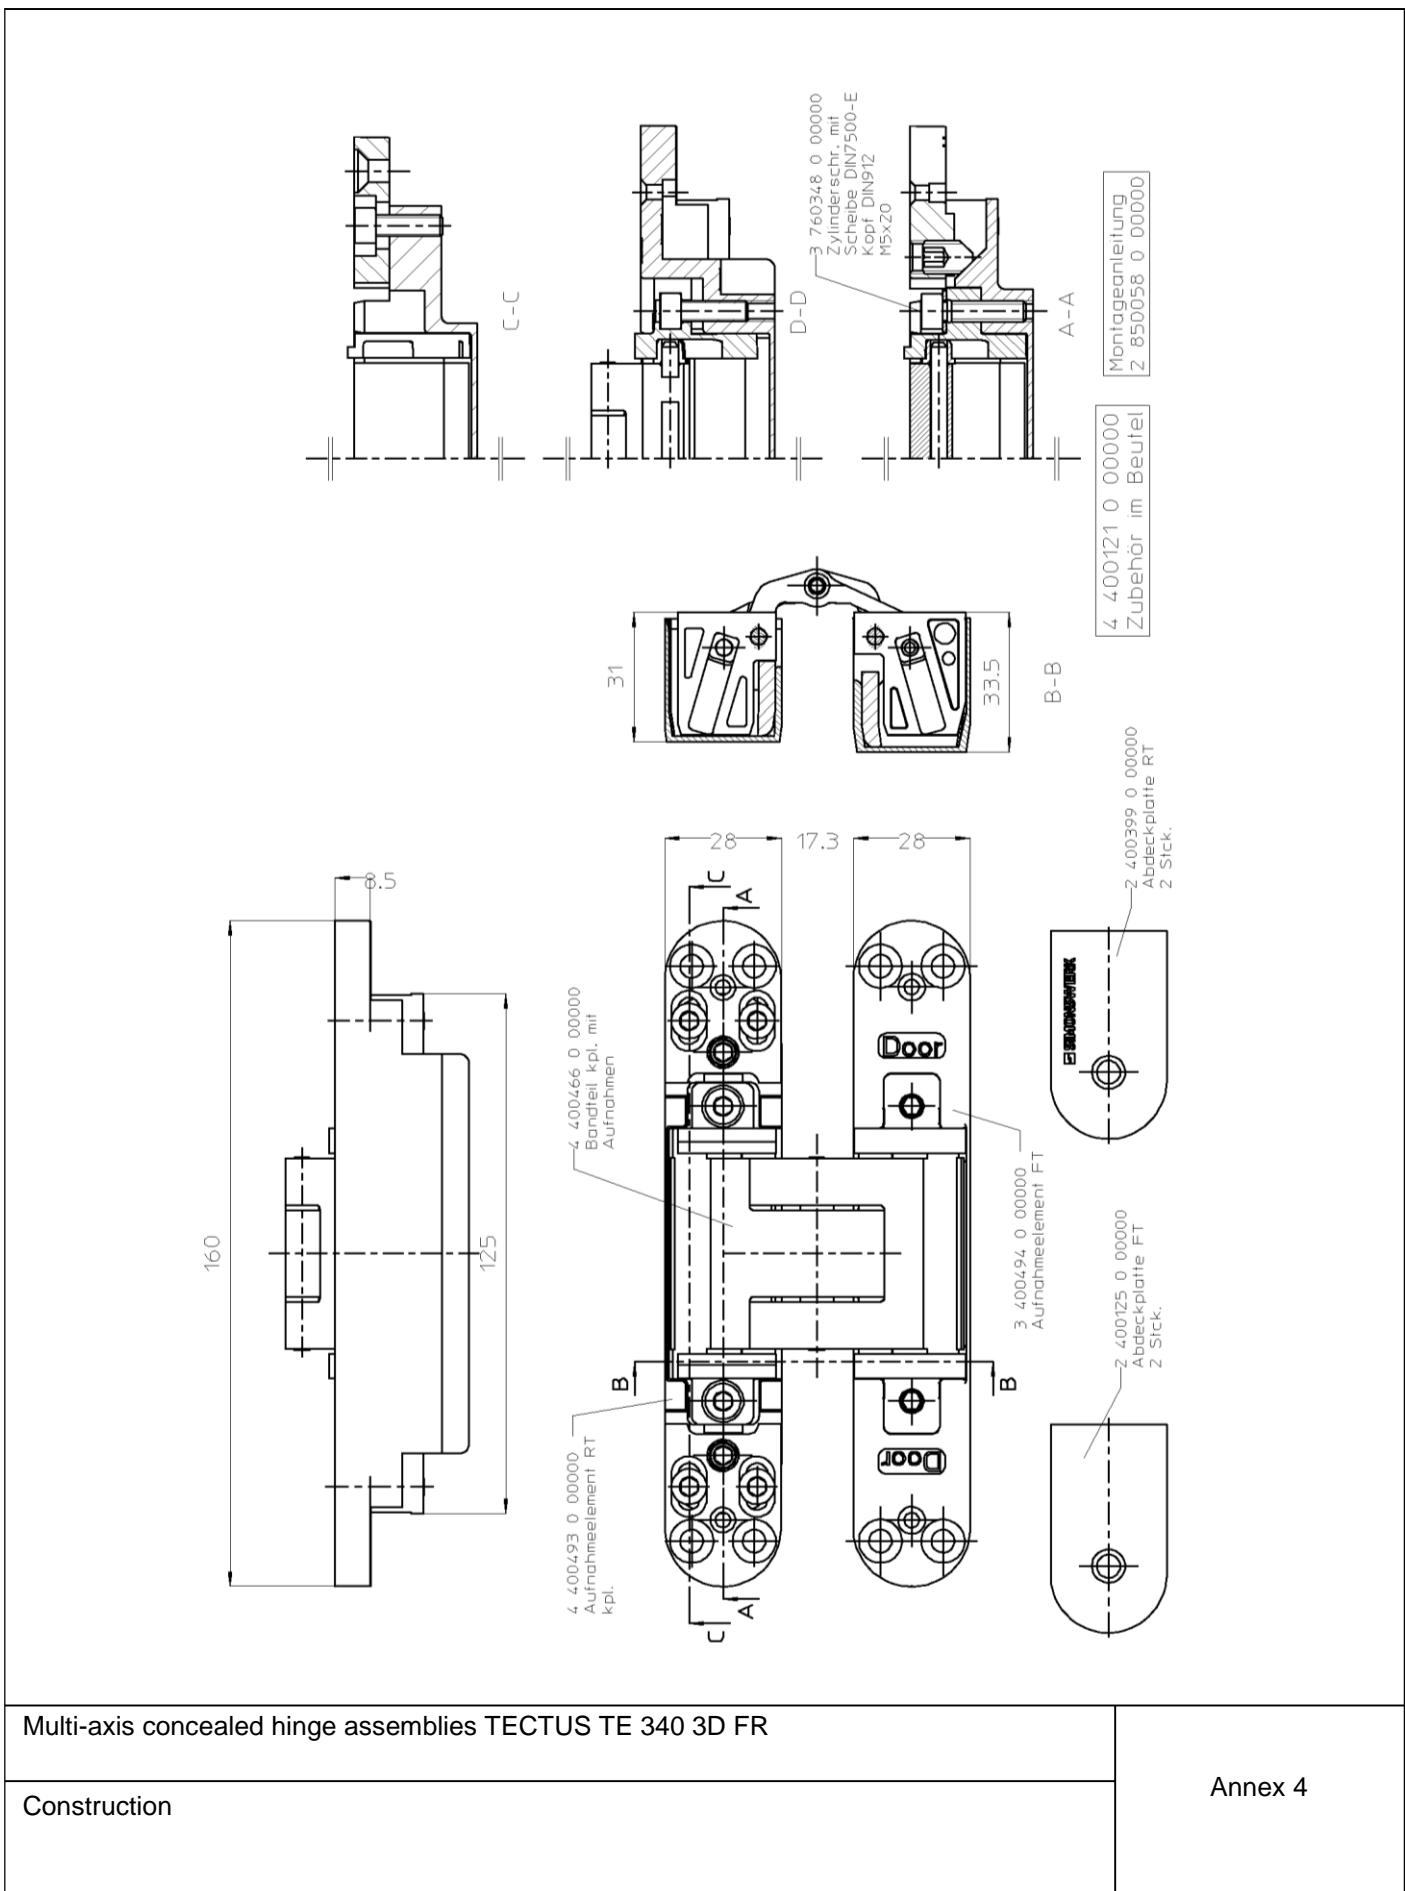


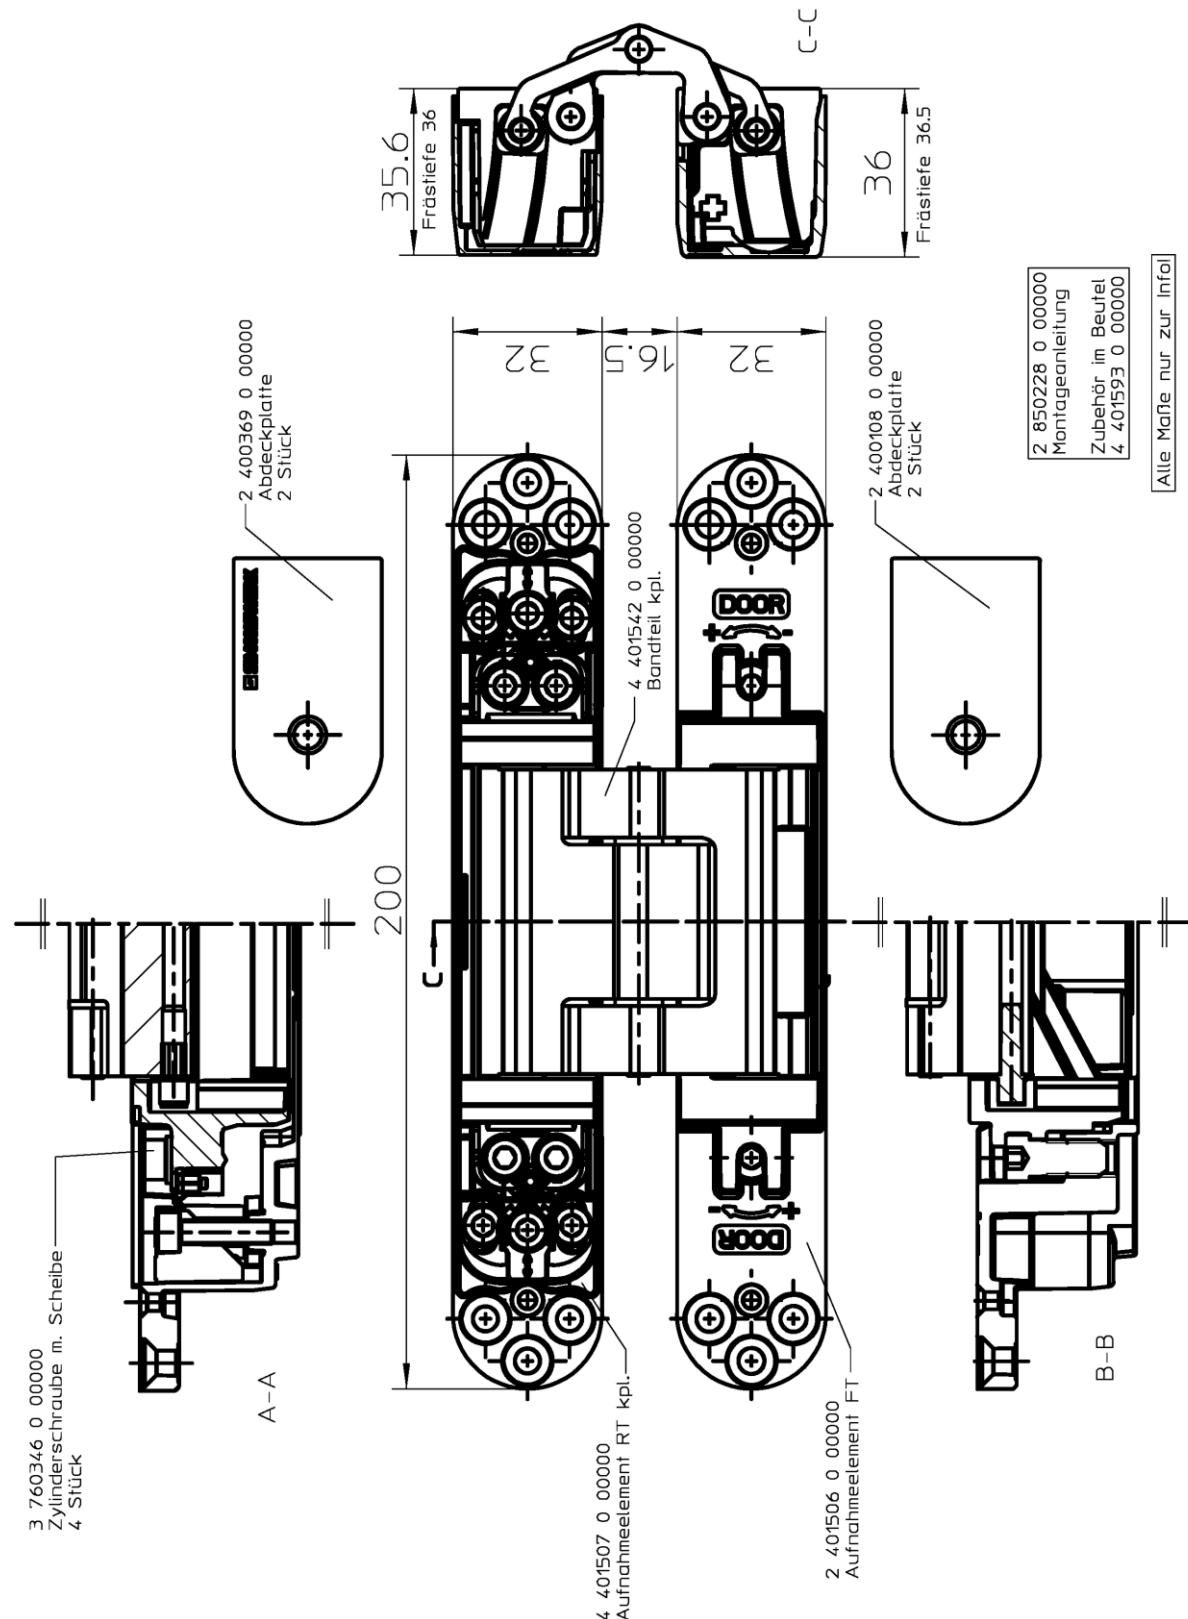

Multi-axis concealed hinge assemblies TECTUS TE 540 3D

Construktion


Annex 5

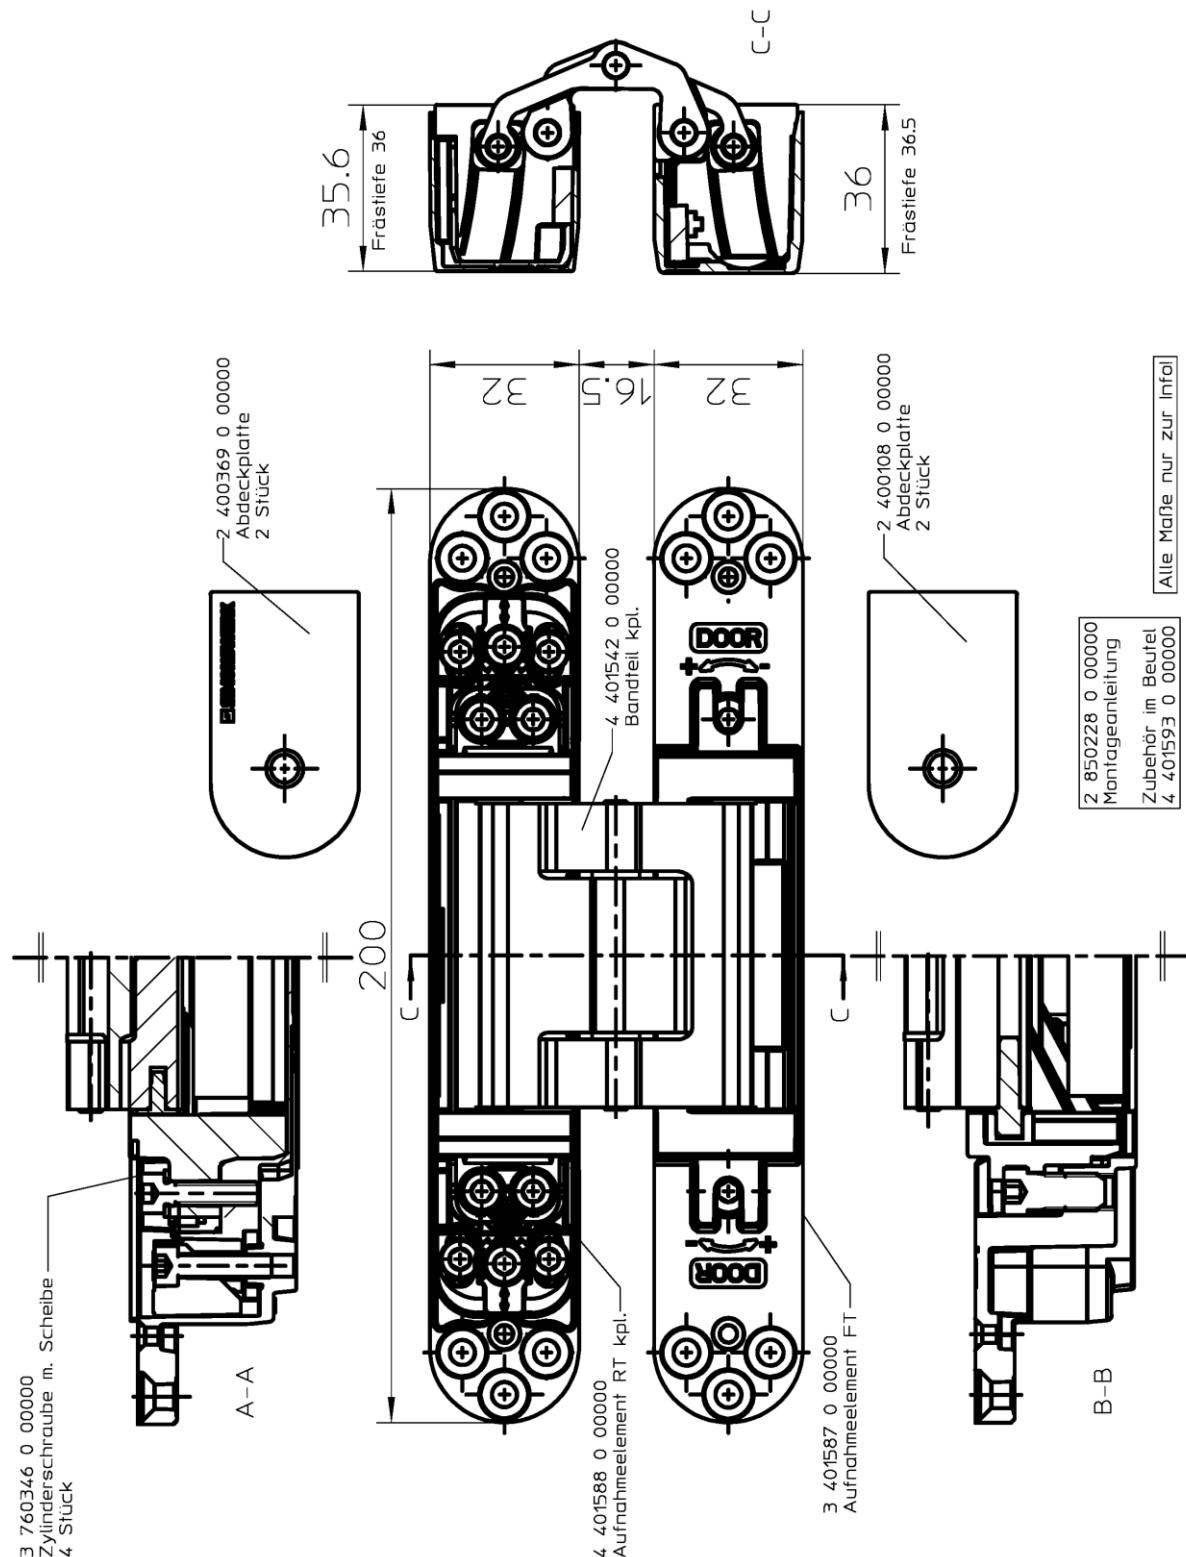



Multi-axis concealed hinge assemblies TECTUS TE 540 3D FR


Construction

Annex 6

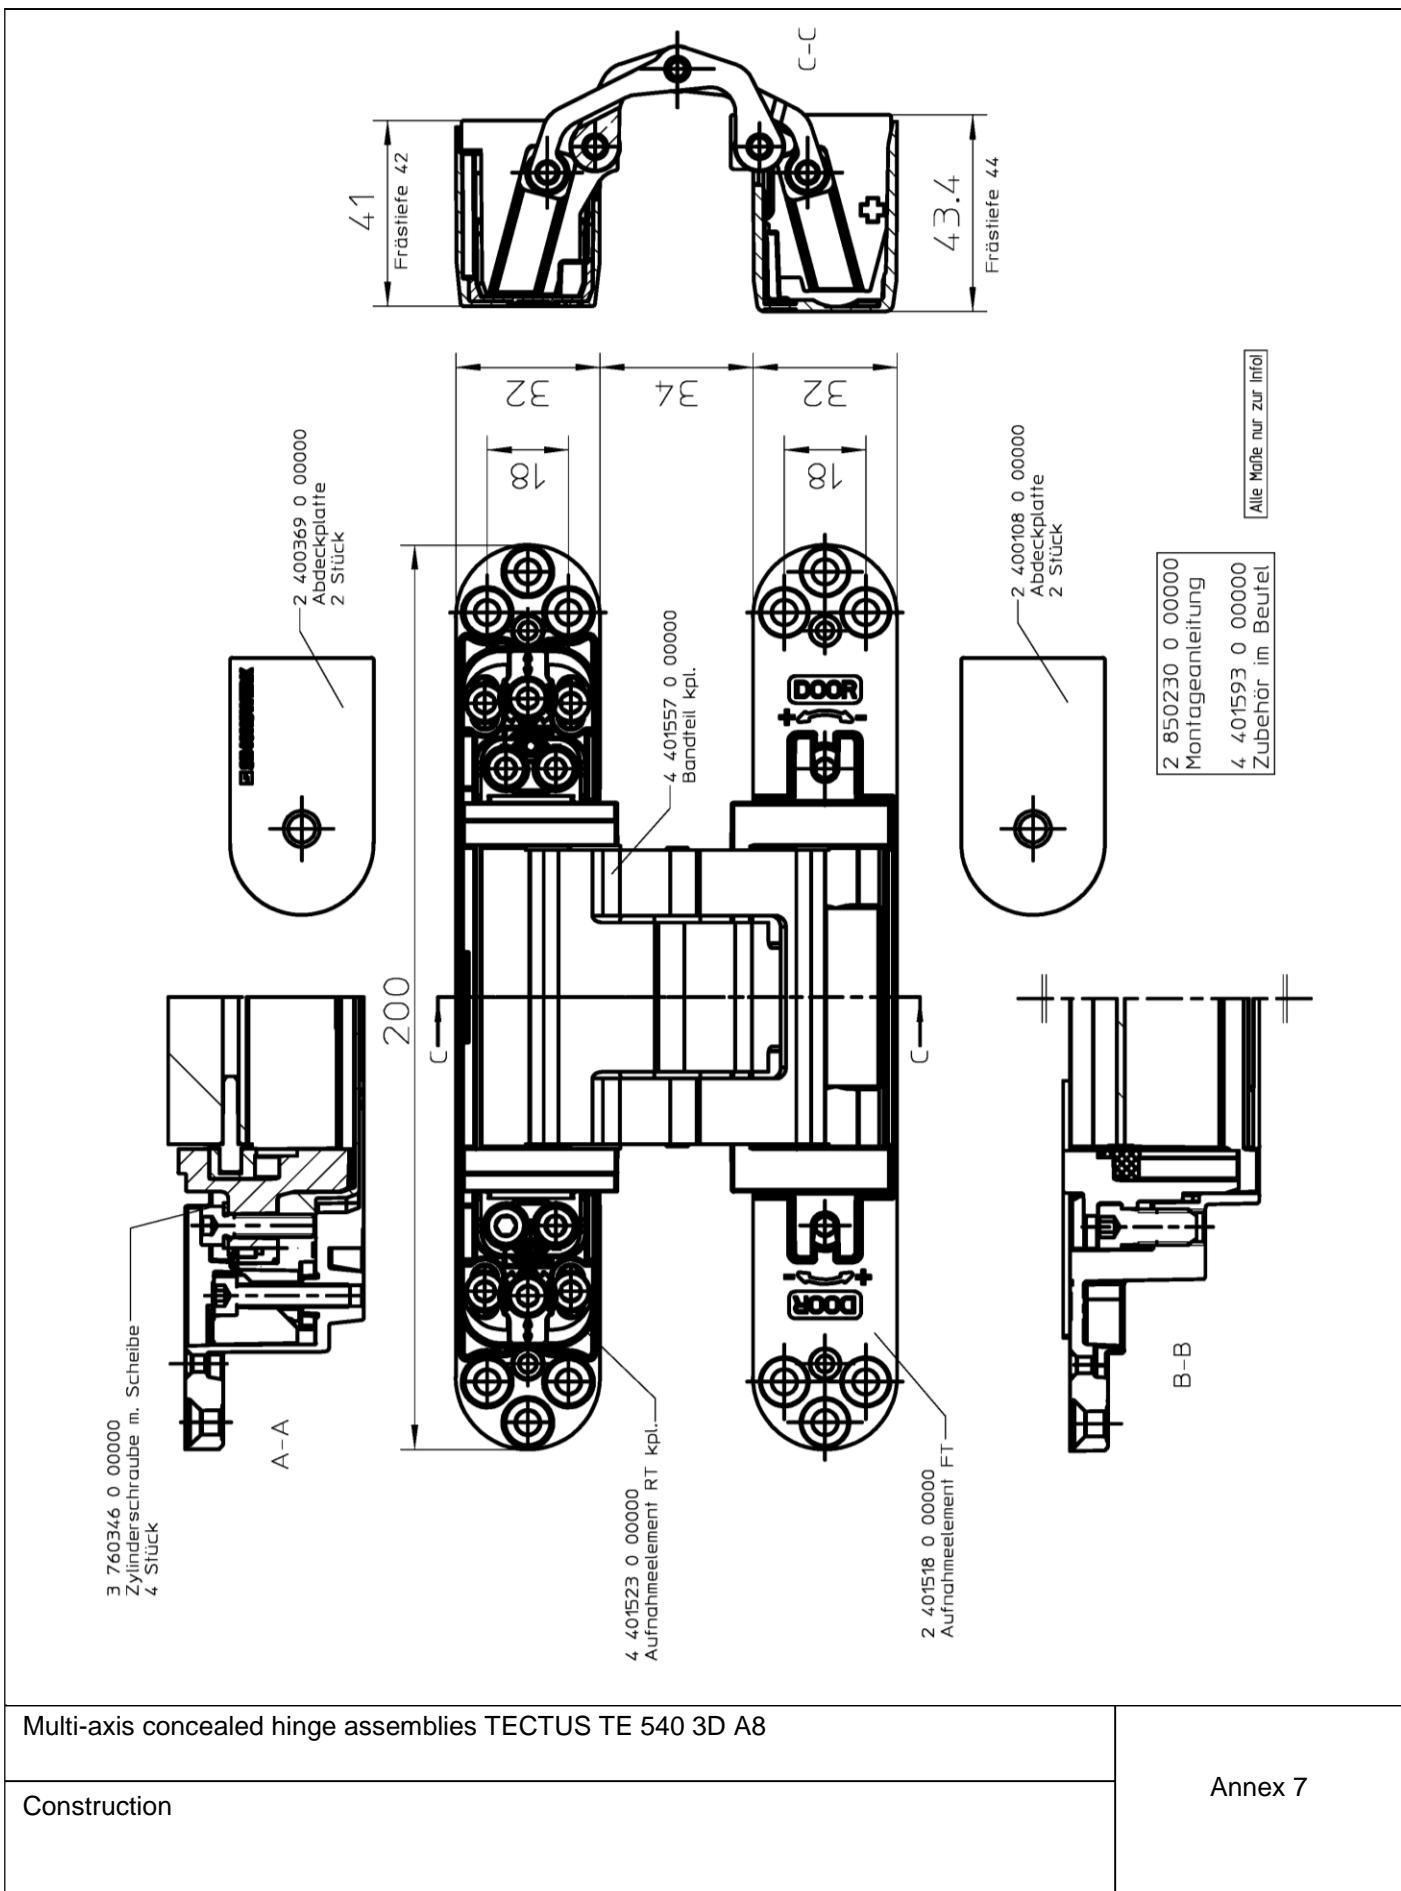

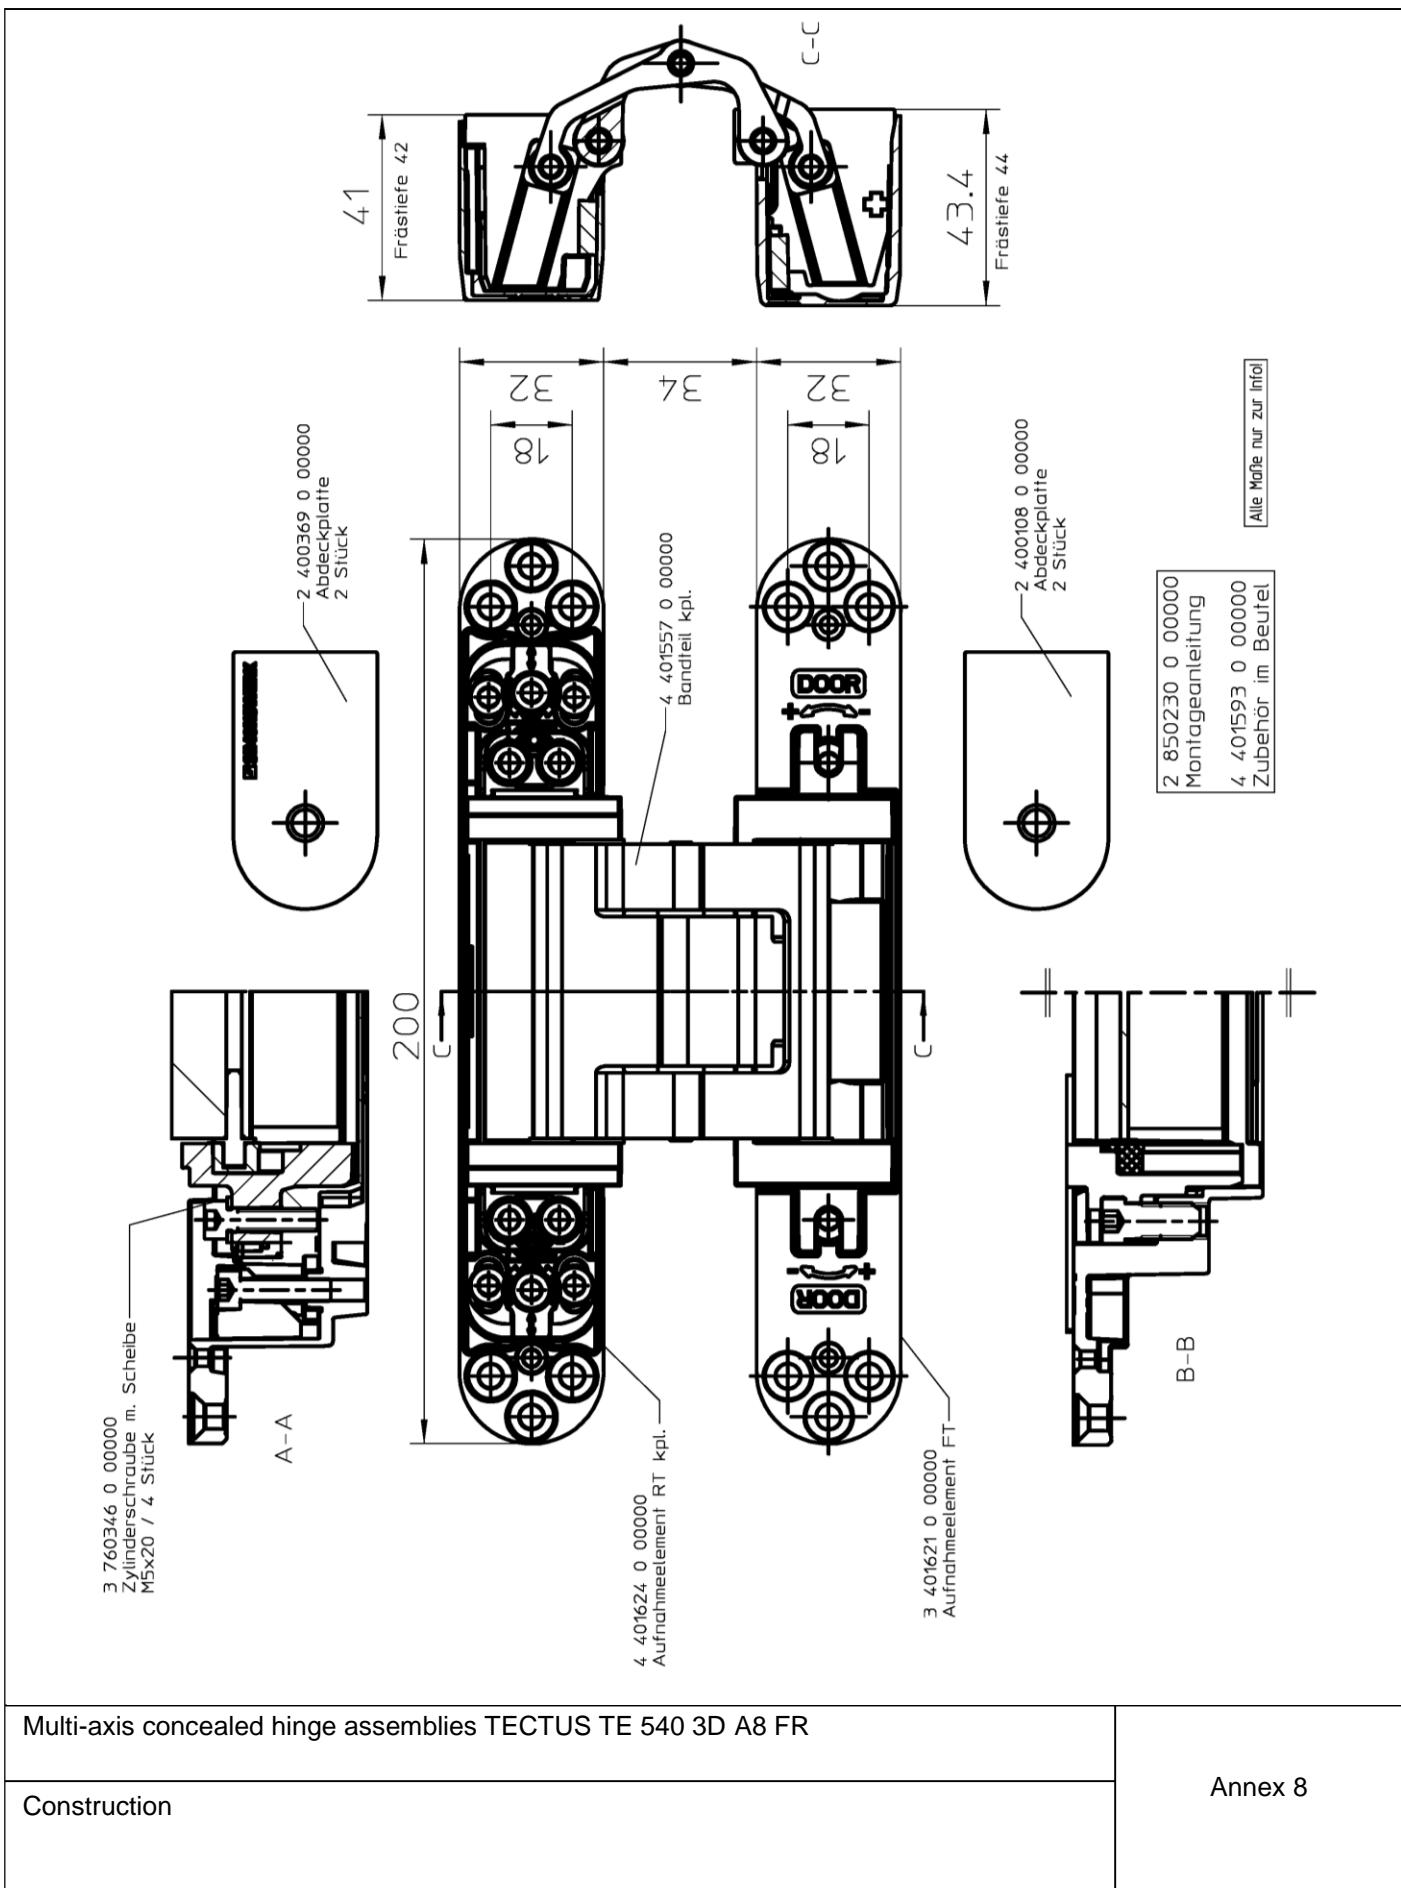

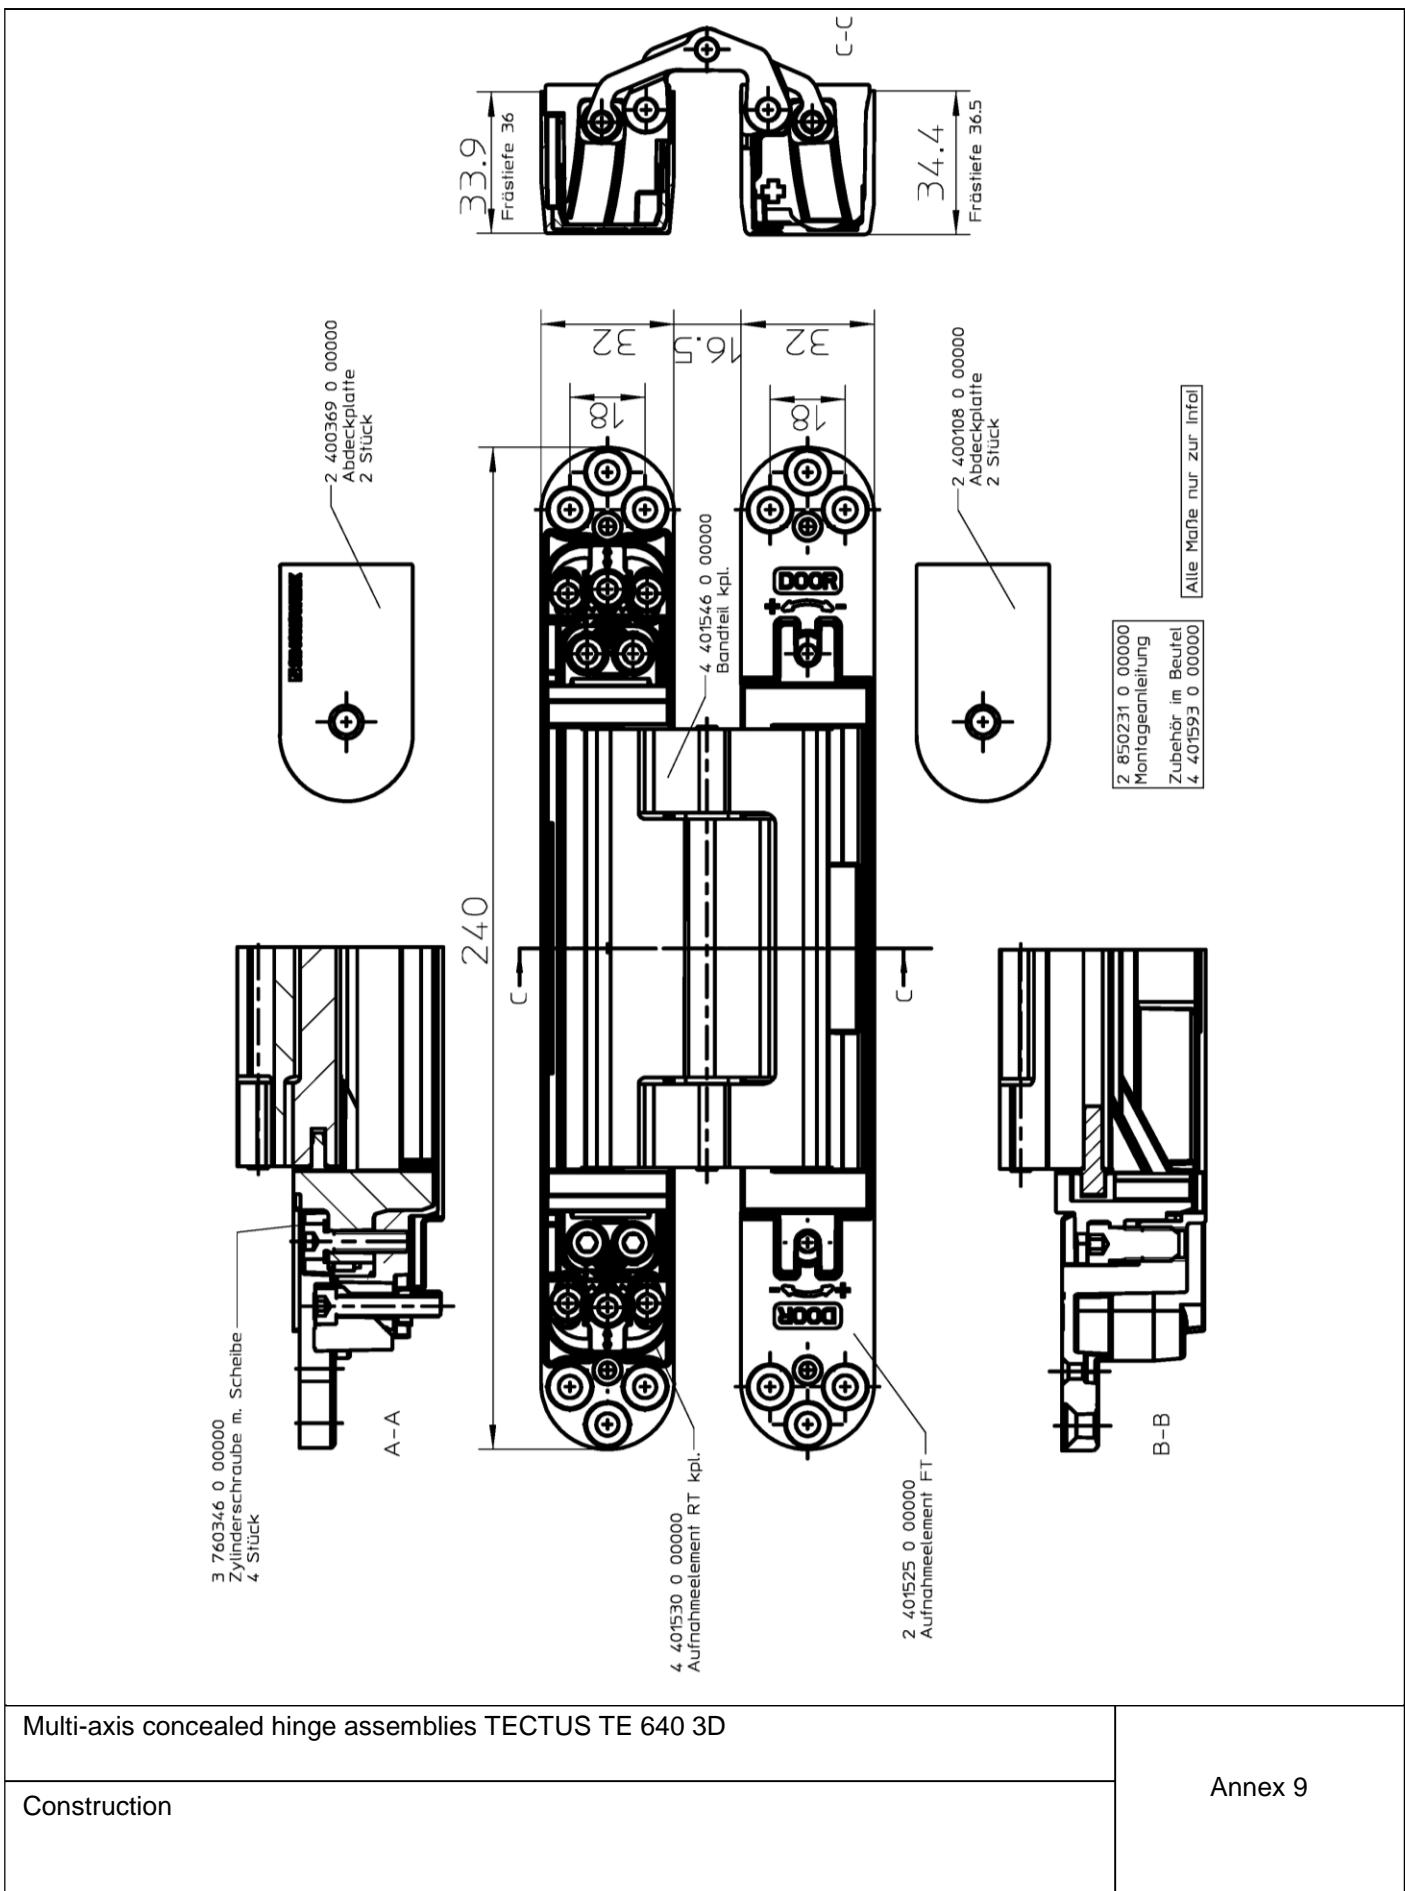

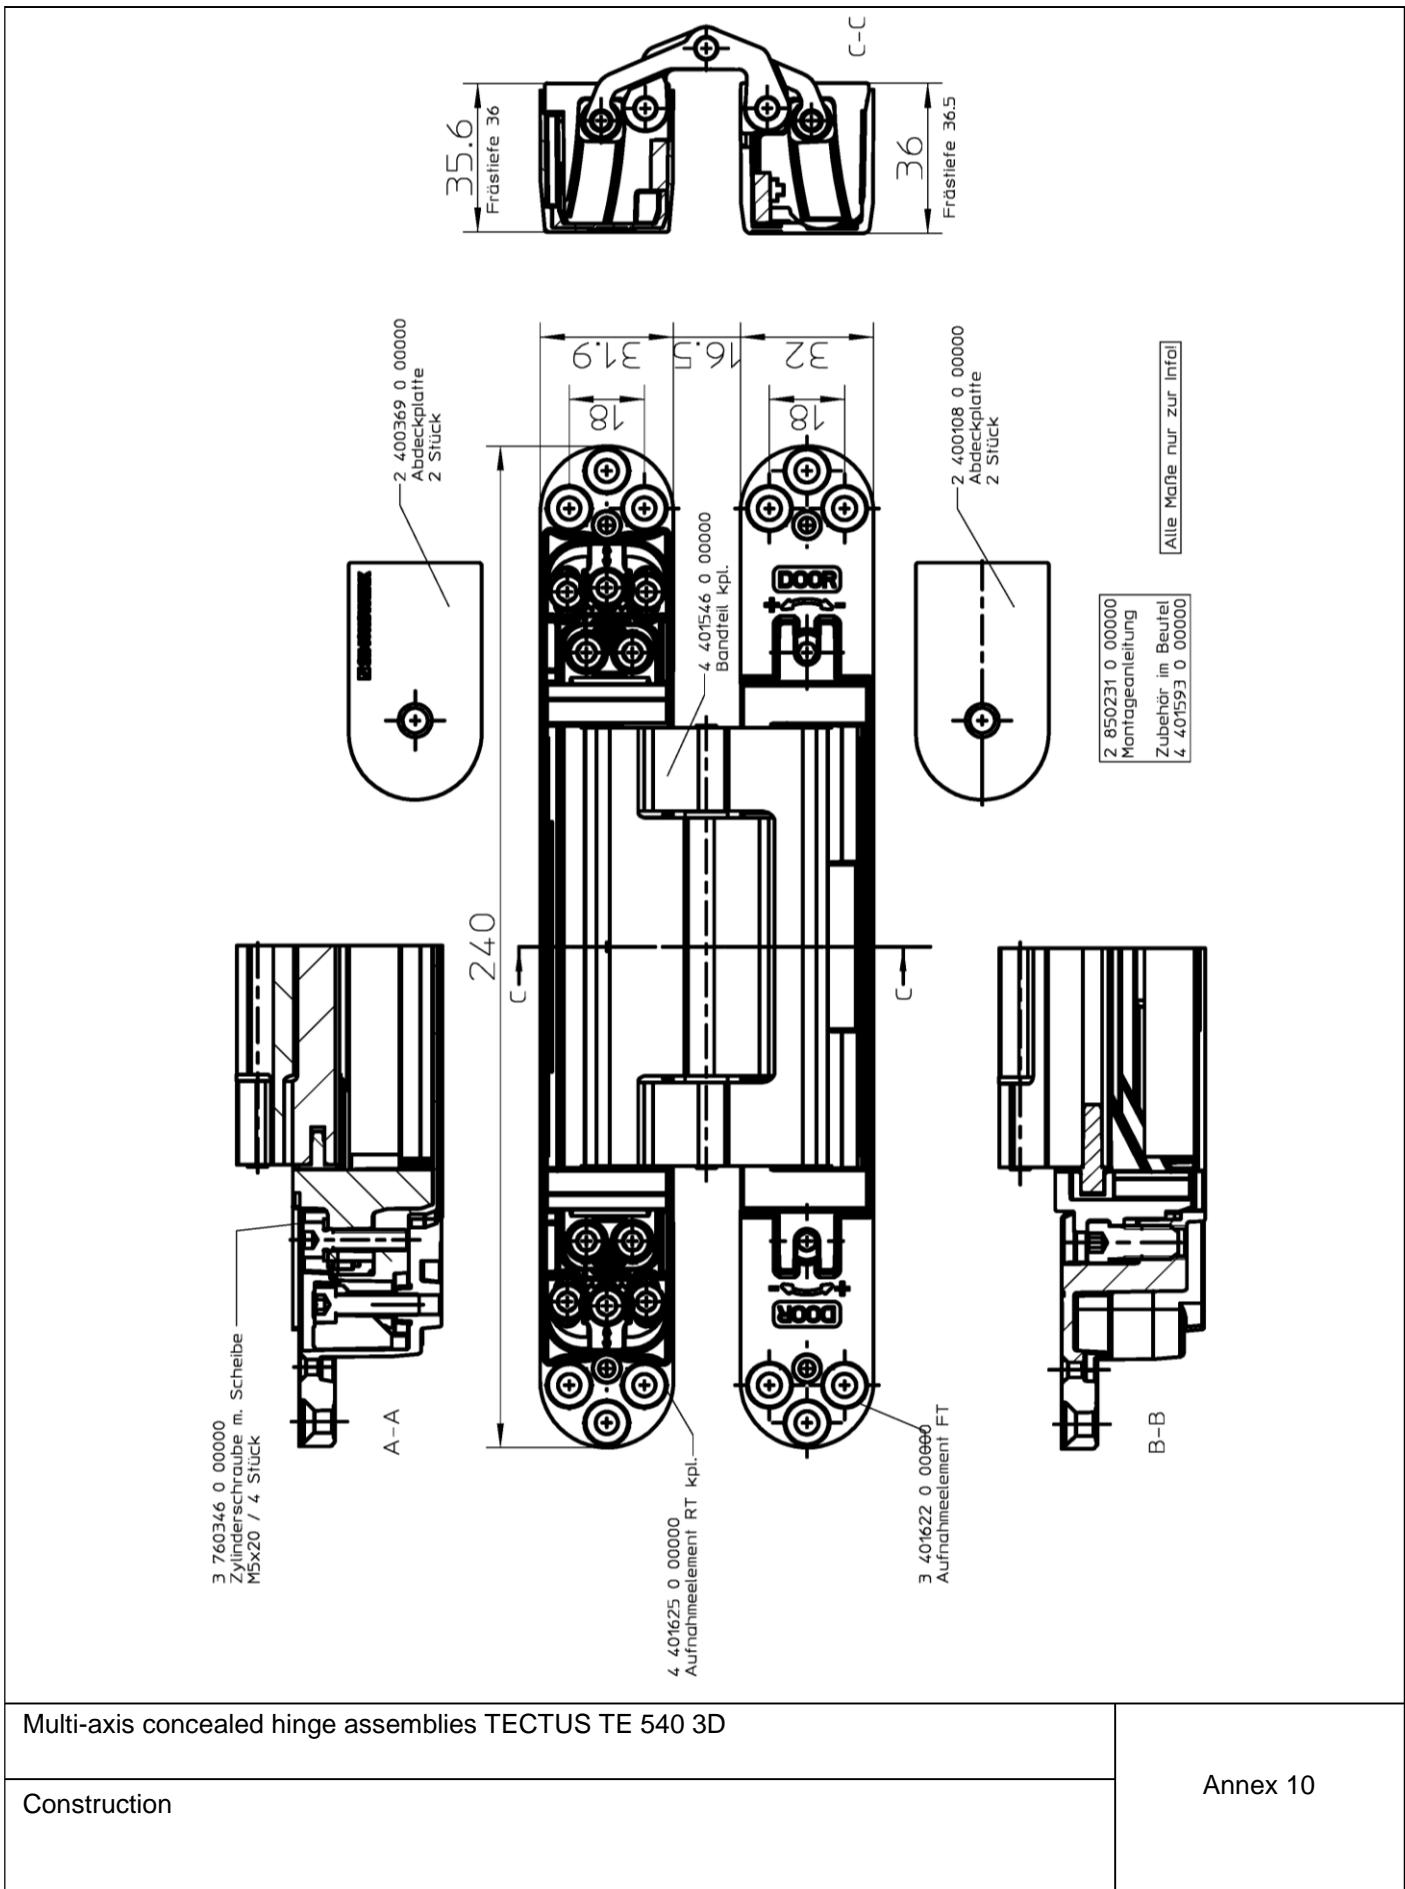

Multi-axis concealed hinge assemblies TECTUS TE 540 3D

Construction

Annex 10

Hinge	Designation	Model number
TECTUS TE 340 3D	TECTUS TE 340 3D J9-09	400672
	TECTUS TE 340 3D Energy	400659
	TECTUS TE 340 3D SAPELI	400641
	TECTUS TE 340 3D V8-09	400619
	TECTUS TE 340 3D J10-01	400672
TECTUS TE 540 3D	TECTUS TE 540 3D J9-12	400708
	TECTUS TE 540 3D Energy	400690
	TECTUS TE 540 3D V8-10	400681
	TECTUS TE 540 3D A8 Energy	400705
TECTUS TE 640 3D A8	TECTUS TE 640 3D Energy	400706
	TECTUS TE 640 3D SNA	400683
	TECTUS TE 640 3D V8-12	400692