

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments



European Technical Assessment

ETA-16/0929
of 27 February 2017

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Anchor channels (HAC-C) with channel bolts (HBC)

Product family
to which the construction product belongs

Anchor channels

Manufacturer

PEC Europe GmbH
Obere Kaiserswerther Straße 56
47249 Duisburg
DEUTSCHLAND

Manufacturing plant

This European Technical Assessment
contains

22 pages including 3 annexes which form an integral part
of this assessment

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

European Assessment Document (EAD)
330008-02-0601

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The anchor channels (HAC-C) with channel bolts (HBC) are a system consisting of C-shaped channel profile of carbon steel or stainless steel and at least two metal anchors non-detachably fixed to the channel back and channel bolts.

The anchor channel is embedded surface-flush in the concrete. Channel bolts (HBC) with appropriate hexagon nuts and washers are fixed to the channel.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor channel is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor channel of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistances under static and quasi-static loads and displacements	See Annex C1 to C6

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for Class A1
Resistance to fire	See Annex C7

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with EAD No. 330008-02-0601, the applicable European legal act is: [2000/273/EC].

The system to be applied is: 1

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable EAD


Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.

Issued in Berlin on 27 February 2017 by Deutsches Institut für Bautechnik

Andreas Kummerow
p. p. Head of Department



beglaubigt:
Müller

Product and installation condition

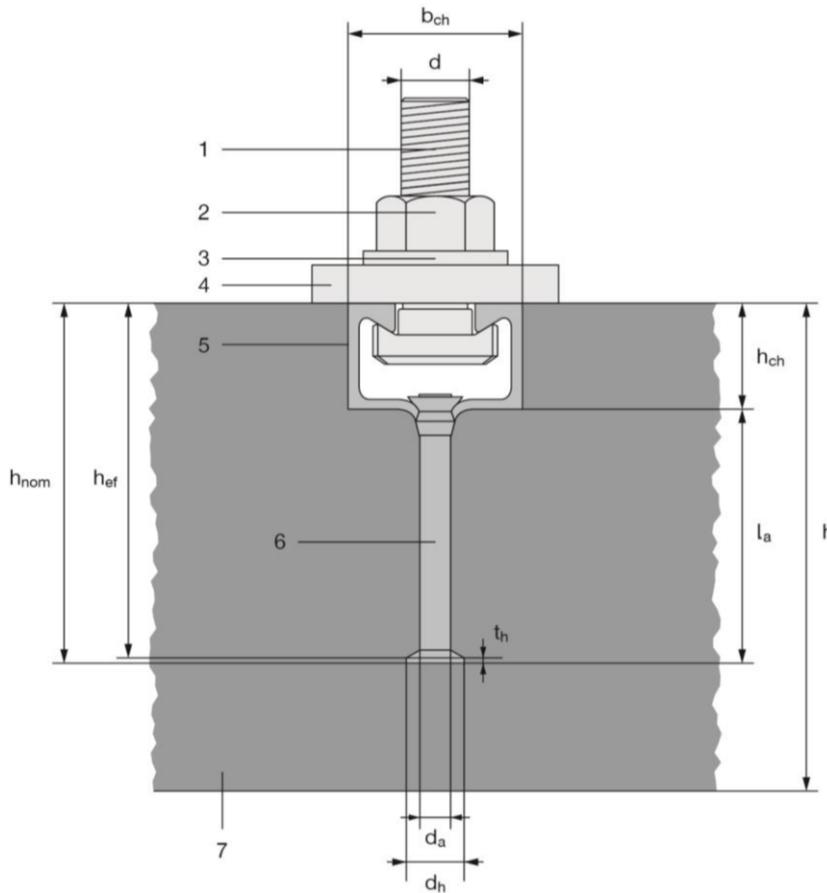

Key

- 1 channel bolt
- 2 hexagonal nut
- 3 washer
- 4 fixture
- 5 channel profile
- 6 anchor
- 7 concrete member

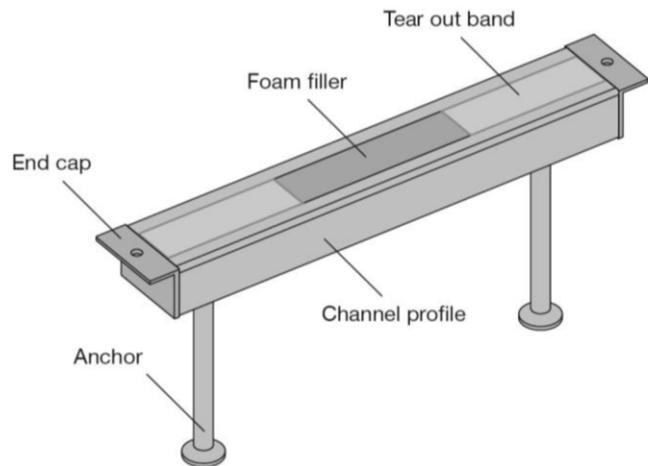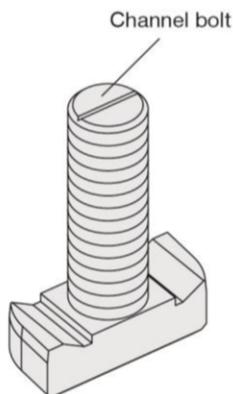


Anchor channels (HAC-C) with channel bolts (HBC)

Product Description
Installed condition


Annex A1

Anchor channel types

Hot-rolled channel profiles

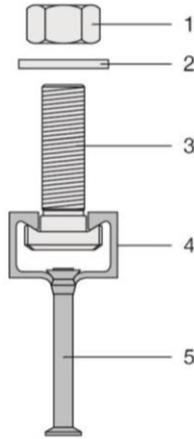

Round anchor

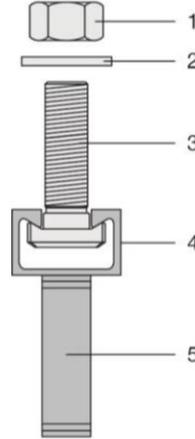

I-anchor

Key

- 1 hexagonal nut
- 2 washer
- 3 channel bolt
- 4 channel profile
- 5 anchor

Marking of the anchor channels:

HAC-C(-I) XZ



(e.g. HAC-C 40/22F)

HAC-C = Identifying mark of the manufacturer

I = Additional marking for I-anchors (no marking in the case of round anchors)

X = Size of the channel

Z = Corrosion class / Material

F = Hot-dip galvanized


A4 = Stainless steel

40/22 = Anchor channel size 40/22

F = Hot-dip galvanized

Marking of the channel bolt:

HBC-X YZ



(e.g. HBC-40/22 8.8F)

HBC = Identifying mark of the manufacturer

X = Type of channel bolt

Y = Steel grade (4.6, 8.8, 70)

Z = Corrosion class / Material

F = Hot-dip galvanized

R = Stainless steel

40 = Channel bolt type in combination with HAC-C 40/22F

8.8 = Steel grade

F = Hot-dip galvanized


Anchor channels (HAC-C) with channel bolts (HBC)

Product Description

Anchor channel types and marking

Annex A2

Anchor Channels

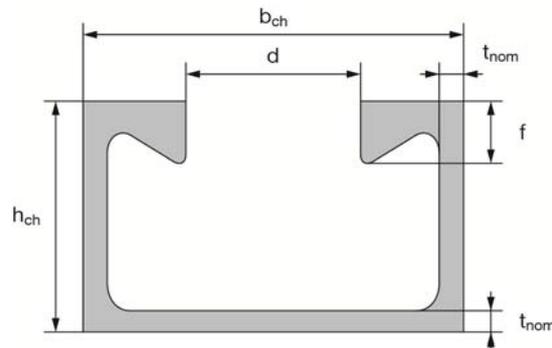

HAC-C 40/22, HAC-C 50/30, HAC-C 52/34

Table 1: Dimensions of channel profile

Anchor channel	b_{ch}	h_{ch}	t_{nom}	d	f	I_y
	[mm]					[mm ⁴]
40/22	39,5	23,0	2,3	18,0	6,0	19354
50/30	49,0	30,0	2,8	22,5	8,1	53537
52/34	52,5	34,0	4,0	22,5	11,5	95934

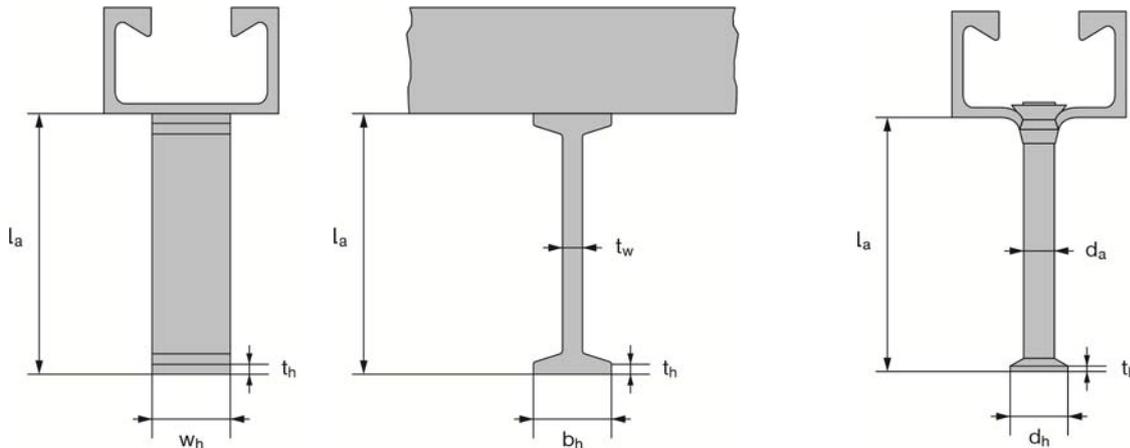


Table 2: Dimensions of anchor
(welded I-anchor or round anchor)

Anchor channel	I-anchor					Round anchor			
	min l_a	t_w	b_h	t_h	w_h	min l_a	d_a	d_h	t_h
[mm]									
40/22	62	5	20	5	20	58	8	16,0	2,0
50/30	69	5	20	5	25	66	10	20,0	2,2
52/34	125	5	20	5	40	124	11	24,3	2,5

Anchor channels (HAC-C) with channel bolts (HBC)

Product Description
Anchor channels (HAC-C)

Annex A3

Channel bolts

Table 3: Dimensions of channel bolt

Anchor channel	Channel bolt type	Dimensions			
		b ₁	b ₂	k	d
HAC-C 40/22	HBC-40/22	14,0	35,0	10,0	10
					12
		17,0	34,0	11,0	16
HAC-C 50/30 HAC-C 52/34	HBC-50/30	13,0	43,3	12,5	12
		17,0	42,7	14,5	16
		21,0	42,2	15,5	20

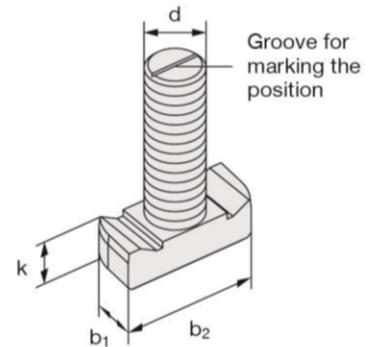


Table 4: Steel grade and corrosion class

Channel Bolt	Carbon steel ¹⁾		Stainless steel ¹⁾
Steel grade	4.6	8.8	A4-70
f _{uk} [N/mm ²]	400	800 / 830 ²⁾	700
f _{yk} [N/mm ²]	240	640 / 660 ²⁾	450
Corrosion class	G ³⁾ F ⁴⁾		R

¹⁾ Material properties according to Annex A5

²⁾ Material properties according to EN ISO 898-1

³⁾ Electroplated

⁴⁾ Hot-dip galvanized

Anchor channels (HAC-C) with channel bolts (HBC)

Product Description
Channel bolts (HBC)

Annex A4

Table 5: Materials

Component	Carbon steel			Stainless steel
	Mechanical properties	Coating		Mechanical properties
1	2a	2b	2c	3
Channel Profile	1.0038, 1.0044 acc. to EN 10025 1.0976, 1.0979 acc. to EN 10149	Hot dip galvanized $\geq 50 \mu\text{m}$ acc. to EN ISO 10684		1.4362, 1.4401 1.4404, 1.4571 acc. to EN 10088
Anchor	1.0038, 1.0213, 1.0214 acc. to EN 10025 1.5523, 1.5535 acc. to EN 10263:2002-02			
Channel bolt	Steel grade 4.6 and 8.8 acc. to EN ISO 898-1	Electroplated acc. to EN ISO 4042	Hot dip galvanized $\geq 50 \mu\text{m}$ acc. to EN ISO 10684	Grade 70 acc. to EN ISO 3506
Plain washer ¹⁾ acc. to ISO 7089 and ISO 7093-1	Hardness class A $\geq 200 \text{ HV}$	Electroplated acc. to EN ISO 4042	Hot dip galvanized $\geq 50 \mu\text{m}$ acc. to EN ISO 10684	1.4401, 1.4404 1.4571, 1.4578 acc. to EN 10088
Hexagonal nut acc. to ISO 4032 or DIN 934 ²⁾	Property class 5 or 8 acc. to EN ISO 898-2	Electroplated acc. to EN ISO 4042	Hot dip galvanized $\geq 50 \mu\text{m}$ acc. to EN ISO 10684	Property class 50, 70 or 80 acc. to EN ISO 3506

¹⁾ Not in the scope of delivery

²⁾ Hexagonal nuts according to DIN 934 for channel bolts made from carbon steel (4.6) and stainless steel

Anchor channels (HAC-C) with channel bolts (HBC)

Product Description
Materials

Annex A5

Specifications of intended use

Anchor channels and channel bolts subject to:

- Static and quasi-static loads in tension and shear perpendicular to the longitudinal axis of the channel.
- Fire exposure: only for concrete class C20/25 to C50/60.

Base materials:

- Reinforced or unreinforced normal weight concrete according to EN 206.
- Strength classes C12/15 to C90/105 according to EN 206.
- Cracked or uncracked concrete.

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (e.g. accommodations, bureaus, schools, hospitals, shops, exceptional internal conditions with usual humidity)
(anchor channels and channel bolts according to Annex A5, Table 5, column 2 and 3).
- Structures subject to internal conditions with usual humidity (e.g. kitchen, bath and laundry in residential buildings, exceptional permanent damp conditions and application under water)
(anchor channels and channel bolts according to Annex A5, Table 5, column 2c and 3).
- The stainless steel anchor channels (HAC-C) and channel bolts (HBC), washers and nuts may be used in structures subject to external atmospheric conditions (including industrial and marine environment) or exposure in permanently damp internal conditions, if no particular aggressive conditions (e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with chemical pollution e.g. desulphurization plants or road tunnels where de-icing materials are used) exist
(anchor channels and channel bolts according to Annex A5, Table 5, column 3).

Design:

- Anchor channels are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor channel and channel bolts are indicated on the design drawings (e.g. position of the anchor channel relative to the reinforcement or to supports).
- For static and quasi-static loading as well as fire exposure the anchor channels are designed in accordance with EOTA TR 047 "Calculation Method for the Performance of Anchor Channels" or EN 1992-4.
- The characteristic resistances are calculated with the minimum effective embedment depth.

Anchor channels (HAC-C) with channel bolts (HBC)

Intended Use
Specifications

Annex B1

Installation:

- The installation of anchor channels is carried out by appropriately qualified personnel under the supervision of the person responsible for the technical matters on site.
- Use of the anchor channels only as supplied by the manufacturer - without any manipulations, repositioning or exchanging of channel components.
- Cutting of anchor channels is allowed only if pieces according to Annex B3, Table 6 are generated including end spacing and minimum channel length and in case of hot-dip galvanised anchor channels only to be used in dry internal conditions.
- Installation in accordance with the manufacturer's specifications given in Annexes B5 and B6
- The anchor channels are fixed on the formwork, reinforcement or auxiliary construction such that no movement of the channels will occur during the time of laying the reinforcement and of placing and compacting the concrete.
- The concrete around the head of the anchors are properly compacted. The channels are protected from penetration of concrete into the internal space of the channels.
- Washer may be chosen according to Annex A5 and provided separately by the user.
- Orientating the channel bolt (groove according to Annex B6) rectangular to the channel axis.
- The required installation torques given in Annex B4 must be applied and must not be exceeded.

Anchor channels (HAC-C) with channel bolts (HBC)

Intended Use
Specifications

Annex B2

Table 6: Installation parameters for anchor channel

Anchor channel HAC-C			40/22	50/30	52/34
Minimum effective embedment depth	$h_{ef,min}$	[mm]	79	94	155
Minimum spacing	s_{min}		100		
Maximum spacing	s_{max}		250		
End spacing	x		25 ¹⁾		35 ²⁾
Minimum channel length	l_{min}		150		
Minimum edge distance	c_{min}		50	75	100
Minimum thickness of concrete member	h_{min}		100	110	160 ³⁾

¹⁾ The end spacing may be increased from 25 mm to 35 mm

²⁾ $x = 25$ mm for welded I-anchors is allowed

³⁾ $h_{min} = 157$ mm for round anchors

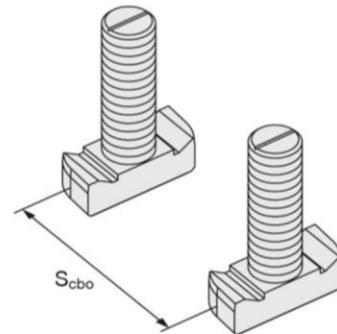
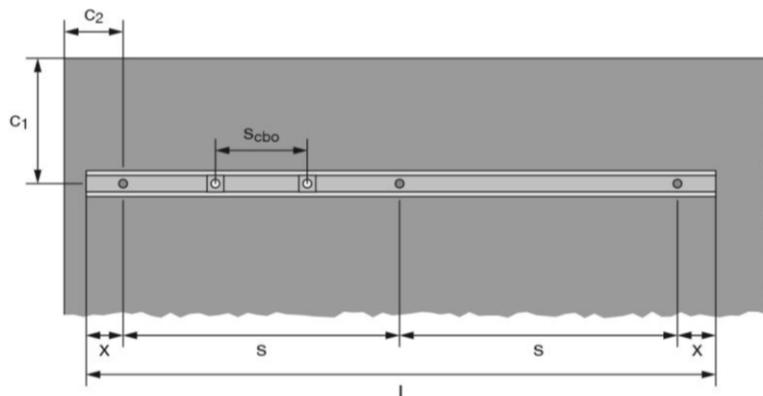


Table 7: Minimum spacing for channel bolts

Channel bolt			M10	M12	M16	M20
Minimum spacing between channel bolts	$s_{cbo,min}$	[mm]	50	60	80	100

s_{cbo} = center to center spacing between channel bolts ($s_{cbo,min} = 5d$)

Anchor channels (HAC-C) with channel bolts (HBC)

Intended Use
Installation parameters for anchor channels (HAC-C)


Annex B3

Table 8: Required installation torque T_{inst}


Channel bolt		T_{inst}^1 [Nm]			
		General	Steel - steel contact		
			4.6, 8.8, A4-70	4.6	8.8
40/22	M10	15	15	-	40
	M12	25	-	70	70
	M16	30		120	70
50/30	M12	25		70	70
	M16	60	120	180	
	M20	75	360	360	

¹⁾ T_{inst} must not be exceeded

General: The fixture is in contact with the channel profile and the concrete surface.

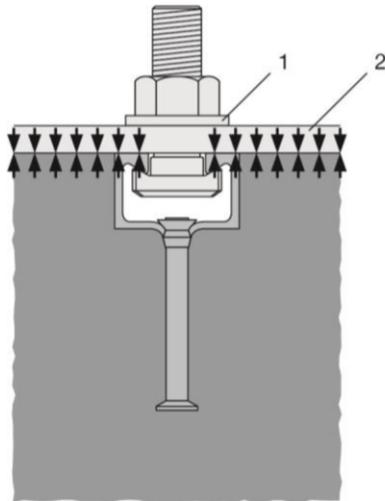

Steel-steel contact: The fixture is fastened to the anchor channel by suitable steel part (e.g. washer). Fixture is in contact with the channel profile only.

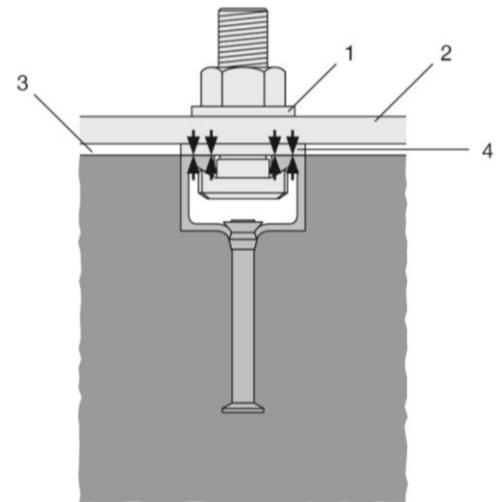


Key

- 1 washer
- 2 fixture
- 3 gap
- 4 suitable steel part

Anchor channels (HAC-C) with channel bolts (HBC)

Intended Use
Installation parameters for channel bolts (HBC)

Annex B4

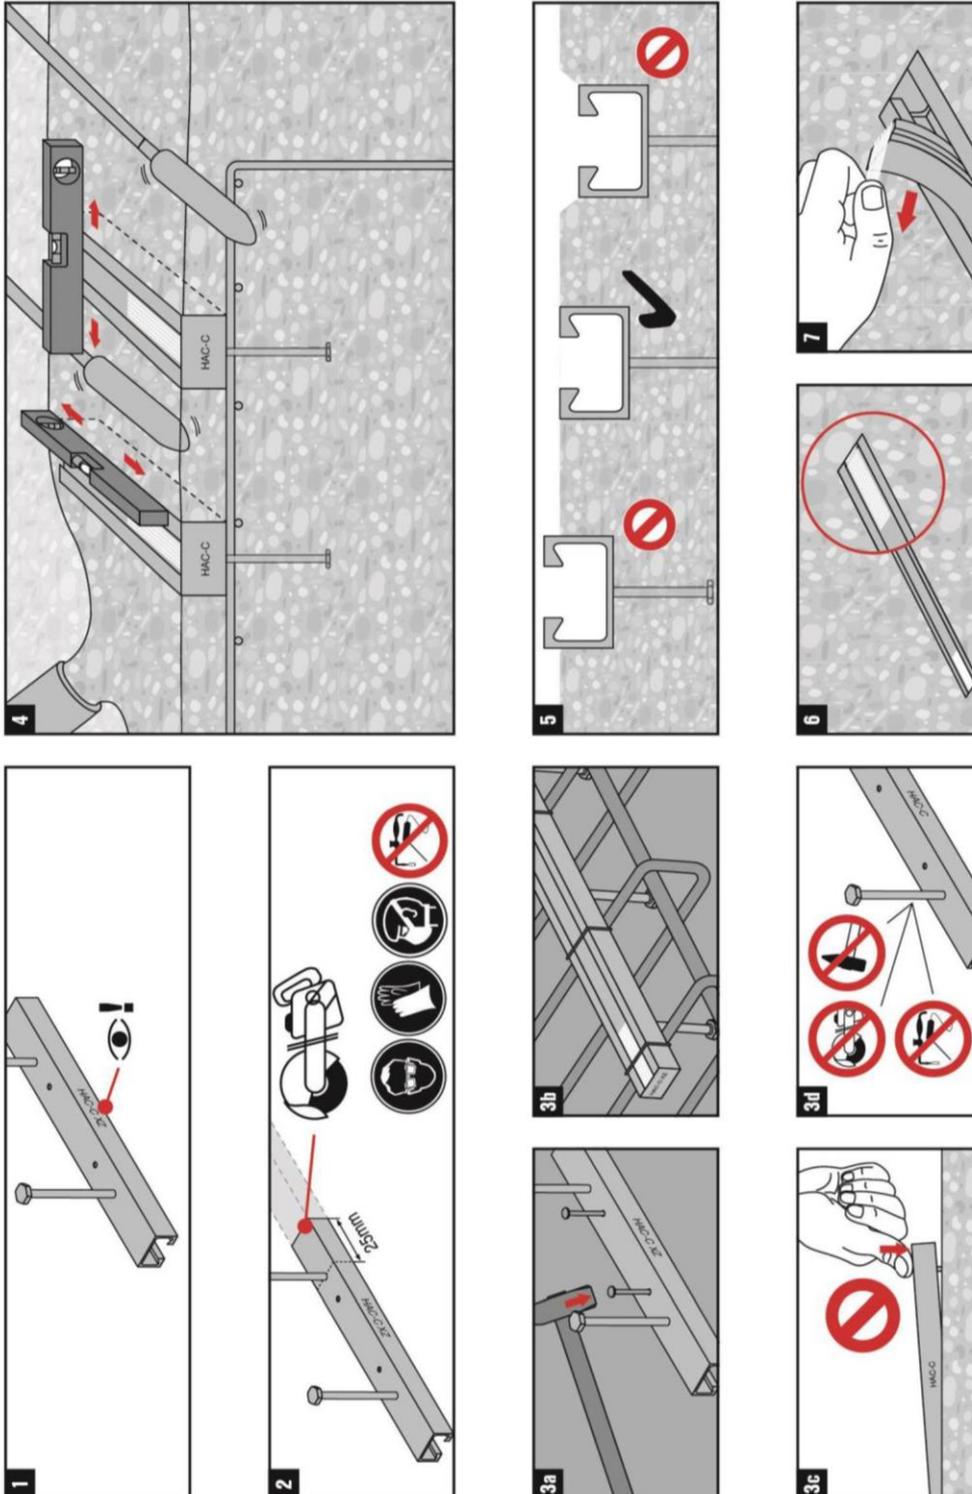


Anchor channels (HAC-C) with channel bolts (HBC)

Intended Use

Installation instructions for anchor channels (HAC-C)

Annex B5

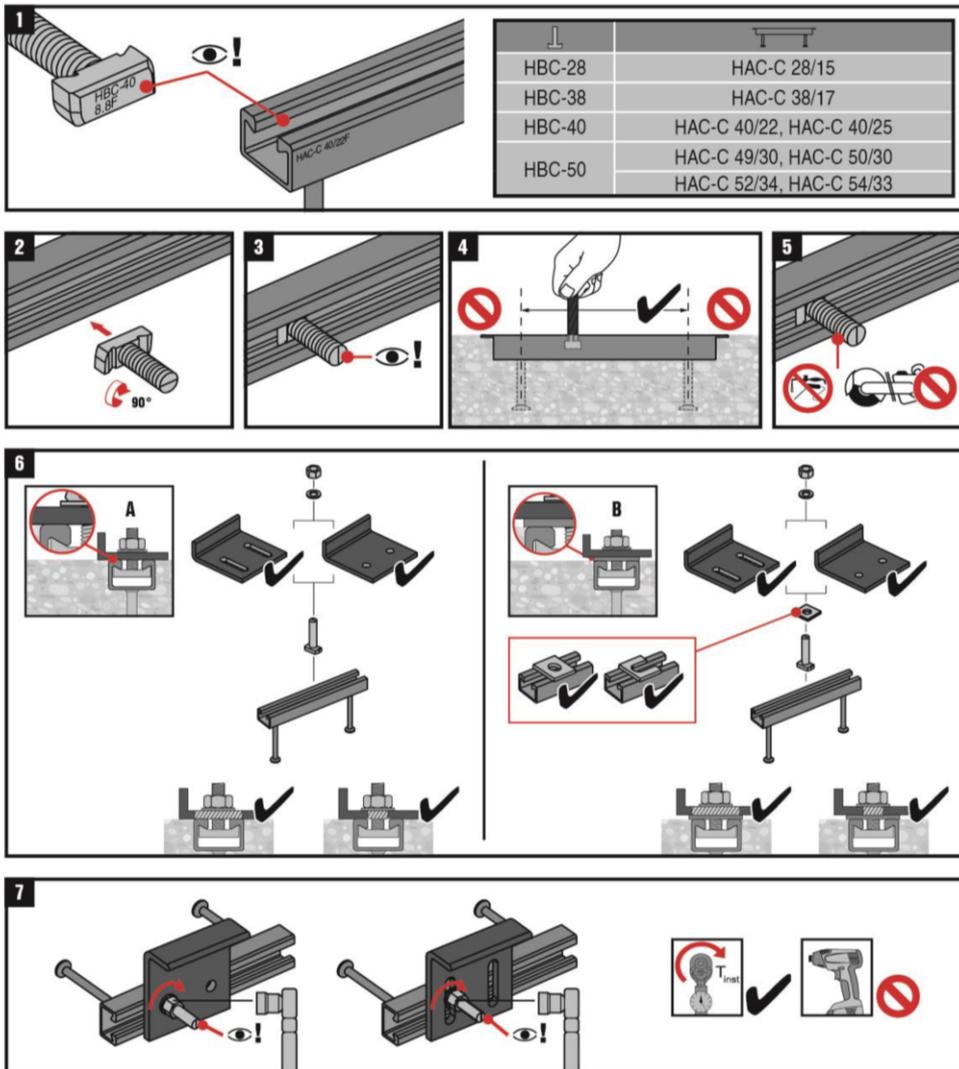

Required installation torque T_{inst} (General)

Strength grade	Anchor channel	T_{inst} [Nm]			
		M10	M12	M16	M20
4.6	40/22	15	25	30	-
8.8	50/30	-	25	60	75
A4-70	52/34	-	25	60	75

Required installation torque T_{inst} (Steel-to-steel contact)

Strength grade	T_{inst} [Nm]			
	M10	M12	M16	M20
4.6	15	-	-	-
8.8	-	70	120	360
A4-70	40	70	180 ¹⁾	360

¹⁾ For channel bolt 40/22 A4-70: $T_{inst}=70$ Nm

Anchor channels (HAC-C) with channel bolts (HBC)

Intended Use
Installation instructions for channel bolts (HBC)

Annex B6

Table 9: Characteristic resistances under tension load – steel failure of anchor channel

Anchor channel HAC-C			40/22	50/30	52/34
Steel failure: Failure of anchor					
Characteristic resistance	$N_{Rk,s,a}$	[kN]	20	31	55
Partial safety factor	γ_{Ms} ¹⁾	[-]	1,8		
Steel failure: Failure of connection between anchor and channel					
Characteristic resistance	$N_{Rk,s,c}$	[kN]	20	31	55
Partial safety factor	$\gamma_{Ms,ca}$ ¹⁾	[-]	1,8		
Steel failure: Local failure by flexure of channel lips					
Characteristic spacing of the channel bolts for $N_{Rk,s,l}$	$s_{l,N}$	[mm]	79	98	105
Characteristic resistance	$N^0_{Rk,s,l}$	[kN]	35	36	65
Partial safety factor	$\gamma_{Ms,l}$ ¹⁾	[-]	1,8		

¹⁾ In absence of other national regulations

Table 10: Characteristic flexural resistance of channel under tension load

Anchor channel HAC-C			40/22	50/30	52/34
Steel failure: Failure by flexure of channel					
Characteristic flexural resistance of channel	$M_{Rk,s,flex}$	[Nm]	1013	2084	3435
Partial safety factor	$\gamma_{Ms,flex}$ ¹⁾	[-]	1,15		

¹⁾ In absence of other national regulations

Anchor channels (HAC-C) with channel bolts (HBC)

Performance Data

Characteristic resistances of anchor channels under tension load

Annex C1

Table 11: Characteristic resistances under tension load – concrete failure

Anchor channel HAC-C				40/22		50/30		52/34	
Type of anchor				I	Round	I	Round	I	Round
Pullout failure									
Characteristic resistance in cracked concrete C12/15	N _{Rk,p}	[kN]	27,0	13,5	33,8	21,2	54,0	33,1	
Characteristic resistance in uncracked concrete C12/15			37,8	19,0	47,3	29,7	75,6	46,5	
Amplification factor of N _{Rk,p}	C16/20	ψ _c [-]	1,33						
	C20/25		1,67						
	C25/30		2,08						
	C30/37		2,50						
	C35/45		2,92						
	C40/50		3,33						
	C45/55		3,75						
	C50/60		4,17						
	C55/67		4,58						
≥ C60/75	5,00								
Partial safety factor	γ _{Mp} = γ _{Mc} ¹⁾	[-]	1,5						
Concrete cone failure									
Product factor k ₁	cracked concrete	k _{cr,N}	[-]	7,9	8,1	8,7			
	uncracked concrete	k _{ucr,N}	[-]	11,2	11,5	12,4			
Partial safety factor	γ _{Mc} ¹⁾	[-]	1,5						
Splitting									
Characteristic edge distance	c _{cr,sp}	[mm]	237	282	465				
Partial safety factor	γ _{Msp} = γ _{Mc} ¹⁾	[-]	1,5						

¹⁾ In absence of other national regulations

Table 12: Displacements under tension load

Anchor channel HAC-C			40/22	50/30	52/34
Tension load	N	[kN]	13,9	14,3	25,8
Short time displacement ¹⁾	δ _{N0}	[mm]	2,3	2,2	1,4
Long time displacement ¹⁾	δ _{N∞}	[mm]	4,6	4,4	2,8

¹⁾ Displacements in midspan of the anchor channel, including slip of channel bolt, deformation of channel lips, bending of the channel and slip of the anchor channel in concrete

Anchor channels (HAC-C) with channel bolts (HBC)

Performance Data

Characteristic resistances of anchor channels and displacements under tension load

Annex C2

Table 13: Characteristic resistances under shear load – steel failure of anchor channel

Anchor channel HAC-C			40/22	50/30	52/34
Steel failure: Failure of anchor					
Characteristic resistance	$V_{Rk,s,a}$	[kN]	26,0	40,3	71,5
Partial safety factor	$\gamma_{Ms}^{1)}$	[-]	1,5		
Steel failure: Failure of connection between anchor and channel					
Characteristic resistance	$V_{Rk,s,c}$	[kN]	26,0	40,3	71,5
Partial safety factor	$\gamma_{Ms,ca}^{1)}$	[-]	1,8		
Steel failure: Local failure by flexure of channel lips					
Characteristic spacing of channel bolts for $V_{Rk,s,l}$	$s_{l,v}$	[mm]	79	98	105
Characteristic resistance	$V^0_{Rk,s,l}$	[kN]	26,0	40,3	71,5
Partial safety factor	$\gamma_{Ms,l}^{1)}$	[-]	1,8		

¹⁾ In absence of other national regulations

Anchor channels (HAC-C) with channel bolts (HBC)

Performance Data

Characteristic resistances of anchor channels under shear load

Annex C3

Table 14: Characteristic resistances under shear load – concrete failure

Anchor channel HAC-C			40/22	50/30	52/34
Pry out failure					
Product factor	k_8	[-]	2,0		
Partial safety factor	$\gamma_{Mc}^{1)}$	[-]	1,5		
Concrete edge failure					
Product factor k_{12}	cracked concrete	$k_{cr,V}$	[-]	7,5	
	uncracked concrete	$k_{ucr,V}$	[-]	10,5	
Partial safety factor	$\gamma_{Mc}^{1)}$	[-]	1,5		

¹⁾ In absence of other national regulations

Table 15: Displacements under shear load

Anchor channel HAC-C			40/22	50/30	52/34
Shear load	V	[kN]	10,3	16,0	28,4
Short time displacement ¹⁾	δ_{V0}	[mm]	2,1	2,6	3,7
Long time displacement ¹⁾	$\delta_{V\infty}$	[mm]	3,1	3,9	5,5

¹⁾ Displacements in midspan of the anchor channel, including slip of channel bolt, deformation of channel lips and slip of the anchor channel in concrete

Table 16: Characteristic resistances under combined tension and shear load

Anchor channel HAC-C			40/22	50/30	52/34
Steel failure: Local failure by flexure of channel lips and failure by flexure of channel					
Product factor	k_{13}	[-]	1,0 ¹⁾		
Steel failure: Failure of anchor and connection between anchor and channel					
Product factor	k_{14}	[-]	1,0 ²⁾		

¹⁾ k_{13} can be taken as 2,0 if $V_{Rd,s,l}$ is limited to $N_{Rd,s,l}$

²⁾ k_{14} can be taken as 2,0 if $\max(V_{Rd,s,a}; V_{Rd,s,c})$ is limited to $\min(N_{Rd,s,a}; N_{Rd,s,c})$

Anchor channels (HAC-C) with channel bolts (HBC)

Performance Data

Characteristic resistances of anchor channels and displacements under shear load
Characteristic resistances under combined tension and shear load

Annex C4

Table 17: Characteristic resistances under tension and shear load – steel failure of channel bolts

Channel bolt			M10	M12	M16	M20	
Steel failure							
Characteristic tension resistance	$N_{Rk,s}$ ¹⁾	[kN]	4.6	23,2	-		
			8.8	-	35,4	55,8	183,1
			A4-70 ²⁾	20,5	47,2 ³⁾	53,0 ⁴⁾	129,0
Partial safety factor	γ_{Ms} ⁵⁾	[-]	4.6	2,0			
			8.8	1,5			
			A4-70 ²⁾	1,87			
Characteristic shear resistance	$V_{Rk,s}$ ¹⁾	[kN]	4.6	13,9	-	-	-
			8.8	-	33,7	62,8	98,0
			A4-70	24,4	35,4	65,9	102,9
Partial safety factor	γ_{Ms} ⁵⁾	[-]	4.6	1,67			
			8.8	1,25			
			A4-70	1,56			

¹⁾ In conformity to EN ISO 898-1:1999

²⁾ Materials according to Table 5, Annex A5

³⁾ For 40/22 M12 A4-70 and 50/30 M12 A4-70: $N_{Rk,s} = 58,6$ kN

⁴⁾ For 40/22 M16 A4-70: $N_{Rk,s} = 91,0$ kN and
50/30 M16 A4-70: $N_{Rk,s} = 109,0$ kN

⁵⁾ In absence of other national regulations

Anchor channels (HAC-C) with channel bolts (HBC)

Performance Data

Characteristic resistances of channel bolts under tension and shear load

Annex C5

Table 18: Characteristic resistances under shear load with lever arm – steel failure of channel bolts

Channel bolt ²⁾				M10	M12	M16	M20	
Steel failure								
Characteristic flexural resistance	$M^0_{Rk,s}$ ³⁾	[Nm]	HBC-40/22 HBC-50/30	4.6	29,9	-		
				8.8	-	104,8	266,4	519,3
				A4-70 ²⁾	52,3	91,7	233,1	454,4
Partial safety factor	γ_{Ms} ¹⁾	[-]	HBC-40/22 HBC-50/30	4.6	1,67			
				8.8	1,25			
				A4-70 ²⁾	1,56			
Internal lever arm	a	[mm]	HBC-40/22	40/22	24,3	25,7	27,3	-
			HBC-50/30	50/30	-	29,9	31,7	33,9

¹⁾ In absence of other national regulations


²⁾ Materials according to Table 5, Annex A5

³⁾ The characteristic flexure resistance according to Table 18 is limited as follows:

$$M^0_{Rk,s} \leq 0,5 \cdot N_{Rk,s,l} \cdot a \quad (N_{Rk,s,l} \text{ according to Table 9})$$

$$M^0_{Rk,s} \leq 0,5 \cdot N_{Rk,s} \cdot a \quad (N_{Rk,s} \text{ according to Table 17})$$

a = internal lever arm according to Table 18

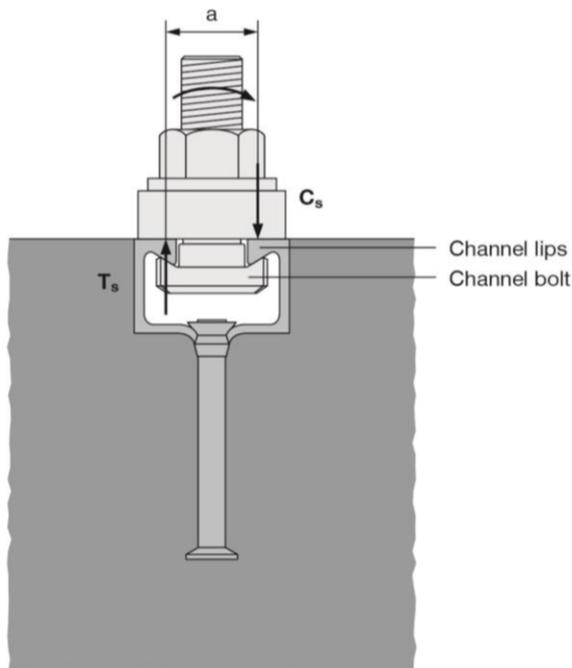

T_s = tension force acting on the channel lips

C_s = compression force acting on the channel lips

Anchor channels (HAC-C) with channel bolts (HBC)

Performance Data

Characteristic flexural resistances of channel bolts under shear load

Annex C6

Table 19: Characteristic resistance $F_{Rd,s,fi}$ [kN] of anchor channels under fire exposure


Channel bolt					M10	M12	≥ M16
Steel failure of anchor, connection between anchor and channel, local flexure of channel lip							
Characteristic resistance in uncracked concrete C20/25	HAC-C 40/22	R30	$N_{Rk,s,fi}$ = $V_{Rk,s,fi}$	[kN]	3,3	7,5	
		R60			1,7	3,5	
		R90			1,2	2,2	
		R120			0,9	1,5	
	HAC-C 50/30 HAC-C 52/34	R30			-	7,7	6,7
		R60			-	3,8	3,9
		R90			-	2,5	2,9
		R120			-	1,9	2,4
Partial safety factor			$\gamma_{Ms,fi}^{1)}$	[-]	1,0		

¹⁾ In absence of other national regulations


Table 20: Minimum concrete cover

Anchor channel HAC-C				40/22	50/30	52/34
Concrete cover	R30	u	[mm]	35	50	50
	R60			45		
	R90			55	55	55
	R120					

Fire exposure from one side only

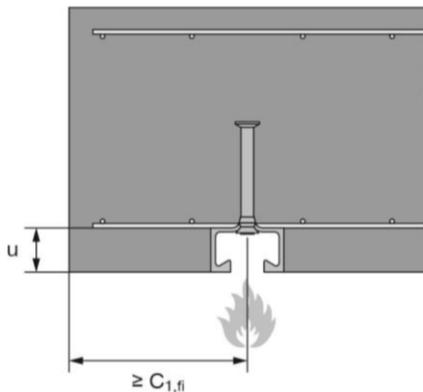

Fire exposure from more than one side

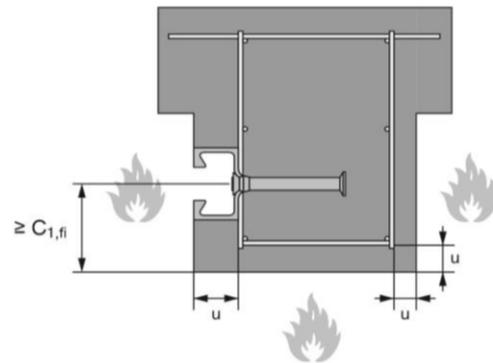

Anchor channels (HAC-C) with channel bolts (HBC)

Performance Data

Characteristic resistances of anchor channels and channel bolts under fire exposure

Annex C7