

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments



European Technical Assessment

ETA-17/0624
of 8 September 2017

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

fischer Bolt Anchor FBZ, FBZ A4

Product family
to which the construction product belongs

Mechanical anchor
for use in concrete

Manufacturer

fischerwerke GmbH & Co. KG
Klaus-Fischer-Straße 1
72178 Waldachtal
DEUTSCHLAND

Manufacturing plant

fischerwerke

This European Technical Assessment
contains

16 pages including 3 annexes which form an integral part
of this assessment

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

EAD 330232-00-0601

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The Fischer Bolt Anchor FBZ is an anchor made of galvanised steel (FBZ) or made of stainless steel (FBZ A4) which is placed into a drilled hole and anchored by torque-controlled expansion. The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance for static and quasi static action	See Annex C 1 to C 4
Displacements	See Annex C 5

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for Class A1
Characteristic resistance under fire exposure	See Annex C 4

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with the European Assessment Document EAD Nr. 330232-00-0601 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document


Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.

Issued in Berlin on 8 September 2017 by Deutsches Institut für Bautechnik



BD Dipl.-Ing. Andreas Kummerow
Head of Department

beglaubigt:
Baderschneider


Cone bolt manufactured by cold - forming:

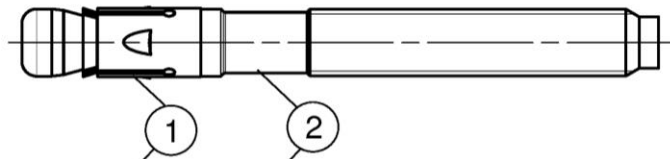

Cone bolt manufactured by turning:



- ① Expansion sleeve
- ② Cone bolt (cold – formed or turned)
- ③ Washer
- ④ Hexagon nut

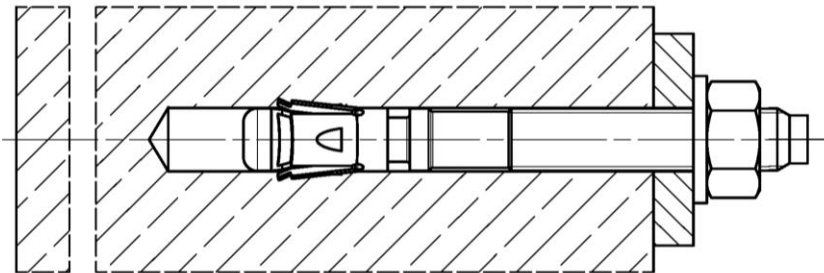


(Fig. not to scaled)

fischer Bolt Anchor FBZ, FBZ A4

Product description
Installed condition

Annex A 1

Product marking and letter-code:

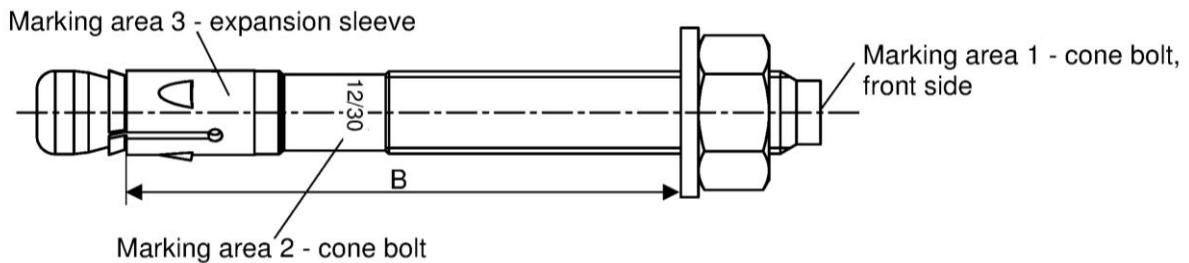

Product marking, example:

 FBZ 12/30 A4

Brand | type of fastener
placed at marking area 2 or marking area 3

Thread size / max. thickness of the fixture (t_{fix})
identification A4 placed at marking area 2

FBZ: carbon steel, galvanized
FBZ A4: stainless steel

Table A2.1: Letter - code at marking area 1:

Marking	(a)	(b)	(c)	(d)	(A)	(B)	(C)	(D)	(E)	(F)	(G)	(H)	(I)	(K)
Max. t_{fix}	5	10	15	20	5	10	15	20	25	30	35	40	45	50
$B \geq [mm]$	M8	40	45	-	50	55	60	65	70	75	80	85	90	95
	M10	45	50	55	60	65	70	75	80	85	90	95	100	105
	M12	55	60	65	70	75	80	85	90	95	100	105	110	115
	M16	70	75	80	85	90	95	100	105	110	115	120	125	130
	M20	-	-	-	-	105	110	115	120	125	130	135	140	145
Marking	(L)	(M)	(N)	(O)	(P)	(R)	(S)	(T)	(U)	(V)	(W)	(X)	(Y)	(Z)
Max. t_{fix}	60	70	80	90	100	120	140	160	180	200	250	300	350	400
$B \geq [mm]$	M8	105	115	125	135	145	165	185	205	225	245	295	345	395
	M10	120	130	140	150	160	180	200	220	240	260	310	360	410
	M12	130	140	150	160	170	190	210	230	250	270	320	370	420
	M16	145	155	165	175	185	205	225	245	265	285	335	385	435
	M20	160	170	180	190	200	220	240	260	280	300	350	400	450

Calculation existing h_{ef} for installed fasteners:

$$\text{existing } h_{ef} = B_{(\text{according to table A2.1})} - \text{existing } t_{fix}$$

Thickness of the fixture t_{fix} including thickness of fastener plate t and e.g. thickness of grout layer t_{grout} or other non-structural layers

(Fig. not to scaled)

fischer Bolt Anchor FBZ, FBZ A4

Product description
Product marking and letter code

Annex A 2

Product dimensions

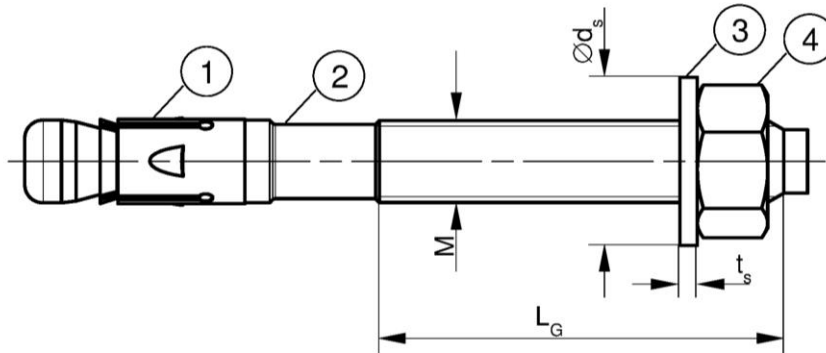


Table A3.1: Dimensions [mm]

Part	Designation		FBZ, FBZ A4				
			M8	M10	M12	M16	M20
1	Expansion sleeve	Sheet thickness	1,3	1,4	1,6	2,4	
2	Cone bolt	Thread size M	8	10	12	16	20
		L_G	19	26	31	40	50
3	Washer	t_s	1,4	1,8	2,3	2,7	
		$\varnothing d_s$	15	19	23	29	36
4	Hexagon nut	Wrench size	13	17	19	24	30

(Fig. not to scaled)

fischer Bolt Anchor FBZ, FBZ A4

Product description
Dimensions

Annex A 3

Specifications of intended use

Anchorage subject to:

Size	FBZ, FBZ A4				
	M8	M10	M12	M16	M20
Static and quasi-static loads	✓				
Cracked and uncracked concrete					
Fire exposure					

Base materials:

- Reinforced and unreinforced normal weight concrete (cracked and uncracked) according to EN 206-1: 2000
- Strength classes C20/25 to C50/60 according to EN 206-1: 2000

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (FBZ, FBZ A4)
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist (FBZ A4)

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used)

Design:

- Anchorages are to be designed under the responsibility of an engineer experienced in anchorages and concrete work
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.)
- Design of fastenings according to FprEN 1992-4: 2016 and EOTA Technical Report TR 055
- For effective embedment depth $h_{ef} < 40$ mm and $h_{min} \geq 80$ mm and / or < 100 mm only statically indeterminate fixings (e.g. lightweight suspended ceilings with internal exposure) are covered by the ETA


fischer Bolt Anchor FBZ, FBZ A4

Intended use
Specifications

Annex B 1

Table B2.1: Installation parameters

Size	FBZ, FBZ A4				
	M8	M10	M12	M16	M20
Nominal drill hole diameter $d_0 =$	8	10	12	16	20
Maximum bit diameter with hammer or hollow drilling $d_{cut,max}$ [mm]	8,45	10,45	12,5	16,5	20,55
Maximum bit diameter with diamond drilling	8,15		12,25	16,45	20,50
Overall fastener embedment depth in the concrete $h_{nom} \geq (L)$ [mm]	44,5 (9,5)	52,0 (12)	63,5 (13,5)	82,5 (17,5)	120 (20)
Depth of drill hole to deepest point $h_1 \geq$	Existing $h_{ef} + L = h_{nom}$ $h_{nom} + 5$				$h_{nom} + 10$
Diameter of clearance hole in the fixture $d_f \leq$ [mm]	9	12	14	18	22
Required setting torque $T_{inst} =$ [Nm]	20	45	60	110	200

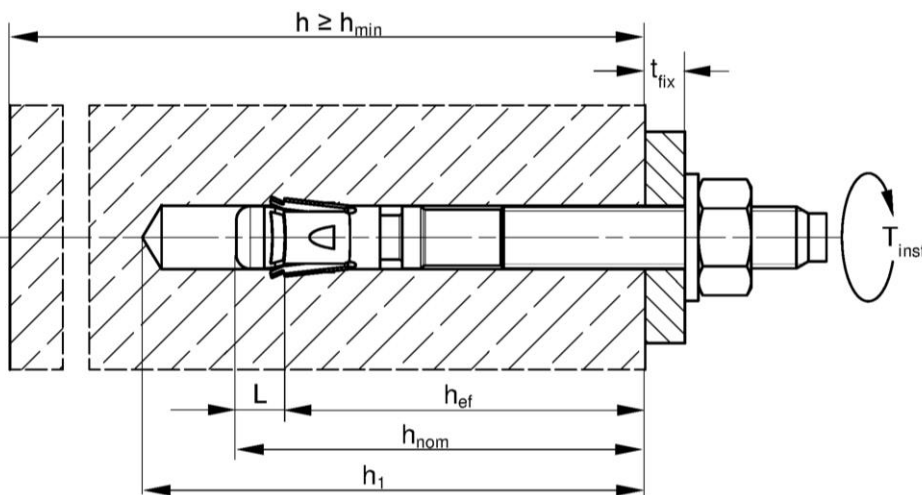

- h_{ef} = Effective embedment depth
- t_{fix} = Thickness of the fixture
- h_1 = Depth of drill hole to deepest point
- h = Thickness of the concrete member
- h_{min} = Minimum thickness of concrete member
- h_{nom} = Overall fastener embedment depth in the concrete
- T_{inst} = Required setting torque

(Fig. not to scaled)

fischer Bolt Anchor FBZ, FBZ A4

Intended use
Installation parameters

Annex B 2

Table B3.1: Minimum thickness of concrete members, minimum spacings and minimum edge distances of anchors for **standard anchorage depth ($h_{ef, sta}$)**

Size		FBZ, FBZ A4					
		M8	M10	M12	M16	M20	
Standard anchorage depth		$h_{ef, sta} \geq$	45	60	70	85	100
Concrete members with thickness $\geq 2 \times h_{ef, sta}$	Minimum thickness of concrete member	$h_{min, 1}$ [mm]	100	120	140	170	200
	Uncracked concrete						
	Minimum spacing	$\frac{s_{min}}{\text{for } c \geq}$ [mm]	40		50	65	95
	Minimum edge distance	$\frac{c_{min}}{\text{for } s \geq}$ [mm]	50	60	70	95	180
			40	45	55	65	95
			100	80	110	150	190
Cracked concrete							
Minimum spacing	$\frac{s_{min}}{\text{for } c \geq}$ [mm]	35	40	50	65	95	
Minimum edge distance	$\frac{c_{min}}{\text{for } s \geq}$ [mm]	50	55	70	95	140	
		40	45	55	65	85	
		70	80	110	150	190	
Concrete members with thickness $< 2 \times h_{ef, sta}$	Minimum thickness of concrete member	$h_{min, 2}$ [mm]	80	100	120	140	160
	Cracked and uncracked concrete						
	Minimum spacing	$\frac{s_{min}}{\text{for } c \geq}$ [mm]	35	40	50	80	125
	Minimum edge distance	$\frac{c_{min}}{\text{for } s \geq}$ [mm]	70	100	90	130	220
		40	60		65	125	
		100	90	120	180	230	

Intermediate values for s_{min} and c_{min} inside of the same thickness of concrete member by linear interpolation

Table B3.2: Minimum thickness of concrete members, minimum spacings and minimum edge distances of anchors for **reduced anchorage depth ($h_{ef, red}$)**

Size		FBZ, FBZ A4					
		M8	M10	M12	M16		
Reduced anchorage depth		$h_{ef, red} \geq$	35 ¹⁾	40	50	65	
Concrete members with thickness $\geq 2 \times h_{ef, red}$	Minimum thickness of concrete member	$h_{min, 3}$ [mm]	80		100	140	
	Uncracked concrete						
	Minimum spacing	$\frac{s_{min}}{\text{for } c \geq}$ [mm]	40		50	65	
	Minimum edge distance	$\frac{c_{min}}{\text{for } s \geq}$ [mm]	100		110	130	
			45		55	65	
			180		220	250	
Cracked concrete							
Minimum spacing	$\frac{s_{min}}{\text{for } c \geq}$ [mm]	40		50	65		
Minimum edge distance	$\frac{c_{min}}{\text{for } s \geq}$ [mm]	90		110	130		
		45		55	65		
		180		220	250		

Intermediate values for s_{min} and c_{min} by linear interpolation

¹⁾ Only in anchoring structural components which are statically indeterminate

fischer Bolt Anchor FBZ, FBZ A4

Intended use
Minimum thickness of member, minimum spacings and edge distances









Annex B 3

Installation instructions:


- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- Use of the anchor only as supplied by the manufacturer without exchanging the components of the anchor
- Checking before placing the anchor to ensure that the strength class of the concrete in which the anchor is to be placed is in the range given and is not lower than that of the concrete to which the characteristic loads apply
- Check of concrete being well compacted, e.g. without significant voids
- Hammer, hollow or diamond drilling according to Annex B4
- Drill hole created perpendicular $\pm 5^\circ$ to concrete surface, positioning without damaging the reinforcement
- In case of aborted hole: new drilling at a minimum distance twice the depth of the aborted drill hole or smaller distance if the aborted drill hole is filled with high strength mortar and if under shear or oblique tension load it is not in the direction of load application
- It must be ensured that in case of fire local spalling of the concrete cover does not occur

Installation instructions: Drilling and cleaning the hole


Types of drills and cleaning

Hammer drill		 1: Drill the hole	 2: Clean the hole
Hollow drill		 1: Drill the hole with automatic cleaning	-
Diamond drill		 1: Drill the hole	 2: Clean the hole


Installation instructions: Installation of the anchor



3: Set the fastener



4: Apply T_{inst}



5: Installed fastener

fischer Bolt Anchor FBZ, FBZ A4

Intended use
Installation instructions

Annex B 4

Table C1.1: Characteristic values of tension resistance for standard anchorage depth

Size	FBZ, FBZ A4							
	M8	M10	M12	M16	M20			
Steel failure for standard anchorage depth								
Characteristic resistance	FBZ	$N_{Rk,s}$	[kN]	16,6	28,3	43,2	67,0	123,3
	FBZ A4	$N_{Rk,s}$	[kN]	17,0	29,0	44,3	70,6	124,9
Partial factor for steel failure	γ_{Ms}	³⁾	[-]	1,5				
Pullout failure for standard anchorage depth								
Effective anchorage depth for calculation	$h_{ef,sta} \geq$	[mm]	45	60	70	85	100	
Characteristic resistance in cracked concrete C20/25	$N_{Rk,p}$	[kN]	6	10	16	26	30	
Characteristic resistance in uncracked concrete C20/25	$N_{Rk,p}$	[kN]	11	16	17	34	42	
Increasing factors for $N_{Rk,p}$ for cracked and uncracked concrete	C25/30		1,12					
	C30/37		1,22					
	C35/45		1,32					
	ψ_c C40/50		1,41					
	C45/55		1,50					
	C50/60		1,58					
Installation sensitivity factor	γ_{inst}	[-]	1,0					
Concrete cone and splitting failure for standard anchorage depth in applications with concrete members of thickness $\geq 2x h_{ef,sta}$								
Effective anchorage depth	h_{ef}	[mm]	45	60	70	85	100	
Factor for uncracked concrete	$k_1 = k_{ucr,N}$	[-]	11,0 ²⁾					
Factor for cracked concrete	$k_1 = k_{cr,N}$	[-]	7,7 ²⁾					
Minimum thickness of concrete member	$h_{min,1}$	[mm]	100	120	140	170	200	
Characteristic spacing	$s_{cr,N}$	[mm]	3 h_{ef}					
Characteristic edge distance	$c_{cr,N}$	[mm]	1,5 h_{ef}					
Spacing (splitting failure) ¹⁾	$s_{cr,sp}$	[mm]	140	180	210	260	370	
Edge distance (splitting failure) ¹⁾	$c_{cr,sp}$	[mm]	70	90	105	130	185	
Concrete cone and splitting failure for standard anchorage depth in applications with concrete members of thickness $< 2x h_{ef,sta}$								
Effective anchorage depth	h_{ef}	[mm]	45	60	70	85	100	
Factor for uncracked concrete	$k_1 = k_{ucr,N}$	[-]	11,0 ²⁾					
Factor for cracked concrete	$k_1 = k_{cr,N}$	[-]	7,7 ²⁾					
Minimum thickness of concrete member	$h_{min,2}$	[mm]	80	100	120	140	160	
Characteristic spacing	$s_{cr,N}$	[mm]	3 h_{ef}					
Characteristic edge distance	$c_{cr,N}$	[mm]	1,5 h_{ef}					
Spacing (splitting failure) ¹⁾	$s_{cr,sp}$	[mm]	180	240	280	340	480	
Edge distance (splitting failure) ¹⁾	$c_{cr,sp}$	[mm]	90	120	140	170	240	
¹⁾ Intermediate values for $s_{cr,sp}$ and $c_{cr,sp}$ between concrete thickness $h_{min,2}$ and $h_{min,1}$ by linear interpolation ²⁾ Based on concrete strength as cylinder strength ³⁾ In absence of other national regulations								
fischer Bolt Anchor FBZ, FBZ A4						Annex C 1		
Performances Characteristic values of resistance under tension loads								

Table C2.1: Characteristic values of tension resistance for reduced anchorage depth

Size	FBZ, FBZ A4						
	M8	M10	M12	M16			
Steel failure for reduced anchorage depth							
Characteristic resistance	FBZ	$N_{Rk,s}$	[kN]	16,6	28,3	43,2	67,0
	FBZ A4	$N_{Rk,s}$	[kN]	17,0	29,0	44,3	70,6
Partial factor for steel failure	γ_{Ms}	³⁾	[-]	1,5			
Pullout failure for reduced anchorage depth							
Effective anchorage depth for calculation	$h_{ef,red} \geq$	[mm]	35 ¹⁾	40	50	65	
Characteristic resistance in cracked concrete C20/25	$N_{Rk,p}$	[kN]	4	7	10	15	
Characteristic resistance in uncracked concrete 20/25	$N_{Rk,p}$	[kN]	8	10	15	22	
Increasing factors for $N_{Rk,p}$ for cracked and uncracked concrete	C25/30	ψ_c	1,12				
	C30/37	ψ_c	1,22				
	C35/45	ψ_c	1,32				
	C40/50	ψ_c	1,41				
	C45/55	ψ_c	1,50				
	C50/60	ψ_c	1,58				
Installation sensitivity factor	γ_{inst}	[-]	1,0				
Concrete cone and splitting failure for reduced anchorage depth							
Effective anchorage depth	h_{ef}	[mm]	35 ¹⁾	40	50	65	
Factor for uncracked concrete	$k_1 = k_{ucr,N}$	[-]	11 ²⁾				
Factor for cracked concrete	$k_1 = k_{cr,N}$	[-]	7,7 ²⁾				
Min. thickness of concrete member	$h_{min,3}$	[mm]	80	100	140		
Characteristic spacing	$s_{cr,N}$	[mm]	3 h_{ef}				
Characteristic edge distance	$c_{cr,N}$	[mm]	1,5 h_{ef}				
Spacing (splitting failure)	$s_{cr,sp}$	[mm]	140	160	200	260	
Edge distance (splitting failure)	$c_{cr,sp}$	[mm]	70	80	100	130	
¹⁾ Use restricted to anchoring of structural components which are statically indeterminate ²⁾ Based on concrete strength as cylinder strength ³⁾ In absence of other national regulations							
fischer Bolt Anchor FBZ, FBZ A4						Annex C 2	
Performances Characteristic values of resistance under tension loads							

Table C3.1: Characteristic values of **shear** resistance for **standard and reduced anchorage depth**

Size		FBZ, FBZ A4					
		M8	M10	M12	M16	M20	
Steel failure without lever arm for standard and reduced anchorage depth							
Characteristic resistance	FBZ	$V_{Rk,s}$ [kN]	12,0	21,4	30,6	55,0	70,0
	FBZ A4	$V_{Rk,s}$	16,1	26,5	37,4	57,2	
Partial factor for steel failure		$\gamma_{Ms}^{1)}$ [-]	1,25				
Factor for ductility		k_7 [-]	1,0				
Standard anchorage depth							
Steel failure with lever arm							
Characteristic bending resistance	FBZ	$M_{Rk,s}^0$ [Nm]	26	52	92	233	513
	FBZ A4	$M_{Rk,s}^0$	29	59	100	256	519
Partial factor for steel failure		$\gamma_{Ms}^{1)}$ [-]	1,25				
Factor for ductility		k_7 [-]	1,0				
Concrete pryout failure							
Factor for pryout failure		k_8 [-]	2,8	3,2	3,0	2,6	
Concrete edge failure							
Effective embedment depth for calculation		l_f [mm]	45	60	70	85	100
Outside diameter of a fastener		d_{nom}	8	10	12	16	20
Installation sensitivity factor		γ_{inst} [-]	1,0				
Reduced anchorage depth							
Steel failure with lever arm							
Characteristic bending resistance	FBZ	$M_{Rk,s}^0$ [Nm]	20	44	92	184	-
	FBZ A4	$M_{Rk,s}^0$	21	45	100	193	-
Partial factor for steel failure		$\gamma_{Ms}^{1)}$ [-]	1,25				
Factor for ductility		k_2 [-]	1,0				
Concrete pryout failure							
Factor for pryout failure		k_8 [-]	2,5	2,6	3,1	3,2	-
Concrete edge failure							
Effective embedment depth for calculation		l_f [mm]	35	40	50	65	-
Outside diameter of a fastener		d_{nom}	8	10	12	16	-
¹⁾ In absence of other national regulations							
fischer Bolt Anchor FBZ, FBZ A4						Annex C 3	
Performances Characteristic values of resistance under shear loads							

Table C4.1: Characteristic values of tension resistance under fire exposure

Size	FBZ, FBZ A4					
	M8	M10	M12	M16	M20	
$h_{ef} \geq$ [mm]	35 / 45	40 / 60	50 / 70	65 / 85	100	
Characteristic resistance steel failure $N_{Rk,s,fi}$	R30	1,4	2,8	5,0	9,4	14,7
	R60	1,2	2,3	4,1	7,7	12,0
	R90	0,9	1,9	3,2	6,0	9,4
	R120	0,8	1,6	2,8	5,2	8,1
Characteristic resistance Concrete cone failure $N_{Rk,c,fi}$	R30 - R90	$7,7 \cdot h_{ef}^{1,5} \cdot (20)^{0,5} \cdot h_{ef} / 200 / 1000$				
	R120	$7,7 \cdot h_{ef}^{1,5} \cdot (20)^{0,5} \cdot h_{ef} / 200 / 1000 \cdot 0,8$				
Characteristic resistance pullout failure $N_{Rk,p,fi}$	R30	0,9 / 2,0	2,2 / 3,3	3,0 / 5,0	4,5 / 6,8	8,6
	R60	0,8 / 2,0				
	R90	0,5 / 2,0	1,7 / 2,6	2,4 / 4,0	3,6 / 5,4	6,9
	R120	0,3 / 1,6				

Table C4.2: Characteristic values of shear resistance under fire exposure

Size FBZ, FBZ A4		R30		R60	
		$V_{Rk,s,fi,30}$ [kN]	$M^0_{Rk,s,fi,30}$ [Nm]	$V_{Rk,s,fi,60}$ [kN]	$M^0_{Rk,s,fi,60}$ [Nm]
M8	35	1,8	1,4	1,6	1,2
M10	40	3,6		2,9	3,0
M12	50	6,3	7,8	4,9	6,4
M16	65	11,7	19,9	9,1	16,3
M20	100	18,2	39,0	14,2	31,8

Size FBZ, FBZ A4		R90		R120	
		$V_{Rk,s,fi,90}$ [kN]	$M^0_{Rk,s,fi,90}$ [Nm]	$V_{Rk,s,fi,120}$ [kN]	$M^0_{Rk,s,fi,120}$ [Nm]
M8	35	1,3	1,0	1,2	0,8
M10	40	2,2	2,4	1,9	2,1
M12	50	3,5	5,0	2,8	4,3
M16	65	6,6	12,6	5,3	11,0
M20	100	10,3	24,6	8,3	21,4

Table C4.3: Minimum spacings and minimum edge distances of anchors under fire exposure for tension and shear load

Size	FBZ, FBZ A4				
	M8	M10	M12	M16	M20
Spacing s_{min}	Annex B3				
Edge distance c_{min} [mm]	$c_{min} = 2 \cdot h_{ef}$, for fire exposure from more than one side $c_{min} \geq 300$ mm				

fischer Bolt Anchor FBZ, FBZ A4

Performances
Characteristic values of resistance under fire exposure

Annex C 4

Table C5.1: Displacements under static and quasi static **tension** loads

Size	FBZ, FBZ A4				
	M8	M10	M12	M16	M20
Displacement – factor for tensile load¹⁾					
δ_{N0} - factor in cracked concrete	0,22	0,12	0,09	0,08	0,07
$\delta_{N\infty}$ - factor [mm/kN]	0,78	0,40	0,19	0,09	
δ_{N0} - factor in uncracked concrete	0,07	0,05	0,06		0,05
$\delta_{N\infty}$ - factor	0,29	0,21	0,14	0,10	0,06

Table C5.2: Displacements under static and quasi static **shear** loads

Size	FBZ				
	M8	M10	M12	M16	M20
Displacement – factor for shear load²⁾					
δ_{V0} - factor in cracked concrete [mm/kN]	0,35	0,37	0,27	0,10	0,09
$\delta_{V\infty}$ - factor	0,52	0,55	0,40	0,14	0,15
FBZ A4					
δ_{V0} - factor in uncracked concrete [mm/kN]	0,23	0,19	0,18	0,10	0,11
$\delta_{V\infty}$ - factor	0,27	0,22	0,16	0,11	0,05

¹⁾ Calculation of effective displacement:
 $\delta_{N0} = \delta_{N0} - \text{factor} \cdot N_{ED}$
 $\delta_{N\infty} = \delta_{N\infty} - \text{factor} \cdot N_{ED}$
 (N_{ED} : Design value of the applied tension force)

²⁾ Calculation of effective displacement:
 $\delta_{V0} = \delta_{V0} - \text{factor} \cdot V_{ED}$
 $\delta_{V\infty} = \delta_{V\infty} - \text{factor} \cdot V_{ED}$
 (V_{ED} : Design value of the applied shear force)

fischer Bolt Anchor FBZ, FBZ A4

Performances
Displacements under tension and shear loads

Annex C 5