

Approval body for construction products  
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and  
Laender Governments



## European Technical Assessment

**ETA-17/0811**  
**of 14 December 2017**

English translation prepared by DIBt - Original version in German language

### General Part

Technical Assessment Body issuing the  
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Frame fixing URD

Product family  
to which the construction product belongs

Plastic anchor for multiple use in concrete and masonry  
for non-structural applications

Manufacturer

Upat Vertriebs GmbH  
Bebelstraße 11  
79108 Freiburg im Breisgau  
DEUTSCHLAND

Manufacturing plant

Werk 1  
Plant 1

This European Technical Assessment  
contains

25 pages including 3 annexes which form an integral part  
of this assessment

This European Technical Assessment is  
issued in accordance with Regulation (EU)  
No 305/2011, on the basis of

ETAG 020, edition March 2012,  
used as EAD according to Article 66 Paragraph 3 of  
Regulation (EU) No 305/2011.

**European Technical Assessment**

**ETA-17/0811**

English translation prepared by DIBt

**Page 2 of 25 | 14 December 2017**

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

## Specific Part

### 1 Technical description of the product

The frame fixing in the range URD 8 and URD 10 is a plastic anchor consisting of a plastic sleeve made of polyamide and an accompanying specific screw of galvanised steel, of galvanised steel with an additional Duplex-coating or of stainless steel.

The plastic sleeve is expanded by screwing in the specific screw which presses the sleeve against the wall of the drilled hole.

The product description is given in Annex A.

### 2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchors of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Mechanical resistance and stability (BWR 1)

The essential characteristics regarding mechanical resistance and stability are included under the Basic Works Requirement Safety in use.

#### 3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for Class A 1
Resistance to fire	See Annex C 2

#### 3.3 Safety and accessibility (BWR 4)

Essential characteristic	Performance
Characteristic resistance for tension and shear loads	See Annexes C 1, C 3 – C 14
Characteristic resistance for bending moments	See Annex C 1
Displacements under shear and tension loads	See Annex C 2
Anchor distances and dimensions of members	See Annex B 2, B 3

#### 3.4 General aspects

The verification of durability is part of testing the essential characteristics. Durability is only ensured if the specifications of intended use according to Annex B are taken into account.

**4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base**

In accordance with guideline for European technical approval ETAG 020, March 2012 used as European Assessment Document (EAD) according to Article 66 Paragraph 3 of Regulation (EU) No 305/2011 the applicable European legal act is: 97/463/EC.

The system to be applied is: 2+

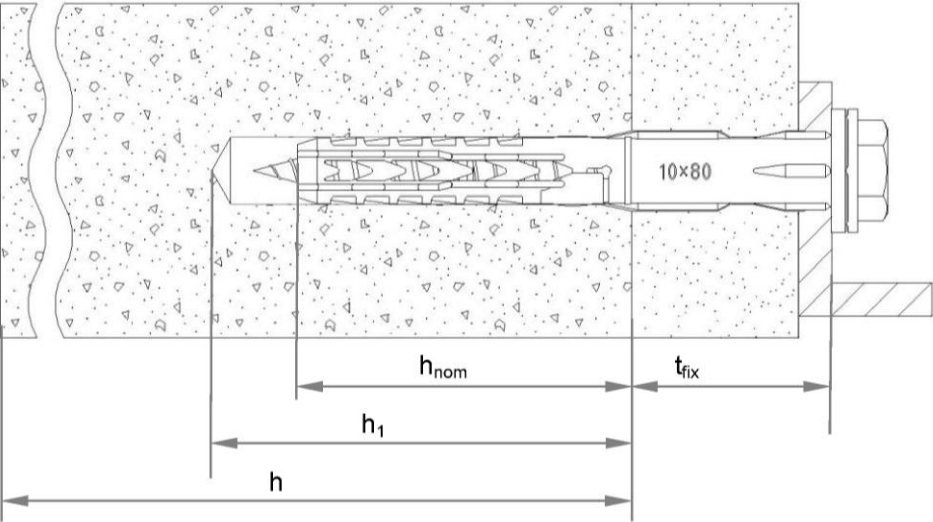
**5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document**

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.

BD Dipl.-Ing. Andreas Kummerow  
Head of Department

*beglaubigt:*  
Ziegler

URD



Legend

- $h_{nom}$  = overall plastic anchor embedment depth in the base material
- $h_1$  = depth of drill hole to deepest point
- $h$  = thickness of member (wall)
- $t_{fix}$  = thickness of fixture and / or non-load bearing layer

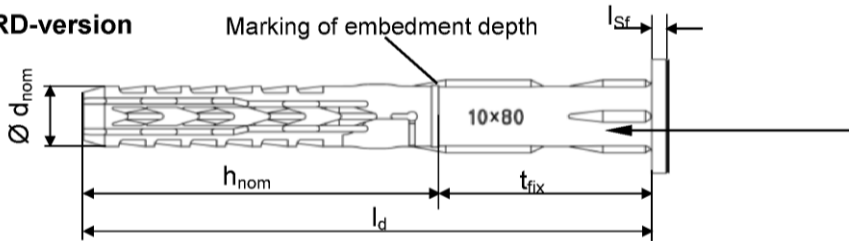
frame fixing URD

Product description  
Installed anchor

Annex A 1

Anchor sleeves – flat collar version of URD

URD-version





Marking:  
Brand  
Anchor type  
Size  
e.g. URD 10x80



Countersunk sleeve version also available




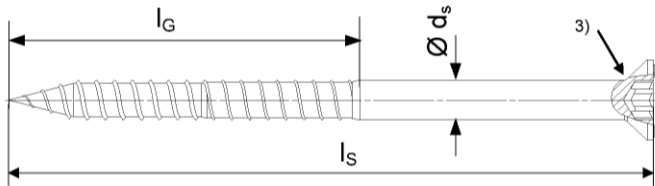
Countersunk screws




Hexagonal screw with washer

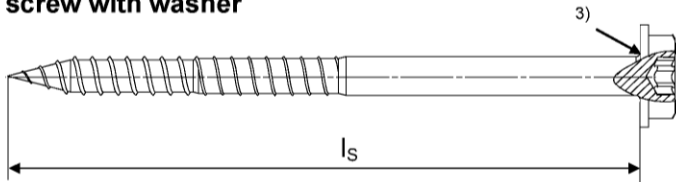

Hexagonal screw

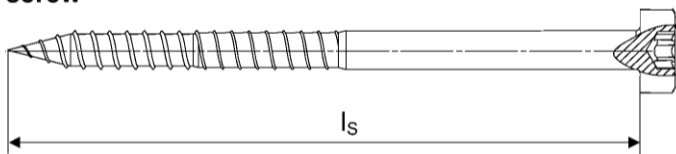

Stud screw



- 1) Additional marking for the special screw, stainless steel version: „A4“.
- 2) Internal driving feature for Torx bit is optional for hexagonal head and for stud screw
- 3) Optional additional version with underhead ribs

frame fixing URD

Product description  
Anchor types / special screws

Annex A 2

**Table A3.1: Dimensions [mm]**

Anchor type	Anchor sleeve							Special screw		
	$h_{nom}$ [mm]	$\varnothing d_{nom}$ [mm]	$t_{fix}$ [mm]	min. $l_d$ [mm]	max. $l_d$ [mm]	$l_{sf}^{1)}$ [mm]	$\varnothing d_{sf}$ [mm]	$\varnothing d_s$ [mm]	$l_G$ [mm]	$l_s$ [mm]
URD 8	50	8	$\geq 1$	51	360	1,8	> 15,0	6,0	$\geq 55$	$\geq l_d + 6$
URD 10	50	10	$\geq 1$	51	360	2,2	> 18,5	7,0	$\geq 57$	$\geq l_d + 7$

<sup>1)</sup> Only valid for flat collar version

**Table A3.2: Materials**

Name	Material
Anchor sleeve	Polyamide, PA6, colours: grey, off-white
Special screw	<ul style="list-style-type: none"> <li>- Steel gvz A2G or A2F acc. to EN ISO 4042:1999</li> <li><u>or</u></li> <li>- Steel gvz A2G or A2F acc. to EN ISO 4042:1999 + Duplex-coating type Delta-Seal in three layers (total layer thickness <math>\geq 6 \mu m</math>)</li> <li><u>or</u></li> <li>- Stainless steel acc. to EN 10 088-3:2014, e.g. 1.4401, 1.4571, 1.4578, 1.4362</li> </ul>

frame fixing URD

**Product description**  
Dimensions and materials

**Annex A 3**

## Specifications of intended use

### Anchorage subject to:

- Static and quasi-static loads.
- Multiple fixing of non-structural applications.

### Base materials:

- Reinforced or unreinforced normal weight concrete with strength classes  $\geq$  C12/15 (use category "a"), according to EN 206-1:2000, Annex C1, C 2.
- Solid brick masonry (use category "b"), according to Annex C 3 – C 5.  
Note: The characteristic resistance is also valid for larger brick sizes and higher compressive strength of the masonry unit.
- Hollow brick masonry (use category "c"), according to Annex C 6 – C 13.
- Autoclaved aerated concrete (use category "d"), according to Annex C 14.
- Mortar strength class of the masonry  $\geq$  M2,5 according to EN 998-2:2010.
- For other base materials of the use categories "a", "b", "c" and "d" the characteristic resistance of the anchor may be determined by job site tests according to ETAG 020, Annex B, Edition March 2012.

### Temperature Range:

URD 8 and 10

- c: - 40 °C to 50 °C (max. short term temperature + 50 °C and max long term temperature + 30 °C)
- b: - 40 °C to 80 °C (max. short term temperature + 80 °C and max long term temperature + 50 °C)

### Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (zinc coated steel, stainless steel).
- The specific screw made of galvanised steel or galvanised steel with an additional Duplex-coating may also be used in structures subject to external atmospheric exposure, if the area of the head of the screw is protected against moisture and driving rain after mounting of the fixing unit in this way, that intrusion of moisture into the anchor shaft is prevented. Therefore there shall be an external cladding or a ventilated rainscreen mounted in front of the head of the screw and the head of the screw itself shall be coated with a soft plastic, permanently elastic bitumen-oil-combination coating (e.g. undercoating or body cavity protection for cars).
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist (stainless steel).  
Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used).

### Design:

- The anchorages are to be designed in accordance with the ETAG 020, Annex C under the responsibility of an engineer experienced in anchorages and masonry work.
- Verifiable calculation notes and drawings shall be prepared taking account of the loads to be anchored, the nature and strength of the base materials and the dimensions of the anchorage members as well as of the relevant tolerances. The position of the anchor is indicated on the design drawings.
- Fasteners are only to be used for multiple use for non-structural application, according to ETAG 020, Edition March 2012.

### Installation:

- Hole drilling by the drilling method according to Annex C1, C 3 – C 14 for use categories "b", "c" and "d".
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- Installation temperature from URD 8 and URD 10: - 5 °C to + 40 °C
- Exposure to UV due to solar radiation of the not protected anchor  $\leq$  6 weeks.

frame fixing URD

Intended use  
Specifications

Annex B 1




**Table B2.1: Installation parameters**

Anchor type		URD 8	URD 10
Drill hole diameter	$d_0 = [\text{mm}]$	8	10
Cutting diameter of drill bit	$d_{\text{cut}} \leq [\text{mm}]$	8,45	10,45
Overall plastic anchor embedment depth in the base material <sup>1)</sup>	$h_{\text{nom}} \geq [\text{mm}]$	50	50
Depth of drill hole to deepest point <sup>1)</sup>	$h_1 \geq [\text{mm}]$	60	60
Diameter of clearance hole in the fixture	$d_f \leq [\text{mm}]$	8,5	10,5/12,5 <sup>2)</sup>

<sup>1)</sup> For hollow and perforated masonry: If the embedment depth is higher than  $h_{\text{nom}}$  given in the Table B2.1, job site tests have to be carried out according to ETAG 020, Annex B.

<sup>2)</sup> See Table C2.1.

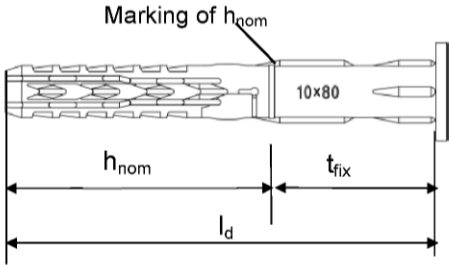**Table B2.2: Assignment of  $h_{\text{nom}}$ ,  $l_d$  and  $t_{\text{fix}}$  for use in thin concrete slabs (e.g. weather resistant shells of external wall panels)**

Anchor type	URD 10		
Use category "a"  	$h_{\text{nom}} \geq 50 \text{ mm}$		
	$l_d$	$t_{\text{fix, min}}$	$t_{\text{fix, max}}$
	52	1	2
	60	1	10
	80	21	30
	100	41	50
	120	61	70
	140	81	90
	160	101	110
	180	121	130
	200	141	150
	230	171	180
	260	201	210
	[mm]		

**Table B2.3: Minimum thickness of member, edge distance and spacing in concrete**

Anchor Type	$h_{\text{nom}} \geq [\text{mm}]$	Concrete Strength class	Min. thickness of member $h_{\text{min}} [\text{mm}]$	Characteristic edge distance $c_{\text{cr,N}} [\text{mm}]$	Characteristic spacing $s_{\text{cr,N}} [\text{mm}]$	Min. spacing and edge distances <sup>1)</sup> [mm]
URD 8	50	$\geq \text{C16/20}$	100	60	70	$s_{\text{min}} = 70$ for $c \geq 60$ $c_{\text{min}} = 60$ for $s \geq 70$
		C12/15		85	100	$s_{\text{min}} = 100$ for $c \geq 85$ $c_{\text{min}} = 85$ for $s \geq 100$
URD 10	50	$\geq \text{C16/20}$	100 <sup>2)</sup>	100	90	$s_{\text{min}} = 50$ for $c \geq 150$ $c_{\text{min}} = 60$ for $s \geq 70$
		C12/15		140	100	$s_{\text{min}} = 70$ for $c \geq 210$ $c_{\text{min}} = 85$ for $s \geq 100$

<sup>1)</sup> Intermediate values by linear interpolation.

<sup>2)</sup> Also valid for thin concrete slabs  $h \geq 40 \text{ mm}$ ,  $h_{\text{nom}} = 50 \text{ mm}$  to  $59 \text{ mm}$

Fixing points with a spacing  $a \leq s_{\text{cr,N}}$  are considered as a group with a max. characteristic resistance  $N_{\text{Rk,p}}$  acc. to Table C1.3. For a spacing  $a > s_{\text{cr,N}}$  the anchors are considered as single anchors, each with a characteristic resistance  $N_{\text{Rk,p}}$  acc. to Table C1.3.

**frame fixing URD**

**Intended use**

Installation parameters, parameters for use in thin e.g. weather resistant concrete skins  
Member thickness, distance and spacing in concrete

**Annex B 2**


**Table B3.1: Minimum thickness of member, edge distance and spacing in masonry**

Anchor type		URD 8	URD 10
Minimum thickness of member	$h_{\min}$ [mm]	100	100
<b>Single anchor</b>			
Minimum spacing	$a_{\min}$ [mm]	250	250
Minimum edge distance	$c_{\min}$ [mm]	100	100
<b>Anchor group</b>			
Minimum spacing perpendicular to free edge	$s_{1,\min}$ [mm]	100	100
Minimum spacing parallel to free edge	$s_{2,\min}$ [mm]	100	100
Minimum edge distance	$c_{\min}$ [mm]	100	100
Distance between anchor groups and / or single anchors	$a$ [mm]	250	


**Table B3.2: Minimum thickness of member, edge distance, spacing in autoclaved aerated concrete (AAC)**

Anchor type		URD 10
Compressive strength	$f_b$ [N/mm <sup>2</sup> ]	$\geq 2$
Nominal embedment depth	$h_{\text{nom}} \geq$ [mm]	50
Minimum thickness of member	$h_{\min}$ [mm]	100
<b>Single anchor</b>		
Minimum spacing	$a_{\min}$ [mm]	250
Minimum edge distance	$c_{\min}$ [mm]	100
<b>Anchor group</b>		
Minimum spacing perpendicular to free edge	$s_{1,\min}$ [mm]	200
Minimum spacing parallel to free edge	$s_{2,\min}$ [mm]	400
Minimum edge distance	$c_{\min}$ [mm]	100
Distance between anchor groups and / or single anchors	$a$ [mm]	400

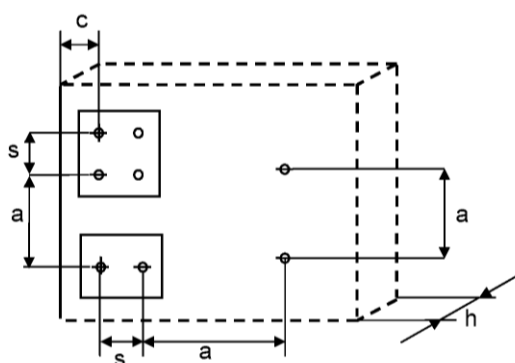**Scheme of distance and spacing in concrete**



**Scheme of distance and spacing in masonry and in AAC**

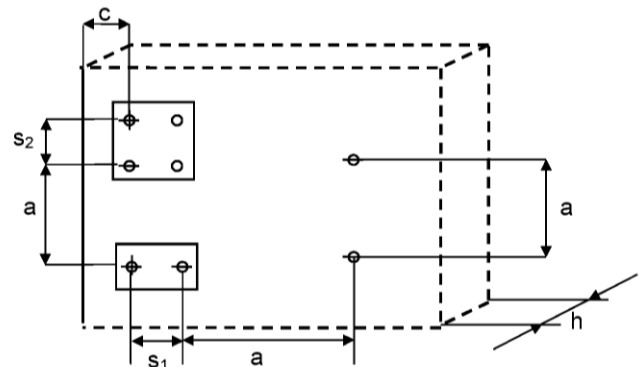


frame fixing URD

**Intended use**

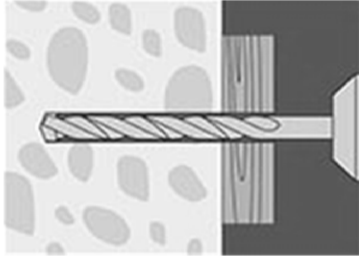Member thickness, distance and spacing in masonry and autoclaved aerated concrete (AAC), schemes of distance and spacing in concrete and in masonry / AAC

**Annex B 3**


### Installation instructions (the following pictures show fixing through timber)




1. Drill the bore hole acc. to Table B2.1 using the drill method described in the corresponding Annex C.



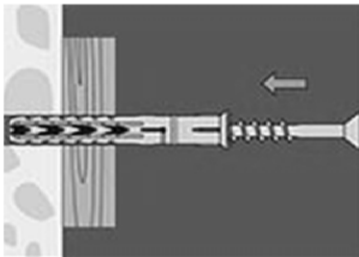
2. Use category „a“ concrete, „b“ solid masonry, „d“ autoclaved aerated concrete: Remove dust from borehole.



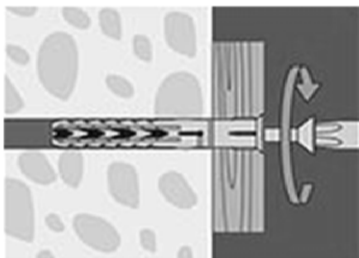3. Insert anchor (screw and plug) by using a hammer until the collar of the plastic sleeve is flush with the surface of the fixture.



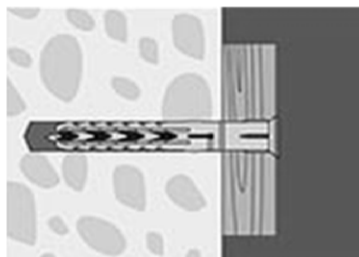4. The screw is screwed-in until the head of the screw touches the sleeve. The anchor is correctly mounted, when the head of the screw fits tight on the surface and cannot be screwed-in any further.



5. Correctly installed anchor in e.g. concrete.

frame fixing URD

Intended use  
Installation instructions

Annex B 4

**Table C1.1: Characteristic bending resistance of the screw**

Anchor type		URD 8		URD 10	
Material		galvanised steel	stainless steel	galvanised steel	stainless steel
Characteristic bending resistance	$M_{Rk,s}$ [Nm]	12,4	12,0	20,6	20,6
Partial safety factor	$\gamma_{Ms}$ <sup>1)</sup>	1,25	1,29	1,29	1,29

<sup>1)</sup> In absence of other national regulations.

**Table C1.2: Characteristic resistance of the screw**

Failure of expansion element (special screw)			URD 8		URD 10	
			galvanised steel	stainless steel	galvanised steel	stainless steel
Characteristic tension resistance	$N_{Rk,s}$	[kN]	14,8	14,3	21,7	21,7
Partial safety factor	$\gamma_{Ms}$ <sup>1)</sup>		1,50	1,45	1,55	1,55
Characteristic shear resistance	$V_{Rk,s}$	[kN]	7,4	7,1	10,8	10,8
Partial safety factor	$\gamma_{Ms}$ <sup>1)</sup>		1,25	1,29	1,29	1,29

<sup>1)</sup> In absence of other national regulations.

**Table C1.3: Characteristic resistance for use in concrete (use cat. "a")**

Drill method in concrete: Hammerdrilling

Pull-out failure (plastic sleeve)				URD 8	URD 10
Embedment depth $h_{nom}$ [mm]				50	50
Concrete $\geq$ C12/15					
Characteristic resistance 30/50 °C	$N_{Rk,p}$	[kN]		3,0	5,0
Characteristic resistance 50/80 °C	$N_{Rk,p}$	[kN]		2,5 3,0 <sup>2)</sup>	4,5
Concrete $\geq$ C12/15 (e.g. weather resistant shells of external wall panels)					
Characteristic resistance 30/50 °C	$N_{Rk}$	[kN]	$h \geq 40$ mm	-	3,5
Characteristic resistance 50/80 °C	$N_{Rk}$	[kN]	$h \geq 40$ mm	-	3,0
Partial safety factor				$\gamma_{Mc}$ <sup>1)</sup>	1,8

<sup>1)</sup> In absence of other national regulations.

<sup>2)</sup> Value corresponds to concrete class  $\geq$  C16/20.

frame fixing URD

**Performances**

Characteristic resistance and characteristic bending resistance of the screw  
Characteristic resistance for use in concrete

**Annex C 1**

**Table C2.1: Displacements<sup>1)</sup> under tension and shear loading in concrete and masonry**

Anchor type	$h_{nom}$ [mm]	F [kN]	Tension load <sup>2)</sup>		Shear load <sup>2)</sup>	
			$\delta_{NO}$ [mm]	$\delta_{N\infty}$ [mm]	$\delta_{VO}$ [mm]	$\delta_{V\infty}$ [mm]
URD 8	50	1,2	0,65	1,30	1,02	1,53
URD 10	50	2,0	1,29	2,58	1,15/3,05 <sup>3)</sup>	1,74/4,58 <sup>3)</sup>

<sup>1)</sup> Valid for all ranges of temperatures.

<sup>2)</sup> Intermediate values by linear interpolation.

<sup>3)</sup> Valid for diameter in the clearance hole  $\leq 12,5$  mm (see Table B2.1).

**Table C2.2: Displacements<sup>1)</sup> under tension and shear loading in autoclaved aerated concrete**

Anchor type	$f_b$ [N/mm <sup>2</sup> ]	$h_{nom}$ [mm]	F [kN]	Tension load <sup>2)</sup>		Shear load <sup>2)</sup>	
				$\delta_{NO}$ [mm]	$\delta_{N\infty}$ [mm]	$\delta_{VO}$ [mm]	$\delta_{V\infty}$ [mm]
URD 10	$\geq 2$	50	0,32	0,03	0,06	0,21	0,31

<sup>1)</sup> Valid for all ranges of temperatures.

<sup>2)</sup> Intermediate values by linear interpolation.

**Table C2.3: Values under fire exposure in concrete C20/25 to C50/60 in any load direction, no permanent centric tension load and without lever arm, fastening of façade systems**

Anchor type	Fire resistance class	F <sup>1)</sup>
URD 10	R 90	$\leq 0,8$ kN

<sup>1)</sup>  $F_{RK} / (\gamma_m \times \gamma_F)$

frame fixing URD

**Performances**

Displacements under tension and shear loading in concrete, masonry and autoclaved aerated concrete, Characteristic values under fire exposure in concrete

**Annex C 2**

**Table C3.1: Characteristic resistance  $F_{Rk}$  in [kN] in solid masonry (use category “b”)**

Base material [Supplier Title] Geometry, DF or nom. size (L x W x H) [mm] and drilling method	Min. com- pressive strength $f_b$ [N/mm <sup>2</sup> ] / bulk density $\rho$ [kg/dm <sup>3</sup> ]	Characteristic resistance $F_{Rk}$ [kN] 50/80°C	
		URD 8	URD 10
		$h_{nom} \geq 50$ mm	
<b>Clay brick Mz</b> , acc. to EN 771-1:2011 <i>e.g. Schlagmann</i> <b>3 DF</b> (240x175x113) by hammer drilling	20/1,8	3,0	2,0 4,0 <sup>4)</sup> 4,5 <sup>6)</sup>
	10/1,8	2,0	1,5 3,0 <sup>4)</sup>
<b>Clay brick Mz</b> , acc. to EN 771-1:2011 <i>e.g. Schlagmann</i> <i>e.g. Ebersdobler</i> <b>NF</b> (240x115x71) by hammer drilling	36/1,8	2,5	5,0
	20/1,8	2,5	3,0 3,5 <sup>2)</sup>
	12/1,8	2,0	2,0
	10/1,8	2,0	2,0
<b>Clay brick Mz</b> , acc. to EN 771-1:2011 <i>e.g. Wienerberger, DK</i> <b>DF</b> (240x115x52) by hammer drilling	28/1,8	3,0	3,0
	20/1,8	2,0	2,0
	16/1,8	1,5	1,5
	12/1,8	1,5	1,2
	10/1,8	1,5	1,2
Partial safety factor $\gamma_{Mm}$ <sup>1)</sup>		2,5	

<sup>1)</sup> In absence of other national regulations.

<sup>2)</sup> Only valid for temperature range 30/50° C.

<sup>4)</sup> Only valid for edge distance  $c \geq 200$  mm; intermediate values by linear interpolation.

<sup>6)</sup> Only valid for edge distance  $c \geq 200$  mm for temperature range 30/50° C; intermediate values by linear interpolation.

frame fixing URD

**Performances**

Characteristic resistance for use in solid masonry

**Annex C 3**

**Table C4.1: Characteristic resistance  $F_{Rk}$  in [kN] in solid masonry (use category “b”)**

Base material [Supplier Title] Geometry, DF or nom. size (L x W x H) [mm] and drilling method	Min. com- pressive strength $f_b$ [N/mm <sup>2</sup> ] / bulk density $\rho$ [kg/dm <sup>3</sup> ]	Characteristic resistance $F_{Rk}$ [kN] 50/80°C	
		URD 8	URD 10
		$h_{nom} \geq 50 \text{ mm}$	
<b>Calcium silicate solid brick KS</b> , acc. to EN 771-2:2011 e.g. <i>KS Wemding NF</i> (240x115x71) by hammer drilling	36/2,0	-	5,0
	20/2,0	-	3,0 3,5 <sup>2)</sup>
	20/1,8	2,5	2,5 4,0 <sup>4)</sup>
	10/2,0	-	2,0
	10/1,8	2,0	1,5
<b>Calcium silicate solid brick KS</b> , acc. to EN 771-2:2011 e.g. <i>KS Wemding 12 DF</i> (495x175x240) by hammer drilling	28/2,0	3,0	5,0
	20/2,0	3,0	4,5
	10/2,0	2,5	3,0
<b>Lightweight solid brick Vbl</b> , acc. to EN 771-3:2011 e.g. <i>KLB 2 DF</i> (240x115x113) by hammer drilling	4/1,4	-	0,75
	2/1,4	-	0,4
	2/1,2	0,9	0,75 0,9 <sup>3)</sup>
<b>Lightweight solid brick Vbl</b> , acc. to EN 771-3:2011 e.g. <i>KLB 8 DF</i> (490x240x115) by hammer drilling	12/1,8	2,5	-
	10/1,8	2,5	-
	8/1,8	2,5	-
	8/1,6	-	3,0
	6/1,8	2,0	-
	6/1,6	-	2,0
	4/1,8	1,2	-
	2/1,2	-	1,2
	2/1,0	1,2	-
Partial safety factor $\gamma_{Mm}$ <sup>1)</sup>		2,5	

<sup>1)</sup> In absence of other national regulations.

<sup>2)</sup> Only valid for temperature range 30/50° C.

<sup>3)</sup> Only valid for edge distance  $c \geq 150 \text{ mm}$ ; intermediate values by linear interpolation.

<sup>4)</sup> Only valid for edge distance  $c \geq 200 \text{ mm}$ ; intermediate values by linear interpolation.

frame fixing URD

**Performances**

Characteristic resistance for use in solid masonry

**Annex C 4**



**Table C5.1: Characteristic resistance  $F_{Rk}$  in [kN] in solid masonry (use category "b")**

Base material [Supplier Title] Geometry, DF or nom. size (L x W x H) [mm] and drilling method	Min. com- pressive strength $f_b$ [N/mm <sup>2</sup> ] / bulk density $\rho$ [kg/dm <sup>3</sup> ]	Characteristic resistance $F_{Rk}$ [kN] 50/80°C	
		URD 8	URD 10
		$h_{nom} \geq 50$ mm	
<b>Lightweight solid brick Vbl</b> , acc. to EN 771-3:2011 <i>e.g. KLB</i> <b>8 DF</b> (245x240x240) by hammer drilling	10/1,6	-	<b>2,5</b>
	8/1,6	-	<b>2,5</b>
	6/1,6	-	<b>2,5</b>
	6/1,4	<b>0,9</b>	-
	4/1,6	-	<b>0,9</b>
	4/1,4	<b>0,6</b> <b>0,75<sup>2)</sup></b>	-
	2/1,6	-	<b>0,5</b>
<b>Lightweight solid brick Vbl</b> , acc. to EN 771-3:2011, <i>e.g. Tarmac</i> (440x100x215) by hammer drilling	6/1,4	-	<b>2,0</b> <b>2,5<sup>4)</sup></b>
	4/1,4	-	<b>1,2</b> <b>1,5<sup>4)</sup></b>
<b>Solid brick normal concrete Vbn</b> , acc. to EN 771-3:2011 <i>e.g. Adolf Blatt</i> (240x245x240) by hammer drilling	20/1,8	<b>2,5</b>	<b>4,5</b>
	16/1,8	<b>2,5</b>	<b>3,5</b>
	12/1,8	<b>2,5</b>	<b>3,0</b>
	10/1,8	<b>1,5</b>	<b>3,0</b>
	8/1,8	<b>1,5</b>	-
	4/1,8	<b>0,75</b>	-
<b>Solid brick normal concrete Vbn</b> , acc. to EN 771-3:2011 <i>e.g. Tarmac GB</i> (440x100x215) by hammer drilling	16/1,8	-	<b>4,0</b> <b>4,5<sup>2)</sup></b>
	10/1,8	-	<b>2,5</b> <b>3,0<sup>2)</sup></b>
Partial safety factor $\gamma_{Mm}$ <sup>1)</sup>		<b>2,5</b>	

<sup>1)</sup> In absence of other national regulations.

<sup>2)</sup> Only valid for temperature range 30/50° C.

<sup>4)</sup> Only valid for edge distance  $c \geq 200$  mm; intermediate values by linear interpolation.

frame fixing URD




**Performances**

Characteristic resistance for use in solid masonry

**Annex C 5**



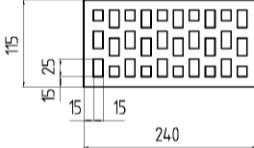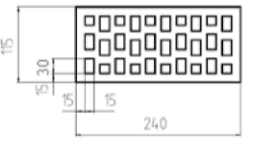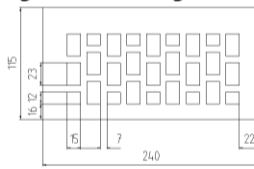**Table C6.1: Characteristic resistance  $F_{Rk}$  in [kN] in hollow or perforated masonry (use category "c")**

Base material [Supplier Title] Geometry, DF or nom. size (L x W x H) [mm] and drilling method	Min. compressive strength $f_b$ [N/mm <sup>2</sup> ] / bulk density $\rho$ [kg/dm <sup>3</sup> ]	Characteristic resistance $F_{Rk}$ [kN] 50/80°C	
		URD 8	URD 10
		$h_{nom}$ 50 mm	
<b>Perforated clay brick</b> <b>HLz</b> Form B, acc. to EN 771-1:2011 <i>e.g. Wienerberger</i> 	20/1,2	1,2	2,5 3,0 <sup>5)</sup>
	20/1,0	-	2,0
	10/1,2	0,6	1,5 2,0 <sup>2)</sup>
	10/1,0	-	1,2
	8/1,2	0,5	-
<b>Perforated clay brick</b> <b>HLz</b> acc. to EN 771-1:2011 <i>e.g. Wienerberger</i> 	12/1,0	0,6	0,9
	10/1,0	-	0,75
	8/1,0	0,4	0,6
<b>Perforated clay brick</b> <b>VHLz</b> acc. to EN 771-1:2011, <i>e.g. Wienerberger</i> 	48/1,6	-	2,5
	36/1,6	-	2,0
	28/1,6	-	1,5
	20/1,6	-	0,9
	12/1,6	-	0,6
Partial safety factor $\gamma_{Mm}$ <sup>1)</sup>		2,5	

1) In absence of other national regulations.

2) Only valid for temperature range 30/50° C.

5) Only valid for edge distance  $c \geq 150$  mm at temperature range 30/50° C; intermediate values by linear interpolation.




frame fixing URD

Performances

Characteristic resistance for use in solid masonry and in hollow or perforated masonry

Annex C 6

**Table C7.1: Characteristic resistance  $F_{Rk}$  in [kN] in hollow or perforated masonry (use category "c")**

Base material [Supplier Title] Geometry, DF or nom. size (L x W x H) [mm] and drilling method	Min. com- pressive strength $f_b$ [N/mm <sup>2</sup> ] / bulk density $\rho$ [kg/dm <sup>3</sup> ]	Characteristic resistance $F_{Rk}$ [kN] 50/80°C	
		URD 8	URD 10
		$h_{nom}$ 50 mm	
<b>Perforated clay brick HLz acc. to EN 771-1:2011+A1:2014, e.g. Wienerberger, BS</b>	28/1,5	2,5	2,5
	20/1,5	1,2 1,5 <sup>2)</sup>	2,0
<b>DF(240x110x52) by hammer drilling</b>	10/1,5	0,6 0,9 <sup>2)</sup>	1,2
<b>Perforated clay brick HLz Form B, acc. to EN 771-1:2011 e.g. Schlagmann</b>	8/0,9	0,9	-
	6/0,9	0,6	-
<b>10 DF (260x240x440) by rotary drilling</b>	4/0,9	0,4	-
<b>Perforated clay brick HLz acc. to EN 771-1:2011 e.g. Schlagmann Poroton T14</b>	6/0,7	-	0,3 0,4 <sup>2)</sup>
	10 DF (300x240x240) by rotary drilling		
Partial safety factor $\gamma_{Mm}$ <sup>1)</sup>		2,5	

<sup>1)</sup> In absence of other national regulations.

<sup>2)</sup> Only valid for temperature range 30/50° C.




frame fixing URD

**Performances**

Characteristic resistance for use in hollow or perforated masonry

**Annex C 7**

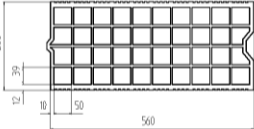**Table C8.1: Characteristic resistance  $F_{Rk}$  in [kN] in hollow or perforated masonry (use category "c")**

Base material [Supplier Title] Geometry, DF or nom. size (L x W x H) [mm] and drilling method	Min. compressive strength $f_b$ [N/mm <sup>2</sup> ] / bulk density $\rho$ [kg/dm <sup>3</sup> ]	Characteristic resistance $F_{Rk}$ [kN] 50/80°C	
		URD 8	URD 10
		$h_{nom}$ 50 mm	
<b>Perforated clay brick</b> <b>HLz Form B,</b> acc. to EN 771-1:2011, <i>e.g. Schlagmann</i> <i>Planfüllziegel</i>  <b>12 DF (380x240x240)</b> by rotary drilling	6/0,7	1,2	2,0
	4/0,7	0,75	-
	2/0,7	0,4	-
<b>Perforated clay brick</b> <b>HLz acc. to</b> EN 771-1:2011, <i>e.g. Imerys Gelimatic</i>  <b>(500x200x270)</b> by rotary drilling	6/0,6	-	0,6 0,75 <sup>6)</sup>
<b>Perforated clay brick</b> <b>HLz acc. to</b> EN 771-1:2011, <i>e.g. Imerys Optibric</i>  <b>(560x200x275)</b> by rotary drilling	10/0,6	-	1,2
Partial safety factor $\gamma_{Mm}$ <sup>1)</sup>		2,5	

<sup>1)</sup> In absence of other national regulations.

<sup>6)</sup> Only valid for edge distance  $c \geq 200$  mm at temperature range 30/50°C; intermediate values by linear interpolation.




frame fixing URD

Annex C 8

Performances

Characteristic resistance for use in hollow or perforated masonry

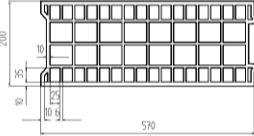**Table C9.1: Characteristic resistance  $F_{Rk}$  in [kN] in hollow or perforated masonry (use category "c")**

Base material [Supplier Title] Geometry, DF or nom. size (L x W x H) [mm] and drilling method	Min. com- pressive strength $f_b$ [N/mm <sup>2</sup> ] / bulk density $\rho$ [kg/dm <sup>3</sup> ]	Characteristic resistance $F_{Rk}$ [kN] 50/80°C	
		URD 8	URD 10
		$h_{nom}$ 50 mm	
<b>Perforated clay brick HLz acc. to EN 771-1:2011, e.g. Bouyer Leroux BGV (570x200x315)</b>  by rotary drilling	6/0,6	-	0,75 0,9 <sup>3)</sup> 1,2 <sup>5)</sup>
<b>Perforated clay brick HLz acc. to EN 771-1:2011, e.g. Wienerberger Porotherm 30 R</b>  (370x300x250) by rotary drilling	10/0,7	-	0,5 0,6 <sup>3)</sup>
<b>Perforated clay brick HLz acc. to EN 771-1:2011, e.g. Wienerberger Porotherm GF R20</b>  (560x200x275) by rotary drilling	10/0,7	-	0,6 0,75 <sup>3)</sup>
Partial safety factor $\gamma_{Mm}$ <sup>1)</sup>		2,5	

<sup>1)</sup> In absence of other national regulations.

<sup>3)</sup> Only valid for edge distance  $c \geq 150$  mm; intermediate values by linear interpolation.

<sup>5)</sup> Only valid for edge distance  $c \geq 150$  mm for temperature range 30/50°C; intermediate values by linear interpolation.




frame fixing URD

Performances

Characteristic resistance for use in hollow or perforated masonry

Annex C 9

**Table C10.1: Characteristic resistance  $F_{Rk}$  in [kN] in hollow or perforated masonry (use category "c")**

Base material [Supplier Title] Geometry, DF or nom. size (L x W x H) [mm] and drilling method	Min. com- pressive strength $f_b$ [N/mm <sup>2</sup> ] / bulk density $\rho$ [kg/dm <sup>3</sup> ]	Characteristic resistance $F_{Rk}$ [kN] 50/80°C	
		URD 8	URD 10
		$h_{nom}$ 50 mm	
<b>Perforated clay brick</b> <b>HLz acc. to</b> <b>EN 771-1:2011,</b> <i>e.g. Terreal Calibric</i>  <b>(500x200x220)</b> <b>by rotary drilling</b>	8/0,7	-	0,6 0,75 <sup>6)</sup>
<b>Hollow calcium silicate brick KSL</b> <b>acc. to EN 771-2:2011</b> <i>e.g. KS Wemding</i>  <b>2 DF (240x115x113)</b> <b>by hammer drilling</b>	12/1,4	2,0	2,0 2,5 <sup>2)</sup>
	10/1,4	1,5	2,0
	8/1,4	1,2	1,5
	6/1,4	0,9	-
<b>Hollow calcium silicate brick KSL</b> <b>acc. to EN 771-2:2011</b> <i>e.g. KS Wemding</i>  <b>3 DF (240x175x113)</b> <b>by hammer drilling</b>	20/1,4	1,2 1,5 <sup>2)</sup>	-
	16/1,4	0,9 1,2 <sup>2)</sup>	-
	12/1,4	0,75 0,9 <sup>2)</sup>	-
	10/1,4	0,6 0,75 <sup>2)</sup>	-
	8/1,4	0,5 0,6 <sup>2)</sup>	-
Partial safety factor $\gamma_{Mm}$ <sup>1)</sup>		2,5	

<sup>1)</sup> In absence of other national regulations.

<sup>2)</sup> Only valid for temperature range 30/50° C.

<sup>6)</sup> Only valid for edge distance  $c \geq 200$  mm for temperature range 30/50° C; intermediate values by linear interpolation.



frame fixing URD

Performances

Characteristic resistance for use in hollow or perforated masonry

Annex C 10

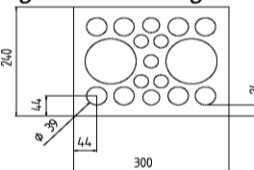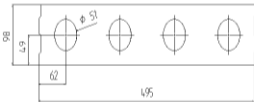**Table C11.1: Characteristic resistance  $F_{Rk}$  in [kN] in hollow or perforated masonry (use category "c")**

Base material [Supplier Title] Geometry, DF or nom. size (L x W x H) [mm] and drilling method	Min. com- pressive strength $f_b$ [N/mm <sup>2</sup> ] / bulk density $\rho$ [kg/dm <sup>3</sup> ]	Characteristic resistance $F_{Rk}$ [kN] 50/80°C	
		URD 8	URD 10
		$h_{nom}$ 50 mm	
<b>Hollow calcium silicate brick KSL</b> acc. to EN 771-2:2011 <i>e.g. KS Wemding</i>  <b>5 DF (300x240x113)</b> by hammer drilling	16/1,4	2,0	3,0 3,5 <sup>5)</sup>
	12/1,4	1,5	-
	10/1,4	1,2	1,5
	8/1,4	0,9	-
	6/1,4	0,75 0,9 <sup>2)</sup>	-
<b>Hollow calcium silicate brick KSL</b> acc. to EN 771-2:2011 <i>e.g. KS Wemding, P10</i>  <b>(495x98x245)</b> by hammer drilling	6/1,2	1,2 1,5 <sup>2)</sup>	1,5 2,0 <sup>3)</sup> 2,5 <sup>5)</sup>
	4/1,2	0,75 0,9 <sup>2)</sup>	-
	2/1,2	0,4 0,5 <sup>2)</sup>	-
Partial safety factor $\gamma_{Mm}$ <sup>1)</sup>		2,5	

<sup>1)</sup> In absence of other national regulations.

<sup>2)</sup> Only valid for temperature range 30/50° C.

<sup>3)</sup> Only valid for edge distance  $c \geq 150$  mm; intermediate values by linear interpolation.

<sup>5)</sup> Only valid for edge distance  $c \geq 150$  mm for temperature range 30/50° C; intermediate values by linear interpolation.




frame fixing URD

Performances

Characteristic resistance for use in hollow or perforated masonry

Annex C 11

**Table C12.1: Characteristic resistance  $F_{Rk}$  in [kN] in hollow or perforated masonry (use category "c")**

Base material [Supplier Title] Geometry, DF or nom. size (L x W x H) [mm] and drilling method	Min. com- pressive strength $f_b$ [N/mm <sup>2</sup> ] / bulk density $\rho$ [kg/dm <sup>3</sup> ]	Characteristic resistance $F_{Rk}$ [kN] 50/80°C	
		URD 8	URD 10
		$h_{nom}$ 50 mm	
<b>Hollow brick light-weight concrete Hbl</b> acc. to EN 771-3:2011, e.g. <i>KLB</i>  (300x240x240) by hammer drilling	2/1,2	-	1,5
<b>Hollow brick light-weight concrete Hbl</b> acc. to EN 771-3:2011, e.g. <i>Roadstone masonry</i>  (440x210x215) by hammer drilling	10/1,2	2,5	-
	8/1,2	2,0	2,5
	6/1,2	1,5	2,0
<b>Hollow brick light-weight concrete Hbl</b> acc. to EN 771-3:2011, e.g. <i>KLB</i>  (360x240x240) by hammer drilling	6/1,0	1,5	-
Partial safety factor $\gamma_{Mm}$ <sup>1)</sup>		2,5	

<sup>1)</sup> In absence of other national regulations.




frame fixing URD

**Performances**

Characteristic resistance for use in hollow or perforated masonry

**Annex C 12**

**Table C13.1: Characteristic resistance  $F_{Rk}$  in [kN] in hollow or perforated masonry (use category "c")**

Base material [Supplier Title] Geometry, DF or nom. size (L x W x H) [mm] and drilling method	Min. com- pressive strength $f_b$ [N/mm <sup>2</sup> ] / bulk density $\rho$ [kg/dm <sup>3</sup> ]	Characteristic resistance $F_{Rk}$ [kN] 50/80°C	
		URD 8	URD 10
		$h_{nom}$ 50 mm	
<b>Hollow brick light-weight concrete Hbl</b> acc. to EN 771-3:2011, <i>e.g. Sepa Parpaing</i>  (500x200x200) by rotary drilling	4/0,9	0,3 0,4 <sup>2)</sup>	0,9 1,2 <sup>4)</sup> 1,5 <sup>6)</sup>
<b>Hollow brick normal concrete Hbn</b> acc. to EN 771-3:2011,  <i>e.g. Adolf Blatt</i> (300x240x240) by hammer drilling	6/1,6	-	2,5
	4/1,6	-	1,5
	2/1,6	-	0,75
<b>Heat insulation brick WDB e.g. Gisoton</b>  (390x240x240) by hammer drilling	2/0,7	-	1,5
Partial safety factor $\gamma_{Mm}$ <sup>1)</sup>		2,5	

1) In absence of other national regulations.

2) Only valid for temperature range 30/50° C.

4) Only valid for edge distance  $c \geq 200$  mm; intermediate values by linear interpolation.

6) Only valid for edge distance  $c \geq 200$  mm for temperature range 30/50° C; intermediate values by linear interpolation.

frame fixing URD

Performances

Characteristic resistance for use in hollow or perforated masonry

Annex C 13



**Table C14.1: Characteristic resistance  $F_{Rk}$  in [kN] in autoclaved aerated concrete (use category "d")**

Base material [Supplier Title] Geometry, DF or nom. size (L x W x H) [mm] and drilling method	Min. com- pressive strength $f_b$ [N/mm <sup>2</sup> ] / bulk density $\rho$ [kg/dm <sup>3</sup> ]	Characteristic resistance $F_{Rk}$ [kN] 50/80°C	
		URD 8	URD 10
		$h_{nom} \geq 50$ mm	
<b>Autoclaved aerated concrete (AAC)</b> acc. to EN 771-4:2011  e.g. (500x120x300) e.g. (500x250x300) by hammer drilling	$\geq 6$	-	<b>0,75</b> <b>0,9<sup>5)</sup></b>
	$\geq 4$	-	<b>0,75</b> <b>0,9<sup>2)</sup></b>
	$\geq 3$	-	<b>0,4<sup>3)</sup></b> <b>0,5<sup>2)3)</sup></b>
	$\geq 2$	-	<b>0,4<sup>3)</sup></b> <b>0,5<sup>2)3)</sup></b>
Partial safety factor $\gamma_{MAAC}$ <sup>1)</sup>		<b>2,0</b>	

1) In absence of other national regulations.


2) Only valid for temperature range 30/50°C.

3) For the fixing in autoclaved aerated concrete with a nominal compressive strength  $f_{ck} < 4$  N/mm<sup>2</sup> the hole is made by using the accompanying AAC hole punch according Table C14.2.

5) Nur für Randabstand  $c \geq 120$  mm.

**Table C14.2: Assignment AAC hole punch type – anchor type (length) only for AAC  $f_b < 4$  N/mm<sup>2</sup> URD 10**

Hole punch only for URD 10 $h_{nom} = 50$ mm, $f_b < 4$ N/mm <sup>2</sup>					Anchor type (length)
Type	$a_1$	$a_2$	b	l	
GBS 10 x 80	9	10	80	85	URD 10 x <b>52</b> URD 10 x <b>60</b> URD 10 x <b>80</b>
GBS 10 x 100			90	105	URD 10 x <b>100</b>
GBS 10 x 135				140	URD 10 x <b>120</b>
GBS 10 x 160				165	URD 10 x <b>140</b> URD 10 x <b>160</b>
GBS 10 x 185				190	URD 10 x <b>180</b>
GBS 10 x 230				235	URD 10 x <b>200</b> URD 10 x <b>230</b>



**frame fixing URD**

**Performances**

Characteristic resistance for use in autoclaved aerated concrete / Assignment hole punch

**Annex C 14**