

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments



European Technical Assessment

ETA-17/0872
of 8 December 2017

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Injection system FMZ for concrete

Product family
to which the construction product belongs

Injection system for use in concrete

Manufacturer

Fasten (Dalian) Engineering Material Co., Ltd
No. 220 Gaoerji Road, Xigang District
DALIAN
VOLKSREPUBLIK CHINA

Manufacturing plant

Manufacturing plant no. 1
Manufacturing plant no. 2

This European Technical Assessment
contains

29 pages including 3 annexes which form an integral part
of this assessment

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

ETAG 001 Part 5: "Bonded anchors", April 2013,
used as EAD according to Article 66 Paragraph 3 of
Regulation (EU) No 305/2011.

European Technical Assessment

ETA-17/0872

English translation prepared by DIBt

Page 2 of 29 | 8 December 2017

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The Injection system FMZ for concrete is a bonded anchor consisting of a cartridge with injection mortar FMZ or FMZ Polar and a steel element. The steel element consist of a threaded rod with washer and hexagon nut in the range of M8 to M30, reinforcing bar in the range of diameter Ø8 to Ø32 mm or internal threaded rod FMZ-IG-M6 to FMZ-IG-M20.

The steel element is placed into a drilled hole filled with injection mortar and is anchored via the bond between metal part, injection mortar and concrete.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance tension and shear loads	See Annex C 1 to C 12
Displacements under tension and shear loads	See Annex C 13 / C 14

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for Class A1
Resistance to fire	No performance assessed

3.3 Hygiene, health and the environment (BWR 3)

Regarding dangerous substances there may be requirements (e.g. transposed European legislation and national laws, regulations and administrative provisions) applicable to the products falling within the scope of this European Technical Assessment. In order to meet the provisions of Regulation (EU) No 305/2011, these requirements need also to be complied with, when and where they apply.

3.4 Safety in use (BWR 4)

The essential characteristics regarding Safety in use are included under the Basic Works Requirement Mechanical resistance and stability.

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with guideline for European technical approval ETAG 001, April 2013 used as European Assessment Document (EAD) according to Article 66 Paragraph 3 of Regulation (EU) No 305/2011 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document


Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.

Issued in Berlin on 8 December 2017 by Deutsches Institut für Bautechnik


BD Dipl.-Ing. Andreas Kummerow
Head of Department

beglaubigt:
Baderschneider


Installation threaded rod M8 to M30

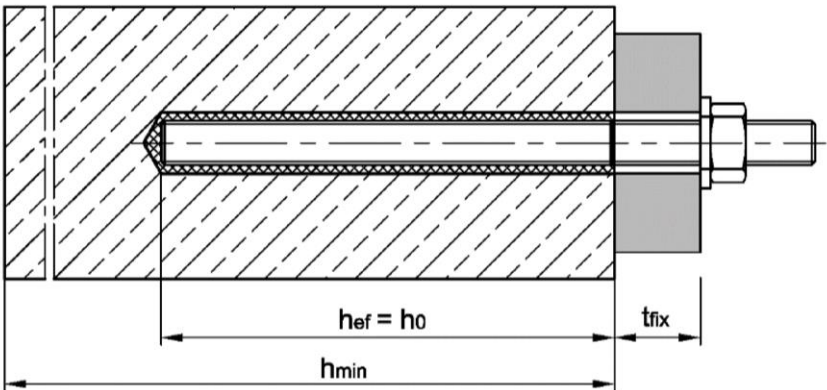

Installation internally threaded anchor rod FMZ-IG-M6 to FMZ-IG-M20

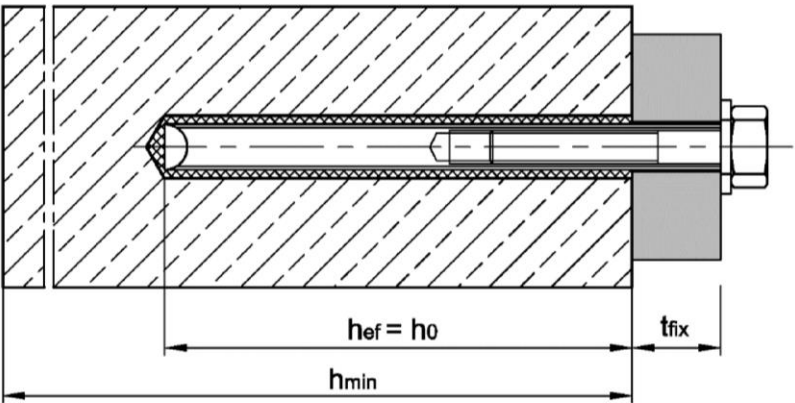

Installation reinforcing bar Ø8 to Ø32

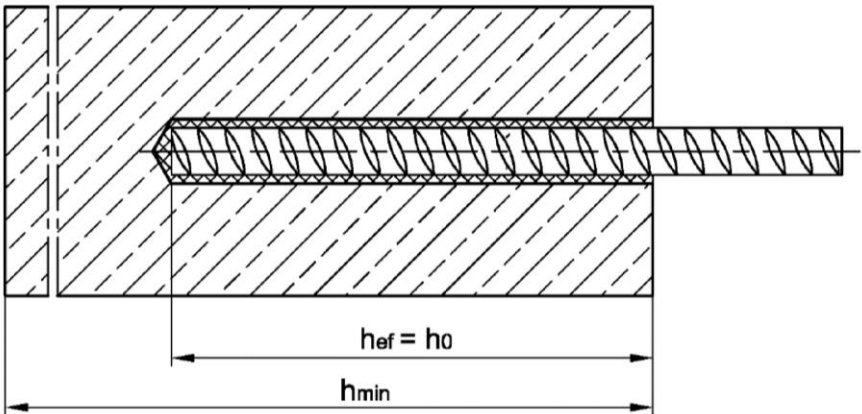

- t_{fix} = thickness of fixture
 h_{ef} = effective anchorage depth
 h_0 = depth of drill hole
 h_{min} = minimum thickness of member

Injection sytem FMZ for concrete


Product description
Installation situation

Annex A1

Cartridge FMZ or FMZ Polar

150 ml, 280 ml, 300 ml up to 333 ml and 380 ml up to 420 ml cartridge (Type: coaxial)


Sealing/Screw cap



Imprint: FMZ or FMZ Polar,
processing notes, charge-code, shelf life, hazard-
code, storage temperature, curing- and processing
time (depending on the temperature), with as well as
without travel scale

235 ml, 345 ml up to 360 ml and 825 ml cartridge (Type: “side-by-side”)


Sealing/Screw cap



Imprint: FMZ or FMZ Polar,
processing notes, charge-code, shelf life, hazard-
code, storage temperature, curing- and processing
time (depending on the temperature), with as well as
without travel scale


165 ml and 300 ml cartridge (Type: “foil tube”)

Sealing/Screw cap



Imprint: FMZ or FMZ Polar,
processing notes, charge-code, shelf life, hazard-code,
storage temperature, curing- and processing time
(depending on the temperature), with as well as without
travel scale

Static mixer

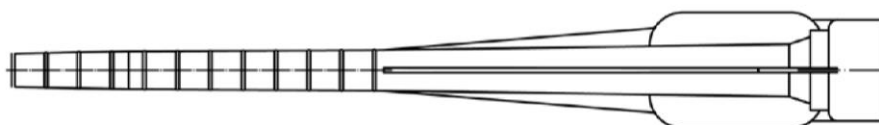

Injection sytem FMZ for concrete


Product description
Cartridges and attachments

Annex A2

Threaded rods

Threaded rod FMZ-A, HFZ with washer and hexagon nut
M8, M10, M12, M16, M20, M24, M27, M30


Threaded rod HFT (material sold by the meter, to be cut at the required length)
M8, M10, M12, M16, M20, M24, M27, M30

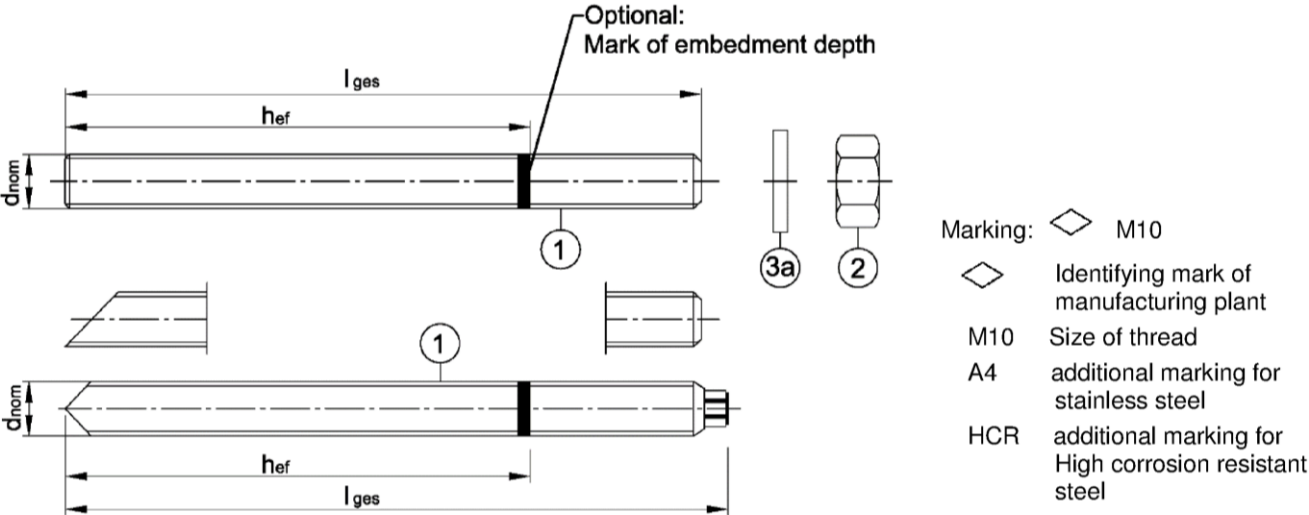

Commercial standard threaded rod with:


- Materials, dimensions and mechanical properties see Table A1
- Inspection certificate 3.1 acc. to EN 10204:2004

Washer with bore and reducing adapter for filling the gap between threaded rod and fixture

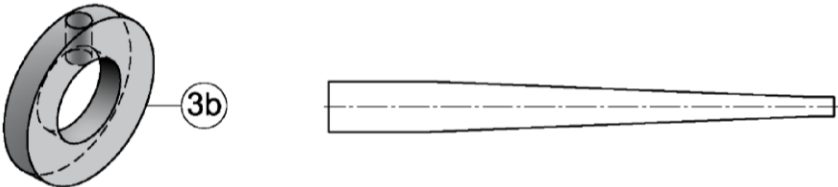

Internally threaded anchor rod

FMZ-IG M6, FMZ-IG M8, FMZ-IG M10, FMZ-IG M12, FMZ-IG M16, FMZ-IG M20

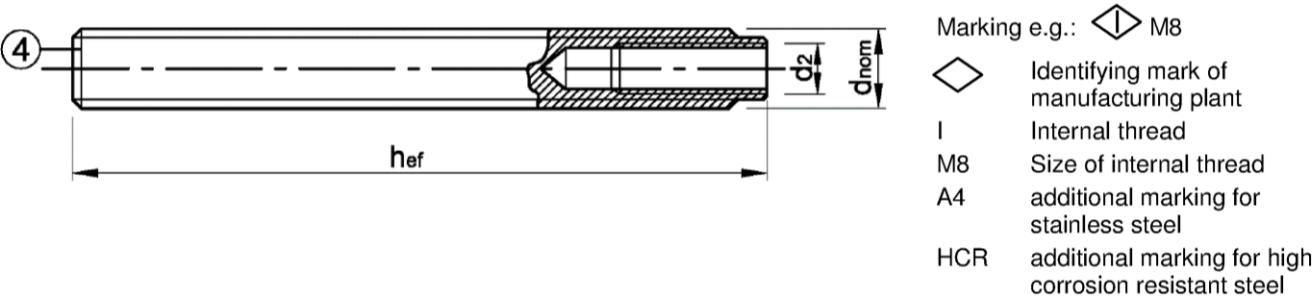

Injection sytem FMZ for concrete

Product description

Threaded rods and internally threaded anchor rod


Annex A3

Table A1: Materials

Part	Designation	Material	
Steel, zinc plated electroplated ≥ 5 μm acc. to EN ISO 4042:1999 or hot-dip galvanised ≥ 40 μm acc. to EN ISO 1461:2009, EN ISO 10684:2004+AC:2009 or sherardized ≥ 40μm acc. to EN ISO 17668:2016			
1	Threaded rod	Property class 4.6 f _{uk} ≥ 400 N/mm²; f _{yk} ≥ 240 N/mm²; A ₅ > 8 % fracture elongation	EN 10087:1998, EN 10263:2001; commercial standard threaded rod: EN ISO 898-1:2013
		Property class 4.8 f _{uk} ≥ 400 N/mm²; f _{yk} ≥ 320 N/mm²; A ₅ > 8 % fracture elongation	
		Property class 5.6 f _{uk} ≥ 500 N/mm²; f _{yk} ≥ 300 N/mm²; A ₅ > 8 % fracture elongation	
		Property class 5.8 f _{uk} ≥ 500 N/mm²; f _{yk} ≥ 400 N/mm²; A ₅ > 8 % fracture elongation	
		Property class 8.8 f _{uk} ≥ 800 N/mm²; f _{yk} ≥ 640 N/mm²; A ₅ > 8 % fracture elongation	
2	Hexagon nut	Steel, zinc plated Property class 4 (for class 4.6 or 4.8 rod) Property class 5 (for class 5.6 or 5.8 rod) Property class 8 (for class 8.8 rod)	EN ISO 898-2:2012
3a	Washer	Steel, zinc plated (e.g.: EN ISO 7089:2000, EN ISO 7093:2000 or EN ISO 7094:2000)	
3b	Washer with bore	Steel, zinc plated	
4	Internally threaded anchor rod	Steel, electroplated, A ₅ > 8 % fracture elongation Property class 5.8 and 8.8	EN 10087:1998
Stainless steel A4			
1	Threaded rod	Material 1.4401 / 1.4404 / 1.4571 / 1.4578 / 1.4362 / 1.4062	EN 10088-1:2014
		Property class 50 f _{uk} = 500 N/mm²; f _{yk} = 210 N/mm²; A ₅ > 8 % fracture elongation	EN ISO 3506-1:2009
		Property class 70 f _{uk} = 700 N/mm²; f _{yk} = 450 N/mm²; A ₅ > 8 % fracture elongation M8 to M24	
2	Hexagon nut	Stainless Steel A4 Property class 50 (for class 50 rod) Property class 70 (for class 70 rod; ≤ M24)	EN ISO 3506-2:2009
3a	Washer	Stainless Steel A4 (e.g.: EN ISO 7089:2000, EN ISO 7093:2000 or EN ISO 7094:2000)	EN 10088-1: 2014
3b	Washer with bore	Material 1.4401 / 1.4404 / 1.4571 / 1.4362	
4	Internally threaded anchor rod	Material 1.4401 / 1.4404 / 1.4571 / 1.4362; A ₅ > 8 % fracture elongation Property class 50 (IG-M20) Property class 70 (IG-M8 to IG-M16)	EN 10088-1: 2014
High corrosion resistant steel HCR			
1	Threaded rod	Material 1.4529 / 1.4565	EN 10088-1: 2014
		Property class 50 f _{uk} = 500 N/mm²; f _{yk} = 210 N/mm²; A ₅ > 8 % fracture elongation	EN ISO 3506-1: 2009
		Property class 70 f _{uk} = 700 N/mm²; f _{yk} = 450 N/mm²; A ₅ > 8 % fracture elongation M8 to M24	
2	Hexagon nut	Material 1.4529 / 1.4565 Property class 50 ((for class 50 rod) Property class 70 (for class 70 rod; ≤ M24)	EN 10088-1: 2014 EN ISO 3506-2:2009
3a	Washer	Material 1.4529 / 1.4565 (e.g.: EN ISO 7089:2000, EN ISO 7093:2000 or EN ISO 7094:2000)	EN 10088-1: 2014
3b	Washer with bore	Material 1.4529 / 1.4565	
4	Internally threaded anchor rod	Material 1.4529 / 1.4565, A ₅ > 8 % fracture elongation Property class 50 (IG-M20) Property class 70 (IG-M8 to IG-M16)	EN 10088-1: 2014
Injection sytem FMZ for concrete			
Product description Materials threaded rods and internally threaded anchor rod			Annex A4

Reinforcing bar

Ø 8, Ø 10, Ø 12, Ø 14, Ø 16, Ø 20, Ø 25, Ø 28, Ø 32

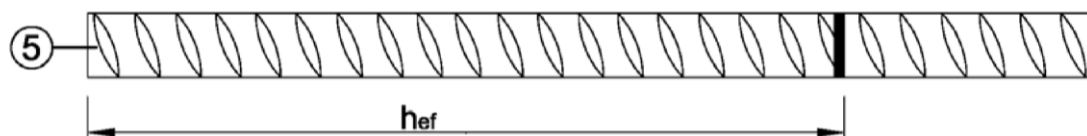

- Minimum value of related rip area $f_{R,min}$ according to EN 1992-1-1:2004+AC:2010
- Rip height of the bar shall be in the range $0,05d \leq h \leq 0,07d$
(d: Nominal diameter of the bar; h: Rip height of the bar)

Table A2: Material rebar

Part	Designation	Material
Rebar		
5	Rebar EN 1992-1-1:2004+AC:2010, Annex C	Bars and de-coiled rods class B or C f_{yk} and k according to NDP or NCL of EN 1992-1-1/NA:2013 $f_{uk} = f_{tk} = k \cdot f_{yk}$

Injection sytem FMZ for concrete

Product description

Product description and materials reinforcing bar

Annex A5

Specification of intended use

Injection System FMZ	Anchor rod	Internally threaded anchor rod	rebar
	FMZ-A, HFZ, HFT commercial standard threaded rod	FMZ-IG	
Static or quasi-static action	M8 - M30 (zinc plated, A4, HCR)	IG-M6 - IG-M20 (electroplated, A4, HCR)	Ø8 - Ø32
Seismic action, category C1	M8 - M30 (zinc plated ¹⁾ , A4, HCR)	-	Ø8 - Ø32
Base materials	Reinforced or unreinforced normal weight concrete acc. to EN 206-1:2000 Strength classes acc. to EN 206-1:2000:C20/25 to C50/60 Cracked and uncracked concrete		
Temperature Range I	-40 °C to +40 °C	max long term temperature +24 °C and max short term temperature +40 °C	
Temperature Range II	-40 °C to +80 °C	max long term temperature +50 °C and max short term temperature +80 °C	
Temperature Range III	-40 °C to +120 °C	max long term temperature +72 °C and max short term temperature +120 °C	

¹⁾ except hot-dip galvanised

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (zinc coated steel, stainless steel or high corrosion resistant steel).
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist (stainless steel or high corrosion resistant steel).
- Structures subject to external atmospheric exposure and to permanently damp internal condition, if other particular aggressive conditions exist (high corrosion resistant steel).

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used).

Design:

- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e. g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorage are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Anchorage under static or quasi-static actions are designed in accordance with:
 - EOTA Technical Report TR 029 "Design of bonded anchors", Edition September 2010 or
 - CEN/TS 1992-4:2009
- Anchorage under seismic actions (cracked concrete) are designed in accordance with:
 - EOTA Technical Report TR 045 "Design of Metal Anchors under Seismic Action", Edition February 2013
 - Anchorage shall be positioned outside of critical regions (e.g. plastic hinges) of the concrete structure.
 - Fastenings in stand-off installation or with a grout layer are not allowed.

Installation:

- Dry or wet concrete: M8 to M30, IG-M6 to IG-M20, Rebar Ø8 to Ø32.
- Flooded holes (not sea water): M8 to M16, IG-M6 to IG-M10, Rebar Ø8 to Ø16.
- Hole drilling by hammer or compressed air drill mode or vacuum drill mode.
- Overhead installation allowed.
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.

Injection system FMZ for concrete

Intended Use
Specifications

Annex B1

Table B1: Installation parameters for threaded rod

Threaded rod		M8	M10	M12	M16	M20	M24	M27	M30
Nominal drill hole diameter	$d_0 =$ [mm]	10	12	14	18	24	28	32	35
Effective anchorage depth	$h_{ef,min}$ [mm]	60	60	70	80	90	96	108	120
	$h_{ef,max}$ [mm]	160	200	240	320	400	480	540	600
Diameter of clearance hole in the fixture ¹⁾	$d_f \leq$ [mm]	9	12	14	18	22	26	30	33
Installation torque	$T_{inst} \leq$ [Nm]	10	20	40	80	120	160	180	200
Minimum thickness of member	h_{min} [mm]	$h_{ef} + 30 \text{ mm}$ $\geq 100 \text{ mm}$			$h_{ef} + 2d_0$				
Minimum spacing	s_{min} [mm]	40	50	60	80	100	120	135	150
Minimum edge distance	c_{min} [mm]	40	50	60	80	100	120	135	150

¹⁾ For larger clearance hole see TR029 section 1.1; for application under seismic loading the diameter of clearance hole in the fixture shall be at maximum $d_{nom} + 1 \text{ mm}$ or alternatively the annular gap between fixture and threaded rod shall be completely filled with mortar

Table B2: Installation parameters for internally threaded anchor rod

Internally threaded anchor rod		IG-M 6	IG-M 8	IG-M 10	IG-M 12	IG-M 16	IG-M 20
Inner diameter of threaded rod	$d_2 =$ [mm]	6	8	10	12	16	20
Outer diameter of threaded rod ²⁾	$d_{nom} =$ [mm]	10	12	16	20	24	30
Nominal drill hole diameter	$d_0 =$ [mm]	12	14	18	24	28	35
Effective anchorage depth	$h_{ef,min}$ [mm]	60	70	80	90	96	120
	$h_{ef,max}$ [mm]	200	240	320	400	480	600
Diameter of clearance hole in the fixture ¹⁾	$d_f \leq$ [mm]	7	9	12	14	18	22
Installation torque	$T_{inst} \leq$ [Nm]	10	10	20	40	60	100
Minimum screw-in depth	l_{IG} [mm]	8	8	10	12	16	20
Minimum thickness of member	h_{min} [mm]	$h_{ef} + 30 \text{ mm}$ $\geq 100 \text{ mm}$			$h_{ef} + 2d_0$		
Minimum spacing	s_{min} [mm]	50	60	80	100	120	150
Minimum edge distance	c_{min} [mm]	50	60	80	100	120	150

¹⁾ For larger clearance hole see TR029 section 1.1

²⁾ With metric thread acc. to EN 1993-1-8:2005+AC:2009

Table B3: Installation parameters for rebar








Rebar		Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32
Nominal drill hole diameter	$d_0 =$ [mm]	12	14	16	18	20	24	32	35	40
Effective anchorage depth	$h_{ef,min}$ [mm]	60	60	70	75	80	90	100	112	128
	$h_{ef,max}$ [mm]	160	200	240	280	320	400	500	560	640
Minimum thickness of member	h_{min} [mm]	$h_{ef} + 30 \text{ mm}$ $\geq 100 \text{ mm}$			$h_{ef} + 2d_0$					
Minimum spacing	s_{min} [mm]	40	50	60	70	80	100	125	140	160
Minimum edge distance	c_{min} [mm]	40	50	60	70	80	100	125	140	160

Injection system FMZ for concrete

Intended Use
Installation parameters

Annex B2

Table B4: Parameter cleaning and setting tools

Threaded rod	Internally threaded anchor rod	Rebar	Drill bit \varnothing	Brush \varnothing	min. Brush \varnothing	Retaining washer			
							Installation direction and use of retaining washer		
[-]	[-]	\varnothing [mm]	d_0 [mm]	d_b [mm]	$d_{b,min}$ [mm]	[-]	↓	→	↑
M8			10	12	10,5	No retaining washer required			
M10	FMZ-IG M 6	8	12	14	12,5				
M12	FMZ-IG M 8	10	14	16	14,5				
		12	16	18	16,5				
M16	FMZ-IG M10	14	18	20	18,5	VM-IA 18	$h_{ef} > 250\text{mm}$	$h_{ef} > 250\text{mm}$	all
		16	20	22	20,5	VM-IA 20			
M20	FMZ-IG M12	20	24	26	24,5	VM-IA 24			
M24	FMZ-IG M16		28	30	28,5	VM-IA 28			
M27		25	32	34	32,5	VM-IA 32			
M30	FMZ-IG M20	28	35	37	35,5	VM-IA 35			
		32	40	41,5	40,5	VM-IA 40			



Blow-out pump (volume 750ml)
Drill bit diameter (d_0): 10 mm to 20 mm
Anchorage depth (h_{ef}): $\leq 10 d_{nom}$
for uncracked concrete



Recommended compressed air tool (min 6 bar)
All applications



Retaining washer for overhead or horizontal installation
Drill bit diameter (d_0):
18 mm to 40 mm



Steel brush
Drill bit diameter (d_0): all diameters

Injection sytem FMZ for concrete


Intended Use
Cleaning and setting tools

Annex B3

Installation instructions

Drilling of the hole

1.



Drill the borehole by applying the drilling method acc. to Annex B1, the drill bit diameter (Table B4) and the selected borehole depth.
In case of aborted drill hole, the drill hole shall be filled with mortar


Cleaning

Attention! Standing water in the bore hole must be removed before cleaning!

Cleaning with compressed air


(all diameters, cracked and uncracked concrete)

2a.




Starting from the bottom or back of the bore hole, blow out the hole with compressed air (min. 6 bar) **four** times.
If the bore hole ground is not reached, an extension must be used.

2b.



Attach the brush to a drilling machine or a battery screwdriver. Brush the hole with an appropriate sized wire brush $> d_{b,min}$ (Table B4) **four** times.
If the bore hole ground is not reached, a brush extension shall be used.

2c.



Finally blow the hole clean again with compressed air (min. 6 bar) **four** times. If the bore hole ground is not reached an extension shall be used.


2.

Manual cleaning

Uncracked concrete: Bore hole diameter $d_0 \leq 20\text{mm}$ and effective anchorage depth $h_{ef} \leq 10 d_{nom}$


Cracked concrete: Bore hole diameter: $14\text{mm} \leq d_0 \leq 20\text{mm}$ and effective anchorage depth $h_{ef} \leq 10 d_{nom}$

2a.




Starting from the bottom or back of the bore hole, blow the hole clean with the blow-out pump **four** times.

2b.



Attach the brush to a drilling machine or a battery screwdriver. Brush the hole with an appropriate sized wire brush $> d_{b,min}$ (Table B4) **four** times.
If the bore hole ground is not reached, a brush extension shall be used.

2c.



Finally blow the hole clean again with the blow-out pump **four** times.











After cleaning, the bore hole has to be protected against re-contamination in an appropriate way, until dispensing the mortar in the bore hole. If necessary, the cleaning has to be repeated directly before dispensing the mortar. In-flowing water must not contaminate the bore hole again.

Injection system FMZ for concrete

Intended Use
Installation instructions

Annex B4

Installation instructions (continuation)

Injection		
3.		Attach a supplied static-mixing nozzle to the cartridge and load the cartridge into the correct dispensing tool. For every working interruption longer than the recommended working time (Table B5 or Table B6) as well as for new cartridges, a new static-mixer shall be used.
4.		Before injecting the mortar, mark the required anchorage depth on the fastening element.
5.		Prior to dispensing into the drill hole, squeeze out separately a minimum of three full strokes and discard non-uniformly mixed adhesive components until the mortar shows a consistent grey colour. For tubular film cartridges dismiss a minimum of six full strokes.
6a.		Starting from the bottom or back of the cleaned drill hole fill the hole up to approximately two-thirds with adhesive. Slowly withdraw the static mixing nozzle as the hole fills to avoid air pockets. For embedment larger than 190mm an extension nozzle shall be used. Observe the gel-/ working times given in Table B5 or Table B6.
6b.		Retaining washer and mixer nozzle extensions shall be used according to Annex B3 for the following applications: <ul style="list-style-type: none"> Horizontal installation (horizontal direction) and ground installation (vertical downwards direction): Drill bit-Ø $d_0 \geq 18$ mm and embedment depth $h_{ef} > 250$ mm Overhead installation: Drill bit-Ø $d_0 \geq 18$ mm
Inserting the anchor		
7.		Push the threaded rod into the hole while turning slightly to ensure proper distribution of the adhesive until the embedment depth is reached. The anchor shall be free of dirt, grease, oil or other foreign material.
8.		Make sure that the anchor is fully seated up to the full embedment depth and that excess mortar is visible at the top of the hole. If these requirements are not maintained, pull out the rod immediately and start again with step 6. For overhead installation, the anchor should be fixed (e.g. by wedges).
9.		Allow the adhesive to cure to the specified time prior to applying any load or torque. Do not move or load the anchor until it is fully cured (Table B5 or Table B6).
10.		Remove excess mortar.
11.		The fixture can be mounted after curing time. Apply installation torque T_{INST} according to Table B1 or B2 by using a calibrated torque wrench. Optionally, the annular gap between anchor rod and attachment can be filled with mortar. Therefor replace the regular washer by washer with bore and plug on reducing adapter on static mixer. Annular gap is completely filled, when excess mortar seeps out.

Injection sytem FMZ for concrete

Intended Use
Installation instructions (continuation)

Annex B5

Table B5: Maximum processing time and minimum curing time, FMZ

Concrete temperature	Maximum processing time	Minimum curing time in dry concrete ¹⁾
-10°C to -6°C	90 min ²⁾	24 h ²⁾
-5°C to -1°C	90 min	14 h
0°C to +4°C	45 min	7 h
+5°C to +9°C	25 min	2 h
+10°C to +19°C	15 min	80 min
+20°C to +29°C	6 min	45 min
+30°C to +34°C	4 min	25 min
+35°C to +39°C	2 min	20 min
+ 40°C	1,5 min	15 min
Cartridge temperature	+ 5°C to + 40°C	

¹⁾ In wet concrete the curing time must be doubled.

²⁾ Cartridge temperature must be at min. + 15°C.

Table B6: Maximum processing time and minimum curing time, FMZ Polar

Concrete temperature	Maximum processing time	Minimum curing time in dry concrete ¹⁾
- 20°C to -16°C	75 min	24 h
-15°C to -11°C	55 min	16 h
-10°C to -6°C	35 min	10 h
-5°C to -1°C	20 min	5 h
0°C to +4°C	10 min	2,5 h
+5°C to +9°C	6 min	80 min
+10°C	6 min	60 min
Cartridge temperature	- 20°C to + 10°C	

¹⁾ In wet concrete the curing time must be doubled.

Injection sytem FMZ for concrete

Intended Use
Processing time and curing time

Annex B6

Table C1: Characteristic steel resistances for **threaded rods** under tension and shear loads

Threaded rod				M 8	M 10	M 12	M 16	M 20	M 24	M 27	M 30
Steel failure											
Tension load											
Characteristic tension resistance	Steel, Property class 4.6 and 4.8	N _{Rk,s}	[kN]	15	23	34	63	98	141	184	224
	Steel, Property class 5.6 and 5.8	N _{Rk,s}	[kN]	18	29	42	78	122	176	230	280
	Steel, Property class 8.8	N _{Rk,s}	[kN]	29	46	67	125	196	282	368	449
	Stainless steel A4 and HCR, Property class 50	N _{Rk,s}	[kN]	18	29	42	79	123	177	230	281
	Stainless steel A4 and HCR, Property class 70	N _{Rk,s}	[kN]	26	41	59	110	171	247	-	-
Partial factor	Steel, Property class 4.6	γ _{Ms,N}	[-]	2,0							
	Steel, Property class 4.8	γ _{Ms,N}	[-]	1,5							
	Steel, Property class 5.6	γ _{Ms,N}	[-]	2,0							
	Steel, Property class 5.8	γ _{Ms,N}	[-]	1,5							
	Steel, Property class 8.8	γ _{Ms,N}	[-]	1,5							
	Stainless steel A4 and HCR, Property class 50	γ _{Ms,N}	[-]	2,86							
	Stainless steel A4 and HCR, Property class 70	γ _{Ms,N}	[-]	1,87							-
Shear load											
Steel failure <u>without</u> lever arm											
Characteristic shear resistance	Steel, Property class 4.6 and 4.8	V _{Rk,s}	[kN]	7	12	17	31	49	71	92	112
	Steel, Property class 5.6 and 5.8	V _{Rk,s}	[kN]	9	15	21	39	61	88	115	140
	Steel, Property class 8.8	V _{Rk,s}	[kN]	15	23	34	63	98	141	184	224
	Stainless steel A4 and HCR, Property class 50	V _{Rk,s}	[kN]	9	15	21	39	61	88	115	140
	Stainless steel A4 and HCR, Property class 70	V _{Rk,s}	[kN]	13	20	30	55	86	124	-	-
Steel failure <u>with</u> lever arm											
Characteristic bending moment	Steel, Property class 4.6 and 4.8	M _{Rk,s}	[Nm]	15	30	52	133	260	449	666	900
	Steel, Property class 5.6 and 5.8	M _{Rk,s}	[Nm]	19	37	65	166	324	560	833	1123
	Steel, Property class 8.8	M _{Rk,s}	[Nm]	30	60	105	266	519	896	1333	1797
	Stainless steel A4 and HCR, Property class 50	M _{Rk,s}	[Nm]	19	37	66	167	325	561	832	1125
	Stainless steel A4 and HCR, Property class 70	M _{Rk,s}	[Nm]	26	52	92	232	454	784	-	-
Partial factor	Steel, Property class 4.6	γ _{Ms,V}	[-]	1,67							
	Steel, Property class 4.8	γ _{Ms,V}	[-]	1,25							
	Steel, Property class 5.6	γ _{Ms,V}	[-]	1,67							
	Steel, Property class 5.8	γ _{Ms,V}	[-]	1,25							
	Steel, Property class 8.8	γ _{Ms,V}	[-]	1,25							
	Stainless steel A4 and HCR, Property class 50	γ _{Ms,V}	[-]	2,38							
	Stainless steel A4 and HCR, Property class 70	γ _{Ms,V}	[-]	1,56							-

Injection sytem FMZ for concrete

Performance

Characteristic steel resistances for **threaded rods** under **tension** and **shear loads**

Annex C1

Table C2: Characteristic values for **threaded rods** under **tension loads** in **cracked concrete**

Threaded rod				M8	M10	M12	M16	M20	M24	M27	M30
Steel failure											
Characteristic tension resistance		N _{Rk,s}	[kN]	see table C1							
Combined pull-out and concrete cone failure											
Characteristic bond resistance in cracked concrete C20/25											
Temperature range I: 40°C/24°C	dry and wet concrete	τ _{Rk,cr}	[N/mm²]	4,0	5,0	5,5	5,5	5,5	5,5	6,5	6,5
	flooded bore hole	τ _{Rk,cr}	[N/mm²]	4,0	4,0	5,5	5,5	no performance determined (NPD)			
Temperature range II: 80°C/50°C	dry and wet concrete	τ _{Rk,cr}	[N/mm²]	2,5	3,5	4,0	4,0	4,0	4,0	4,5	4,5
	flooded bore hole	τ _{Rk,cr}	[N/mm²]	2,5	3,0	4,0	4,0	no performance determined (NPD)			
Temperature range III: 120°C/72°C	dry and wet concrete	τ _{Rk,cr}	[N/mm²]	2,0	2,5	3,0	3,0	3,0	3,0	3,5	3,5
	flooded bore hole	τ _{Rk,cr}	[N/mm²]	2,0	2,5	3,0	3,0	no performance determined (NPD)			
Increasing factor for τ _{Rk,cr}		ψ _c	C25/30	1,02							
			C30/37	1,04							
			C35/45	1,07							
			C40/50	1,08							
			C45/55	1,09							
			C50/60	1,10							
Factor according to CEN/TS 1992-4-5		k ₈	[-]	7,2							
Concrete cone failure											
Factor according to CEN/TS 1992-4-5		k _{cr}	[-]	7,2							
Edge distance		c _{cr,N}	[mm]	1,5 h _{ef}							
Axial distance		s _{cr,N}	[mm]	3,0 h _{ef}							
Installation factor (dry and wet concrete)		γ ₂ = γ _{inst}	[-]	1,0	1,2						
Installation factor (flooded bore hole)		γ ₂ = γ _{inst}	[-]	1,4				no performance determined (NPD)			

Injection sytem FMZ for concrete

Performance

Characteristic values for **threaded rods** under **tension loads** in **cracked concrete**

Annex C2

Table C3: Characteristic values for **threaded rods** under **tension loads** in **uncracked concrete**

Threaded rod				M8	M10	M12	M16	M20	M24	M27	M30
Steel failure											
Characteristic tension resistance		N _{Rk,s}	[kN]	see table C1							
Combined pull-out and concrete cone failure											
Characteristic bond resistance in uncracked concrete C20/25											
Temperature range I: 40°C/24°C	dry and wet concrete	τ _{Rk,ucr}	[N/mm²]	10	12	12	12	12	11	10	9
	flooded bore hole	τ _{Rk,ucr}	[N/mm²]	7,5	8,5	8,5	8,5	no performance determined (NPD)			
Temperature range II: 80°C/50°C	dry and wet concrete	τ _{Rk,ucr}	[N/mm²]	7,5	9	9	9	9	8,5	7,5	6,5
	flooded bore hole	τ _{Rk,ucr}	[N/mm²]	5,5	6,5	6,5	6,5	no performance determined (NPD)			
Temperature range III: 120°C/72°C	dry and wet concrete	τ _{Rk,ucr}	[N/mm²]	5,5	6,5	6,5	6,5	6,5	6,5	5,5	5,0
	flooded bore hole	τ _{Rk,ucr}	[N/mm²]	4,0	5,0	5,0	5,0	no performance determined (NPD)			
Increasing factor for τ _{Rk,ucr}		ψ _c	C25/30	1,02							
			C30/37	1,04							
			C35/45	1,07							
			C40/50	1,08							
			C45/55	1,09							
			C50/60	1,10							
Factor according to CEN/TS 1992-4-5		k ₈	[-]	10,1							
Concrete cone failure											
Factor according to CEN/TS 1992-4-5		k _{ucr}	[-]	10,1							
Edge distance		c _{cr,N}	[mm]	1,5 h _{ef}							
Axial distance		s _{cr,N}	[mm]	3,0 h _{ef}							
Splitting failure											
Edge distance for		c _{cr,sp}	[mm]	$1,0 \cdot h_{ef} \leq 2 \cdot h_{ef} \left(2,5 - \frac{h}{h_{ef}} \right) \leq 2,4 \cdot h_{ef}$							
Axial distance		s _{cr,sp}	[mm]	2 c _{cr,sp}							
Installation factor (dry and wet concrete)		γ ₂ = γ _{inst}	[-]	1,0	1,2						
Installation factor (flooded bore hole)		γ ₂ = γ _{inst}	[-]	1,4				no performance determined (NPD)			

Injection sytem FMZ for concrete

Performance
Characteristic values for **threaded rods** under **tension loads** in **uncracked concrete**

Annex C3

Table C4: Characteristic values for **threaded rods** under **shear loads** in **cracked and uncracked concrete**

Threaded rod			M8	M10	M12	M16	M20	M24	M27	M30
Steel failure without lever arm										
Characteristic shear resistance	$V_{Rk,s}$	[kN]	see table C1							
Ductility factor acc. to CEN/TS 1992-4-5	k_2	[-]	0,8							
Steel failure with lever arm										
Characteristic bending moment	$M^0_{Rk,s}$	[Nm]	see table C1							
Concrete pry-out failure										
Factor k acc. to TR 029 or k_3 acc. to CEN/TS 1992-4-5	$k_{(3)}$	[-]	2,0							
Concrete edge failure										
Effective length of anchor	l_f	[mm]	$l_f = \min(h_{ef}; 8 d_{nom})$							
Outside diameter of anchor	d_{nom}	[mm]	8	10	12	16	20	24	27	30
Installation factor	$\gamma_2 = \gamma_{inst}$	[-]	1,0							

Injection sytem FMZ for concrete

Performance
Characteristic value for **threaded rods** under **shear loads**

Annex C4

Table C5: Characteristic values for **threaded rods** under **seismic action**, category **C1**

Threaded rod				M8	M10	M12	M16	M20	M24	M27	M30
Tension load											
Steel failure											
Characteristic tension resistance		$N_{Rk,s,seis}$	[kN]	$1,0 \cdot N_{Rk,s}$ (see table C1)							
Combined pull-out and concrete cone failure											
Characteristic bond resistance in concrete C20/25 to C50/60											
Temperature range I: 40°C/24°C	dry and wet concrete	$\tau_{Rk,seis}$	[N/mm ²]	2,5	3,1	3,7	3,7	3,7	3,8	4,5	4,5
	flooded bore hole	$\tau_{Rk,seis}$	[N/mm ²]	2,5	2,5	3,7	3,7	no performance determined (NPD)			
Temperature range II: 80°C/50°C	dry and wet concrete	$\tau_{Rk,seis}$	[N/mm ²]	1,6	2,2	2,7	2,7	2,7	2,8	3,1	3,1
	flooded bore hole	$\tau_{Rk,seis}$	[N/mm ²]	1,6	1,9	2,7	2,7	no performance determined (NPD)			
Temperature range III: 120°C/72°C	dry and wet concrete	$\tau_{Rk,seis}$	[N/mm ²]	1,3	1,6	2,0	2,0	2,0	2,1	2,4	2,4
	flooded bore hole	$\tau_{Rk,seis}$	[N/mm ²]	1,3	1,6	2,0	2,0	no performance determined (NPD)			
Increasing factor for $\tau_{Rk,seis}$		ψ_c	[-]	1,0							
Installation factor (dry and wet concrete)		$\gamma_2 = \gamma_{inst}$	[-]	1,0	1,2						
Installation factor (flooded bore hole)		$\gamma_2 = \gamma_{inst}$	[-]	1,4				no performance determined (NPD)			
Shear load											
Steel failure without lever arm											
Characteristic shear resistance		$V_{Rk,s,seis}$	[kN]	$0,7 \cdot V_{Rk,s}$ (see table C1)							
Steel failure with lever arm											
Characteristic bending moment		$M^0_{Rk,s,seis}$	[Nm]	No Performance Determined (NPD)							

Injection sytem FMZ for concrete

Performance

Characteristic values for **threaded rods** under **seismic action**, category **C1**

Annex C5

Table C6: Characteristic values of tension loads for internally threaded anchor rods in cracked concrete

Internally threaded anchor rod				IG-M 6	IG-M 8	IG-M 10	IG-M 12	IG-M 16	IG-M20
Steel failure ¹⁾									
Characteristic shear resistance Steel, strength class 5.8	N _{Rk,s}	[kN]	10	18	29	42	79	123	
Partial factor	γ _{Ms,N}	[-]	1,5						
Characteristic shear resistance Steel, strength class 8.8	N _{Rk,s}	[kN]	16	27	46	67	121	196	
Partial factor	γ _{Ms,N}	[-]	1,5						
Characteristic shear resistance Stainless steel A4 / HCR, strength class 70	N _{Rk,s}	[kN]	14	26	41	59	110	124 ²⁾	
Partial factor	γ _{Ms,N}	[-]	1,87						2,86
Combined pull-out and concrete cone failure									
Characteristic bond resistance in cracked concrete C20/25									
Temperature range I: 40°C/24°C	dry and wet concrete	τ _{Rk,cr}	[N/mm²]	5,0	5,5	5,5	5,5	5,5	6,5
	flooded bore hole	τ _{Rk,cr}	[N/mm²]	4,0	5,5	5,5	no performance determined (NPD)		
Temperature range II: 80°C/50°C	dry and wet concrete	τ _{Rk,cr}	[N/mm²]	3,5	4,0	4,0	4,0	4,0	4,5
	flooded bore hole	τ _{Rk,cr}	[N/mm²]	3,0	4,0	4,0	no performance determined (NPD)		
Temperature range III: 120°C/72°C	dry and wet concrete	τ _{Rk,cr}	[N/mm²]	2,5	3,0	3,0	3,0	3,0	3,5
	flooded bore hole	τ _{Rk,cr}	[N/mm²]	2,5	3,0	3,0	no performance determined (NPD)		
Increasing factor for τ _{Rk,cr}		ψ _c	C25/30	1,02					
			C30/37	1,04					
			C35/45	1,07					
			C40/50	1,08					
			C45/55	1,09					
			C50/60	1,10					
Factor according to CEN/TS 1992-4-5		k ₈	[-]	7,2					
Concrete cone failure									
Factor according to CEN/TS 1992-4-5		k _{cr}	[-]	7,2					
Edge distance		c _{cr,N}	[mm]	1,5 h _{ef}					
Spacing		s _{cr,N}	[mm]	3,0 h _{ef}					
Installation factor (dry and wet concrete)		γ ₂ = γ _{inst}	[-]	1,2					
Installation factor (flooded bore hole)		γ ₂ = γ _{inst}	[-]	1,4			no performance determined (NPD)		

¹⁾ Fastening screws or threaded rods (incl. nut and washer) must comply with the appropriate material and property class of the internally threaded anchor rod. The characteristic tension resistance for steel failure of the given strength class are valid for the internally threaded anchor rod and the fastening element

²⁾ For IG M20: Internally threaded rod: strength class 50; Fastening screws or threaded rods (incl. nut and washer): strength class 70

Injection sytem FMZ for concrete

Performance

Characteristic values for **internally threaded anchor rods** under **tension loads** in **cracked concrete**

Annex C6

Table C7: Characteristic values of tension loads for internally threaded anchor rods in uncracked concrete

Internally threaded anchor rod				IG-M 6	IG-M 8	IG-M 10	IG-M 12	IG-M 16	IG-M 20
Steel failure ¹⁾									
Characteristic shear resistance Steel, strength class 5.8	N _{Rk,s}	[kN]	10	18	29	42	79	123	
Partial factor	γ _{Ms,N}	[-]	1,5						
Characteristic shear resistance Steel, strength class 8.8	N _{Rk,s}	[kN]	16	27	46	67	121	196	
Partial factor	γ _{Ms,N}	[-]	1,5						
Characteristic shear resistance Stainless steel A4 / HCR, strength class 70	N _{Rk,s}	[kN]	14	26	41	59	110	124 ²⁾	
Partial factor	γ _{Ms,N}	[-]	1,87						2,86
Combined pull-out and concrete cone failure									
Characteristic bond resistance in <u>uncracked</u> concrete C20/25									
Temperature range I: 40°C/24°C	dry and wet concrete	τ _{Rk,ucr}	[N/mm ²]	12	12	12	12	11	9,0
	flooded bore hole	τ _{Rk,ucr}	[N/mm ²]	8,5	8,5	8,5	no performance determined		
Temperature range II: 80°C/50°C	dry and wet concrete	τ _{Rk,ucr}	[N/mm ²]	9,0	9,0	9,0	9,0	8,5	6,5
	flooded bore hole	τ _{Rk,ucr}	[N/mm ²]	6,5	6,5	6,5	no performance determined		
Temperature range III: 120°C/72°C	dry and wet concrete	τ _{Rk,ucr}	[N/mm ²]	6,5	6,5	6,5	6,5	6,5	5,0
	flooded bore hole	τ _{Rk,ucr}	[N/mm ²]	5,0	5,0	5,0	no performance determined		
Increasing factor for τ _{Rk,ucr}		ψ _c	C25/30	1,02					
			C30/37	1,04					
			C35/45	1,07					
			C40/50	1,08					
			C45/55	1,09					
			C50/60	1,10					
Factor according to CEN/TS 1992-4-5		k _g	[-]	10,1					
Concrete cone failure									
Factor according to CEN/TS 1992-4-5		k _{ucr}	[-]	10,1					
Edge distance		C _{cr,N}	[mm]	1,5 h _{ef}					
Spacing		S _{cr,N}	[mm]	3,0 h _{ef}					
Splitting failure									
Edge distance	h/h _{ef} ≥ 2,0	C _{cr,sp}	[mm]	1,0 h _{ef}					
	2,0> h/h _{ef} > 1,3			2 * h _{ef} (2,5 – h / h _{ef})					
	h/h _{ef} ≤ 1,3			2,4 h _{ef}					
Spacing		S _{cr,sp}	[mm]	2 C _{cr,sp}					
Installation factor (dry and wet concrete)		γ ₂ = γ _{inst}	[-]	1,2					
Installation factor (flooded bore hole)		γ ₂ = γ _{inst}	[-]	1,4			no performance determined		

¹⁾ Fastening screws or threaded rods (incl. nut and washer) must comply with the appropriate material and property class of the internally threaded anchor rod. The characteristic tension resistance for steel failure of the given strength class are valid for the internally threaded anchor rod and the fastening element.

²⁾ For IG M20: Internally threaded rod: strength class 50; Fastening screws or threaded rods (incl. nut and washer): strength class 70

Injection sytem FMZ for concrete

Performance

Characteristic values for **internally threaded anchor rods** under **tension loads** in **uncracked concrete**

Annex C7

Table C8: Characteristic values for **internally threaded anchor rods** under **shear loads** in **cracked and uncracked concrete**

Internally threaded anchor rod			IG-M 6	IG-M 8	IG-M 10	IG-M 12	IG-M 16	IG-M 20	
Steel failure <u>without</u> lever arm ¹⁾									
Characteristic shear resistance Steel, strength class 5.8	V _{Rk,s}	[kN]	5	9	15	21	39	61	
Partial factor	γ _{Ms,V}	[-]	1,25						
Characteristic shear resistance Steel, strength class 8.8	V _{Rk,s}	[kN]	8	14	23	34	60	98	
Partial factor	γ _{Ms,V}	[-]	1,25						
Characteristic shear resistance Stainless steel A4 / HCR, strength class 70	V _{Rk,s}	[kN]	7	13	20	30	55	62 ²⁾	
Partial factor	γ _{Ms,V}	[-]	1,56						2,38
Ductility factor according to CEN/TS 1992-4-5	k ₂	[-]	0,8						
Steel failure <u>with</u> lever arm ¹⁾									
Characteristic bending moment, Steel, strength class 5.8	M ⁰ _{Rk,s}	[Nm]	8	19	37	66	167	325	
Partial factor	γ _{Ms,V}	[-]	1,25						
Characteristic bending moment, Steel, strength class 8.8	M ⁰ _{Rk,s}	[Nm]	12	30	60	105	267	519	
Partial factor	γ _{Ms,V}	[-]	1,25						
Characteristic bending moment, Stainless steel A4 / HCR, strength class 70	M ⁰ _{Rk,s}	[Nm]	11	26	53	92	234	643 ²⁾	
Partial factor	γ _{Ms,V}	[-]	1,56						2,38
Concrete pry-out failure									
Factor k acc. to TR 029 or k ₃ acc. to CEN/TS 1992-4-5	k ₍₃₎	[-]	2,0						
Concrete edge failure									
Effective length of anchor	l _f	[mm]	l _f = min(h _{ef} ; 8 d _{nom})						
Outside diameter of anchor	d _{nom}	[mm]	10	12	16	20	24	30	
Installation factor	γ ₂ = γ _{inst}	[-]	1,0						

¹⁾ Fastening screws or threaded rods (incl. nut and washer) must comply with the appropriate material and property class of the internally threaded anchor rod. The characteristic shear resistance for steel failure of the given strength class are valid for the internally threaded anchor rod and the fastening element

²⁾ For IG M20: Internally threaded rod: strength class 50; Fastening screws or threaded rods (incl. nut and washer): strength class 70

Injection sytem FMZ for concrete

Performance

Characteristic values for **internally threaded anchor rods** under **shear loads**

Annex C8

Table C9: Characteristic values for **rebar** under **tension loads** in **cracked concrete**

Rebar				Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32
Steel failure												
Characteristic tension resistance		N _{Rk,s}	[kN]	A _s · f _{uk} ¹⁾								
Combined pull-out and concrete cone failure												
Characteristic bond resistance in cracked concrete C20/25												
Temperature range I: 40°C/24°C	dry and wet concrete	τ _{Rk,cr}	[N/mm²]	4,0	5,0	5,5	5,5	5,5	5,5	5,5	6,5	6,5
	flooded bore hole	τ _{Rk,cr}	[N/mm²]	4,0	4,0	5,5	5,5	5,5	no performance determined (NPD)			
Temperature range II: 80°C/50°C	dry and wet concrete	τ _{Rk,cr}	[N/mm²]	2,5	3,5	4,0	4,0	4,0	4,0	4,0	4,5	4,5
	flooded bore hole	τ _{Rk,cr}	[N/mm²]	2,5	3,0	4,0	4,0	4,0	no performance determined (NPD)			
Temperature range III: 120°C/72°C	dry and wet concrete	τ _{Rk,cr}	[N/mm²]	2,0	2,5	3,0	3,0	3,0	3,0	3,0	3,5	3,5
	flooded bore hole	τ _{Rk,cr}	[N/mm²]	2,0	2,5	3,0	3,0	3,0	no performance determined (NPD)			
Increasing factors for τ _{Rk,cr}		ψ _c	C25/30	1,02								
			C30/37	1,04								
			C35/45	1,07								
			C40/50	1,08								
			C45/55	1,09								
			C50/60	1,10								
Factor acc. to CEN/TS 1992-4-5		k ₈	[-]	7,2								
Concrete cone failure												
Factor acc. to CEN/TS 1992-4-5		k _{cr}	[-]	7,2								
Edge distance		c _{cr,N}	[mm]	1,5 h _{ef}								
Axial distance		s _{cr,N}	[mm]	3,0 h _{ef}								
Installation factor (dry and wet concrete)		γ ₂ = γ _{inst}	[-]	1,0	1,2							
Installation factor (flooded bore hole)		γ ₂ = γ _{inst}	[-]	1,4					no performance determined (NPD)			

¹⁾ $f_{uk} = f_{tk} = k \cdot f_{yk}$

Injection sytem FMZ for concrete

Performance

Characteristic values for **rebar** under **tension loads** in **cracked concrete**

Annex C9

Table C10: Characteristic values for rebar under tension loads in uncracked concrete

Rebar				Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32
Steel failure												
Characteristic tension resistance		N _{Rk,s}	[kN]	A _s • f _{uk} ¹⁾								
Combined pull-out and concrete cone failure												
Characteristic bond resistance in uncracked concrete C20/25												
Temperature range I: 40°C/24°C	dry and wet concrete	τ _{Rk,ucr}	[N/mm²]	10	12	12	12	12	12	11	10	8,5
	flooded bore hole	τ _{Rk,ucr}	[N/mm²]	7,5	8,5	8,5	8,5	8,5	no performance determined (NPD)			
Temperature range II: 80°C/50°C	dry and wet concrete	τ _{Rk,ucr}	[N/mm²]	7,5	9,0	9,0	9,0	9,0	9,0	8,0	7,0	6,0
	flooded bore hole	τ _{Rk,ucr}	[N/mm²]	5,5	6,5	6,5	6,5	6,5	no performance determined (NPD)			
Temperature range III: 120°C/72°C	dry and wet concrete	τ _{Rk,ucr}	[N/mm²]	5,5	6,5	6,5	6,5	6,5	6,5	6,0	5,0	4,5
	flooded bore hole	τ _{Rk,ucr}	[N/mm²]	4,0	5,0	5,0	5,0	5,0	no performance determined (NPD)			
Increasing factors for τ _{Rk,ucr}		ψ _c	C25/30	1,02								
			C30/37	1,04								
			C35/45	1,07								
			C40/50	1,08								
			C45/55	1,09								
			C50/60	1,10								
Factor acc. to CEN/TS 1992-4-5		k ₈	[-]	10,1								
Concrete cone failure												
Factor acc. to CEN/TS 1992-4-5		k _{ucr}	[-]	10,1								
Edge distance		c _{cr,N}	[mm]	1,5 h _{ef}								
Axial distance		s _{cr,N}	[mm]	3,0 h _{ef}								
Splitting failure												
Edge distance for		c _{cr,sp}	[mm]	$1,0 \cdot h_{ef} \leq 2 \cdot h_{ef} \left(2,5 - \frac{h}{h_{ef}} \right) \leq 2,4 \cdot h_{ef}$								
Axial distance		s _{cr,sp}	[mm]	2 c _{cr,sp}								
Installation factor (dry and wet concrete)		γ ₂ = γ _{inst}	[-]	1,0	1,2							
Installation factor (flooded bore hole)		γ ₂ = γ _{inst}	[-]	1,4					no performance determined (NPD)			

¹⁾ $f_{uk} = f_{tk} = k \cdot f_{yk}$

Injection sytem FMZ for concrete

Performance

Characteristic values for rebar under tension loads in uncracked concrete

Annex C10

Table C11: Characteristic values for **rebar** under **shear loads** in **cracked and uncracked concrete**

Rebar			Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32
Steel failure without lever arm											
Characteristic shear resistance	$V_{Rk,s}$	[kN]	$0,50 \cdot A_s \cdot f_{uk}^{1)}$								
Ductility factor according to CEN/TS 1992-4-5	k_2	[-]	0,8								
Steel failure with lever arm											
Characteristic bending moment	$M^0_{Rk,s}$	[Nm]	$1,2 \cdot W_{el} \cdot f_{uk}^{1)}$								
Concrete pry-out failure											
Factor k acc. to TR 029 or k_3 acc. to CEN/TS 1992-4-5	$k_{(3)}$	[-]	2,0								
Concrete edge failure											
Effective length of anchor	l_f	[mm]	$l_f = \min(h_{ef}; 8 d_{nom})$								
Outside diameter of anchor	d_{nom}	[mm]	8	10	12	14	16	20	25	28	32
Installation factor	$\gamma_2 = \gamma_{inst}$	[-]	1,0								

¹⁾ $f_{uk} = f_{tk} = k \cdot f_{yk}$

Injection sytem FMZ for concrete

Performance

Characteristic values for **rebar** under **shear loads** in **cracked and uncracked concrete**

Annex C11

Table C12: Characteristic values for **rebar** under **seismic action**, category **C1**

Rebar				Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32
Tension load												
Steel failure												
Characteristic tension resistance		N _{Rk,s,seis}	[kN]	A _s · f _{uk} ¹⁾								
Combined pull-out and concrete cone failure												
Characteristic bond resistance in concrete C20/25 to C50/60												
Temperature range I: 40°C/24°C	dry and wet concrete	τ _{Rk,seis}	[N/mm²]	2,5	3,1	3,7	3,7	3,7	3,7	3,8	4,5	4,5
	flooded bore hole	τ _{Rk,seis}	[N/mm²]	2,5	2,5	3,7	3,7	3,7	no performance determined (NPD)			
Temperature range II: 80°C/50°C	dry and wet concrete	τ _{Rk,seis}	[N/mm²]	1,6	2,2	2,7	2,7	2,7	2,7	2,8	3,1	3,1
	flooded bore hole	τ _{Rk,seis}	[N/mm²]	1,6	1,9	2,7	2,7	2,7	no performance determined (NPD)			
Temperature range III: 120°C/72°C	dry and wet concrete	τ _{Rk,seis}	[N/mm²]	1,3	1,6	2,0	2,0	2,0	2,0	2,1	2,4	2,4
	flooded bore hole	τ _{Rk,seis}	[N/mm²]	1,3	1,6	2,0	2,0	2,0	no performance determined (NPD)			
Increasing factor for τ _{Rk,seis}		ψ _c	[-]	1,0								
Installation factor (dry and wet concrete)		γ ₂ = γ _{inst}	[-]	1,0	1,2							
Installation factor (flooded bore hole)		γ ₂ = γ _{inst}	[-]	1,4					no performance determined (NPD)			
Shear load												
Steel failure without lever arm												
Characteristic shear resistance		V _{Rk,s,seis}	[kN]	0,35 · A _s · f _{uk} ¹⁾								
Steel failure with lever arm												
Characteristic bending moment		M ⁰ _{Rk,s,seis}	[Nm]	no performance determined (NPD)								

¹⁾ $f_{yk} = f_{tk} = k \cdot f_{yk}$

Injection sytem FMZ for concrete

Performance

Characteristic values for **rebar** under **seismic action**, category **C1**

Annex C12

Table C13: Displacements under tension loads¹⁾
(threaded rod and internally threaded anchor rod)

Threaded rod			M8	M10 IG-M6	M12 IG-M8	M16 IG-M10	M20 IG-M12	M24 IG-M16	M27	M30 IG-M20
Uncracked concrete C20/25										
Temperature range I: 40°C/24°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,021	0,023	0,026	0,031	0,036	0,041	0,045	0,049
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,030	0,033	0,037	0,045	0,052	0,060	0,065	0,071
Temperature range II: 80°C/50°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,050	0,056	0,063	0,075	0,088	0,100	0,110	0,119
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,072	0,081	0,090	0,108	0,127	0,145	0,159	0,172
Temperature range III: 120°C/72°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,050	0,056	0,063	0,075	0,088	0,100	0,110	0,119
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,072	0,081	0,090	0,108	0,127	0,145	0,159	0,172
Cracked concrete C20/25										
Temperature range I: 40°C/24°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,090		0,070					
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,105		0,105					
Temperature range II: 80°C/50°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,219		0,170					
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,255		0,245					
Temperature range III: 120°C/72°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,219		0,170					
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,255		0,245					

¹⁾ Calculation of the displacement

$\delta_{N0} = \delta_{N0}\text{-Faktor} \cdot \tau$; τ : acting bond stress for tension load

$\delta_{N\infty} = \delta_{N\infty}\text{-Faktor} \cdot \tau$;

Table C14: Displacements under shear load¹⁾
(threaded rod and internally threaded anchor rod)

Threaded rod			M8	M10 IG-M6	M12 IG-M8	M16 IG-M10	M20 IG-M12	M24 IG-M16	M27	M30 IG-M20
Uncracked concrete C20/25										
All temperature ranges	δ_{V0} -factor	[mm/(kN)]	0,06	0,06	0,05	0,04	0,04	0,03	0,03	0,03
	$\delta_{V\infty}$ -factor	[mm/(kN)]	0,09	0,08	0,08	0,06	0,06	0,05	0,05	0,05
Cracked concrete C20/25										
All temperature ranges	δ_{V0} -factor	[mm/(kN)]	0,12	0,12	0,11	0,10	0,09	0,08	0,08	0,07
	$\delta_{V\infty}$ -factor	[mm/(kN)]	0,18	0,18	0,17	0,15	0,14	0,13	0,12	0,10

¹⁾ Calculation of the displacement

$\delta_{V0} = \delta_{V0}\text{-factor} \cdot V$; V : acting shear load

$\delta_{V\infty} = \delta_{V\infty}\text{-factor} \cdot V$;

Injection sytem FMZ for concrete

Performance

Displacements (threaded rod and internally threaded anchor rod)

Annex C13

Table C15: Displacements under tension load¹⁾ (rebar)

Rebar			Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32
Uncracked concrete C20/25											
Temperature range I: 40°C/24°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,021	0,023	0,026	0,028	0,031	0,036	0,043	0,047	0,052
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,030	0,033	0,037	0,041	0,045	0,052	0,061	0,071	0,075
Temperature range II: 80°C/50°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,050	0,056	0,063	0,069	0,075	0,088	0,104	0,113	0,126
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,072	0,081	0,090	0,099	0,108	0,127	0,149	0,163	0,181
Temperature range III: 120°C/72°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,050	0,056	0,063	0,069	0,075	0,088	0,104	0,113	0,126
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,072	0,081	0,090	0,099	0,108	0,127	0,149	0,163	0,181
Cracked concrete C20/25											
Temperature range I: 40°C/24°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,090					0,070			
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,105					0,105			
Temperature range II: 80°C/50°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,219					0,170			
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,255					0,245			
Temperature range III: 120°C/72°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,219					0,170			
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,255					0,245			

¹⁾ Calculation of the displacement

$$\delta_{N0} = \delta_{N0}\text{-Faktor} \cdot \tau; \quad \tau: \text{acting bond stress for tension load}$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-Faktor} \cdot \tau;$$

Table C16: Displacements under shear load¹⁾ (rebar)

Rebar			Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32
Uncracked concrete C20/25											
All temperature ranges	δ_{V0} -factor	[mm/(kN)]	0,06	0,05	0,05	0,04	0,04	0,04	0,03	0,03	0,03
	$\delta_{V\infty}$ -factor	[mm/(kN)]	0,09	0,08	0,08	0,06	0,06	0,05	0,05	0,04	0,04
Cracked concrete C20/25											
All temperature ranges	δ_{V0} -factor	[mm/(kN)]	0,12	0,12	0,11	0,11	0,10	0,09	0,08	0,07	0,06
	$\delta_{V\infty}$ -factor	[mm/(kN)]	0,18	0,18	0,17	0,16	0,15	0,14	0,12	0,11	0,10

¹⁾ Calculation of the displacement

$$\delta_{V0} = \delta_{V0}\text{-factor} \cdot V; \quad V: \text{acting shear load}$$

$$\delta_{V\infty} = \delta_{V\infty}\text{-factor} \cdot V;$$

Injection sytem FMZ for concrete

Performance
Displacements (rebar)

Annex C14