

Approval body for construction products  
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and  
Laender Governments



## European Technical Assessment

**ETA-05/0011**  
**of 4 September 2018**

English translation prepared by DIBt - Original version in German language

### General Part

Technical Assessment Body issuing the  
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

HECO MULTI-MONTI MMS A4

Product family  
to which the construction product belongs

Concrete screw for use in concrete

Manufacturer

HECO-Schrauben GmbH & Co. KG  
Dr.-Kurt-Steim-Straße 28  
78713 Schramberg

Manufacturing plant

HECO-Schrauben GmbH & Co. KG  
Dr.-Kurt-Steim-Straße 28  
78713 Schramberg

This European Technical Assessment  
contains

11 pages including 3 annexes which form an integral part  
of this assessment

This European Technical Assessment is  
issued in accordance with Regulation (EU)  
No 305/2011, on the basis of

EAD 330232-00-0601

This version replaces

ETA-05/0011 issued on 21 January 2015

**European Technical Assessment  
ETA-05/0011**

English translation prepared by DIBt

**Page 2 of 11 | 4 September 2018**

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

## Specific Part

### 1 Technical description of the product

The Concrete Screw HECO MULTI MONTI MMS A4 is an anchor in sizes 7.5, 10 and 12 mm made of stainless steel. The anchor is screwed into a predrilled cylindrical drill hole. The special thread of the anchor cuts an internal thread into the member while setting. The anchorage is characterised by mechanical interlock in the special thread.

The product description is given in Annex A.

### 2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading)	See Annex C 1
Characteristic resistance to shear load (static and quasi-static loading)	See Annex C 2
Displacements (static and quasi-static loading)	See Annex C 1 and C 2
Characteristic resistance and displacements for seismic performance categories C1 and C2	No performance assessed

#### 3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	See Annex C 3

#### 3.3 Safety in use (BWR 4)

The essential characteristics regarding Safety in use are included under the Basic Works Requirement Mechanical resistance and stability.

**4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base**

In accordance with the European Assessment Document EAD 330232-00-0601 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

**5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document**


Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.

Issued in Berlin on 4 September 2018 by Deutsches Institut für Bautechnik

BD Dipl.-Ing. Andreas Kummerow  
Head of Department

*beglaubigt:*  
Tempel

Installed condition

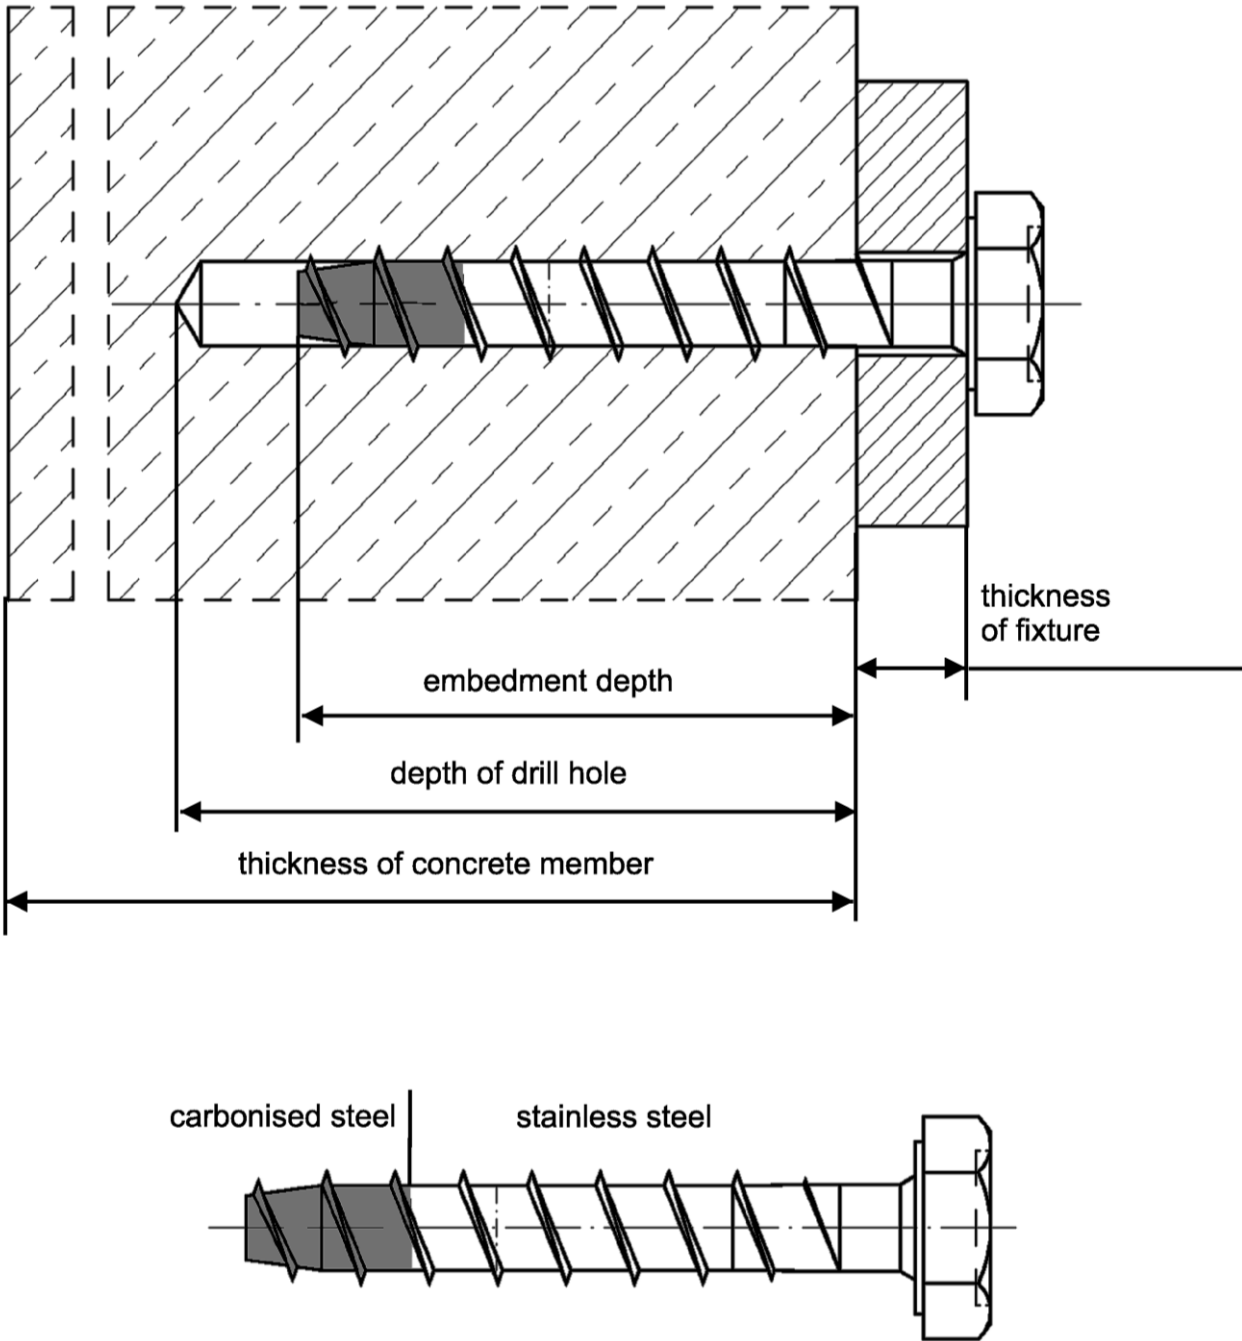

electronic copy of the eta by dibt: eta-05/0011

HECO MULTI-MONTI MMS A4

Product description  
Product,  
Installed condition

Annex A 1

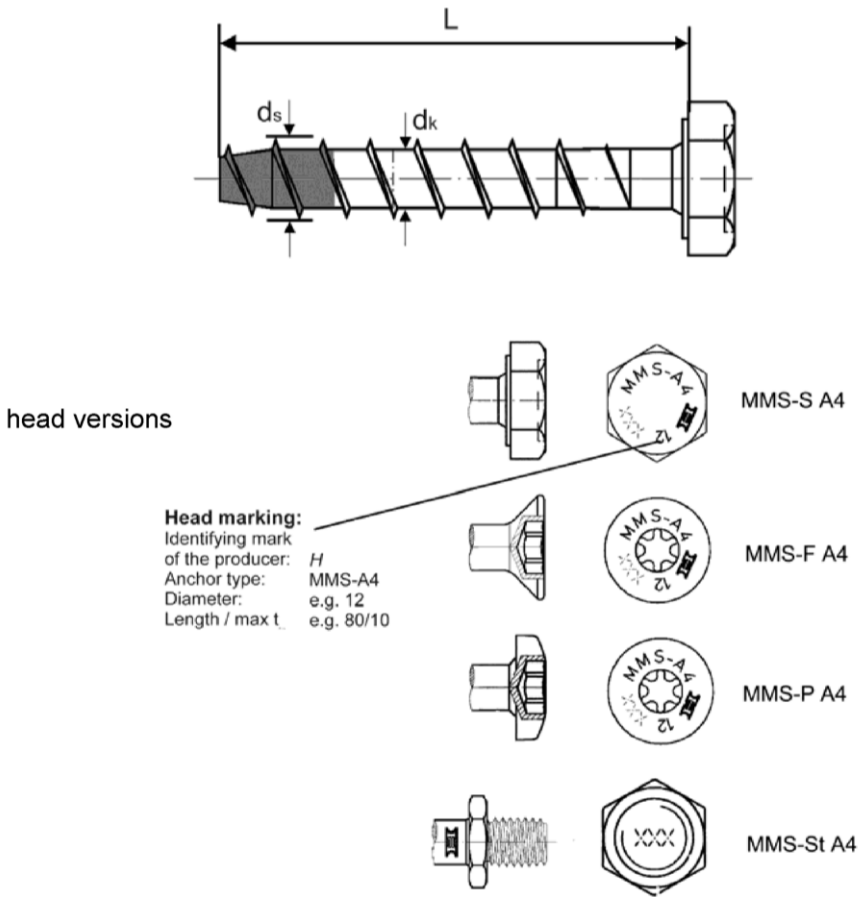


Table A1: Dimensions and Materials

Anchor sizes			MMS-7,5 A4	MMS-10 A4	MMS-12 A4
Length	$L \geq$	[mm]	65	75	90
Length	$L \leq$	[mm]	500	500	500
Bolt diameter	$d_k$	[mm]	5,7	7,6	9,6
Thread diameter	$d_s$	[mm]	7,5	10,1	12,4
Material			stainless steel 1.4401, 1.4462, 1.4529 and 1.4571		
Material of the tip			steel acc. to EN 10263-4		

Table A2: Materials and head marking

Material	head-marking
Stahl, gvz	MMS
1.4401	MMS-A4
1.4462	MMS-FA
1.4571	MMS-A5
1.4529	MMS-KK

HECO MULTI-MONTI MMS A4

Product description  
Head Versions,  
dimensions and materials

Annex A 2

## Specifications of intended use

### Anchorage subject to:

- Static and quasi-static loads: all sizes.
- Fire exposure: all sizes.

### Base Materials:

- Reinforced or unreinforced normal weight concrete according to EN 206-1:2000.
- Strength classes C20/25 to C50/60 according to EN 206-1:2000.
- Cracked and uncracked concrete: all sizes.

### Use conditions (Environmental conditions):

- Structures subject to dry internal conditions: all screw-types
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal conditions where no particular aggressive conditions exist: all screw-types
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal conditions where particular aggressive conditions exist: screw-types with head-marking KK

Note: Such particular aggressive conditions are e.g. permanent or alternate immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulfurization plants or road tunnels where de-icing materials are used)

### Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e. g. position of the anchor relative to reinforcement or to supports, etc.).
- The design of the anchoring under static or quasi-static actions and fire exposure have to be carried out in accordance with FprEN 1992-4:2017 and EOTA Technical Report TR055
- The design under shear load according to FprEN 1992-4:2017, section 6.2.2 applies to all in appendix B2, table B1 specified diameter  $d_f$  the diameter of clearance hole in the fixture

### Installation:

- Hole drilling by hammer-drilling only.
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- The head of the anchor is attached to the fixture and is not damaged; respectively the required embedment depth  $h_{nom}$  is reached.
- MMS-St: The required setting depth has to be achieved and the anchor has to be secured against further turning.

## HECO MULTI-MONTI MMS A4


Intended Use  
Specifications

## Annex B 1




**Table B1: Installation Parameters**

Anchor sizes		MMS-7,5 A4	MMS-10 A4	MMS-12 A4
Nominal drill diameter	$d_0$ [mm]	6,0	8,0	10,0
Cutting diameter of the drill bit	$d_{cut} \leq$ [mm]	6,4	8,45	10,45
Depth of drill hole	$h_1 \geq$ [mm]	75	90	100
Embedment depth	$h_{nom} \geq$ [mm]	65	75	90
Diameter of clearance hole in the fixture	$d_f \leq$ [mm]	9,0	12,0	14,0
Recommended installation tool		Impact screw driver, max. power output $T_{max}$ according to manufacturer information		
		100 Nm	250 Nm	250 Nm

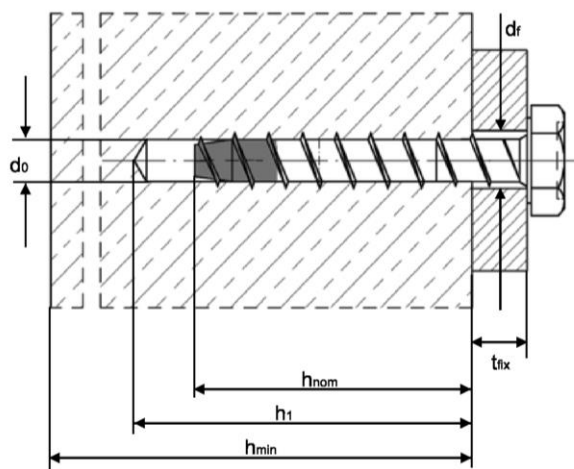


### Installation Instruction




#### Drilling

Drill diameter  $d_0$  and drilling depth  $h_1$  have to be met




#### Removal of drill dust

e.g. blowing



#### Installation

e.g. by hand or with impact screw driver



#### Complete

verification: head supported to fixture and embedment depth  $h_{nom}$

**Table B2: Minimum thickness of concrete member, minimum spacing and minimum edge distances of anchor**

Anchor sizes		MMS-7,5 A4	MMS-10 A4	MMS-12 A4
min. thickness of concrete member	$h_{min}$ [mm]	105	130	140
<b>cracked and uncracked concrete</b>				
min. spacing	$s_{min}$ [mm]	40	50	60
min. edge distance	$c_{min}$ [mm]	40	50	60

## HECO MULTI-MONTI MMS A4

### Intended Use

Installation Parameters, installation instruction, minimum thickness of concrete member, minimum spacing and minimum edge distance

## Annex B 2



**Table C1: Performance under tension loads**

Anchor sizes			MMS-7,5 A4	MMS-10 A4	MMS-12 A4
Steel failure					
Characteristic resistance	$N_{Rk,s}$	[kN]	23	16	25
Partial safety factor	$\gamma_{Ms}$	[-]	1,4		
Pullout					
Characteristic resistance in cracked concrete C20/25	$N_{Rk,p}$	[kN]	5	9	12
Characteristic resistance in uncracked concrete C20/25	$N_{Rk,p}$	[kN]	7,5	12	16
Increasing factor for $N_{Rk,p}$ in cracked and uncracked concrete	$\psi_c$	C30/37	1,22		
		C40/50	1,41		
		C50/60	1,58		
Installation safety factor	$\gamma_{inst}$	[-]	1,4	1,2	
Concrete cone failure, splitting failure					
Effective anchorage depth	$h_{ef}$	[mm]	40	47,5	54,5
Factor for	cracked concrete	$k_{cr,N}$	[-]	7,7	
	uncracked concrete	$k_{urc,N}$	[-]	11,0	
Spacing	$s_{cr,N} = s_{cr}$	[mm]	3 x $h_{ef}$		
Edge distance	$c_{cr,N} = c_{cr}$	[mm]	1,5 x $h_{ef}$		
Installation safety factor	$\gamma_{inst}$	[-]	1,4	1,2	

**Table C2: Displacements under tension loads**

Anchor sizes			MMS-7,5 A4	MMS-10 A4	MMS-12 A4
Tension load in cracked concrete	N	[kN]	1,7	3,0	4,0
Displacements	$\delta_{N0}$	[mm]	0,1	0,1	0,2
	$\delta_{N\infty}$	[mm]	0,2	0,2	0,6
Tension load in uncracked concrete	N	[kN]	2,6	4,0	5,3
Displacements	$\delta_{N0}$	[mm]	0,1	0,1	0,2
	$\delta_{N\infty}$	[mm]	0,2	0,2	0,6

## HECO MULTI-MONTI MMS A4

### Performance

Characteristic values under tension loads  
Displacements under tension loads

## Annex C 1

**Table C3: Performance under shear loads**

Anchor sizes			MMS-7,5 A4	MMS-10 A4	MMS-12 A4
Steel failure without lever arm					
Characteristic resistance	$V_{Rk,s}$	[kN]	12,3	20	33
Factor	$k_7$		0,8		
Partial safety factor	$\gamma_{Ms}$	[-]	1,5		
Steel failure with lever arm					
Characteristic resistance	$M^0_{Rk,s}$	[Nm]	22	45	93
Partial safety factor	$\gamma_{Ms}$	[-]	1,5		
Concrete pryout failure					
k-factor	$k_8$	[-]	1,0	2,0	
Installation safety factor	$\gamma_{inst}$	[-]	1,0		
Concrete edge failure					
Effective length of the anchor	$l_f$	[mm]	40	47,5	54,5
Effective diameter of the anchor	$d_{nom}$	[mm]	6	8	10
Installation safety factor	$\gamma_{inst}$	[-]	1,0		

**Table C4: Displacements under shear loads**

Anchor sizes			MMS-7,5 A4	MMS-10 A4	MMS-12 A4
Shear load in cracked and uncracked concrete	$V$	[kN]	5,9	9,7	15,7
Displacements	$\delta_{V0}$	[mm]	1,7	3,0	3,2
	$\delta_{V\infty}$	[mm]	2,6	4,5	4,8

## HECO MULTI-MONTI MMS A4

### Performance

Characteristic values under shear loads  
Displacements under shear loads

## Annex C 2

**Table C5: Performance under tension loads under fire exposure**

Anchor sizes			MMS-7,5 A4				MMS-10 A4				MMS-12 A4			
Fire resistance duration	R	[min]	30	60	90	120	30	60	90	120	30	60	90	120
Steel failure														
Characteristic resistance	$N_{Rk,s,fi}$	[kN]	1,7	1,2	0,8	0,6	3,4	2,5	1,7	1,2	5,9	4,4	3,0	2,2
Characteristic resistance for MMS-St with metric stud	$N_{Rk,s,fi}$	[kN]	1,7	1,2	0,8	0,6	1,8	1,5	1,1	1,0	-	-	-	-
Pullout														
Characteristic resistance in concrete C20/25 to C50/60	$N_{Rk,p,fi}$	[kN]	1,3			1,0	2,3			1,8	3,0			2,4
Concrete cone failure														
Characteristic resistance in concrete C20/25 to C50/60	$N_{Rk,c,fi}$	[kN]	1,8			1,5	2,8			2,2	3,9			3,2
Spacing	$s_{cr,fi}$	[mm]	4 x $h_{ef}$											
Edge distance	$c_{cr,fi}$	[mm]	2 x $h_{ef}$											

**Table C6: Performance under shear loads under fire exposure**

Anchor sizes			MMS-7,5 A4				MMS-10 A4				MMS-12 A4			
Fire resistance duration	R	[min]	30	60	90	120	30	60	90	120	30	60	90	120
<b>Steel failure without lever arm</b>														
Characteristic resistance	$V_{Rk,s,fi}$	[kN]	1,7	1,2	0,8	0,6	3,4	2,5	1,7	1,2	5,9	4,4	3,0	2,2
<b>Steel failure with lever arm</b>														
Characteristic resistance	$M^0_{Rk,s,fi}$	[Nm]	1,5	1,1	0,7	0,5	4,0	3,0	2,0	1,5	8,8	6,6	4,4	3,3

## HECO MULTI-MONTI MMS A4

### Performance

Characteristic values of tension and shear load resistance under fire exposure

## Annex C 3