

Approval body for construction products  
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and  
Laender Governments



## European Technical Assessment

**ETA-11/0325  
of 10 September 2018**

English translation prepared by DIBt - Original version in German language

### General Part

Technical Assessment Body issuing the  
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

KEMA HIDROSTOP DP-System

Product family  
to which the construction product belongs

Liquid applied watertight covering for wet rooms with  
wearing surface

Manufacturer

Kema Puconci d.o.o.  
Puconci 393  
9201 PUCONCI  
SLOWENIEN

Manufacturing plant

Produktionsanlage 9201

This European Technical Assessment  
contains

8 pages including 3 annexes which form an integral part  
of this assessment

This European Technical Assessment is  
issued in accordance with Regulation (EU)  
No 305/2011, on the basis of

ETAG 022 Part 1: "Liquid Applied Coverings with or  
without Wearing Surface",  
used as EAD according to Article 66 Paragraph 3 of  
Regulation (EU) No 305/2011.

This version replaces

ETA-11/0325 issued on 24 May 2013

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

## Specific part

### 1 Technical description of the product

The watertight covering "KEMA HIDROSTOP DP-System" is a kit. It consists of the following components:

- primer "KEMAGRUND S" or "KEMAGRUND A"
- one-component liquid waterproofing membrane "KEMA HIDROSTOP DP" on the basis of styrol-butadien
- sealing tape Type "KEMABAND 12"
- sealing ingoing and outgoing corners "KEMABAND Y" and "KEMABAND X"
- sealing sleeves for walls "KEMABAND M Wandmanschette"
- sealing sleeves for floor gullies "KEMABAND M Bodenmanschette"
- adhesive "KEMAKOL FLEX 170", " KEMA FK 200" or "KEMABOND FLEX 131" according to EN 12004<sup>1</sup>

The kit is intended to be used under a wearing surface, e.g. tiles. The wearing surface and the jointing material are not part of the kit, but are considered during the assessment of the intended use of the product.

Annex A1 shows the system build-up and annex A2 shows the components for sealing details.

### 2 Specification of the intended use in accordance with the applicable European Assessment Document

The intended use of the watertight covering under a wearing surface is to create a floor and wall watertight covering for indoor wet areas at possible operating temperature of 5 °C till 40 °C.

The following uses are intended:

- floor and/or wall surfaces with only occasional direct exposure to water, e. g. at a good distance from shower or bathtub
- floor and/or wall in shower areas or around bathtubs used for a few showers daily, e. g. in ordinary dwellings, multifamily houses and hotels
- floor and/or wall surfaces with exposure to water more frequent or of longer duration than normally anticipated in dwellings, e. g. public wet rooms, schools and sport facilities

The watertight membrane is intended to be used on flexible substrate e. g. plywood, chipboard, gypsum, anhydrite or similar material vulnerable to water and on rigid substrates e. g. masonry or concrete.

The product should be used in connection with the following types of gullies:

stainless steel or plastics – type PP or PE – with flange for attaching of collar/membrane or with clamping ring and collar.

The gullies are not part of the kit. It is up to the responsibility of the user to use suitable products of the given types.

<sup>1</sup> EN 12004:2007 Adhesives for tiles - Requirements, evaluation of conformity, classification and designation

The performances given in Section 3 are only valid if the watertight covering kit is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the watertight covering kit of at least 25 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	see Annex A1

#### 3.2 Hygiene, health and the environment (BWR 3)

Essential characteristic	Performance
contain dangerous substances	
Component: Tile adhesive (CE-marked)	According to EN 12004
Other components: carcinogenic substances, classified as EU-Kat. Carc. 1A/1B (H350, H350i) and mutagenic substances, classified as EU-Kat. Muta. 1A/1B (H340), according to the regulation (EG) Nr. 1272/2008.	no performance assessed
release dangerous substances	
release scenario concerning BWR 3: IA2, IA3 (according to EOTA TR 034)	no performance assessed
Vapour permeability	see Annex A1
Watertightness	see Annex A1
Crack bridging ability	see Annex A1, category
Bond strength	see Annex A1, category
Scratching resistance	see Annex A1
Joint bridging ability	see Annex A1, category
Watertightness around penetrations	see Annex A1, category
Resistance to temperature	see Annex A1, category
Resistance to water	see Annex A1, category
Resistance to alkalinity	see Annex A1, category
Resistance to mechanical wear	see Annex A1
Cleanability	see Annex A1
Reparability	see Annex A1, statement of the manufacturer
Thickness	see Annex A1
Applicability	see Annex A1, description

**3.3 Safety and accessibility (BWR 4)**

Essential characteristic	Performance
Slipperiness	see Annex A1

**3.4 General aspects**

The verification of durability and serviceability is only ensured if the specifications of intended use according to Annex B and the specifications of the technical file of the manufacturer are kept.

**4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base**

In accordance with ETAG 022 used as EAD, the applicable European legal act is: 2003/655/EC.  
The system to be applied is: 2+  
In addition, with regard to reaction to fire for products covered by this EAD the applicable European legal act is 2001/596/EC.  
The system to be applied is: 3


**5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable EAD**

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.

Issued in Berlin on 10 September 2018 by Deutsches Institut für Bautechnik

BD Dipl.-Ing. Andreas Kummerow  
Head of Department

*beglaubigt:*  
Gnamou

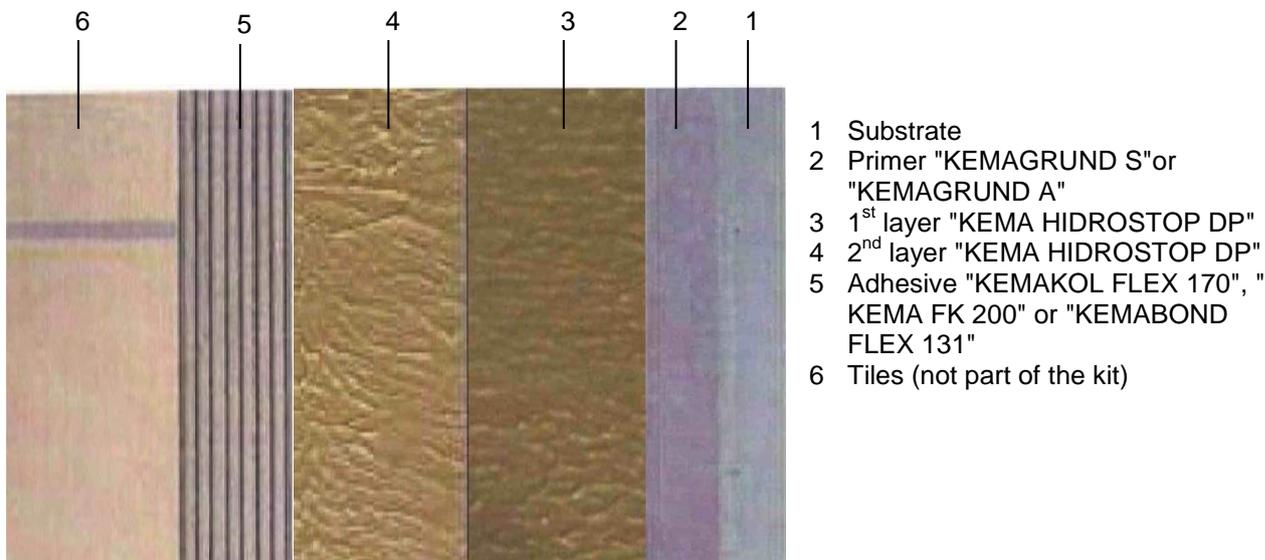

Minimum layer thickness of the waterproofing sheet 0.5 mm

Level of use categories according to ETAG 022 with relation to:

Use category related to BWR 3	see section 3.2
Crack bridging ability	category 1: 0.4 mm
Bond strength	category 2: $\geq 0.5$ MPa
Joint bridging ability	category 2: watertight
Water tightness around penetrations	category 2: watertight
Resistance to water	category 2: $\geq 0.5$ MPa
Resistance to alkalinity	category 2: $\geq 0.5$ MPa

Performance of the product::

Working life	25 years
Reaction to fire acc. to EN 13501-1	class E
Statement on dangerous substance	see section 3.2
Water vapour diffusion resistance factor at 23 °C – 50/93 % r.h	$s_d = 2.3$ m with "KEMAGRUND S" $s_d = 1.2$ m with "KEMAGRUND A"
Water tightness acc. to EN 14891	watertight
Scratch resistance	not relevant
Resistance to mechanical wear	not relevant
Cleanability	not relevant
Reparability	reparable
Slipperiness	no performance assessed
Applicability	applicable
Resistance to temperature	category 2: $\geq 0.5$ MPa

**KEMA HIDROSTOP DP-System**  
KEMA PUCONI D.o.o

**System built-up, levels of use categories and performances of the product**


Annex A1

**Sealing tape:**




"KEMABAND 12"  
width 120 mm

**Ingoing- and Outgoing Corner:**

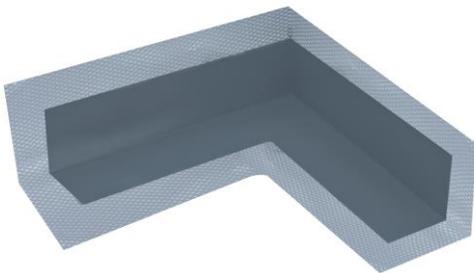


"KEMABAND Y"  
leg length 100 or 140 mm

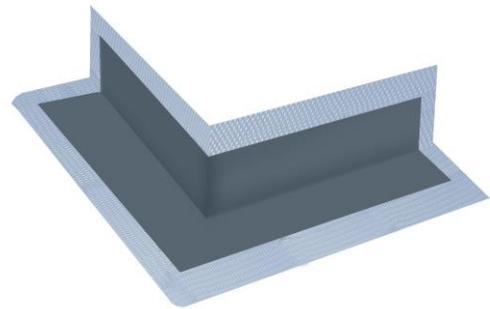


"KEMABAND X"  
leg length 75 or 140 mm

**Sealing sleeves for walls and floors:**

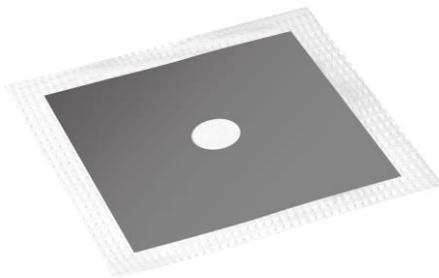

"KEMABAND M Wandmanschette"  
100 x 100 mm, 150 x 150 mm or 200 x 200 mm

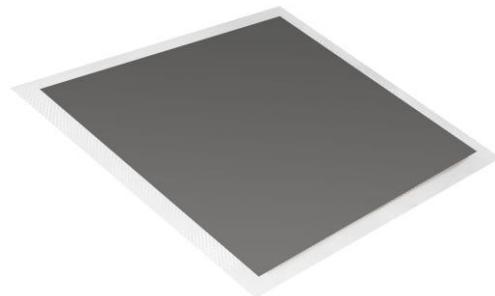

"KEMABAND M Bodenmanschette"  
350 x 350 mm or 400 x 400 mm

electronic copy of the eta by dibt: eta-11/0325

**KEMA HIDROSTOP DP-System**  
KEMA PUCONI D.o.o.

**Components**

Annex A 2

## Installation

The levels of use categories and the performance of the waterproofing kit can be assumed only, if the installation is carried out according to the installation instructions stated in the technical file of the manufacturer, in particular taking account of the following points:

- installation by appropriately trained personnel,
- installation of only those components which are specified components of the kit,
- installation with the required tools and adjuvant,
- precautions during installation,
- inspecting the substrate surface for cleanliness and correct treatment,
- inspecting during installation and of the finished watertight membrane and documentation of the results.

**KEMA HIDROSTOP DP-System**  
KEMA PUCONI D.o.o.

**Intended use**  
Specifications

Annex B