

Approval body for construction products  
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and  
Laender Governments



## European Technical Assessment

**ETA-13/0216**  
**of 24 April 2018**

English translation prepared by DIBt - Original version in German language

### General Part

Technical Assessment Body issuing the  
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

KENNGOTT - Cantilever step stair

Product family  
to which the construction product belongs

Prefabricated stair with steps made of steel for use as an  
indoor stair in buildings

Manufacturer

Kenngott - Treppen Servicezentrale  
Longlife - Treppen GmbH  
Neulandstraße 31  
74889 Sinsheim  
DEUTSCHLAND

Manufacturing plant

Kenngott - Treppen, Werk 1 und 2

This European Technical Assessment  
contains

13 pages including 3 annexes which form an integral part  
of this assessment

This European Technical Assessment is  
issued in accordance with Regulation (EU)  
No 305/2011, on the basis of

EAD 340006-00-0506

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

## Specific Part

### 1 Technical description of the product

The KENNGOTT - Cantilever step stair is a prefabricated stair system, which consists of steps and fasteners.

The steps consist of a welded steel section, which is fixed by wall ties on the wall side in a concrete wall. Alternatively the steel section can be screwed or welded on steel columns.

The product description is given in Annex A. The material values, dimensions and tolerances of the components of the stair not indicated in the annexes shall correspond to the values laid down in the technical documentation<sup>1</sup>.

### 2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the stair is used in compliance with the specifications and conditions given in Annex B.

The verification and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the stair of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

<sup>1</sup> The technical documentation comprises all information of the manufacturer necessary for the production, installation and maintenance of the stair; these are in particular the structural analysis, design drawings and the manufacturer's installation instructions. The part to be treated confidentially is deposited with Deutsches Institut für Bautechnik and, as far as this is relevant to the tasks of the approved bodies involved in the procedure of the AVCP system, shall be handed over to the approved body.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Load-bearing capacity of stair	See Annex C2
Load-bearing capacity of fixings	See technical documentation of this European Technical Assessment
Load/displacement behaviour	See Annex C2
Vibration behaviour	Construction type 1 according to Annex A1: Walking on the stair does not result in vibration of the entire construction. Construction type 2 according to Annex A1: First natural frequency: $f_1 \geq 5$ Hz (inclusive a single mass of 100 kg) Deflection under a single load $F = 1$ kN: $w \leq 5$ mm
Prevention of progressive collapse	Failure of individual components of the stair does not lead to a progressive collapse of the complete stair
Residual load-bearing capacity	Local material failure does not lead to an abrupt total loss of load-bearing capacity of the steps.
Long-term behaviour	Load-bearing capacity are ensured under an appropriate use and maintenance over the indicated working life
Resistance to earthquakes	No performance assessed
Durability against physical, chemical and biological agents	Adequate durability for the intended use under an appropriate use and maintenance

#### 3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Components made of steel: A1
Fire resistance	No performance assessed

#### 3.3 Hygiene, health and the environment (BWR 3)

Essential characteristic	Performance
Release of formaldehyde	No formaldehyde treated materials are used
Release of pentachlorophenol	No pentachlorophenol treated materials are used
Radioactive emission	Not relevant

English translation prepared by DIBt

**3.4 Safety in use (BWR 4)**

Essential characteristic	Performance
Geometry	See Annex C1
Slipperiness	No performance assessed
Equipment of the stair for a safe use	No performance assessed
Safe breakage of components	No brittle failure of individual components
Impact resistance	No performance assessed

**4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base**

In accordance with the European Assessment Document EAD No. 340006-00-0506 the applicable European legal act is: 1999/89/EC

The System to be applied is: 2+

In addition, with regard to reaction to fire for products covered by the European Assessment Document EAD No. 340006-00-0506 the applicable European legal act is: 2001/596/EC

The System to be applied is: 4

**5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document**

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.


Issued in Berlin on 24 April 2018 by Deutsches Institut für Bautechnik

BD Dipl.-Ing. Andreas Kummerow  
Head of Department


*beglaubigt:*  
Stiller

### Types of plan


Walking line is exemplified, position may be chosen freely within the walking zone, walking zone is 20 % of the clear width of the stair in the middle of the stair

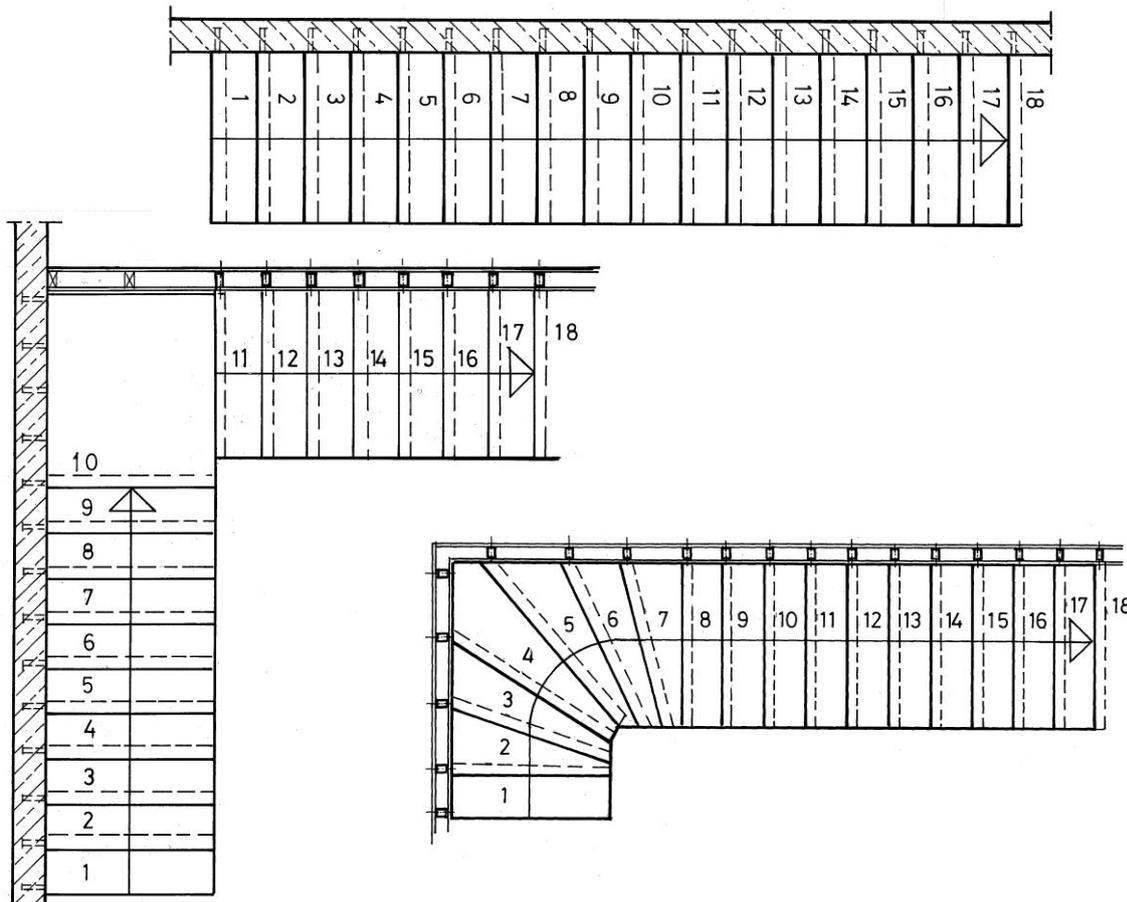

### Types of construction

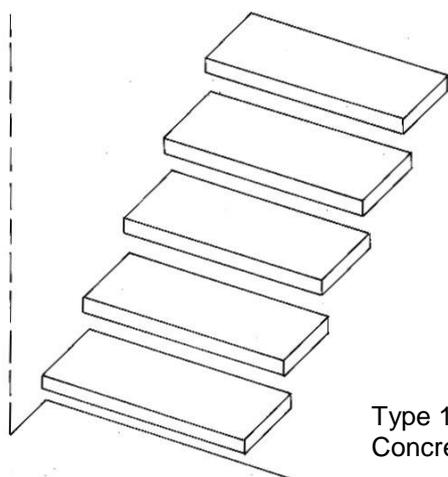

Type 1  
Concrete wall

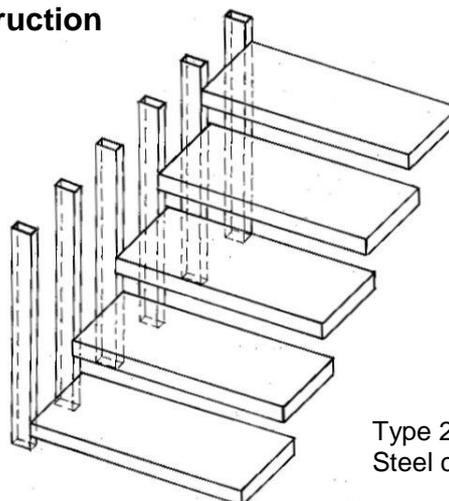

Type 2  
Steel columns

**KENNGOTT – Cantilever step stair**

Product



**Annex A1**

**Joint to concrete wall ( $\geq C20/25$ )**



**Rectangle step**

**Trapezium step**


Plan

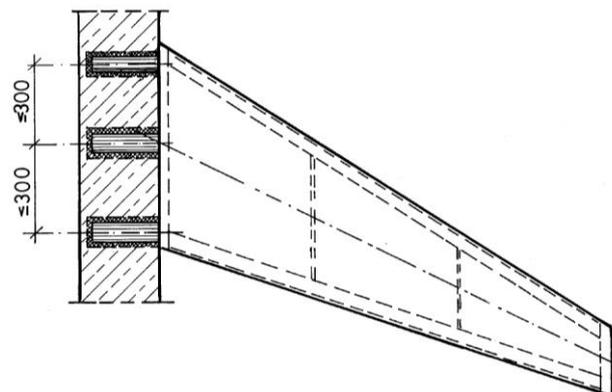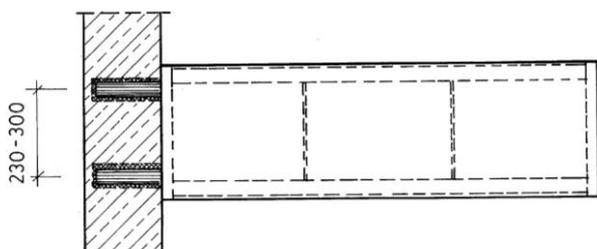

Section

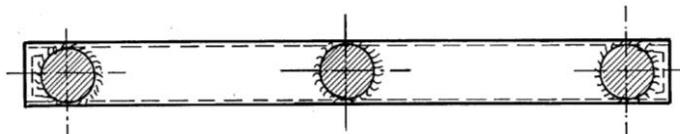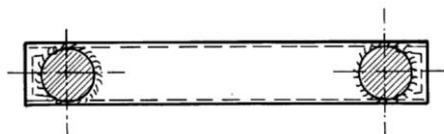

View

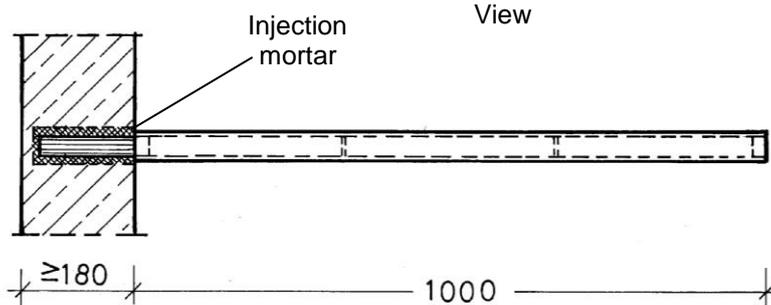

Dimensions in mm, more details (geometry, joints etc.) according to technical documentation

**KENNGOTT – Cantilever step stair**

Steps and joint to concrete wall



**Annex A2**

### Joint to steel columns



#### Rectangle step

#### Trapezium step

Plan

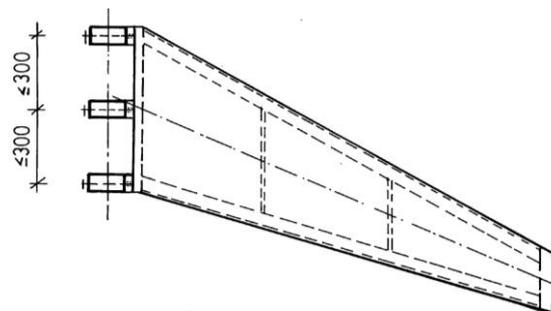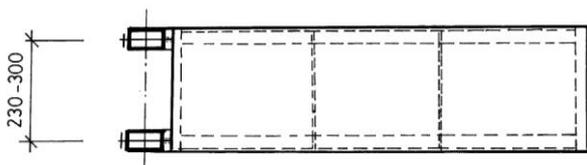


Section

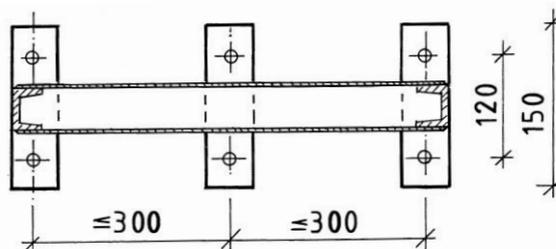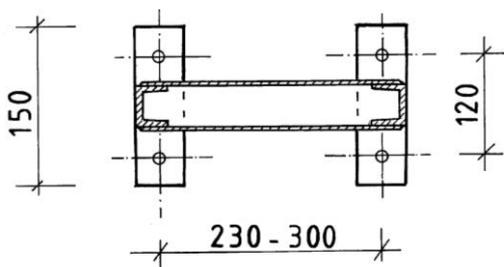


View

Welded joint



Screwed joint

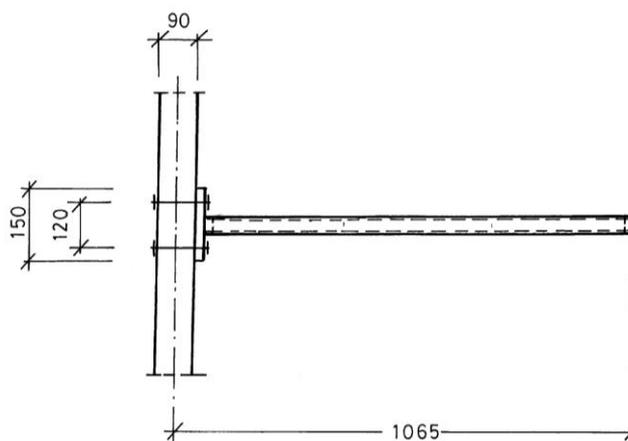

Dimensions in mm, more details (geometry, joints etc.) according to technical documentation

**KENNGOTT – Cantilever step stair**

Steps and joint to steel columns

**Annex A3**

**Table 1: Minimum dimensions and materials of relevant stair components**

Component of stair	Minimum dimensions			Material
Step (box section)	Thickness / Width	[mm]	46 / 320 <sup>3)</sup>	Steel S235
Column <sup>2) 3)</sup>	Rectangle section	[mm]	90 / 50 / 4	Steel S235
Fasteners	Diameter	[mm]	12	Steel <sup>1)</sup>

- 1) characteristic values of material according to technical documentation  
 2) maximum length: 3.00 m; Fixed at bottom and hinged support at the top; maximum distance between columns: 260 mm  
 3) Trapezium step and related column according to technical documentation  
 4) Wood covering and covering of natural stone with maximum dead load of 0.56 kN/m<sup>2</sup> is possible

**KENNGOTT – Cantilever step stair**

Minimum dimensions and materials of relevant stair components

**Annex A4**

## Specification of intended use (Part 1)

### Intended use:

- European Technical Assessment applies for a construction system.
- For the specific case of use the corresponding type of stair is manufactured within the context of the values defined in this European Technical Assessment.
- Values of this ETA applies to all types of stairs, the real dimensions follow in accordance with the relevant case of use.

### Stair subject to:

- Static and quasi static loads

### Use conditions:

- Indoor stair
- Air temperatures between +5 °C and +30 °C
- Relative air humidity between 30% and 70%
- To the individual requirements handrail and barrier can be attached to the stair optionally. Conditions for possible handrail/barrier:
  - Dead load  $\leq 0.50$  kN/m
  - Height  $\leq 1,0$  m
  - Distance of baluster  $\leq 0.90$  m

### Design:

- Design of the stair according to the annexes and the technical documentation of this European Technical Assessment.
- Fastening of the stair to the construction works according to the annexes and the technical documentation of this Technical European Assessment.
- Verification of the transmission of loads to the construction works by the civil engineer responsible for the construction works.
- Load bearing capacity at ultimate limit state:

$$q_k \cdot \gamma_Q \leq q_{RK} / \gamma_M$$

$$Q_k \cdot \gamma_Q \leq Q_{RK} / \gamma_M$$

$$h_k \cdot \gamma_Q \cdot \psi_0 \leq h_{RK} / \gamma_M$$

with

$q_{RK}, Q_{RK}, h_{RK}$ : characteristic values of resistance; see Table 3

$\gamma_M$ : recommended material partial safety factor; see Table 3

$q_k, Q_k, h_k$ : characteristic values of imposed loads according to EN 1991-1-1:2002 + AC:2009

$\gamma_Q = 1.5$ : recommended partial safety factor, in absence of other national regulations

$\psi_0 = 0.7$ : recommended combination factor, in absence of other national regulations

- Maximum characteristic values of imposed loads under consideration of the partial factors mentioned above; see Table 5

## KENNGOTT – Cantilever step stair

Specification of intended use (Part 1)

Annex B1

## Specification of intended use (Part 2)

### Installation:

- Installation by personal appropriately trained and authorized by the manufacturer of the assessment by means of the technical documentation of this European Technical Assessment
- Installation only in the way as specified in the technical documentation of this European Technical Assessment
- Sufficient support of the stair when assembling
- Installation of stair components without imposed deformations
- Bolted connection are protected such that they will not be loosened by vibrations

### Indication of the manufacturer:

- Ensure that all persons involved will be appropriately informed about the specific conditions according to sections 1 and 2 (including the annexes to which reference is being made as well as the not confidential parts of the technical documentation deposited to this European Technical Assessment)
- Instructions for use should provide information as to use, maintenance and repair of the stair

**KENNGOTT – Cantilever step stair**

Specification of intended use (Part 2)


**Annex B2**

**Table 2: Geometry**

designation			dimension	
			minimum	maximum
going	step on walking line <sup>1)</sup>	[mm]	210	320 <sup>2)</sup>
	tapered step	[mm]	120 <sup>2) 3)</sup>	560 <sup>2) 4)</sup>
rise of the stairs <sup>1)</sup>		[mm]	140 <sup>2)</sup>	210
pitch of the walking line <sup>1)</sup>		[°]	21	45
overlap of the steps		[mm]	30	- <sup>5)</sup>
number of rises		[-]	3	18
openings	between stairs and wall	[mm]	0	0
	between consecutive steps	[mm]	- <sup>3)</sup>	164
clear width of stairs		[mm]	500	1000
length of the flight		[mm]	- <sup>3)</sup>	
thickness of steps		[mm]	46	- <sup>5)</sup>

- 1) values are constant within one flight
- 2) tolerance between nominal value and actual value = ± 5 mm
- 3) wall - free side of tapered step
- 4) wall side of tapered step
- 5) not relevant

- 1 going
- 2 rise
- 3 overlap
- 4 opening between consecutive steps
- 5 length of the flight
- 6 thickness of steps

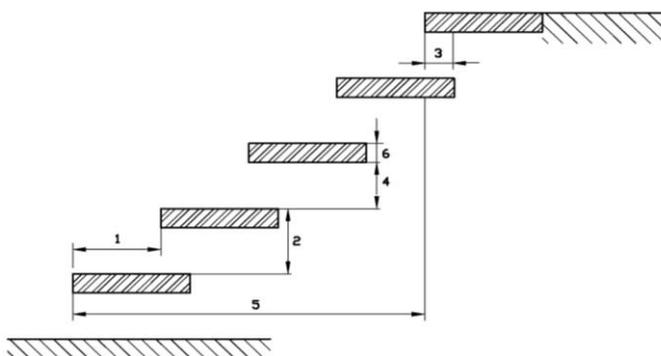

**KENNGOTT – Cantilever step stair**

Geometry of the stair

**Annex C1**

**Table 3: Load-bearing capacity – Characteristic values of resistance**

Type of loading	Characteristic values of resistance			$\gamma_M$ <sup>1)</sup>
vertical variable uniformly distributed load	$q_{R,k}$	[kN/m <sup>2</sup> ]	5.63	1.25
vertical variable single load	$Q_{R,k}$	[kN]	3.75	
horizontal variable uniformly distributed load on barrier	$h_{R,k}$	[kN/m]	0.66	

<sup>1)</sup> Recommended partial safety factor, in absence of other national regulations

**Table 4: Deflections under loading**

Deflection of the step under single point load			
single load	$Q_k$	[kN]	2.0
clear width of the stair	L	[mm]	1000
deflection under load $F_S$ related to the clear width of the stair	w	[-]	$\leq L/150$

**Table 5: Imposed loads**

Type of loading	Imposed loads		
vertical variable uniformly distributed load	q	[kN/m <sup>2</sup> ]	3.0
vertical variable single load	Q	[kN]	2.0
horizontal variable uniformly distributed load on barrier	h	[kN/m]	0.5

**KENNGOTT – Cantilever step stair**

Load-bearing capacity – Characteristic values of resistance,  
Deflections under loading,  
Imposed loads

**Annex C2**