

## **Approval body for construction products and types of construction**

Bautechnisches Prüfamt

An institution established by the Federal and  
Laender Governments



# European Technical Assessment

**ETA-18/0680**  
**of 10 September 2018**

English translation prepared by DIBt - Original version in German language

## **General Part**

Technical Assessment Body issuing the European Technical Assessment:	Deutsches Institut für Bautechnik
Trade name of the construction product	JT2-D-6-5/6,3xL, JT2-D-12-5/6,3xL, JT2-D-18-5/6,3xL, JT2-D-2-6,5/7,0xL,
Product family to which the construction product belongs	Fastening screws for sandwich elements on steel and wooden structures
Manufacturer	EJOT Baubefestigungen GmbH In der Stockwiese 35 57334 Bad Laasphe DEUTSCHLAND
Manufacturing plant	manufacturing plant 8, 12, 19 and 21
This European Technical Assessment contains	19 pages including 15 annexes which form an integral part of this assessment
This European Technical Assessment is issued in accordance with Regulation (EU) No 305/2011, on the basis of	EAD 330047-01-0602

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

**Specific part****1 Technical description of the product**

The fastening screws are self-drilling or self-tapping screws made of austenitic stainless steel or carbon steel with anticorrosion coating (listed in Table 1). The fastening screws are completed with sealing washers consisting of metal washer and EPDM-seal.

**Table 1 – Fastening screws for sandwich panels**

Annex	Fastening screw	Component I	Component II
4	JT2-D-6H-5,5/6,3xL	S280GD to S350GD	S235 to S355 S280GD to S450GD HX300LAD to HX460LAD
5	JT2-D-6H-5,5/6,3xL	S280GD to S350GD	S235 to S355 S280GD to S450GD HX300LAD to HX460LAD
6	JT2-D-6H-5,5/6,3xL	S280GD to S350GD	S235 to S355 S280GD to S450GD HX300LAD to HX460LAD
7	JT2-D-12H-5,5/6,3xL	S280GD to S350GD	S235 to S355 S280GD to S350GD
8	JT2-D-12H-5,5/6,3xL	S280GD to S350GD	S235 to S355 S280GD to S350GD
9	JT2-D-12H-5,5/6,3xL	S280GD to S350GD	S235 to S355 S280GD to S350GD
10	JT2-D-18H-5,5/6,3xL	S280GD to S350GD	S235 to S355 S280GD to S350GD
11	JT2-D-18H-5,5/6,3xL	S280GD to S350GD	S235 to S355 S280GD to S350GD
12	JT2-D-18H-5,5/6,3xL	S280GD to S350GD	S235 to S355 S280GD to S350GD
13	JT2-D-2H-6,5/7,0xL	S280GD to S350GD	Timber
14	JT2-D-2H-6,5/7,0xL	S280GD to S350GD	Timber
15	JT2-D-2H-6,5/7,0xL	S280GD to S350GD	Timber

**2 Specification of the intended use in accordance with the applicable European Assessment Document**

The fastening screws are intended to be used for fastening sandwich panels to metal or timber substructures. The sandwich panel can either be used as wall or roof cladding or as load bearing wall and roof element. The intended use comprises fastening screws and connections for indoor and outdoor applications. Fastening screws which are intended to be used in external environments with  $\geq C2$  corrosion according to the standard EN ISO 12944-2 are made of

stainless steel. Furthermore the intended use comprises connections with predominantly static loads (e.g. wind loads, dead loads). The fastening screws are not intended for re-use.

The performances given in Section 3 are only valid if the fastening screws are used in compliance with the specifications and conditions given in Annexes (1-15).

The verification and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the fastening screws of at least 25 years. The indications given on the working life cannot be interpreted as a guarantee given by the manufacturer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Shear Resistance of the Connection	see Annexes to this ETA
Tension Resistance of the Connection	see Annexes to this ETA
Design Resistance in case of combined Tension and Shear Forces (interaction)	see Annexes to this ETA
Check of Bending Capacity in case of constraining forces due to temperature	see Annexes to this ETA
Durability	No performance assessed

#### 3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Performance Class A1

### 4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with EAD No. 330047-01-0602, the applicable European legal act is: Commission Decision 1998/214/EC, amended by 2001/596/EC.

The system to be applied is: 2+

### 5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable EAD

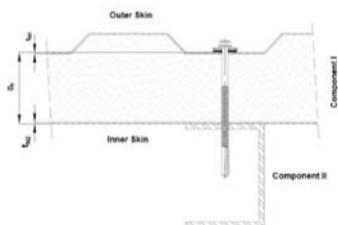
Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.

Issued in Berlin on 10 September 2018 by Deutsches Institut für Bautechnik

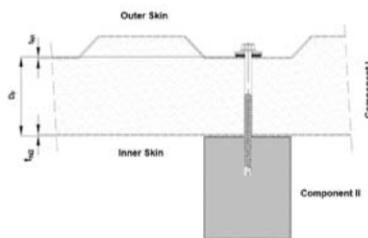
BD Dipl.-Ing. Andreas Kummerow  
Head of Department

*beglaubigt:*  
Schult

## Examples of execution and connection



Component II made of metal



Component II made of timber

## Materials and dimensions

Design relevant materials and dimensions are indicated in the Annexes of the fastening screws:

Fastener	Material of the fastening screw
Washer	Material of the sealing washer
Component I	Material of the sandwich panel (outer skin and inner skin)
Component II	Material of substructure

$d_f$	Thickness of component I
$t_{N1}$	Thickness of the outer skin of component I
$t_{N2}$	Thickness of the inner skin of component II
$t_{N,II}$	Thickness of component II made of metal
$l_{ef}$	Effective screw-in length in component II made of timber (without drill point)
$l_g$	Screw-in length in component II made of timber (with drill point)
$d_{pd}$	Pre-drill diameter of component I and II

The thickness  $t_{N,II}$  corresponds to the load-bearing screw-in length of the fastening screw in component II, if the load-bearing screw-in length does not cover the entire component thickness.

## Performance characteristics

The design relevant performance characteristics of a connection are indicated in the Annexes of the fastening screws:

$N_{R,k}$	Characteristic value of tension resistance
$V_{R,k}$	Characteristic value of shear resistance
$u$	Maximum allowed head displacement of the fastening screw

In some cases component-specific performance characteristics are indicated for an individual calculation of the design relevant performance characteristics of a connection:

$N_{R,I,k}$	Characteristic value of pull-through resistance for the outer skin of component I
$N_{R,II,k}$	Characteristic value of pull-out resistance for component II
$V_{R,I,k}$	Characteristic value of hole bearing resistance for the inner skin of component I
$V_{R,II,k}$	Characteristic value of hole bearing resistance for component II

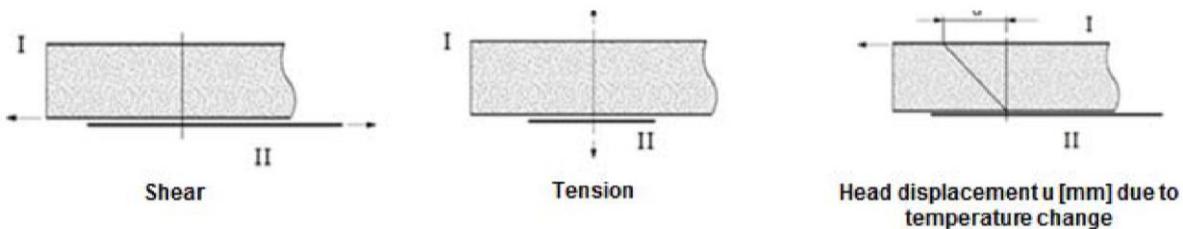
$M_{y,Rk}$	Characteristic value of yield moment of the fastening screw for component II made of timber
$f_{ax,k}$	Characteristic value of withdrawal strength for component II made of timber
$f_{h,k}$	Characteristic value of embedding strength for component II made of timber

## Terms and explanations

## Fastening screws for sandwich panels

Annex 1

### Occurred loadings of a connection



### Design values

The design values of tension and shear resistance of a connection have to be determined as following:

$N_{R,d}$	Design value of tension resistance
$V_{R,d}$	Design value of shear resistance
$\gamma_M$	Partial safety factor

The recommended partial safety factor  $\gamma_M$  is 1,33, provided no partial safety factor is given in national regulations or national Annexes to Eurocode 3.

### Special conditions

If the component thickness  $t_{N,1}$ ,  $t_{N,2}$  or  $t_{N,II}$  lies in between two indicated component thicknesses, the characteristic value may be calculated by linear interpolation.

For asymmetric components II made of metal (e.g. Z- or C-shaped profiles) with component thickness  $t_{N,II} < 5$  mm, the characteristic value  $N_{R,k}$  has to be reduced to 70%.

In case of combined loading by tension and shear forces the following interaction equation has to be taken into account:

$$\frac{N_{S,d}}{N_{R,d}} + \frac{V_{S,d}}{V_{R,d}} \leq 1,0$$

$N_{S,d}$	Design value of the applied tension forces
$V_{S,d}$	Design value of the applied shear forces

### Head displacement

The head displacement of the fastening screw as a result of thermal expansion of the outer skin of the sandwich panel may not exceed the maximum allowed head displacement of the fastening screw.

### Installation conditions

The installation is carried out according to manufacturer's instruction.

The load-bearing screw-in length of the fastening screw specified by the manufacturer has to be taken into account.

The fastening screws have to be processed with suitable drill driver (e.g. cordless drill driver with depth control). The use of impact wrench is not allowed.

The fastening screws have to be fixed rectangular to the surface of the component.

Component I and component II have to be in direct contact to each other. The use of compression resistant thermal insulation strips up to a thickness of 3 mm is allowed.

### Design and installation

Annex 2

### Fastening screws for sandwich panels

## Component II made of timber

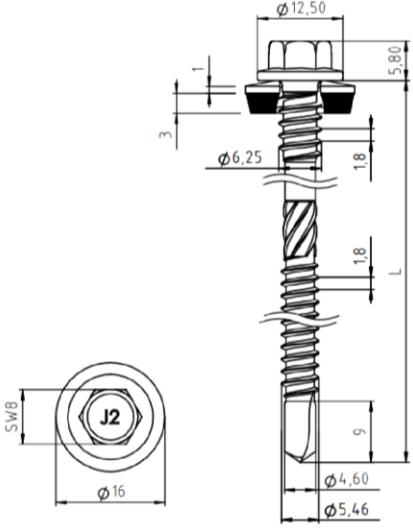
The characteristic values of tension and shear resistance:

$$N_{R,k} = \min \left\{ \frac{N_{R;I,k}}{N_{R,II,k} * k_{mod}}, \frac{V_{R,I,k}}{V_{R,II,k} * k_{mod}} \right\}$$

$N_{R,I,k}$  and  $V_{R,I,k}$  are given in the Annex of the fastening screw.

$N_{R,II,k}$  is determined according to EN 1995-1-1:2014 + A1:2008, equation (8.40a), with  $f_{ax,k}$  given in the Annex of the fastening screw.

$V_{R,II,k}$  is determined according to EN 1995-1-1:2004 + A1:2008, equation (8.9), with  $M_{y,Rk}$  given in the Annex of the fastening screw and  $f_{h,k}$  according to EN 1995-1-1:2014 + A1:2008, equation (8.15) and equation (8.16).

	<u>Materials:</u>
	<p>Fastener: carbon steel case hardened and corrosion-resistant</p> <p>Washer: carbon steel, corrosion-resistant with vulcanised EPDM seal stainless steel (A2/A4) – EN ISO 3506 with vulcanised EPDM seal</p>
	<p>Component I: S280GD to S350GD – EN 10346</p> <p>Component II: S235 to S355 – EN 10025-1 S280GD to S450GD – EN 10346 HX300LAD to HX460LAD – EN 10346</p>
	<p>Drilling capacity: <math>\Sigma(t_{N2} + t_{N,II}) \leq 6,50 \text{ mm}</math></p>
	<p><u>Timber substructures:</u> no performance determined</p>

$t_{N,II} [\text{mm}]$	1,50	2,00	2,50	3,00	4,00	5,00	—	—	—	—	—
$V_{R,k} [\text{kN}] \text{ for } t_{N2} =$											
0,40	0,60*	0,60*	0,60*	0,60*	0,60*	0,60*	—	—	—	—	—
0,50	1,50*	1,50*	1,50*	1,50*	1,50*	1,50*	—	—	—	—	—
0,55	1,50*	1,50*	1,50*	1,50*	1,50*	1,50*	—	—	—	—	—
0,60	1,56*	1,56*	1,56*	1,56*	1,56*	1,56*	—	—	—	—	—
0,63	1,60*	1,60*	1,60*	1,60*	1,60*	1,60*	—	—	—	—	—
0,75	2,70	2,70	2,70	2,70	2,70	2,70	—	—	—	—	—
0,88	2,70	2,70	2,70	2,70	2,70	2,70	—	—	—	—	—
1,00	2,70	2,70	2,70	2,70	2,70	2,70	—	—	—	—	—
$N_{R,k} [\text{kN}] \text{ for } t_{N1} =$											
0,40	1,57*	1,57*	1,57*	1,57*	1,57*	1,57*	—	—	—	—	—
0,50	1,70*	1,70*	1,70*	1,70*	1,70*	1,70*	—	—	—	—	—
0,55	1,90	2,00*	2,00*	2,00*	2,00*	2,00*	—	—	—	—	—
0,60	1,90	2,13*	2,13*	2,13*	2,13*	2,13*	—	—	—	—	—
0,63	1,90	2,20*	2,20*	2,20*	2,20*	2,20*	—	—	—	—	—
0,75	1,90	2,60	3,40*	3,40*	3,40*	3,40*	—	—	—	—	—
0,88	1,90	2,60	4,10	4,10	4,10	4,10	—	—	—	—	—
1,00	1,90	2,60	4,20	4,90	4,90	4,90	—	—	—	—	—
$N_{R,k,II} [\text{kN}]$	1,90	2,60	4,20	4,90	4,90	4,90	—	—	—	—	—
$\max u [\text{mm}] \text{ for } D_F =$											
40	9,1	5,1	3,3	2,3	1,3	0,9	—	—	—	—	—
60	13,6	7,7	4,9	3,4	1,9	1,4	—	—	—	—	—
80	18,1	10,2	6,5	4,5	2,6	1,8	—	—	—	—	—
100	22,7	12,8	8,2	5,7	3,2	2,3	—	—	—	—	—
120	27,2	15,3	9,8	6,8	3,8	2,8	—	—	—	—	—
140	31,7	17,9	11,4	7,9	4,5	3,2	—	—	—	—	—
$\geq 160$	36,3	20,4	13,1	9,1	5,1	3,7	—	—	—	—	—

- $N_{R,k,II}$ : Pull-out resistance of component II
- For  $t_{N2}$  made of S320GD or S350GD the values  $V_{R,k}$  marked with \* can be increased by 8,3%.
- For  $t_{N1}$  made of S320GD or S350GD the values  $N_{R,k}$  marked with \* can be increased by 8,3%.

#### Fastening screws for sandwich panels

#### Self-drilling screw JT2-D-6-5,5/6,3xL

with hexagon head and sealing washer Ø16 mm

Annex 4

	<u>Materials:</u>
	Fastener: carbon steel case hardened and corrosion-resistant  Washer: carbon steel, corrosion-resistant with vulcanised EPDM seal stainless steel (A2/A4) – EN ISO 3506 with vulcanised EPDM seal
	Component I: S280GD to S350GD – EN 10346 Component II: S235 to S355 – EN 10025-1 S280GD to S450GD – EN 10346 HX300LAD to HX460LAD – EN 10346
	Drilling capacity: $\Sigma(t_{N2} + t_{N,II}) \leq 6,50 \text{ mm}$
	<u>Timber substructures:</u> no performance determined

$t_{N,II} [\text{mm}]$	1,50	2,00	2,50	3,00	4,00	5,00	—	—	—	—	—
$V_{R,k} [\text{kN}]$ for $t_{N2} =$											
<b>0,40</b>	0,60*	0,60*	0,60*	0,60*	0,60*	0,60*	—	—	—	—	—
<b>0,50</b>	1,50*	1,50*	1,50*	1,50*	1,50*	1,50*	—	—	—	—	—
<b>0,55</b>	1,50*	1,50*	1,50*	1,50*	1,50*	1,50*	—	—	—	—	—
<b>0,60</b>	1,56*	1,56*	1,56*	1,56*	1,56*	1,56*	—	—	—	—	—
<b>0,63</b>	1,60*	1,60*	1,60*	1,60*	1,60*	1,60*	—	—	—	—	—
<b>0,75</b>	2,70	2,70	2,70	2,70	2,70	2,70	—	—	—	—	—
<b>0,88</b>	2,70	2,70	2,70	2,70	2,70	2,70	—	—	—	—	—
<b>1,00</b>	2,70	2,70	2,70	2,70	2,70	2,70	—	—	—	—	—
$N_{R,k} [\text{kN}]$ for $t_{N1} =$											
<b>0,40</b>	1,86	1,86*	1,86*	1,86*	1,86*	1,86*	—	—	—	—	—
<b>0,50</b>	1,90	2,02*	2,02*	2,02*	2,02*	2,02*	—	—	—	—	—
<b>0,55</b>	1,90	2,45	2,45*	2,45*	2,45*	2,45*	—	—	—	—	—
<b>0,60</b>	1,90	2,60	2,89*	2,89*	2,89*	2,89*	—	—	—	—	—
<b>0,63</b>	1,90	2,60	3,15*	3,15*	3,15*	3,15*	—	—	—	—	—
<b>0,75</b>	1,90	2,60	3,40*	3,40*	3,40*	3,40*	—	—	—	—	—
<b>0,88</b>	1,90	2,60	4,10	4,10*	4,10*	4,10*	—	—	—	—	—
<b>1,00</b>	1,90	2,60	4,20	4,90	4,90	4,90	—	—	—	—	—
$N_{R,k,II} [\text{kN}]$	1,90	2,60	4,20	4,90	4,90	4,90	—	—	—	—	—
$D_F [\text{mm}]$ for $t_{N1} =$											
<b>40</b>	9,1	5,1	3,3	2,3	1,3	0,9	—	—	—	—	—
<b>60</b>	13,6	7,7	4,9	3,4	1,9	1,4	—	—	—	—	—
<b>80</b>	18,1	10,2	6,5	4,5	2,6	1,8	—	—	—	—	—
<b>100</b>	22,7	12,8	8,2	5,7	3,2	2,3	—	—	—	—	—
<b>120</b>	27,2	15,3	9,8	6,8	3,8	2,8	—	—	—	—	—
<b>140</b>	31,7	17,9	11,4	7,9	4,5	3,2	—	—	—	—	—
<b><math>\geq 160</math></b>	36,3	20,4	13,1	9,1	5,1	3,7	—	—	—	—	—

- $N_{R,k,II}$ : Pull-out resistance of component II
- For  $t_{N2}$  made of S320GD or S350GD the values  $V_{R,k}$  marked with \* can be increased by 8,3%.
- For  $t_{N1}$  made of S320GD or S350GD the values  $N_{R,k}$  marked with \* can be increased by 8,3%.

#### Fastening screws for sandwich panels

#### Self-drilling screw JT2-D-6-5,5/6,3xL

with hexagon head and sealing washer Ø19 mm

Annex 5

	<b>Materials:</b>
	<b>Fastener:</b> carbon steel case hardened and corrosion-resistant  <b>Washer:</b> carbon steel, corrosion-resistant with vulcanised EPDM seal stainless steel (A2/A4) – EN ISO 3506 with vulcanised EPDM seal
	<b>Component I:</b> S280GD to S350GD – EN 10346 <b>Component II:</b> S235 to S355 – EN 10025-1 S280GD to S450GD – EN 10346 HX300LAD to HX460LAD – EN 10346
	<b>Drilling capacity:</b> $\Sigma(t_{N2} + t_{N,II}) \leq 6,50 \text{ mm}$
	<b>Timber substructures:</b> no performance determined

$t_{N,II} [\text{mm}]$	1,50	2,00	2,50	3,00	4,00	5,00	—	—	—	—	—
$V_{R,k} [\text{kN}]$ for $t_{N2} =$											
0,40	0,60*	0,60*	0,60*	0,60*	0,60*	0,60*	—	—	—	—	—
0,50	1,50*	1,50*	1,50*	1,50*	1,50*	1,50*	—	—	—	—	—
0,55	1,50*	1,50*	1,50*	1,50*	1,50*	1,50*	—	—	—	—	—
0,60	1,56*	1,56*	1,56*	1,56*	1,56*	1,56*	—	—	—	—	—
0,63	1,60*	1,60*	1,60*	1,60*	1,60*	1,60*	—	—	—	—	—
0,75	2,70	2,70	2,70	2,70	2,70	2,70	—	—	—	—	—
0,88	2,70	2,70	2,70	2,70	2,70	2,70	—	—	—	—	—
1,00	2,70	2,70	2,70	2,70	2,70	2,70	—	—	—	—	—
$N_{R,k} [\text{kN}]$ for $t_{N1} =$											
0,40	1,90	2,16*	2,16*	2,16*	2,16*	2,16*	—	—	—	—	—
0,50	1,90	2,28*	2,28*	2,28*	2,28*	2,28*	—	—	—	—	—
0,55	1,90	2,60	2,71*	2,71*	2,71*	2,71*	—	—	—	—	—
0,60	1,90	2,60	3,14*	3,14*	3,14*	3,14*	—	—	—	—	—
0,63	1,90	2,60	3,40*	3,40*	3,40*	3,40*	—	—	—	—	—
0,75	1,90	2,60	3,40*	3,40*	3,40*	3,40*	—	—	—	—	—
0,88	1,90	2,60	4,10	4,10*	4,10*	4,10*	—	—	—	—	—
1,00	1,90	2,60	4,20	4,90	4,90	4,90	—	—	—	—	—
$N_{R,k,II} [\text{kN}]$	1,90	2,60	4,20	4,90	4,90	4,90	—	—	—	—	—
$\max u [\text{mm}]$ for $D_F =$											
40	9,1	5,1	3,3	2,3	1,3	0,9	—	—	—	—	—
60	13,6	7,7	4,9	3,4	1,9	1,4	—	—	—	—	—
80	18,1	10,2	6,5	4,5	2,6	1,8	—	—	—	—	—
100	22,7	12,8	8,2	5,7	3,2	2,3	—	—	—	—	—
120	27,2	15,3	9,8	6,8	3,8	2,8	—	—	—	—	—
140	31,7	17,9	11,4	7,9	4,5	3,2	—	—	—	—	—
$\geq 160$	36,3	20,4	13,1	9,1	5,1	3,7	—	—	—	—	—

- $N_{R,k,II}$ : Pull-out resistance of component II
- For  $t_{N2}$  made of S320GD or S350GD the values  $V_{R,k}$  marked with \* can be increased by 8,3%.
- For  $t_{N1}$  made of S320GD or S350GD the values  $N_{R,k}$  marked with \* can be increased by 8,3%.

#### Fastening screws for sandwich panels

#### Self-drilling screw JT2-D-6-5,5/6,3xL

with hexagon head and sealing washer  $\geq \varnothing 22 \text{ mm}$

Annex 6

	<u>Materials:</u>
	<p>Fastener: carbon steel case hardened and corrosion-resistant</p> <p>Washer: carbon steel, corrosion-resistant with vulcanised EPDM seal stainless steel (A2/A4) – EN ISO 3506 with vulcanised EPDM seal</p>
	<p>Component I: S280GD to S350GD – EN 10346</p> <p>Component II: S235 to S355 – EN 10025-1 S280GD to S350GD – EN 10346</p>
	<p>Drilling capacity: <math>\Sigma(t_{N2} + t_{N,II}) \leq 13,0 \text{ mm}</math></p>
	<p><u>Timber substructures:</u> no performance determined</p>

$t_{N,II} [\text{mm}]$	3,00	4,00	5,00	6,00	8,00	10,0	12,0	—	—	—	—
$V_{R,k} [\text{kN}]$ for $t_{N2}$	0,40	0,90	0,90	0,90	0,90	0,90	0,90	—	—	—	—
	0,50	0,90	0,90	0,90	0,90	0,90	0,90	—	—	—	—
	0,55	0,90	0,90	0,90	0,90	0,90	0,90	—	—	—	—
	0,60	1,03	1,03	1,03	1,03	1,03	1,03	—	—	—	—
	0,63	1,10	1,10	1,10	1,10	1,10	1,10	—	—	—	—
	0,75	1,60	1,60	1,60	1,60	1,60	1,60	—	—	—	—
	0,88	2,20	2,20	2,20	2,20	2,20	2,20	—	—	—	—
	1,00	2,90	2,90	2,90	2,90	2,90	2,90	—	—	—	—
$N_{R,k} [\text{kN}]$ for $t_{N1}$	0,40	1,54*	1,54*	1,54*	1,54*	1,54*	1,54*	—	—	—	—
	0,50	1,60*	1,60*	1,60*	1,60*	1,60*	1,60*	—	—	—	—
	0,55	1,90*	1,90*	1,90*	1,90*	1,90*	1,90*	—	—	—	—
	0,60	2,09*	2,09*	2,09*	2,09*	2,09*	2,09*	—	—	—	—
	0,63	2,20*	2,20*	2,20*	2,20*	2,20*	2,20*	—	—	—	—
	0,75	2,80	2,80*	2,80*	2,80*	2,80*	2,80*	—	—	—	—
	0,88	3,00	3,50*	3,50*	3,50*	3,50*	3,50*	—	—	—	—
	1,00	3,00	4,20*	4,20*	4,20*	4,20*	4,20*	—	—	—	—
$N_{R,k,II} [\text{kN}]$	3,00	4,70	6,90	6,90	6,90	6,90	6,90	—	—	—	—
$\max u [\text{mm}]$ for $D_F =$	40	2,3	1,3	0,9	0,9	0,9	0,9	—	—	—	—
	60	3,4	1,9	1,4	1,4	1,4	1,4	—	—	—	—
	80	4,5	2,6	1,8	1,8	1,8	1,8	—	—	—	—
	100	5,7	3,2	2,3	2,3	2,3	2,3	—	—	—	—
	120	6,8	3,8	2,8	2,8	2,8	2,8	—	—	—	—
	140	7,9	4,5	3,2	3,2	3,2	3,2	—	—	—	—
	$\geq 160$	9,1	5,1	3,7	3,7	3,7	3,7	—	—	—	—

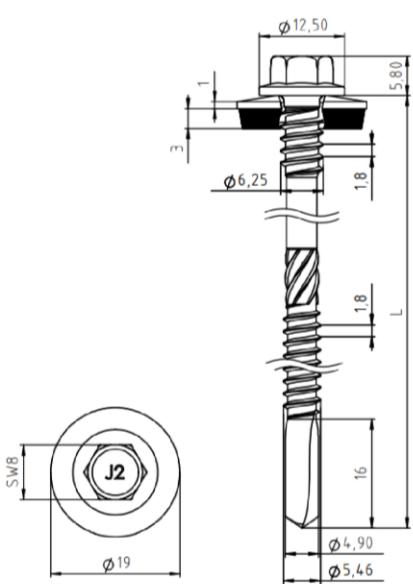
- $N_{R,k,II}$ : Pull-out resistance of component II
- For  $t_{N2}$  made of S320GD or S350GD the indicated values  $V_{R,k}$  can be increased by 8,3%.
- For  $t_{N1}$  made of S320GD or S350GD the values  $N_{R,k}$  marked with \* can be increased by 8,3%.

#### Fastening screws for sandwich panels

#### Self-drilling screw JT2-D-12-5,5/6,3xL

with hexagon head and sealing washer  $\geq \varnothing 16 \text{ mm}$

Annex 7

	<b>Materials:</b>
	<b>Fastener:</b> carbon steel case hardened and corrosion-resistant  <b>Washer:</b> carbon steel, corrosion-resistant with vulcanised EPDM seal stainless steel (A2/A4) – EN ISO 3506 with vulcanised EPDM seal
	<b>Component I:</b> S280GD to S350GD – EN 10346 <b>Component II:</b> S235 to S355 – EN 10025-1 S280GD to S350GD – EN 10346
	<b>Drilling capacity:</b> $\Sigma(t_{N2} + t_{N,II}) \leq 13,0 \text{ mm}$
	<b>Timber substructures:</b> no performance determined

$t_{N,II} [\text{mm}]$	3,00	4,00	5,00	6,00	8,00	10,0	12,0	—	—	—	—
$V_{R,k} [\text{kN}] \text{ for } t_{N2} =$	0,40	0,90	0,90	0,90	0,90	0,90	0,90	—	—	—	—
	0,50	0,90	0,90	0,90	0,90	0,90	0,90	—	—	—	—
	0,55	0,90	0,90	0,90	0,90	0,90	0,90	—	—	—	—
	0,60	1,03	1,03	1,03	1,03	1,03	1,03	—	—	—	—
	0,63	1,10	1,10	1,10	1,10	1,10	1,10	—	—	—	—
	0,75	1,60	1,60	1,60	1,60	1,60	1,60	—	—	—	—
	0,88	2,20	2,20	2,20	2,20	2,20	2,20	—	—	—	—
	1,00	2,90	2,90	2,90	2,90	2,90	2,90	—	—	—	—
$N_{R,k} [\text{kN}] \text{ for } t_{N1} =$	0,40	1,83*	1,83*	1,83*	1,83*	1,83*	1,83*	—	—	—	—
	0,50	2,02*	2,02*	2,02*	2,02*	2,02*	2,02*	—	—	—	—
	0,55	2,45*	2,45*	2,45*	2,45*	2,45*	2,45*	—	—	—	—
	0,60	2,89	2,89*	2,89*	2,89*	2,89*	2,89*	—	—	—	—
	0,63	3,00	3,15*	3,15*	3,15*	3,15*	3,15*	—	—	—	—
	0,75	3,00	3,15*	3,15*	3,15*	3,15*	3,15*	—	—	—	—
	0,88	3,00	3,50*	3,50*	3,50*	3,50*	3,50*	—	—	—	—
	1,00	3,00	4,20*	4,20*	4,20*	4,20*	4,20*	—	—	—	—
$N_{R,k,II} [\text{kN}]$	3,00	4,70	6,90	6,90	6,90	6,90	6,90	—	—	—	—
$\max u [\text{mm}] \text{ for } D_F =$	40	2,3	1,3	0,9	0,9	0,9	0,9	—	—	—	—
	60	3,4	1,9	1,4	1,4	1,4	1,4	—	—	—	—
	80	4,5	2,6	1,8	1,8	1,8	1,8	—	—	—	—
	100	5,7	3,2	2,3	2,3	2,3	2,3	—	—	—	—
	120	6,8	3,8	2,8	2,8	2,8	2,8	—	—	—	—
	140	7,9	4,5	3,2	3,2	3,2	3,2	—	—	—	—
	$\geq 160$	9,1	5,1	3,7	3,7	3,7	3,7	—	—	—	—

- $N_{R,k,II}$ : Pull-out resistance of component II
- For  $t_{N2}$  made of S320GD or S350GD the indicated values  $V_{R,k}$  can be increased by 8,3%.
- For  $t_{N1}$  made of S320GD or S350GD the values  $N_{R,k}$  marked with \* can be increased by 8,3%.

#### Fastening screws for sandwich panels

#### Self-drilling screw JT2-D-12-5,5/6,3xL

with hexagon head and sealing washer Ø19 mm

Annex 8

	<b>Materials:</b>
	<b>Fastener:</b> carbon steel case hardened and corrosion-resistant  <b>Washer:</b> carbon steel, corrosion-resistant with vulcanised EPDM seal stainless steel (A2/A4) – EN ISO 3506 with vulcanised EPDM seal
	<b>Component I:</b> S280GD to S350GD – EN 10346 <b>Component II:</b> S235 to S355 – EN 10025-1 S280GD to S350GD – EN 10346
	<b>Drilling capacity:</b> $\Sigma(t_{N2} + t_{N,II}) \leq 13,0 \text{ mm}$
	<b>Timber substructures:</b> no performance determined

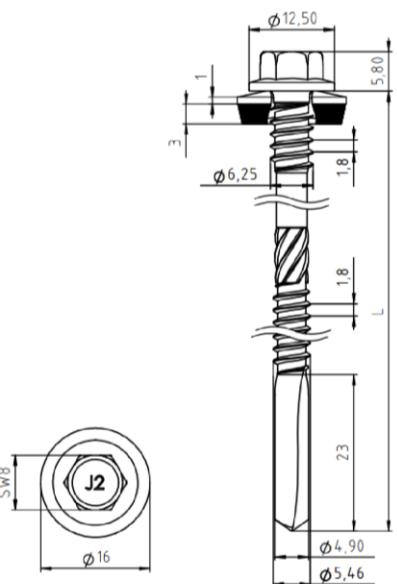
$t_{N,II} [\text{mm}]$	3,00	4,00	5,00	6,00	8,00	10,0	12,0	—	—	—	—
$V_{R,k} [\text{kN}]$ for $t_{N2} =$	0,40	0,90	0,90	0,90	0,90	0,90	0,90	—	—	—	—
	0,50	0,90	0,90	0,90	0,90	0,90	0,90	—	—	—	—
	0,55	0,90	0,90	0,90	0,90	0,90	0,90	—	—	—	—
	0,60	1,03	1,03	1,03	1,03	1,03	1,03	—	—	—	—
	0,63	1,10	1,10	1,10	1,10	1,10	1,10	—	—	—	—
	0,75	1,60	1,60	1,60	1,60	1,60	1,60	—	—	—	—
	0,88	2,20	2,20	2,20	2,20	2,20	2,20	—	—	—	—
	1,00	2,90	2,90	2,90	2,90	2,90	2,90	—	—	—	—
$N_{R,k} [\text{kN}]$ for $t_{N1} =$	0,40	2,12*	2,12*	2,12*	2,12*	2,12*	2,12*	—	—	—	—
	0,50	2,28*	2,28*	2,28*	2,28*	2,28*	2,28*	—	—	—	—
	0,55	2,71*	2,71*	2,71*	2,71*	2,71*	2,71*	—	—	—	—
	0,60	3,00	3,14*	3,14*	3,14*	3,14*	3,14*	—	—	—	—
	0,63	3,00	3,40*	3,40*	3,40*	3,40*	3,40*	—	—	—	—
	0,75	3,00	3,40*	3,40*	3,40*	3,40*	3,40*	—	—	—	—
	0,88	3,00	3,50*	3,50*	3,50*	3,50*	3,50*	—	—	—	—
	1,00	3,00	4,20*	4,20*	4,20*	4,20*	4,20*	—	—	—	—
$N_{R,k,II} [\text{kN}]$	3,00	4,70	6,90	6,90	6,90	6,90	6,90	—	—	—	—
$\max u [\text{mm}]$ for $D_F =$	40	2,3	1,3	0,9	0,9	0,9	0,9	—	—	—	—
	60	3,4	1,9	1,4	1,4	1,4	1,4	—	—	—	—
	80	4,5	2,6	1,8	1,8	1,8	1,8	—	—	—	—
	100	5,7	3,2	2,3	2,3	2,3	2,3	—	—	—	—
	120	6,8	3,8	2,8	2,8	2,8	2,8	—	—	—	—
	140	7,9	4,5	3,2	3,2	3,2	3,2	—	—	—	—
	$\geq 160$	9,1	5,1	3,7	3,7	3,7	3,7	—	—	—	—

- $N_{R,k,II}$ : Pull-out resistance of component II
- For  $t_{N2}$  made of S320GD or S350GD the indicated values  $V_{R,k}$  can be increased by 8,3%.
- For  $t_{N1}$  made of S320GD or S350GD the values  $N_{R,k}$  marked with \* can be increased by 8,3%.

#### Fastening screws for sandwich panels

**Self-drilling screw JT2-D-12-5,5/6,3xL**  
with hexagon head and sealing washer  $\geq \varnothing 22 \text{ mm}$

Annex 9

	<b>Materials:</b>
	<b>Fastener:</b> carbon steel case hardened and corrosion-resistant  <b>Washer:</b> carbon steel, corrosion-resistant with vulcanised EPDM seal stainless steel (A2/A4) – EN ISO 3506 with vulcanised EPDM seal
	<b>Component I:</b> S280GD to S350GD – EN 10346 <b>Component II:</b> S235 to S355 – EN 10025-1 S280GD to S350GD – EN 10346
	<b>Drilling capacity:</b> $\Sigma(t_{N2} + t_{N,II}) \leq 18,0 \text{ mm}$
	<b>Timber substructures:</b> no performance determined

$t_{N,II} [\text{mm}]$	4,00	5,00	6,00	8,00	10,00	12,00	14,00	16,00	—	—	—
$V_{R,k} [\text{kN}]$ for $t_{N2} =$	0,40	0,90	0,90	0,90	0,90	0,90	0,90	0,90	—	—	—
	0,50	0,90	0,90	0,90	0,90	0,90	0,90	0,90	—	—	—
	0,55	0,90	0,90	0,90	0,90	0,90	0,90	0,90	—	—	—
	0,60	1,03	1,03	1,03	1,03	1,03	1,03	1,03	—	—	—
	0,63	1,10	1,10	1,10	1,10	1,10	1,10	1,10	—	—	—
	0,75	1,60	1,60	1,60	1,60	1,60	1,60	1,60	—	—	—
	0,88	2,20	2,20	2,20	2,20	2,20	2,20	2,20	—	—	—
	1,00	2,90	2,90	2,90	2,90	2,90	2,90	2,90	—	—	—
$N_{R,k} [\text{kN}]$ for $t_{N1} =$	0,40	1,54	1,54	1,54	1,54	1,54	1,54	1,54	—	—	—
	0,50	1,60	1,60	1,60	1,60	1,60	1,60	1,60	—	—	—
	0,55	1,90	1,90	1,90	1,90	1,90	1,90	1,90	—	—	—
	0,60	2,09	2,09	2,09	2,09	2,09	2,09	2,09	—	—	—
	0,63	2,20	2,20	2,20	2,20	2,20	2,20	2,20	—	—	—
	0,75	2,80	2,80	2,80	2,80	2,80	2,80	2,80	—	—	—
	0,88	3,50	3,50	3,50	3,50	3,50	3,50	3,50	—	—	—
	1,00	4,20	4,20	4,20	4,20	4,20	4,20	4,20	—	—	—
$N_{R,k,II} [\text{kN}]$	4,70	6,90	6,90	6,90	6,90	6,90	6,90	6,90	—	—	—
$\max u [\text{mm}]$ for $D_F =$	40	1,3	0,9	0,9	0,9	0,9	0,9	0,9	—	—	—
	60	1,9	1,4	1,4	1,4	1,4	1,4	1,4	—	—	—
	80	2,6	1,8	1,8	1,8	1,8	1,8	1,8	—	—	—
	100	3,2	2,3	2,3	2,3	2,3	2,3	2,3	—	—	—
	120	3,8	2,8	2,8	2,8	2,8	2,8	2,8	—	—	—
	140	4,5	3,2	3,2	3,2	3,2	3,2	3,2	—	—	—
	$\geq 160$	5,1	3,7	3,7	3,7	3,7	3,7	3,7	—	—	—

- $N_{R,k,II}$ : Pull-out resistance of component II
- For  $t_{N2}$  made of S320GD or S350GD the indicated values  $V_{R,k}$  can be increased by 8,3%.
- For  $t_{N1}$  made of S320GD or S350GD the values  $N_{R,k}$  can be increased by 8,3%.

#### Fastening screws for sandwich panels

#### Self-drilling screw JT2-D-18-5,5/6,3xL

with hexagon head and sealing washer Ø16 mm

Annex 10

	<b>Materials:</b>
	<b>Fastener:</b> carbon steel case hardened and corrosion-resistant  <b>Washer:</b> carbon steel, corrosion-resistant with vulcanised EPDM seal stainless steel (A2/A4) – EN ISO 3506 with vulcanised EPDM seal
	<b>Component I:</b> S280GD to S350GD – EN 10346 <b>Component II:</b> S235 to S355 – EN 10025-1 S280GD to S350GD – EN 10346
	<b>Drilling capacity:</b> $\Sigma(t_{N2} + t_{N,II}) \leq 18,0 \text{ mm}$
	<b>Timber substructures:</b> no performance determined

$t_{N,II} [\text{mm}]$	4,00	5,00	6,00	8,00	10,00	12,00	14,00	16,00	—	—	—
$V_{R,k} [\text{kN}] \text{ for } t_{N2} =$	0,40	0,90	0,90	0,90	0,90	0,90	0,90	0,90	—	—	—
	0,50	0,90	0,90	0,90	0,90	0,90	0,90	0,90	—	—	—
	0,55	0,90	0,90	0,90	0,90	0,90	0,90	0,90	—	—	—
	0,60	1,03	1,03	1,03	1,03	1,03	1,03	1,03	—	—	—
	0,63	1,10	1,10	1,10	1,10	1,10	1,10	1,10	—	—	—
	0,75	1,60	1,60	1,60	1,60	1,60	1,60	1,60	—	—	—
	0,88	2,20	2,20	2,20	2,20	2,20	2,20	2,20	—	—	—
	1,00	2,90	2,90	2,90	2,90	2,90	2,90	2,90	—	—	—
$N_{R,k} [\text{kN}] \text{ for } t_{N1} =$	0,40	1,83	1,83	1,83	1,83	1,83	1,83	1,83	—	—	—
	0,50	2,02	2,02	2,02	2,02	2,02	2,02	2,02	—	—	—
	0,55	2,45	2,45	2,45	2,45	2,45	2,45	2,45	—	—	—
	0,60	2,89	2,89	2,89	2,89	2,89	2,89	2,89	—	—	—
	0,63	3,15	3,15	3,15	3,15	3,15	3,15	3,15	—	—	—
	0,75	3,15	3,15	3,15	3,15	3,15	3,15	3,15	—	—	—
	0,88	3,50	3,50	3,50	3,50	3,50	3,50	3,50	—	—	—
	1,00	4,20	4,20	4,20	4,20	4,20	4,20	4,20	—	—	—
$N_{R,k,II} [\text{kN}]$	4,70	6,90	6,90	6,90	6,90	6,90	6,90	6,90	—	—	—
$\max u [\text{mm}] \text{ for } D_F =$	40	1,3	0,9	0,9	0,9	0,9	0,9	0,9	—	—	—
	60	1,9	1,4	1,4	1,4	1,4	1,4	1,4	—	—	—
	80	2,6	1,8	1,8	1,8	1,8	1,8	1,8	—	—	—
	100	3,2	2,3	2,3	2,3	2,3	2,3	2,3	—	—	—
	120	3,8	2,8	2,8	2,8	2,8	2,8	2,8	—	—	—
	140	4,5	3,2	3,2	3,2	3,2	3,2	3,2	—	—	—
	$\geq 160$	5,1	3,7	3,7	3,7	3,7	3,7	3,7	—	—	—

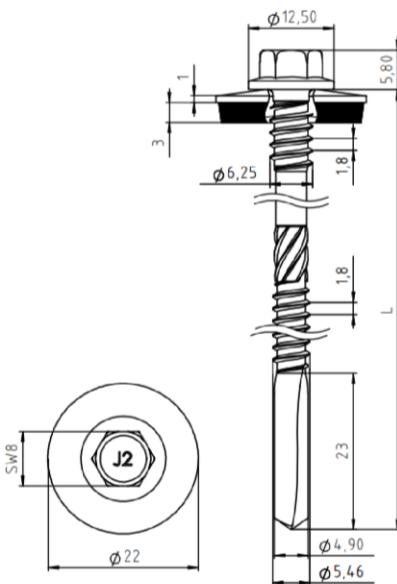
- $N_{R,k,II}$ : Pull-out resistance of component II
- For  $t_{N2}$  made of S320GD or S350GD the indicated values  $V_{R,k}$  can be increased by 8,3%.
- For  $t_{N1}$  made of S320GD or S350GD the indicated values  $N_{R,k}$  can be increased by 8,3%.

#### Fastening screws for sandwich panels

#### Self-drilling screw JT2-D-18-5,5/6,3xL

with hexagon head and sealing washer Ø19 mm

Annex 11

	<b>Material:</b>
	<b>Fastener:</b> carbon steel case hardened and corrosion-resistant  <b>Washer:</b> carbon steel, corrosion-resistant with vulcanised EPDM seal stainless steel (A2/A4) – EN ISO 3506 with vulcanised EPDM seal
	<b>Component I:</b> S280GD to S350GD – EN 10346 <b>Component II:</b> S235 to S355 – EN 10025-1 S280GD to S350GD – EN 10346
	<b>Drilling capacity:</b> $\Sigma(t_{N2} + t_{N,II}) \leq 18,0 \text{ mm}$
	<b>Timber substructures:</b> no performance determined

$t_{N,II} [\text{mm}]$	4,00	5,00	6,00	8,00	10,00	12,00	14,00	16,00	—	—	—
$V_{R,k} [\text{kN}]$ for $t_{N2} =$	0,40	0,90	0,90	0,90	0,90	0,90	0,90	0,90	—	—	—
	0,50	0,90	0,90	0,90	0,90	0,90	0,90	0,90	—	—	—
	0,55	0,90	0,90	0,90	0,90	0,90	0,90	0,90	—	—	—
	0,60	1,03	1,03	1,03	1,03	1,03	1,03	1,03	—	—	—
	0,63	1,10	1,10	1,10	1,10	1,10	1,10	1,10	—	—	—
	0,75	1,60	1,60	1,60	1,60	1,60	1,60	1,60	—	—	—
	0,88	2,20	2,20	2,20	2,20	2,20	2,20	2,20	—	—	—
	1,00	2,90	2,90	2,90	2,90	2,90	2,90	2,90	—	—	—
$N_{R,k} [\text{kN}]$ for $t_{N1} =$	0,40	2,12	2,12	2,12	2,12	2,12	2,12	2,12	—	—	—
	0,50	2,28	2,28	2,28	2,28	2,28	2,28	2,28	—	—	—
	0,55	2,71	2,71	2,71	2,71	2,71	2,71	2,71	—	—	—
	0,60	3,14	3,14	3,14	3,14	3,14	3,14	3,14	—	—	—
	0,63	3,40	3,40	3,40	3,40	3,40	3,40	3,40	—	—	—
	0,75	3,40	3,40	3,40	3,40	3,40	3,40	3,40	—	—	—
	0,88	3,50	3,50	3,50	3,50	3,50	3,50	3,50	—	—	—
	1,00	4,20	4,20	4,20	4,20	4,20	4,20	4,20	—	—	—
$N_{R,k,II} [\text{kN}]$	4,70	6,90	6,90	6,90	6,90	6,90	6,90	6,90	—	—	—
$\max u [\text{mm}]$ for $D_F =$	40	1,3	0,9	0,9	0,9	0,9	0,9	0,9	—	—	—
	60	1,9	1,4	1,4	1,4	1,4	1,4	1,4	—	—	—
	80	2,6	1,8	1,8	1,8	1,8	1,8	1,8	—	—	—
	100	3,2	2,3	2,3	2,3	2,3	2,3	2,3	—	—	—
	120	3,8	2,8	2,8	2,8	2,8	2,8	2,8	—	—	—
	140	4,5	3,2	3,2	3,2	3,2	3,2	3,2	—	—	—
	$\geq 160$	5,1	3,7	3,7	3,7	3,7	3,7	3,7	—	—	—

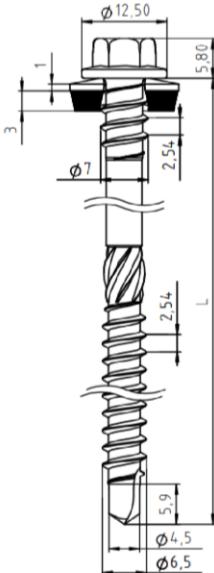

- $N_{R,k,II}$ : Pull-out resistance of component II
- For  $t_{N2}$  made of S320GD or S350GD the indicated values  $V_{R,k}$  can be increased by 8,3%.
- For  $t_{N1}$  made of S320GD or S350GD the indicated values  $N_{R,k}$  can be increased by 8,3%.

#### Fastening screws for sandwich panels

#### Self-drilling screw JT2-D-18-5,5/6,3xL

with hexagon head and sealing washer  $\geq \varnothing 22 \text{ mm}$

Annex 12

 	<b>Materials</b>
	<b>Fastener:</b> carbon steel case hardened and corrosion-resistant  <b>Washer:</b> carbon steel, corrosion-resistant with vulcanised EPDM seal stainless steel (A2/A4) – EN ISO 3506 with vulcanised EPDM seal
	Component I: S280GD to S350GD – EN 10346
	Component II: timber – EN 14081
	Drilling capacity: $t_{N2} \leq 2,00 \text{ mm}$
	<b>Timber substructures:</b> performance determined with $M_{y,Rk} = 9,742 \text{ Nm}$ $f_{ax,k} = 11,810 \text{ N/mm}^2 \text{ for } l_{ef} \geq 44 \text{ mm}$

$l_g [\text{mm}]$	50	53	56	59	62	65	68	71	74	77	80	$V_{R,k} [\text{kN}] \text{ for } t_{N2} =$
<b>0,40</b>	1,03	1,03	1,03	1,03	1,03	1,03	1,03	1,03	1,03	1,03	1,03	1,03
<b>0,50</b>	1,10	1,10	1,10	1,10	1,10	1,10	1,10	1,10	1,10	1,10	1,10	1,10
<b>0,55</b>	1,20	1,20	1,20	1,20	1,20	1,20	1,20	1,20	1,20	1,20	1,20	1,20
<b>0,60</b>	1,26	1,26	1,26	1,26	1,26	1,26	1,26	1,26	1,26	1,26	1,26	1,26
<b>0,63</b>	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30
<b>0,75</b>	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30
<b>0,88</b>	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30
<b>1,00</b>	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30
$N_{R,k} [\text{kN}] \text{ for } t_{N1} =$	0,40	1,57*	1,57*	1,57*	1,57*	1,57*	1,57*	1,57*	1,57*	1,57*	1,57*	$V_{R,k,l} [\text{kN}] =$
<b>II</b>	<b>0,50</b>	1,70*	1,70*	1,70*	1,70*	1,70*	1,70*	1,70*	1,70*	1,70*	1,70*	1,70*
	<b>0,55</b>	2,00*	2,00*	2,00*	2,00*	2,00*	2,00*	2,00*	2,00*	2,00*	2,00*	2,00*
	<b>0,60</b>	2,13*	2,13*	2,13*	2,13*	2,13*	2,13*	2,13*	2,13*	2,13*	2,13*	2,13*
	<b>0,63</b>	2,20*	2,20*	2,20*	2,20*	2,20*	2,20*	2,20*	2,20*	2,20*	2,20*	2,20*
	<b>0,75</b>	3,04	3,25	3,40	3,40*	3,40*	3,40*	3,40*	3,40*	3,40*	3,40*	3,40*
	<b>0,88</b>	3,04	3,25	3,45	3,66	3,87	4,08	4,10	4,10	4,10*	4,10*	4,10*
	<b>1,00</b>	3,04	3,25	3,45	3,66	3,87	4,08	4,28	4,49	4,70	4,90	4,90*
	$\max u [\text{mm}] \text{ for } D_F =$	30	0,9	0,9	0,9	0,9	0,9	0,9	0,9	0,9	0,9	$\max u [\text{mm}] \text{ for } D_F =$
<b>max u [mm] for <math>D_F =</math></b>	<b>40</b>	1,4	1,4	1,4	1,4	1,4	1,4	1,4	1,4	1,4	1,4	1,4
	<b>60</b>	1,8	1,8	1,8	1,8	1,8	1,8	1,8	1,8	1,8	1,8	1,8
	<b>80</b>	2,3	2,3	2,3	2,3	2,3	2,3	2,3	2,3	2,3	2,3	2,3
	<b>100</b>	2,8	2,8	2,8	2,8	2,8	2,8	2,8	2,8	2,8	2,8	2,8
	<b>120</b>	3,2	3,2	3,2	3,2	3,2	3,2	3,2	3,2	3,2	3,2	3,2
	<b><math>\geq 140</math></b>	3,7	3,7	3,7	3,7	3,7	3,7	3,7	3,7	3,7	3,7	3,7

- The values indicated above, depending on the screw depth  $l_g$  shall apply to  $k_{mod} = 0,90$  and the timber strength class C24 ( $\rho_k = 350 \text{ kg/m}^3$ ). For other values of  $k_{mod}$  and strength classes see Annex 3.
- For  $t_{N2}$  made of S320GD or S350GD the indicated values  $V_{R,k}$  can be increased by 8,3%.
- For  $t_{N1}$  made of S320GD or S350GD the values  $N_{R,k}$  marked with \* can be increased by 8,3%.

#### Fastening screws for sandwich panels

#### Self-drilling screw JT-D-2-6,5/7,0xL

with hexagon head and sealing washer  $\geq \varnothing 16 \text{ mm}$

Annex 13

	<p><b>Materials</b></p> <p>Fastener: carbon steel case hardened and corrosion-resistant</p> <p>Washer: carbon steel, corrosion-resistant with vulcanised EPDM seal stainless steel (A2/A4) – EN ISO 3506 with vulcanised EPDM seal</p> <p>Component I: S280GD to S350GD – EN 10346</p> <p>Component II: timber – EN 14081</p>																																																																																																																																																																																																																																																																																																																																														
	<p>Drilling capacity: <math>t_{N2} \leq 2,00</math> mm</p>																																																																																																																																																																																																																																																																																																																																														
	<p><b>Timber substructures:</b> performance determined with <math>M_{y,Rk} = 9,742</math> Nm <math>f_{ax,k} = 11,810</math> N/mm<sup>2</sup> for <math>l_{ef} \geq 44</math> mm</p>																																																																																																																																																																																																																																																																																																																																														
	<table border="1"> <thead> <tr> <th><math>l_g</math> [mm]</th><th>50</th><th>53</th><th>56</th><th>59</th><th>62</th><th>65</th><th>68</th><th>71</th><th>74</th><th>77</th><th>80</th><th><math>V_{R,k,l}</math> [kN]</th></tr> </thead> <tbody> <tr> <td><math>V_{R,k}</math> [kN] for <math>t_{N2}</math> =</td><td>0,40</td><td>1,03</td><td>1,03</td><td>1,03</td><td>1,03</td><td>1,03</td><td>1,03</td><td>1,03</td><td>1,03</td><td>1,03</td><td>1,03</td><td>1,03</td></tr> <tr> <td></td><td>0,50</td><td>1,10</td><td>1,10</td><td>1,10</td><td>1,10</td><td>1,10</td><td>1,10</td><td>1,10</td><td>1,10</td><td>1,10</td><td>1,10</td><td>1,10</td></tr> <tr> <td></td><td>0,55</td><td>1,20</td><td>1,20</td><td>1,20</td><td>1,20</td><td>1,20</td><td>1,20</td><td>1,20</td><td>1,20</td><td>1,20</td><td>1,20</td><td>1,20</td></tr> <tr> <td></td><td>0,60</td><td>1,26</td><td>1,26</td><td>1,26</td><td>1,26</td><td>1,26</td><td>1,26</td><td>1,26</td><td>1,26</td><td>1,26</td><td>1,26</td><td>1,26</td></tr> <tr> <td></td><td>0,63</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td></tr> <tr> <td></td><td>0,75</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td></tr> <tr> <td></td><td>0,88</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td></tr> <tr> <td></td><td>1,00</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td><td>1,30</td></tr> <tr> <td><math>N_{R,k}</math> [kN] for <math>t_{N1}</math> =</td><td>0,40</td><td>1,86*</td><td>1,86*</td><td>1,86*</td><td>1,86*</td><td>1,86*</td><td>1,86*</td><td>1,86*</td><td>1,86*</td><td>1,86*</td><td>1,86*</td><td>1,86*</td></tr> <tr> <td></td><td>0,50</td><td>2,02*</td><td>2,02*</td><td>2,02*</td><td>2,02*</td><td>2,02*</td><td>2,02*</td><td>2,02*</td><td>2,02*</td><td>2,02*</td><td>2,02*</td><td>2,02*</td></tr> <tr> <td></td><td>0,55</td><td>2,45*</td><td>2,45*</td><td>2,45*</td><td>2,45*</td><td>2,45*</td><td>2,45*</td><td>2,45*</td><td>2,45*</td><td>2,45*</td><td>2,45*</td><td>2,45*</td></tr> <tr> <td></td><td>0,60</td><td>2,89</td><td>2,89*</td><td>2,89*</td><td>2,89*</td><td>2,89*</td><td>2,89*</td><td>2,89*</td><td>2,89*</td><td>2,89*</td><td>2,89*</td><td>2,89*</td></tr> <tr> <td></td><td>0,63</td><td>3,04</td><td>3,15</td><td>3,15*</td><td>3,15*</td><td>3,15*</td><td>3,15*</td><td>3,15*</td><td>3,15*</td><td>3,15*</td><td>3,15*</td><td>3,15*</td></tr> <tr> <td></td><td>0,75</td><td>3,04</td><td>3,25</td><td>3,40</td><td>3,40</td><td>3,40*</td><td>3,40*</td><td>3,40*</td><td>3,40*</td><td>3,40*</td><td>3,40*</td><td>3,40*</td></tr> <tr> <td></td><td>0,88</td><td>3,04</td><td>3,25</td><td>3,45</td><td>3,66</td><td>3,87</td><td>4,08</td><td>4,10</td><td>4,10*</td><td>4,10*</td><td>4,10*</td><td>4,10*</td></tr> <tr> <td></td><td>1,00</td><td>3,04</td><td>3,25</td><td>3,45</td><td>3,66</td><td>3,87</td><td>4,08</td><td>4,28</td><td>4,49</td><td>4,70</td><td>4,90</td><td>4,90*</td></tr> <tr> <td><math>\max u</math> [mm] for <math>D_F =</math></td><td>30</td><td>0,9</td><td>0,9</td><td>0,9</td><td>0,9</td><td>0,9</td><td>0,9</td><td>0,9</td><td>0,9</td><td>0,9</td><td>0,9</td><td>0,9</td></tr> <tr> <td></td><td>40</td><td>1,4</td><td>1,4</td><td>1,4</td><td>1,4</td><td>1,4</td><td>1,4</td><td>1,4</td><td>1,4</td><td>1,4</td><td>1,4</td><td>1,4</td></tr> <tr> <td></td><td>60</td><td>1,8</td><td>1,8</td><td>1,8</td><td>1,8</td><td>1,8</td><td>1,8</td><td>1,8</td><td>1,8</td><td>1,8</td><td>1,8</td><td>1,8</td></tr> <tr> <td></td><td>80</td><td>2,3</td><td>2,3</td><td>2,3</td><td>2,3</td><td>2,3</td><td>2,3</td><td>2,3</td><td>2,3</td><td>2,3</td><td>2,3</td><td>2,3</td></tr> <tr> <td></td><td>100</td><td>2,8</td><td>2,8</td><td>2,8</td><td>2,8</td><td>2,8</td><td>2,8</td><td>2,8</td><td>2,8</td><td>2,8</td><td>2,8</td><td>2,8</td></tr> <tr> <td></td><td>120</td><td>3,2</td><td>3,2</td><td>3,2</td><td>3,2</td><td>3,2</td><td>3,2</td><td>3,2</td><td>3,2</td><td>3,2</td><td>3,2</td><td>3,2</td></tr> <tr> <td></td><td><math>\geq 140</math></td><td>3,7</td><td>3,7</td><td>3,7</td><td>3,7</td><td>3,7</td><td>3,7</td><td>3,7</td><td>3,7</td><td>3,7</td><td>3,7</td><td>3,7</td></tr> <tr> <td><math>\max u</math> [mm] for <math>D_F =</math></td><td colspan="11" rowspan="5"></td></tr> </tbody> </table>	$l_g$ [mm]	50	53	56	59	62	65	68	71	74	77	80	$V_{R,k,l}$ [kN]	$V_{R,k}$ [kN] for $t_{N2}$ =	0,40	1,03	1,03	1,03	1,03	1,03	1,03	1,03	1,03	1,03	1,03	1,03		0,50	1,10	1,10	1,10	1,10	1,10	1,10	1,10	1,10	1,10	1,10	1,10		0,55	1,20	1,20	1,20	1,20	1,20	1,20	1,20	1,20	1,20	1,20	1,20		0,60	1,26	1,26	1,26	1,26	1,26	1,26	1,26	1,26	1,26	1,26	1,26		0,63	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30		0,75	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30		0,88	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30		1,00	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	$N_{R,k}$ [kN] for $t_{N1}$ =	0,40	1,86*	1,86*	1,86*	1,86*	1,86*	1,86*	1,86*	1,86*	1,86*	1,86*	1,86*		0,50	2,02*	2,02*	2,02*	2,02*	2,02*	2,02*	2,02*	2,02*	2,02*	2,02*	2,02*		0,55	2,45*	2,45*	2,45*	2,45*	2,45*	2,45*	2,45*	2,45*	2,45*	2,45*	2,45*		0,60	2,89	2,89*	2,89*	2,89*	2,89*	2,89*	2,89*	2,89*	2,89*	2,89*	2,89*		0,63	3,04	3,15	3,15*	3,15*	3,15*	3,15*	3,15*	3,15*	3,15*	3,15*	3,15*		0,75	3,04	3,25	3,40	3,40	3,40*	3,40*	3,40*	3,40*	3,40*	3,40*	3,40*		0,88	3,04	3,25	3,45	3,66	3,87	4,08	4,10	4,10*	4,10*	4,10*	4,10*		1,00	3,04	3,25	3,45	3,66	3,87	4,08	4,28	4,49	4,70	4,90	4,90*	$\max u$ [mm] for $D_F =$	30	0,9	0,9	0,9	0,9	0,9	0,9	0,9	0,9	0,9	0,9	0,9		40	1,4	1,4	1,4	1,4	1,4	1,4	1,4	1,4	1,4	1,4	1,4		60	1,8	1,8	1,8	1,8	1,8	1,8	1,8	1,8	1,8	1,8	1,8		80	2,3	2,3	2,3	2,3	2,3	2,3	2,3	2,3	2,3	2,3	2,3		100	2,8	2,8	2,8	2,8	2,8	2,8	2,8	2,8	2,8	2,8	2,8		120	3,2	3,2	3,2	3,2	3,2	3,2	3,2	3,2	3,2	3,2	3,2		$\geq 140$	3,7	3,7	3,7	3,7	3,7	3,7	3,7	3,7	3,7	3,7	3,7	$\max u$ [mm] for $D_F =$																					
$l_g$ [mm]	50	53	56	59	62	65	68	71	74	77	80	$V_{R,k,l}$ [kN]																																																																																																																																																																																																																																																																																																																																			
$V_{R,k}$ [kN] for $t_{N2}$ =	0,40	1,03	1,03	1,03	1,03	1,03	1,03	1,03	1,03	1,03	1,03	1,03																																																																																																																																																																																																																																																																																																																																			
	0,50	1,10	1,10	1,10	1,10	1,10	1,10	1,10	1,10	1,10	1,10	1,10																																																																																																																																																																																																																																																																																																																																			
	0,55	1,20	1,20	1,20	1,20	1,20	1,20	1,20	1,20	1,20	1,20	1,20																																																																																																																																																																																																																																																																																																																																			
	0,60	1,26	1,26	1,26	1,26	1,26	1,26	1,26	1,26	1,26	1,26	1,26																																																																																																																																																																																																																																																																																																																																			
	0,63	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30																																																																																																																																																																																																																																																																																																																																			
	0,75	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30																																																																																																																																																																																																																																																																																																																																			
	0,88	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30																																																																																																																																																																																																																																																																																																																																			
	1,00	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30																																																																																																																																																																																																																																																																																																																																			
$N_{R,k}$ [kN] for $t_{N1}$ =	0,40	1,86*	1,86*	1,86*	1,86*	1,86*	1,86*	1,86*	1,86*	1,86*	1,86*	1,86*																																																																																																																																																																																																																																																																																																																																			
	0,50	2,02*	2,02*	2,02*	2,02*	2,02*	2,02*	2,02*	2,02*	2,02*	2,02*	2,02*																																																																																																																																																																																																																																																																																																																																			
	0,55	2,45*	2,45*	2,45*	2,45*	2,45*	2,45*	2,45*	2,45*	2,45*	2,45*	2,45*																																																																																																																																																																																																																																																																																																																																			
	0,60	2,89	2,89*	2,89*	2,89*	2,89*	2,89*	2,89*	2,89*	2,89*	2,89*	2,89*																																																																																																																																																																																																																																																																																																																																			
	0,63	3,04	3,15	3,15*	3,15*	3,15*	3,15*	3,15*	3,15*	3,15*	3,15*	3,15*																																																																																																																																																																																																																																																																																																																																			
	0,75	3,04	3,25	3,40	3,40	3,40*	3,40*	3,40*	3,40*	3,40*	3,40*	3,40*																																																																																																																																																																																																																																																																																																																																			
	0,88	3,04	3,25	3,45	3,66	3,87	4,08	4,10	4,10*	4,10*	4,10*	4,10*																																																																																																																																																																																																																																																																																																																																			
	1,00	3,04	3,25	3,45	3,66	3,87	4,08	4,28	4,49	4,70	4,90	4,90*																																																																																																																																																																																																																																																																																																																																			
$\max u$ [mm] for $D_F =$	30	0,9	0,9	0,9	0,9	0,9	0,9	0,9	0,9	0,9	0,9	0,9																																																																																																																																																																																																																																																																																																																																			
	40	1,4	1,4	1,4	1,4	1,4	1,4	1,4	1,4	1,4	1,4	1,4																																																																																																																																																																																																																																																																																																																																			
	60	1,8	1,8	1,8	1,8	1,8	1,8	1,8	1,8	1,8	1,8	1,8																																																																																																																																																																																																																																																																																																																																			
	80	2,3	2,3	2,3	2,3	2,3	2,3	2,3	2,3	2,3	2,3	2,3																																																																																																																																																																																																																																																																																																																																			
	100	2,8	2,8	2,8	2,8	2,8	2,8	2,8	2,8	2,8	2,8	2,8																																																																																																																																																																																																																																																																																																																																			
	120	3,2	3,2	3,2	3,2	3,2	3,2	3,2	3,2	3,2	3,2	3,2																																																																																																																																																																																																																																																																																																																																			
	$\geq 140$	3,7	3,7	3,7	3,7	3,7	3,7	3,7	3,7	3,7	3,7	3,7																																																																																																																																																																																																																																																																																																																																			
$\max u$ [mm] for $D_F =$																																																																																																																																																																																																																																																																																																																																															
<ul style="list-style-type: none"> <li>The values indicated above, depending on the screw depth <math>l_g</math> shall apply to <math>k_{mod} = 0,90</math> and the timber strength class C24 (<math>\rho_k = 350</math> kg/m<sup>3</sup>). For other values of <math>k_{mod}</math> and strength classes see Annex 3.</li> <li>For <math>t_{N2}</math> made of S320GD or S350GD the indicated values <math>V_{R,k}</math> can be increased by 8,3%.</li> <li>For <math>t_{N1}</math> made of S320GD or S350GD the values <math>N_{R,k}</math> marked with * can be increased by 8,3%.</li> </ul>																																																																																																																																																																																																																																																																																																																																															
<p><b>Fastening screws for sandwich panels</b></p>																																																																																																																																																																																																																																																																																																																																															
<p><b>Self-drilling screw JT2-D-2-6,5/7,0xL</b> with hexagon head and sealing washer <math>\geq \varnothing 19</math> mm</p>																																																																																																																																																																																																																																																																																																																																															
<p style="text-align: right;">Annex 14</p>																																																																																																																																																																																																																																																																																																																																															

	<u>Materials</u>
	<p>Fastener: carbon steel case hardened and corrosion-resistant</p> <p>Washer: carbon steel, corrosion-resistant with vulcanised EPDM seal stainless steel (A2/A4) – EN ISO 3506 with vulcanised EPDM seal</p>
	Component I: S280GD to S350GD – EN 10346
	Component II: timber – EN 14081
	Drilling capacity: $t_{N2} \leq 2,00$ mm

Timber substructures:

performance determined with

$$M_{y,Rk} = 9,742 \text{ Nm}$$

$$f_{ax,k} = 11,810 \text{ N/mm}^2 \text{ for } l_{ef} \geq 44 \text{ mm}$$

$l_g$ [mm]	50	53	56	59	62	65	68	71	74	77	80	$V_{R,k}$ [kN] for $t_{N2}$
<b>0,40</b>	1,03	1,03	1,03	1,03	1,03	1,03	1,03	1,03	1,03	1,03	1,03	1,03
<b>0,50</b>	1,10	1,10	1,10	1,10	1,10	1,10	1,10	1,10	1,10	1,10	1,10	1,10
<b>0,55</b>	1,20	1,20	1,20	1,20	1,20	1,20	1,20	1,20	1,20	1,20	1,20	1,20
<b>0,60</b>	1,26	1,26	1,26	1,26	1,26	1,26	1,26	1,26	1,26	1,26	1,26	1,26
<b>0,63</b>	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30
<b>0,75</b>	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30
<b>0,88</b>	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30
<b>1,00</b>	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30	1,30
$N_{R,k}$ [kN] for $t_{N1}$	0,40	2,16*	2,16*	2,16*	2,16*	2,16*	2,16*	2,16*	2,16*	2,16*	2,16*	$N_{R,k}$ [kN]
<b>0,50</b>	2,28*	2,28*	2,28*	2,28*	2,28*	2,28*	2,28*	2,28*	2,28*	2,28*	2,28*	2,28*
<b>0,55</b>	2,71*	2,71*	2,71*	2,71*	2,71*	2,71*	2,71*	2,71*	2,71*	2,71*	2,71*	2,71*
<b>0,60</b>	3,04	3,14	3,14*	3,14*	3,14*	3,14*	3,14*	3,14*	3,14*	3,14*	3,14*	3,14*
<b>0,63</b>	3,04	3,25	3,40	3,40	3,40*	3,40*	3,40*	3,40*	3,40*	3,40*	3,40*	3,40*
<b>0,75</b>	3,04	3,25	3,40	3,40	3,40*	3,40*	3,40*	3,40*	3,40*	3,40*	3,40*	3,40*
<b>0,88</b>	3,04	3,25	3,45	3,66	3,87	4,08	4,10	4,10*	4,10*	4,10*	4,10*	4,10*
<b>1,00</b>	3,04	3,25	3,45	3,66	3,87	4,08	4,28	4,49	4,70	4,90	4,90	4,90
$\max u$ [mm] for $D_F$	30	0,9	0,9	0,9	0,9	0,9	0,9	0,9	0,9	0,9	0,9	$\max u$ [mm] for $D_F$
<b>40</b>	1,4	1,4	1,4	1,4	1,4	1,4	1,4	1,4	1,4	1,4	1,4	1,4
<b>60</b>	1,8	1,8	1,8	1,8	1,8	1,8	1,8	1,8	1,8	1,8	1,8	1,8
<b>80</b>	2,3	2,3	2,3	2,3	2,3	2,3	2,3	2,3	2,3	2,3	2,3	2,3
<b>100</b>	2,8	2,8	2,8	2,8	2,8	2,8	2,8	2,8	2,8	2,8	2,8	2,8
<b>120</b>	3,2	3,2	3,2	3,2	3,2	3,2	3,2	3,2	3,2	3,2	3,2	3,2
<b><math>\geq 140</math></b>	3,7	3,7	3,7	3,7	3,7	3,7	3,7	3,7	3,7	3,7	3,7	3,7

- The values indicated above, depending on the screw depth  $l_g$  shall apply to  $k_{mod} = 0,90$  and the timber strength class C24 ( $\rho_k = 350 \text{ kg/m}^3$ ). For other values of  $k_{mod}$  and strength classes see Annex 3.
- For  $t_{N2}$  made of S320GD or S350GD the indicated values  $V_{R,k}$  can be increased by 8,3%.
- For  $t_{N1}$  made of S320GD or S350GD the values  $N_{R,k}$  marked with \* can be increased by 8,3%.

**Fastening screws for sandwich panels**

**Self-drilling screw JT2-D-2-6,5/7,0xL**

with hexagon head and sealing washer  $\geq \varnothing 22 \text{ mm}$

Annex 15