

Approval body for construction products  
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and  
Laender Governments



## European Technical Assessment

**ETA-18/0764**  
**of 2 October 2018**

English translation prepared by DIBt - Original version in German language

### General Part

Technical Assessment Body issuing the  
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Bucan Concrete Screw BBS-SK 6

Product family  
to which the construction product belongs

Fasteners for use in concrete for redundant  
non-structural systems

Manufacturer

Bucan Befestigungstechnik AG  
Althardstrasse 147  
8105 REGENSDORF  
SCHWEIZ

Manufacturing plant

Bucan Befestigungstechnik AG Werke

This European Technical Assessment  
contains

14 pages including 3 annexes which form an integral part  
of this assessment

This European Technical Assessment is  
issued in accordance with Regulation (EU)  
No 305/2011, on the basis of

EAD 330747-00-0601

**European Technical Assessment**

**ETA-18/0764**

English translation prepared by DIBt

**Page 2 of 14 | 2 October 2018**

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

## Specific Part

### 1 Technical description of the product

The Bucan concrete screw BBS-SK 6 is an anchor made of galvanised steel of size 6. The anchor is screwed into a predrilled cylindrical drill hole. The special thread of the anchor cuts an internal thread into the member while setting. The anchorage is characterised by mechanical interlock in the special thread.

The product description is given in Annex A.

### 2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Safety in case of fire (BWR 2)

| Essential characteristic | Performance           |
|--------------------------|-----------------------|
| Reaction to fire         | Class A1              |
| Resistance to fire       | See Annex C 3 and C 4 |

#### 3.2 Safety in use (BWR 4)

| Essential characteristic   | Performance   |
|--|---------------|
| Characteristic resistance to tension load<br>(static and quasi-static loading) | See Annex C 1 |
| Characteristic resistance to shear load<br>(static and quasi-static loading)   | See Annex C 2 |

### 4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with European Assessment Document EAD No. 330747-00-0601, the applicable European legal act is: [97/161/EC].

The system to be applied is: 2+

**5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document**

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.

Issued in Berlin on 2 October 2018 by Deutsches Institut für Bautechnik

BD Dipl.-Ing. Andreas Kummerow  
Head of Department

*beglaubigt:*  
Baderschneider


Product in the installed condition




Steel 10B21




Stainless steel A2 /A4

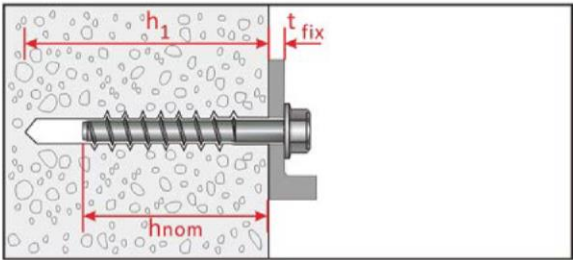


Hexagon Head : SK-H,-HF  
10B21 (SK6)  
A4 (SK6, SK8)  
A2 (SK8)

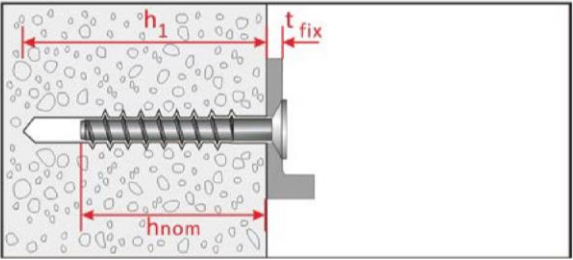

Countersunk Head : SK-C  
10B21 (Sk6)  
A4 (SK6)

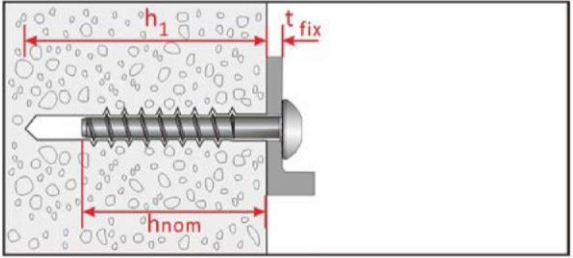

Pan Head : SK-P  
10B21 (SK6)  
A4 (SK6)

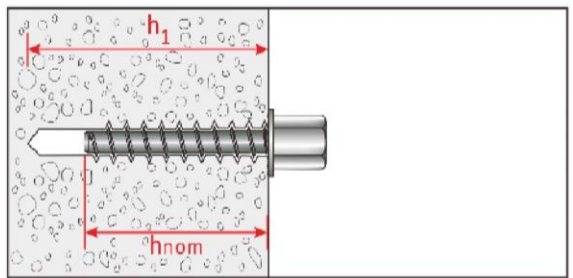

















Internal Thread : SK-I  
10B21 (SK6-M8, SK6-M10,  
SK6-M8/M10)

Bucan Concrete Screw BBS-SK 6

Product description  
Installed condition

Annex A1

**Table A1: Materials and screw types**

| Name  | Material                 |  |   |  |                 |                   |      |     |     |     |     |
|---|--------------------------|--|---|--|-----------------|-------------------|------|-----|-----|-----|-----|
| Screw anchor  | Head marking             |  | material  |  |                 |                   |      |     |     |     |     |
|   | SK                       |  | Steel 10B21 acc. To SAE-J403<br>zinc coating: electro plated (> 5 μm)<br>or mechanical plated (> 30 μm) |  |                 |                   |      |     |     |     |     |
|   | SK A4                    |  | Stainless steel 1.4401, 1.4404 (both A4)  |  |                 |                   |      |     |     |     |     |
|   | SK A2                    |  | Stainless steel 1.4301  |  |                 |                   |      |     |     |     |     |
|   | Anchor size / head types |  |   | SK 6   |                 |                   | SK 8 |     |     |     |     |
|   |                          |  |   | -H<br>-HF<br>-C<br>-P<br>-I                          | -H<br>-HF       | -C<br>-P          | -H   | -H  |     |     |     |
|   |                          |  |   | material   |                 | 10B21             | A4   |     | A2  | A4  |     |
|   |                          |  |   | Nominal value of the characteristic yield strength   | f <sub>yk</sub> | N/mm <sup>2</sup> | 780  | 640 | 432 | 640 | 640 |
|   |                          |  |   | Nominal value of the characteristic teisile strength | f <sub>uk</sub> | N/mm <sup>2</sup> | 870  | 800 | 540 | 800 | 800 |
|   | Elongation at rupture    |  | As  | [%]  | ≤ 8             |                   |      |     |     |     |     |
|  |                          |  | Hexagon washer head   |  |                 |                   |      |     |     |     |     |
|  |                          |  | 1) SK-H size 6 (10B21 steel)  |  |                 |                   |      |     |     |     |     |
|  |                          |  | 2) SK-H A4 size 6,8 (stainless A4)  |  |                 |                   |      |     |     |     |     |
|  |                          |  | 3) SK-H A2 size 8 (stainless A2)  |  |                 |                   |      |     |     |     |     |
|  |                          |  | Hexagon washer head   |  |                 |                   |      |     |     |     |     |
|  |                          |  | 3) SK-HF size 6 (10B21 steel)   |  |                 |                   |      |     |     |     |     |
|  |                          |  | 4) SK-HF A4 size 6 (stainless A4)   |  |                 |                   |      |     |     |     |     |
|  |                          |  | Countersunk head  |  |                 |                   |      |     |     |     |     |
|  |                          |  | 5) SK-C size 6 (10B21 steel)  |  |                 |                   |      |     |     |     |     |
|  |                          |  | 6) SK-C A4 size 6 (stainless A4)  |  |                 |                   |      |     |     |     |     |
|  |                          |  | Pan head  |  |                 |                   |      |     |     |     |     |
|  |                          |  | 7) SK-P size 6 (10B21 steel)  |  |                 |                   |      |     |     |     |     |
|  |                          |  | 8) SK-P A4 size 6 (stainless A4)  |  |                 |                   |      |     |     |     |     |
|  |                          |  | Internal thread head (10B21 steel)  |  |                 |                   |      |     |     |     |     |
|  |                          |  | 9) SK-I size 6 with internal thread M8 or M10   |  |                 |                   |      |     |     |     |     |
|  |                          |  | 10) SK-I size 6 with internal thread M8 and M10   |  |                 |                   |      |     |     |     |     |

**Bucan Concrete Screw BBS-SK 6**

**Product description**  
Materials and screw types

**Annex A2**


**Table A2: Dimensions and markings**

| Anchor size                   |           |      | SK 6           |    |                 |    |                | SK 8            |                 |
|-------------------------------|-----------|------|----------------|----|-----------------|----|----------------|-----------------|-----------------|
| Head type                     |           |      | H, HF, P       | C  | H, HF, P        | C  | I              | H               | H               |
| Material                      |           |      | Steel<br>10B21 |    | Stainless<br>A4 |    | Steel<br>10B21 | Stainless<br>A2 | Stainless<br>A4 |
| Nominal<br>Embedment<br>depth | $h_{nom}$ | [mm] | 55             |    | 70              |    | 55             | 52              | 52              |
| Length of<br>anchor           | min L     | [mm] | 60             | 65 | 75              | 80 | 57             | 55              | 55              |
|                               | max L     | [mm] | 140            |    |                 |    | 57             | 150             |                 |
| Thread diameter               | D         | [mm] | 7,5            |    |                 |    |                | 9,9             |                 |
| Shaft diameter                | d         | [mm] | 5,5            |    |                 |    |                | 7,4             |                 |
| Thread pitch                  | p         | [mm] | 4,45           |    |                 |    |                | 5,8             |                 |

Steel  
10B21




Head marking:  
Identifying mark of producer: SK  
Nominal size: e.g. 6mm  
Length L: 70mm


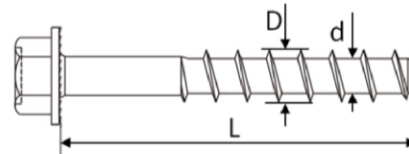


Reverse Locking  
Serrations

Stainless Steel  
A4




Head marking:  
Identifying mark of producer: SK  
Nominal size: e.g. 6mm  
Length L: 85mm  
Material: A4


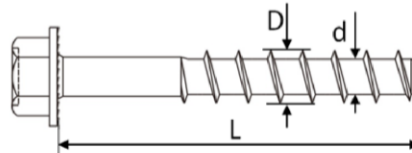


Reverse Locking  
Serrations

Stainless Steel  
A2



Head marking:  
Identifying mark of producer: SK  
Nominal size: e.g. 8mm  
Length L: 65mm  
Material: A2

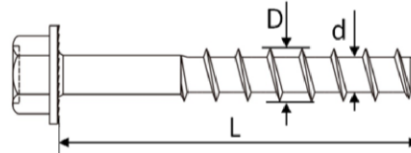

Reverse Locking  
Serrations

**Bucan Concrete Screw BBS-SK 6**

**Product description**  
Dimensions and markings

**Annex A3**



## Specifications of Intended use

### Anchorage subject to:

- Static and quasi-static loads:
- Used only for multiple use for non-structural application.
- Fire exposure: only for concrete C20/25 to C50/60.

### Base materials:

- Compacted reinforced or unreinforced normal weight concrete without fibres according to EN 206:2013,
- Strength classes C20/25 to C50/60 according to EN 206:2013,
- Non-cracked or cracked concrete: all sizes.

### Use conditions (Environmental conditions)

- Anchorages subject to dry internal conditions. (zinc plated steel and stainless steel)
- Anchorages subject to external atmospheric exposure (including industrial and marine environment) or exposure in permanently damp internal conditions if no particular aggressive conditions exist. (only stainless steel with marking A4)

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere or indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used)

### Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e. g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages are designed in accordance with FprEN 1992-4:2016 Design method A and TR 055, Edition December 2016

### Installation:

- Hammer drilling only: all sizes and all embedment depths.
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- In case of aborted hole: new drilling at a minimum distance away of twice the depth of the aborted hole or smaller distance if the aborted hole is filled with high strength mortar and if under shear or oblique tension load it is not the direction of the load application.
- After installation further turning of the anchor shall not be possible.
- The head of the anchor must be fully engaged on the fixture and show no signs of damage.

## Bucan Concrete Screw BBS-SK 6

### Intended use Specifications

## Annex B1



**Table B1: Installation parameters**

| Anchor size                           |                       |      | SK 6           |                 |      |                 |                 |    |                 | SK 8            |                 |
|---------------------------------------|-----------------------|------|----------------|-----------------|------|-----------------|-----------------|----|-----------------|-----------------|-----------------|
| Head type                             |                       |      | H,<br>HF       | P               | I    | C               | H,<br>HF        | P  | C               | H               | H               |
| Material                              |                       |      | Steel<br>10B21 |                 |      |                 | Stainless<br>A4 |    |                 | Stainless<br>A2 | Stainless<br>A4 |
| Nominal diameter of<br>drill bit      | d <sub>0</sub>        | [mm] | 6              |                 |      |                 |                 |    |                 | 8               |                 |
| Nominal embedment<br>depth            | h <sub>nom</sub>      | [mm] | 55             |                 |      |                 | 70              |    |                 | 52              |                 |
| Min. hole depth in<br>concrete        | h <sub>1</sub> ≥      | [mm] | 64             |                 |      |                 | 80              |    |                 | 65              |                 |
| Effective anchorage<br>depth          | h <sub>ef</sub>       | [mm] | 42,6           |                 |      |                 | 43,1            |    |                 | 22,2            |                 |
| Clearance hole                        | d <sub>f</sub>        | [mm] | 9              |                 |      |                 |                 |    |                 | 11              |                 |
| Thickness of fixture                  | t <sub>fix</sub>      | [mm] | 5-85           |                 | -    | 10-85           | 5-70            |    | 10-70           | 3-98            |                 |
| Installation torque <sup>1)</sup>     | T <sub>inst</sub>     | [Nm] | 20             | - <sup>1)</sup> | 20   | - <sup>1)</sup> | - <sup>1)</sup> |    | - <sup>1)</sup> | 31              |                 |
| Wrench size                           | WS                    | [mm] | 10             | -               | 12,7 | -               | -               |    | -               | 13              |                 |
| Torx size                             | TX                    | -    | -              | 40              | -    | 40              | -               | 40 | 40              | -               |                 |
| Max. power output,<br>machine setting | T <sub>max</sub><br>≤ | [Nm] | 80             |                 |      |                 | 120             | 80 | 80              | 185             |                 |

1) Screws can only be set using a impact screw driver.

**Table B2: Minimum thickness of member, minimum spacing and edge distance**


| Anchor size              |                  |      | SK 6           |  |  |                 | SK 8            |                 |
|--------------------------|------------------|------|----------------|--|--|-----------------|-----------------|-----------------|
|                          |                  |      | H, HF, C, P, I |  |  | H, HF, C, P     | H               | H               |
| Material                 |                  |      | Steel<br>10B21 |  |  | Stainless<br>A4 | Stainless<br>A2 | Stainless<br>A4 |
| Minimum member thickness | h <sub>min</sub> | [mm] | 100            |  |  | 110             | 100             |                 |
| Minimum edge distance    | c <sub>min</sub> | [mm] | 40             |  |  | 40              | 55              |                 |
| Minimum spacing          | s <sub>min</sub> | [mm] | 40             |  |  | 40              | 55              |                 |

**Bucan Concrete Screw BBS-SK 6**


**Intended use**  
Installation parameters

**Annex B2**


Installation instruction

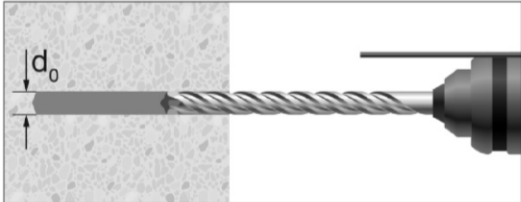


Drill the hole to the depth  $h_1$ .

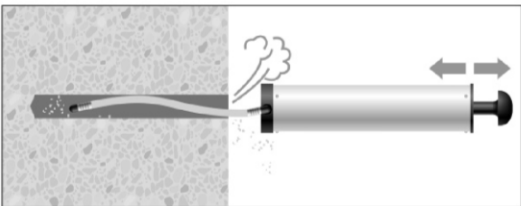

Clean the hole.

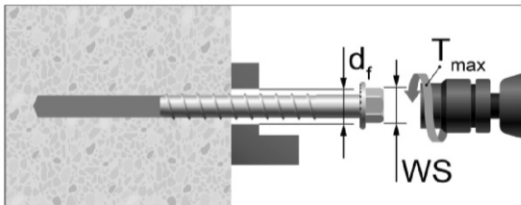

Screw in the anchor by using a torque wrench or an impact screw driver.  
In case of using torque wrench:  $T_{inst}$  acc. to Table B1.  
In case of using impact screw driver:  $T_{max}$  acc. to Table B1.  
WS= Wrench Size

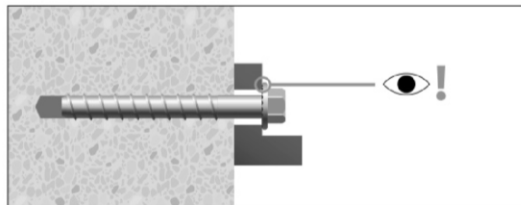

Control of complete setting, full contact of screw head with fixture part.

Bucan Concrete Screw BBS-SK 6

Intended Use  
Installation Instruction

Annex B3

**Table C1: Characteristic resistance under tension loading**

| Anchor size   |                    |        | SK 6               |     |     |                    |      |      | SK 8               |                 |
|---|--------------------|--------|--------------------|-----|-----|--------------------|------|------|--------------------|-----------------|
| Head type   |                    |        | H,HF,I             | C   | P   | H,HF               | C    | P    | H                  | H               |
| Material  |                    |        | Steel<br>10B21     |     |     | Stainless<br>A4    |      |      | Stainless<br>A2    | Stainless<br>A4 |
| Steel failure   |                    |        |                    |     |     |                    |      |      |                    |                 |
| Characteristic resistance   | N <sub>Rk,s</sub>  | [kN]   | 19,7               |     |     | 18,1               | 12,2 | 12,2 | 33,0               | 33,0            |
| Partial factor  | γ <sub>Ms</sub>    | [-]    | 1,4                |     |     | 1,5                |      |      | 1,5                |                 |
| Pull-out failure  |                    |        |                    |     |     |                    |      |      |                    |                 |
| Characteristic resistance in cracked and uncracked concrete C20/25          | N <sub>Rk,p</sub>  | [kN]   | 5,0                | 5,0 | 4,0 | 5,0                | 3,5  | 2,5  | 2,0                |                 |
| Increasing factors for N <sub>Rk,p</sub> in cracked or non-cracked concrete | ψ <sub>c</sub>     | C30/37 | 1,22               |     |     |                    |      |      | 1,20               |                 |
|   |                    | C40/50 | 1,41               |     |     |                    |      |      | 1,37               |                 |
|   |                    | C50/60 | 1,58               |     |     |                    |      |      | 1,51               |                 |
| Installation factor   | γ <sub>Inst</sub>  | [-]    | 1,0                |     |     | 1,0                |      |      | 1,0                |                 |
| Concrete cone failure   |                    |        |                    |     |     |                    |      |      |                    |                 |
| Effective anchorage depth   | h <sub>ef</sub>    | [mm]   | 42,6               |     |     | 43,1               |      |      | 22,2               |                 |
| Characteristic edge distance  | c <sub>cr,N</sub>  | [mm]   | 1,5h <sub>ef</sub> |     |     |                    |      |      |                    |                 |
| Characteristic spacing  | s <sub>cr,N</sub>  | [mm]   | 3,0h <sub>ef</sub> |     |     |                    |      |      |                    |                 |
| Installation factor   | γ <sub>Inst</sub>  | [-]    | 1,0                |     |     | 1,0                |      |      | 1,0                |                 |
| Factor for cracked concrete   | k <sub>cr,N</sub>  | [-]    | 7,7                |     |     |                    |      |      |                    |                 |
| Factor for uncracked concrete   | k <sub>ucr,N</sub> | [-]    | 11,0               |     |     |                    |      |      |                    |                 |
| Splitting failure   |                    |        |                    |     |     |                    |      |      |                    |                 |
| Proof of splitting is required  | -                  | [-]    | Yes                |     |     | Yes                |      |      | Yes                |                 |
| Characteristic edge distance for splitting                                  | c <sub>cr,sp</sub> | [mm]   | 1,5h <sub>ef</sub> |     |     | 1,5h <sub>ef</sub> |      |      | 2,5h <sub>ef</sub> |                 |
| Characteristic anchor spacing for splitting                                 | s <sub>cr,sp</sub> | [mm]   | 3,0h <sub>ef</sub> |     |     | 3,0h <sub>ef</sub> |      |      | 5,0h <sub>ef</sub> |                 |
| Installation factor   | γ <sub>Inst</sub>  | [-]    | 1,0                |     |     | 1,0                |      |      | 1,0                |                 |
| Factor for cracked concrete   | k <sub>cr,N</sub>  | [-]    | 7,7                |     |     |                    |      |      |                    |                 |
| Factor for uncracked concrete   | k <sub>ucr,N</sub> | [-]    | 11,0               |     |     |                    |      |      |                    |                 |

**Bucan Concrete Screw BBS-SK 6**

**Performance**  
Characteristic values under tension loading

**Annex C1**

**Table C2: Characteristic resistance under shear loading**

| Anchor size                                 |                |      | SK 6        |   |              |      |     | SK 8         |              |   |
|---|----------------|------|-------------|---|--------------|------|-----|--------------|--------------|---|
| Head type                                   |                |      | H,HF,I      | C | P            | H,HF | C   | P            | H            | H |
| Material                                    |                |      | Steel 10B21 |   | Stainless A4 |      |     | Stainless A2 | Stainless A4 |   |
| Setting depth                               | $h_{nom}$      | [mm] | 55          |   | 70           |      |     | 52           |              |   |
| Effective embedment depth                   | $h_{ef}$       | [mm] | 42,6        |   | 43,1         |      |     | 22,2         |              |   |
| Steel failure without lever arm             |                |      |             |   |              |      |     |              |              |   |
| Characteristic resistance                   | $V_{Rk,s}$     | [kN] | 7,9         |   | 9,0          | 6,1  | 6,1 | 13,2         |              |   |
| Ductility factor                            | $k_7$          | [-]  | 0,8         |   |              |      |     |              |              |   |
| Partial factor                              | $\gamma_{Ms}$  | [-]  | 1,5         |   | 1,25         |      |     | 1,25         |              |   |
| Steel failure with lever arm                |                |      |             |   |              |      |     |              |              |   |
| Characteristic resistance                   | $M^0_{Rk,s}$   | [Nm] | 15,9        |   | 14,6         | 9,9  | 9,9 | 35,9         |              |   |
| Partial factor                              | $\gamma_{Ms}$  | [-]  | 1,5         |   | 1,25         |      |     | 1,25         |              |   |
| Concrete pryout failure                     |                |      |             |   |              |      |     |              |              |   |
| k-factor                                    | $k_8$          | [-]  | 1,0         |   | 1,0          |      |     | 1,0          |              |   |
| Partial factor                              | $\gamma_{Mcp}$ | [-]  | 1,5         |   |              |      |     |              |              |   |
| Concrete edge failure                       |                |      |             |   |              |      |     |              |              |   |
| Effective length of anchor in shear loading | $\ell_f$       | [mm] | 42,6        |   | 43,1         |      |     | 22,2         |              |   |
| Effective diameter of anchor                | $d_{nom}$      | [mm] | 5,37        |   |              |      |     | 7,4          |              |   |
| Partial factor                              | $\gamma_{Mc}$  | [-]  | 1,5         |   |              |      |     |              |              |   |

**Bucan Concrete Screw BBS-SK 6**

**Performance**  
Characteristic values under shear loading

**Annex C2**

**Table C3: Characteristic values for resistance to fire (Tension)**

| Anchor size  |      |                 |                 | SK 6           |     |     |                 |     |     | SK 8            |                 |
|--|------|-----------------|-----------------|----------------|-----|-----|-----------------|-----|-----|-----------------|-----------------|
| Head type  |      |                 |                 | H,HF,I         | C   | P   | H,HF            | C   | P   | H               | H               |
| Material   |      |                 |                 | Steel<br>10B21 |     |     | Stainless<br>A4 |     |     | Stainless<br>A2 | Stainless<br>A4 |
| Partial factor   |      |                 | $\gamma_{M,fi}$ | [-]            | 1,0 |     |                 | 1,0 |     |                 | 1,0             |
| Steel failure  |      |                 |                 |                |     |     |                 |     |     |                 |                 |
| Characteristic resistance                              | R30  | $N_{Rk,s,fi}$   | [kN]            | 0,23           |     |     | 0,23            |     |     | 0,8             |                 |
|  | R60  | $N_{Rk,s,fi}$   | [kN]            | 0,20           |     |     | 0,20            |     |     | 0,7             |                 |
|  | R90  | $N_{Rk,s,fi}$   | [kN]            | 0,16           |     |     | 0,16            |     |     | 0,5             |                 |
|  | R120 | $N_{Rk,s,fi}$   | [kN]            | 0,11           |     |     | 0,11            |     |     | 0,4             |                 |
| Pull-out failure                                       |      |                 |                 |                |     |     |                 |     |     |                 |                 |
| Characteristic resistance<br>in concrete $\geq$ C20/25 | R30  | $N_{Rk,p,fi}$   | [kN]            | 1,3            |     | 1,0 | 1,3             | 0,9 | 0,6 | 0,5             |                 |
|  | R60  |                 |                 |                |     |     |                 |     |     |                 |                 |
|  | R90  |                 |                 |                |     |     |                 |     |     |                 |                 |
|  | R120 | $N_{Rk,p,fi}$   | [kN]            | 1,0            |     | 0,8 | 1,0             | 0,7 | 0,5 | 0,4             |                 |
| Concrete cone failure                                  |      |                 |                 |                |     |     |                 |     |     |                 |                 |
| Characteristic resistance<br>in concrete $\geq$ C20/25 | R30  | $N^0_{Rk,c,fi}$ | [kN]            | 2,0            |     |     | 2,1             |     |     | 0,4             |                 |
|  | R60  |                 |                 |                |     |     |                 |     |     |                 |                 |
|  | R90  |                 |                 |                |     |     |                 |     |     |                 |                 |
|  | R120 | $N^0_{Rk,c,fi}$ | [kN]            | 1,6            |     |     | 1,7             |     |     | 0,3             |                 |
| Effective embedment depth                              |      | $h_{ef}$        | [mm]            | 42,6           |     |     | 43,1            |     |     | 22,2            |                 |
| Minimum member thickness                               |      | $h_{min}$       | [mm]            | 100            |     |     | 110             |     |     | 100             |                 |
| Spacing  |      | $s_{cr,N,fi}$   | [mm]            | 4 $h_{ef}$     |     |     |                 |     |     |                 |                 |
|  |      | $s_{min}$       | [mm]            | 40             |     |     |                 |     |     | 55              |                 |
| Edge distance  |      | $c_{cr,N,fi}$   | [mm]            | 2 $h_{ef}$     |     |     |                 |     |     |                 |                 |
| Fire exposure from one side only                       |      | $c_{min}$       | [mm]            | 40             |     |     |                 |     |     | 55              |                 |
| Fire exposure from more than one side                  |      |                 |                 | $\geq 300$ mm  |     |     |                 |     |     |                 |                 |

**Bucan Concrete Screw BBS-SK 6**

**Performance**  
Characteristic values for resistance to fire

**Annex C3**

**Table C4: Characteristic values for resistance to fire (Shear)**

| Anchor size                     |            |                 |                 | SK 6                                |     |   |              |   |   | SK 8         |              |
|---------------------------------|------------|-----------------|-----------------|-------------------------------------|-----|---|--------------|---|---|--------------|--------------|
| Head type                       |            |                 |                 | H, HF, I                            | C   | P | H, HF        | C | P | H            | H            |
| Material                        |            |                 |                 | Steel 10B21                         |     |   | Stainless A4 |   |   | Stainless A2 | Stainless A4 |
| Partial factor                  |            |                 | $\gamma_{M,fi}$ | [-]                                 | 1.0 |   |              |   |   |              |              |
| Steel failure without level arm |            |                 |                 |                                     |     |   |              |   |   |              |              |
| Characteristic resistance       | R30        | $V_{Rk,s,fi}$   | [kN]            | 0,23                                |     |   | 0,23         |   |   | 0,8          |              |
|                                 | R60        | $V_{Rk,s,fi}$   | [kN]            | 0,20                                |     |   | 0,20         |   |   | 0,7          |              |
|                                 | R90        | $V_{Rk,s,fi}$   | [kN]            | 0,16                                |     |   | 0,16         |   |   | 0,5          |              |
|                                 | R120       | $V_{Rk,s,fi}$   | [kN]            | 0,11                                |     |   | 0,11         |   |   | 0,4          |              |
| Steel failure with level arm    |            |                 |                 |                                     |     |   |              |   |   |              |              |
| Characteristic resistance       | R30        | $M^0_{Rk,p,fi}$ | [Nm]            | 0,18                                |     |   | 0,18         |   |   | 0,9          |              |
|                                 | R60        | $M^0_{Rk,p,fi}$ | [Nm]            | 0,16                                |     |   | 0,16         |   |   | 0,7          |              |
|                                 | R90        | $M^0_{Rk,p,fi}$ | [Nm]            | 0,13                                |     |   | 0,13         |   |   | 0,5          |              |
|                                 | R120       | $M^0_{Rk,p,fi}$ | [Nm]            | 0,09                                |     |   | 0,09         |   |   | 0,4          |              |
| Pry-out failure                 |            |                 |                 |                                     |     |   |              |   |   |              |              |
| $k_8$                           |            |                 | [-]             | 1,0                                 |     |   | 1,0          |   |   | 1,0          |              |
| Characteristic resistance       | R30        | $V_{Rk,cp,fi}$  | [kN]            | 2,0                                 |     |   | 2,1          |   |   | 0,4          |              |
|                                 | R60        |                 |                 |                                     |     |   |              |   |   |              |              |
|                                 | R90        |                 |                 |                                     |     |   |              |   |   |              |              |
|                                 | R120       | $V_{Rk,cp,fi}$  | [kN]            | 1,6                                 |     |   | 1,7          |   |   | 0,3          |              |
| Concrete edge failure           |            |                 |                 |                                     |     |   |              |   |   |              |              |
| Characteristic resistance       | $\leq R90$ | $V_{Rk,c,fi}$   | [kN]            | $V^0_{Rk,c,fi} = 0,25 * V^0_{Rk,c}$ |     |   |              |   |   |              |              |
|                                 | R120       | $V_{Rk,c,fi}$   | [kN]            | $V^0_{Rk,c,fi} = 0,20 * V^0_{Rk,c}$ |     |   |              |   |   |              |              |

**Bucan Concrete Screw BBS-SK 6**

**Performance**  
Characteristic values for resistance to fire

**Annex C4**