

Approval body for construction products  
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and  
Laender Governments

★ ★ ★  
★ Designated  
according to  
Article 29 of Regula-  
tion (EU) No 305/2011  
and member of EOTA  
(European Organi-  
sation for Technical  
Assessment)  
★ ★ ★  
★ ★

## European Technical Assessment

ETA-12/0258  
of 22 July 2019

English translation prepared by DIBt - Original version in German language

### General Part

Technical Assessment Body issuing the  
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

fischer Superbond

Product family  
to which the construction product belongs

Bonded anchor for use in concrete

Manufacturer

fischerwerke GmbH & Co. KG  
Otto-Hahn-Straße 15  
79211 Denzlingen  
DEUTSCHLAND

Manufacturing plant

fischerwerke

This European Technical Assessment  
contains

42 pages including 3 annexes which form an integral part  
of this assessment

This European Technical Assessment is  
issued in accordance with Regulation (EU)  
No 305/2011, on the basis of

EAD 330499-01-0601

This version replaces

ETA-12/0258 issued on 19 May 2016

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

**Specific Part****1 Technical description of the product**

The injection system fischer Superbond is a bonded anchor for use in concrete consisting of a cartridge with injection mortar fischer FIS SB or a resin capsule fischer RSB and a steel element according to Annex A 5.

The steel element is placed into a drilled hole filled with injection mortar and is anchored via the bond between metal part, injection mortar and concrete.

The resin capsule is placed into the hole and the steel element is driven by machine with simultaneous hammering and turning. The anchor rod is anchored via the bond between steel element, chemical mortar and concrete.

The product description is given in Annex A.

**2 Specification of the intended use in accordance with the applicable European Assessment Document**

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

**3 Performance of the product and references to the methods used for its assessment****3.1 Mechanical resistance and stability (BWR 1)**

Essential characteristic	Performance
Characteristic resistance for static and quasi-static tension load	See Annex C 1 to C 10
Characteristic resistance for static and quasi-static shear load	See Annex C 1 to C 4
Displacements for static and quasi-static loads	See Annex C 11 to C 12
Characteristic resistance for seismic performance categories C1 and C2	See Annex C 13 to C 16
Durability	See Annex B 3

**3.2 Hygiene, health and the environment (BWR 3)**

Essential characteristic	Performance
Content, emission and/or release of dangerous substances	No performance assessed

**European Technical Assessment**

**ETA-12/0258**

English translation prepared by DIBt

Page 4 of 42 | 22 July 2019

**4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base**

In accordance with European Assessment Document EAD 330499-01-0601 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

**5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document**

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.

Issued in Berlin on 22 July 2019 by Deutsches Institut für Bautechnik

Dr.-Ing. Lars Eckfeldt  
p. p. Head of Department

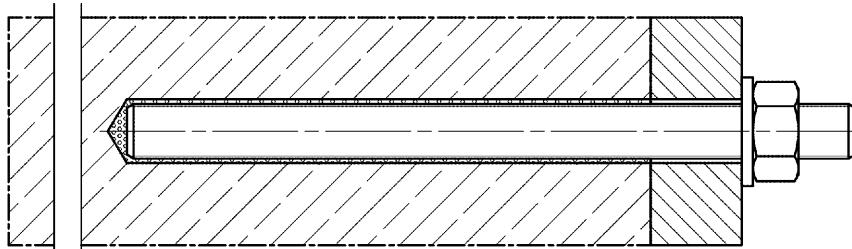
*beglaubigt:*  
Lange

English translation prepared by DIBt


## Installation conditions part 1

**anchor rod or fischer anchor rod RG M with fischer injection system FIS SB**


**Pre-positioned installation**



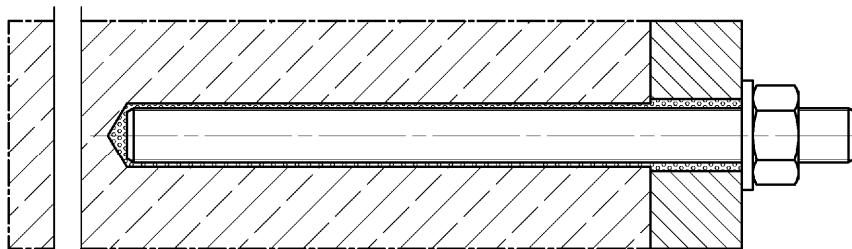**Push through installation** (annular gap filled with mortar)



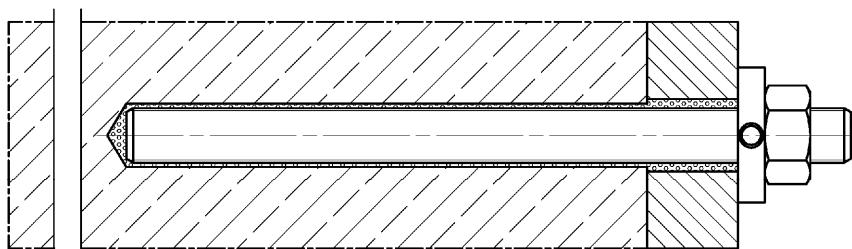**Pre-positioned or push through installation with subsequently injected filling disk**  
(annular gap filled with mortar)



Figures not to scale


fischer Superbond

**Product description**  
Installation conditions part 1

**Annex A 1**

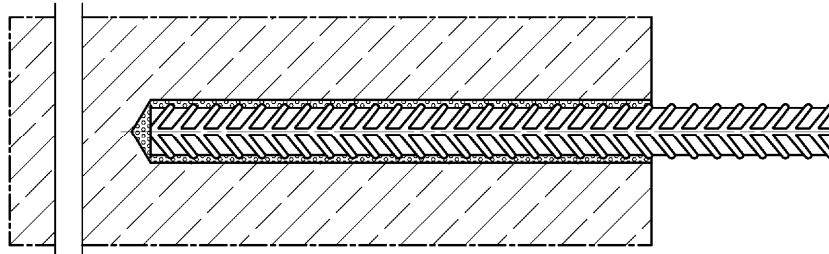
## Installation conditions part 2

### Reinforcing bar with fischer injection system FIS SB




### fischer rebar anchor FRA with fischer injection system FIS SB
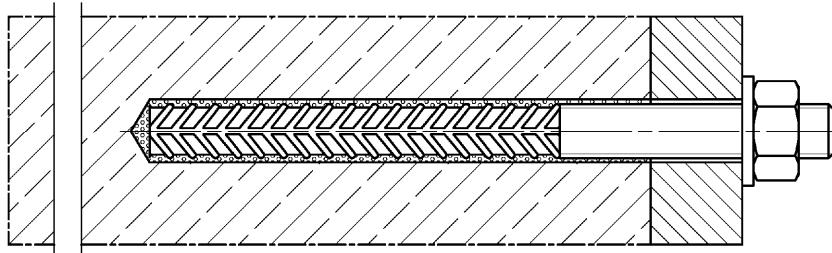
#### Pre-positioned installation



#### Push through installation (annular gap filled with mortar)

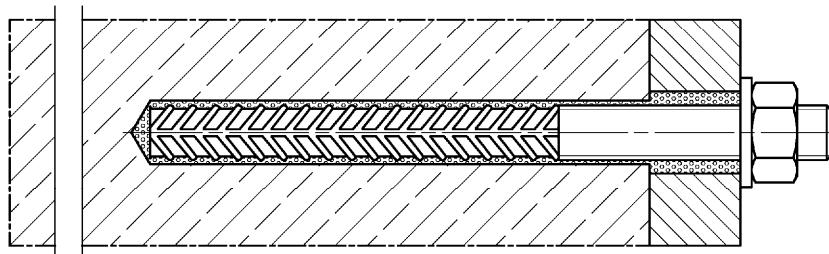

Figures not to scale

fischer Superbond


**Product description**  
Installation conditions part 2

**Annex A 2**

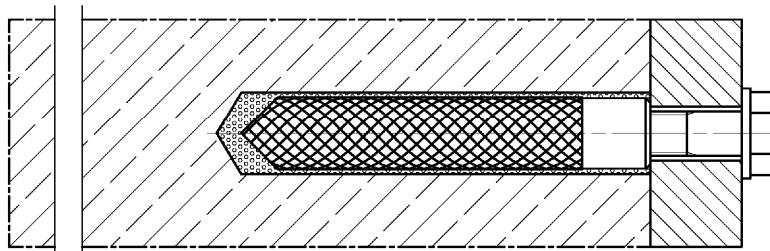
### Installation conditions part 3

fischer internal threaded anchor RG MI with fischer resin capsule system RSB or fischer injection system FIS SB

#### Pre-positioned installation




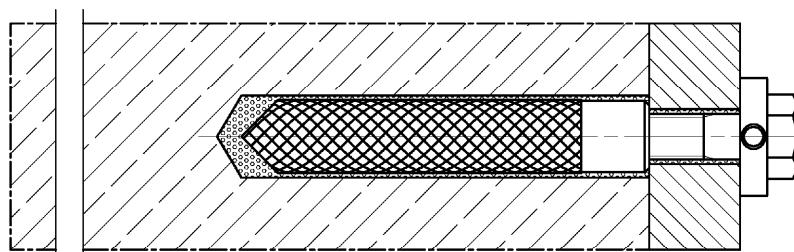Pre-positioned installation with subsequently injected filling disk (annular gap filled with mortar)




fischer anchor rod RG M with fischer resin capsule system RSB

#### Pre-positioned installation

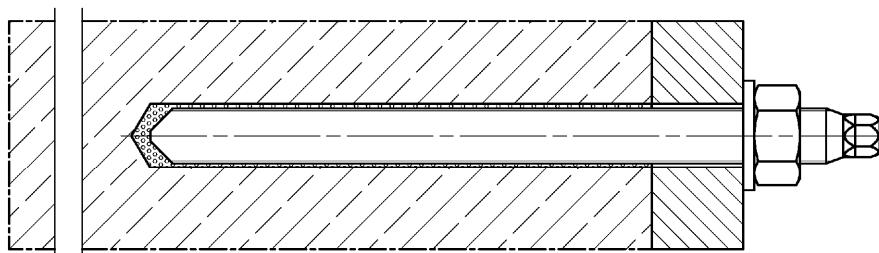

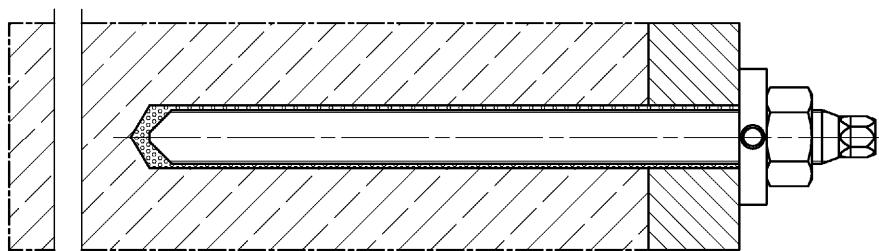Pre-positioned installation with subsequently injected filling disk (annular gap filled with mortar)



Figures not to scale


fischer Superbond

**Product description**  
Installation conditions part 3

**Annex A 3**
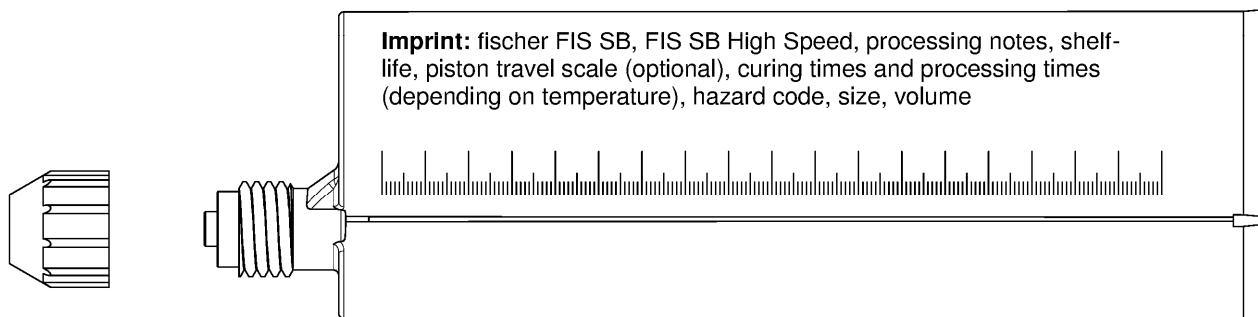
## Overview system components Part 1

**Mortar cartridge (shuttle cartridge) with sealing cap; Sizes: 390 ml, 585 ml, 1100 ml, 1500 ml**




**Resin capsule**


Sizes: 8, 10 mini, 10, 12 mini, 12, 16 mini, 16, 16 E, 20, 20 E / 24, 30



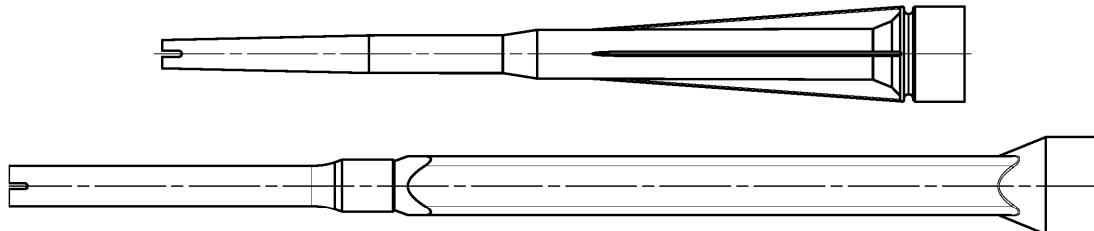**Static mixer FIS MR Plus or UMR**



**Injection adapter / extension tube for static mixer**



Figures not to scale

**fischer Superbond**

**System description**

Overview system components part 1;  
cartridges / capsule / static mixer / injection adapter

**Annex A 4**

## Overview system components Part 2


### anchor rod

Sizes: M8, M10, M12, M16, M20, M24, M27, M30



### fischer anchor rod RG M

Sizes: M8, M10, M12, M16, M20, M24, M30




### fischer internal threaded anchor RG MI


Size: M8, M10, M12, M16, M20


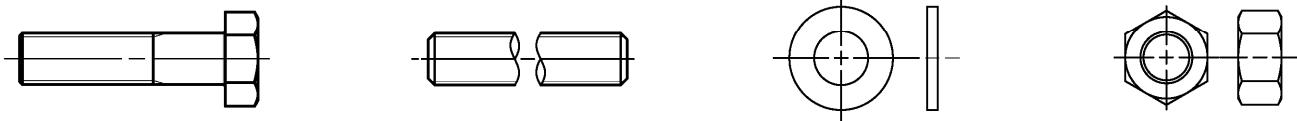
### Screw / threaded rod / washer / hexagon nut



### fischer filling disc with injection adapter

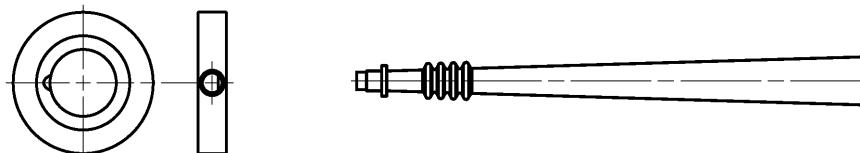

### Reinforcing bar

Nominal diameters:  $\phi 8, \phi 10, \phi 12, \phi 14, \phi 16, \phi 20, \phi 25, \phi 28, \phi 32$



### fischer rebar anchor FRA

Sizes: M12, M16, M20, M24



Figures not to scale

### fischer Superbond

**System description**  
Overview system components part 2;  
steel components

**Annex A 5**

## Overview system components Part 3

### Cleaning brush BS / BSB



### Blow-out pump ABG or ABP with cleaning nozzle



Figures not to scale

fischer Superbond

#### System description

Overview system components part 3;  
cleaning brush / blow-out pump / injection adapter

Annex A 6

**Table A7.1: Materials**

Part	Designation	Material		
1	Injection cartridge	Mortar, hardener, filler		
	Steel grade	Steel, zinc plated	Stainless steel A4 <sup>1)</sup>	High corrosion resistant steel C <sup>2)</sup>
2	Anchor rod	Property class 5.8 or 8.8; EN ISO 898-1:2013 zinc plated $\geq 5 \mu\text{m}$ , EN ISO 4042:1999 A2K or hot-dip galvanized $\geq 40 \mu\text{m}$ EN ISO 10684:2004 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 12\%$ fracture elongation	Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; 1.4062, 1.4662, 1.4462; EN 10088-1:2014 <sup>1)</sup> $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 12\%$ fracture elongation	Property class 50 or 80 EN ISO 3506-1:2009 or property class 70 with $f_{yk} = 560 \text{ N/mm}^2$ 1.4565; 1.4529; EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 12\%$ fracture elongation
		Fracture elongation $A_5 > 8\%$ , for applications without requirements for seismic performance category C2		
3	Washer ISO 7089:2000	zinc plated $\geq 5 \mu\text{m}$ , EN ISO 4042:1999 A2K or hot-dip galvanised $\geq 40 \mu\text{m}$ EN ISO 10684:2004	1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014	1.4565; 1.4529; EN 10088-1:2014
4	Hexagon nut	Property class 5 or 8; EN ISO 898-2:2012 zinc plated $\geq 5 \mu\text{m}$ , ISO 4042:1999 A2K or hot-dip galvanised $\geq 40 \mu\text{m}$ EN ISO 10684:2004	Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014	Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014
5	fischer internal threaded anchor RG MI	Property class 5.8 ISO 898-1:2013 zinc plated $\geq 5 \mu\text{m}$ , ISO 4042:1999 A2K	Property class 70 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014	Property class 70 EN ISO 3506-1:2009 1.4565; 1.4529; EN 10088-1:2014
6	Commercial standard screw or anchor / threaded rod for fischer internal threaded anchor RG MI	Property class 5.8 or 8.8; EN ISO 898-1:2013 zinc plated $\geq 5 \mu\text{m}$ , ISO 4042:1999 A2K $A_5 > 8\%$ fracture elongation	Property class 70 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014 <sup>1)</sup> $A_5 > 8\%$ fracture elongation	Property class 70 EN ISO 3506-1:2009 1.4565; 1.4529; EN 10088-1:2014 $A_5 > 8\%$ fracture elongation
7	fischer filling disk FFD similar to DIN 6319-G	zinc plated $\geq 5 \mu\text{m}$ , EN ISO 4042:1999 A2K or hot-dip galvanised $\geq 40 \mu\text{m}$ EN ISO 10684:2004	1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014	1.4565; 1.4529; EN 10088-1:2014
8	Reinforcing bar EN 1992-1-1:2004 and AC:2010, Annex C	Bars and de-coiled rods, class B or C with $f_{yk}$ and $k$ according to NDP or NCL of EN 1992-1-1:2004+AC:2010 $f_{uk} = f_{ik} = k \cdot f_{yk}$		
9	fischer rebar anchor FRA	Rebar part: Bars and de-coiled rods class B or C with $f_{yk}$ and $k$ according to NDP or NCL of EN 1992-1-1:2004+AC:2010 $f_{uk} = f_{ik} = k \cdot f_{yk}$	Threaded part: Property class 70 or 80 EN ISO 3506-1:2009 1.4401, 1.4404, 1.4571, 1.4578, 1.4439, 1.4362, 1.4062 EN 10088-1:2014 <sup>1)</sup> 1.4565; 1.4529 EN 10088-1:2014 <sup>2)</sup>	
<sup>1)</sup> acc. to EN 10088-1:2014 Corrosion resistance class CRC III acc. to EN 1993-1-4:2015 <sup>2)</sup> acc. to EN 10088-1:2014 Corrosion resistance class CRC V acc. to EN 1993-1-4:2015				
<b>fischer Superbond</b>				
<b>Product description</b> Materials				
<b>Annex A 7</b>				


## Specifications of intended use (part 1)

**Table B1.1:** Overview use and performance categories, injection mortar system FIS SB

Anchorage subject to		FIS SB with ...																		
		anchor rod		fischer internal threaded anchor RG MI		Reinforcing bar		fischer rebar anchor FRA												
		all sizes																		
		Nominal drill bit diameter ( $d_0$ ) 12 mm to 35 mm																		
		not permitted																		
Static and quasi static load, in	uncracked concrete	all sizes	Tables: C1.1 C4.1 C5.1 C11.1	all sizes	Tables: C2.1 C4.1 C7.1 C11.2	all sizes	Tables: C3.1 C4.1 C9.1 C12.1	all sizes	Tables: C3.2 C4.1 C10.1 C12.2											
	cracked concrete																			
Seismic performance category (only hammer drilling with standard / hollow drill bits)	C1	all sizes	Tables: C13.1 C14.2 C15.1	---		all sizes	Tables: C14.1 C14.2 C15.2	---	---											
	C2			M12	Tables: C13.1 C14.2 C16.1															
Use category	I1	dry or wet concrete																		
	I2	water filled hole																		
Installation direction		D3 (downward and horizontal and upwards (overhead) installation)																		
Installation method		pre-positioned or push through installation																		
Installation temperature		FIS SB: $T_{i,min} = -15^\circ\text{C}$ to $T_{i,max} = +40^\circ\text{C}$ FIS SB High Speed: $T_{i,min} = -20^\circ\text{C}$ to $T_{i,max} = +40^\circ\text{C}$																		
In-service temperature	Temperature range I	-40 °C to +40 °C		$T_{st} = +40^\circ\text{C}$ / $T_{lt} = +24^\circ\text{C}$																
	Temperature range II	-40 °C to +80 °C		$T_{st} = +80^\circ\text{C}$ / $T_{lt} = +50^\circ\text{C}$																
	Temperature range III	-40 °C to +120 °C		$T_{st} = +120^\circ\text{C}$ / $T_{lt} = +72^\circ\text{C}$																
	Temperature range IV	-40 °C to +150 °C		$T_{st} = +150^\circ\text{C}$ / $T_{lt} = +90^\circ\text{C}$																
fischer Superbond																				
Intended use		Specifications (part 1), fischer injection mortar system FIS SB																		

## Specifications of intended use (part 2)

**Table B2.1:** Overview use and performance categories, resin capsule system RSB

Anchorage subject to		RSB with ...											
		fischer anchor rod RG M 	fischer internal threaded anchor RG MI 										
Hammer drilling with standard drill bit 		all sizes											
Hammer drilling with hollow drill bit (fischer "FHD", Heller "Duster Expert", Bosch „Speed Clean“, Hilti "TE-CD, TE-YD") 		Nominal drill bit diameter ( $d_0$ ) 12 mm to 35 mm		all sizes									
Diamond drilling 		all sizes <sup>1)</sup>											
Static and quasi static load, in	uncracked concrete	all sizes	Tables: C1.1 C4.1 C6.1 C11.1	all sizes	Tables: C2.1 C4.1 C8.1 C11.2								
	cracked concrete	all sizes <sup>1)</sup>		all sizes <sup>1)</sup>									
Seismic performance category (only hammer drilling with standard / hollow drill bits)	C1	all sizes	Tables: C13.1 C14.2 C15.1	---									
	C2	---		---									
Use category	I1 dry or wet concrete	all sizes											
	I2 water filled hole	all sizes											
Installation direction	D3 (downward and horizontal and upwards (overhead) installation)												
Installation method	only pre-positioned installation												
Installation temperature	$T_{i,min} = -30^\circ\text{C}$ to $T_{i,max} = +40^\circ\text{C}$												
In-service temperature	Temperature range I	-40 °C to +40 °C	$T_{st} = +40^\circ\text{C} / T_{lt} = +24^\circ\text{C}$										
	Temperature range II	-40 °C to +80 °C	$T_{st} = +80^\circ\text{C} / T_{lt} = +50^\circ\text{C}$										
	Temperature range III	-40 °C to +120 °C	$T_{st} = +120^\circ\text{C} / T_{lt} = +72^\circ\text{C}$										
	Temperature range IV	-40 °C to +150 °C	$T_{st} = +150^\circ\text{C} / T_{lt} = +90^\circ\text{C}$										
<sup>1)</sup> For diamond drilling in cracked concrete only nominal drill bit diameters ( $d_0$ ) $\geq 18$ mm are permitted													
fischer Superbond					Annex B 2								
Intended use Specifications (part 2), fischer resin capsule system RSB													

## Specifications of intended use (part 3)

### Base materials:

- Compacted reinforced or unreinforced normal weight concrete without fibres of strength classes C20/25 to C50/60 according to EN 206:2013+A1:2016

### Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (zinc coated steel, stainless steel or high corrosion resistant steel).
- For all other conditions according to EN1993-1-4:2015 corresponding to corrosion resistance classes to Annex A 7 table 7.1.

### Design:

- Anchorages have to be designed by a responsible engineer with experience of concrete anchor design.
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e. g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages are designed in accordance with:  
EN 1992-4:2018 and EOTA Technical Report TR 055.  
Anchorages shall be positioned outside of critical regions (e.g. plastic hinges) of the concrete structure.  
Fastening in stand-off installation or with a grout layer under seismic action are not covered in this European Technical Assessment (ETA).


### Installation:

- Anchor installation is to be carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- In case of aborted hole: The hole shall be filled with mortar
- Anchorage depth should be marked and adhered to on installation
- Overhead installation is allowed

**Table B4.1:** Installation parameters for **anchor rods** in combination with **injection mortar system FIS SB**

Anchor rods	Thread	M8	M10	M12	M16	M20	M24	M27	M30
Width across flats	SW [mm]	13	17	19	24	30	36	41	46
Nominal drill hole diameter		10	12	14	18	24	28	30	35
Drill hole depth		$h_0 = h_{\text{ef}}$							
Effective embedment depth		60	60	70	80	90	96	108	120
h <sub>ef, min</sub>		160	200	240	320	400	480	540	600
h <sub>ef, max</sub>		40	45	55	65	85	105	120	140
Minimum spacing and minimum edge distance		9	12	14	18	22	26	30	33
Diameter of the clearance hole of the fixture		11	14	16	20	26	30	33	40
push through installation		$h_{\text{ef}} + 30 \ (\geq 100)$				$h_{\text{ef}} + 2d_0$			
Min. thickness of concrete member		[Nm]	10	20	40	60	120	150	200
Maximum torque moment for attachment of the fixture									300

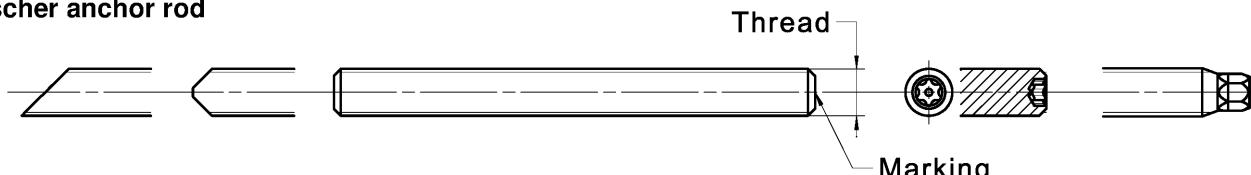fischer anchor rod




**Marking (on random place) fischer anchor rod:**

Property class 8.8, stainless steel, property class 80 and high corrosion resistant steel, property class 80: •

Stainless steel A4, property class 50 and high corrosion resistant steel, property class 50: ••

Alternatively: Colour coding according to DIN 976-1

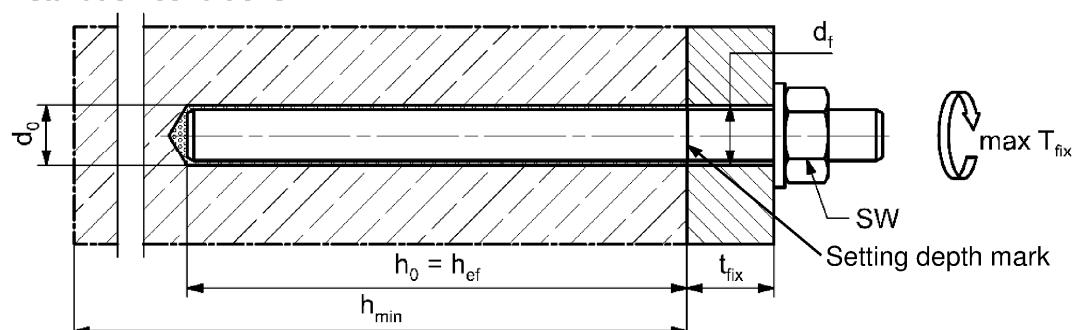**Installation conditions:**



**Commercial standard threaded rods, washers and hexagon nuts may also be used if the following requirements are fulfilled:**

- Materials, dimensions and mechanical properties according to Annex A 7, Table A7.1
- Inspection certificate 3.1 according to EN 10204:2004, the documents have to be stored
- Setting depth is marked

Figures not to scale

fischer Superbond

**Intended use**


Installation parameters for anchor rods in combination with injection mortar system FIS SB

**Annex B 4**

**Table B5.1:** Installation parameters for fischer anchor rods RG M in combination with resin capsule system RSB

Anchor rod RG M	Thread	M8	M10	M12	M16	M20	M24	M30
Width across flats	SW	13	17	19	24	30	36	46
Nominal drill hole diameter	$d_0$	10	12	14	18	25	28	35
Drill hole depth	$h_0$							
	$h_{\text{ef},1}$	---	75	75	95	---	---	---
Effective embedment depth	$h_{\text{ef},2}$	80	90	110	125	170	210	280
	$h_{\text{ef},3}$	---	150	150	190	210	---	---
Minimum spacing and minimum edge distance	$s_{\min} = c_{\min}$	40	45	55	65	85	105	140
Diameter of the pre-clearance hole of the positioned fixture	$d_f$	9	12	14	18	22	26	33
Min. thickness of concrete member	$h_{\min}$							
		$h_{\text{ef}} + 30$ ( $\geq 100$ )			$h_{\text{ef}} + 2d_0$			
Maximum torque moment for attachment of the fixture	max $T_{\text{fix}}$	[Nm]	10	20	40	60	120	150
								300

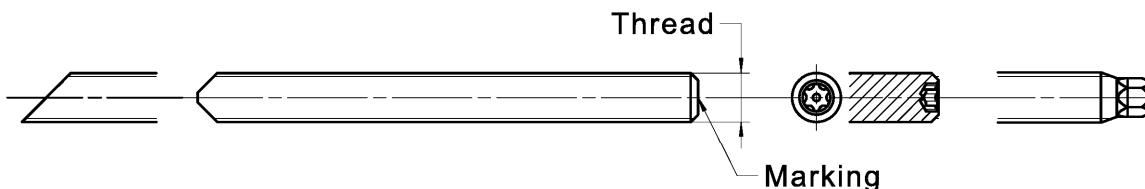
**fischer anchor rod RG M**



**Marking (on random place) fischer anchor rod RG M:**

Property class 8.8, stainless steel, property class 80 and high corrosion resistant steel, property class 80: •  
Stainless steel A4, property class 50 and high corrosion resistant steel, property class 50: ••  
Alternatively: Colour coding according to DIN 976-1

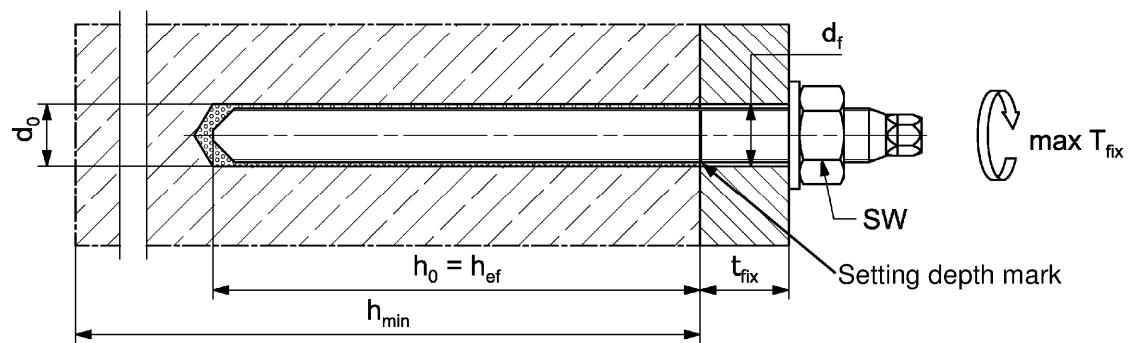**Installation conditions:**



Figures not to scale

**fischer Superbond**

**Intended use**



Installation parameters for fischer anchor rods RG M in combination with resin capsule system RSB

**Annex B 5**

**Table B6.1:** Installation parameters for fischer internal threaded anchors RG MI

Internal threaded anchor RG MI	Thread	M8	M10	M12	M16	M20
Sleeve diameter $d = d_H$	[mm]	12	16	18	22	28
Nominal drill hole diameter $d_0$		14	18	20	24	32
Drill hole depth $h_0$		$h_0 = h_{\text{ef}} = L_H$				
Effective embedment depth ( $h_{\text{ef}} = L_H$ )		90	90	125	160	200
Minimum spacing and minimum edge distance $s_{\min} = c_{\min}$		55	65	75	95	125
Diameter of clearance hole in the fixture $d_f$		9	12	14	18	22
Minimum thickness of concrete member $h_{\min}$		120	125	165	205	260
Maximum screw-in depth $l_{E,\max}$		18	23	26	35	45
Minimum screw-in depth $l_{E,\min}$		8	10	12	16	20
Maximum torque moment for attachment of the fixture $\max T_{\text{fix}}$	[Nm]	10	20	40	80	120

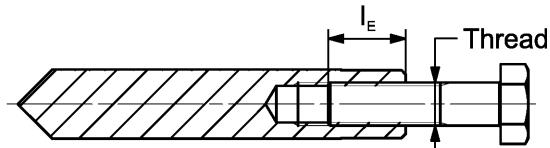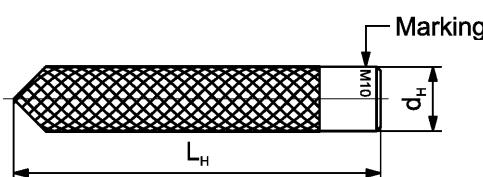**fischer internal threaded anchor RG MI**




**Marking:** Anchor size e. g.: **M10**

Stainless steel → additional **A4**; e.g.: **M10 A4**

High corrosion resistant steel → additional **C**; e.g.: **M10 C**

Retaining bolt or threaded rods (including nut and washer) must comply with the appropriate material and strength class of Annex A 7, Table A7.1

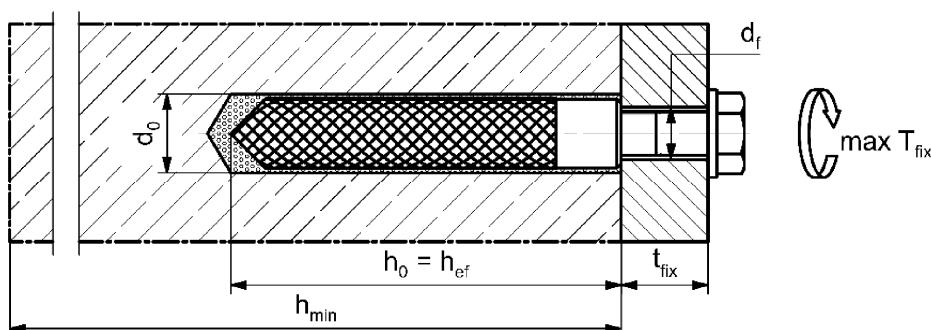**Installation conditions:**



Figures not to scale

**fischer Superbond**

**Intended use**  
Installation parameters for fischer internal threaded anchors RG MI

**Annex B 6**

**Table B7.1:** Installation parameters for reinforcing bars

Nominal diameter of the bar	$\phi$	8 <sup>1)</sup>	10 <sup>1)</sup>	12 <sup>1)</sup>	14	16	20	25	28	32			
Nominal drill hole diameter	$d_0$  [mm]	10	12	12	14	14	16	18	20	25	30	35	40
Drill hole depth											$h_0 = h_{\text{ef}}$		
Effective embedment depth		60	60	70	75	80	90	100	112	128			
		160	200	240	280	320	400	500	560	640			
Minimum spacing and minimum edge distance		40	45	55	60	65	85	110	130	160			
Minimum thickness of concrete member	$h_{\text{min}}$	$h_{\text{ef}} + 30$ ( $\geq 100$ )			$h_{\text{ef}} + 2d_0$								

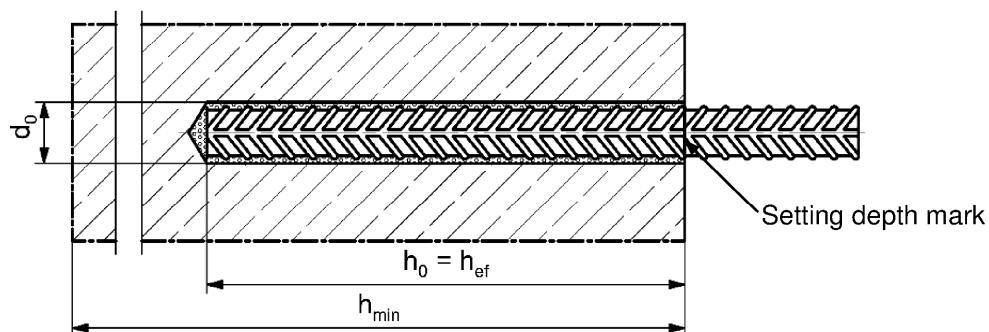
<sup>1)</sup> Both drill hole diameters can be used

#### Reinforcing bar



- The minimum value of related rib area  $f_{R,\text{min}}$  must fulfil the requirements of EN 1992-1-1:2004+AC:2010
- The rib height must be within the range:  $0,05 \cdot \phi \leq h_{\text{rib}} \leq 0,07 \cdot \phi$   
( $\phi$  = Nominal diameter of the bar,  $h_{\text{rib}}$  = rib height)

#### Installation conditions:



Figures not to scale

fischer Superbond

**Intended use**  
Installation parameters reinforcing bars


**Annex B 7**

**Table B8.1:** Installation parameters for fischer rebar anchor FRA

Rebar anchor FRA	Thread	M12 <sup>1)</sup>	M16	M20	M24
Nominal diameter of the bar	$\phi$	12	16	20	25
Width across flats	SW	19	24	30	36
Nominal drill hole diameter	$d_0$	14   16	20	25	30
Drill hole depth	$h_0$			$h_{\text{ef}} + l_e$	
Effective embedment depth	$h_{\text{ef},\text{min}}$	70	80	90	96
	$h_{\text{ef},\text{max}}$	140	220	300	380
Distance concrete surface to welded joint	$l_e$			100	
Minimum spacing and minimum edge distance	$s_{\text{min}} = c_{\text{min}}$	55	65	85	105
Diameter of clearance hole in the fixture	pre-positioned anchorage	≤ $d_f$	14	18	22
	push through anchorage	≤ $d_f$	18	22	26
Minimum thickness of concrete member	$h_{\text{min}}$	$h_0 + 30$ (≥ 100)		$h_0 + 2d_0$	
Maximum torque moment for attachment of the fixture	max $T_{\text{fix}}$ [Nm]	40	60	120	150

<sup>1)</sup> Both drill hole diameters can be used

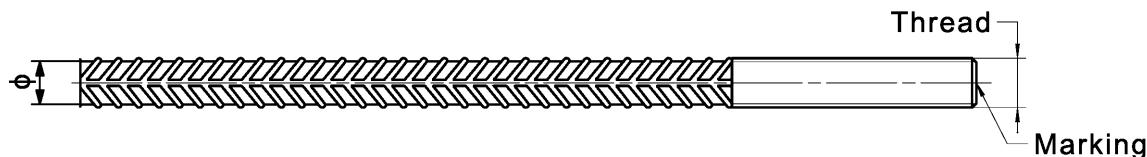
### fischer rebar anchor FRA



Marking frontal e. g.:

- FRA (for stainless steel);
- FRA C (for high corrosion resistant steel)

### Installation conditions:

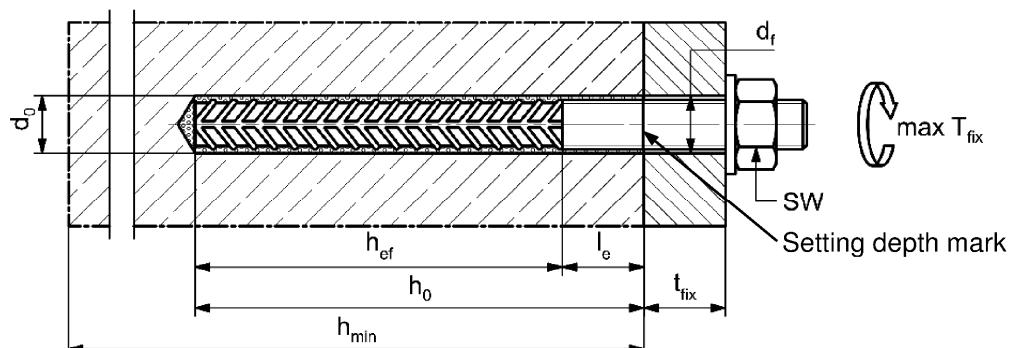

Figures not to scale

### fischer Superbond

**Intended use**  
Installation parameters rebar anchor FRA

**Annex B 8**

**Table B9.1:** Dimension of resin capsule RSB

Resin capsule RSB		RSB 8	RSB 10 mini	RSB 10	RSB 12 mini	RSB 12	RSB 16 mini	RSB 16	RSB 16 E	RSB 20	RSB 20 E / 24	RSB 30	
Capsule diameter	d <sub>P</sub>	9,0		10,5		12,5		16,5		23,0		27,5	
Capsule length	L <sub>P</sub>	[mm]	85	72	90	72	97	72	95	123	160	190	260



**Table B9.2:** Assignment of resin capsule RSB to fischer anchor rod RG M

Anchor rod RG M		M8	M10	M12	M16	M20	M24	M30
Effective embedment depth	h <sub>ef, 1</sub> [mm]	---	75	75	95	---	---	---
Related capsule RSB		---	10 mini	12 mini	16 mini	---	---	---
Effective embedment depth	h <sub>ef, 2</sub> [mm]	80	90	110	125	170	210	280
Related capsule RSB		8	10	12	16	20	20 E / 24	30
Effective embedment depth	h <sub>ef, 3</sub> [mm]	---	150	150	190	210	---	---
Related capsule RSB		---	2 x 10 mini	2 x 12 mini	2 x 16 mini	20 E / 24	---	---

**Table B9.3:** Assignment of resin capsule RSB to fischer internal threaded anchor RG MI

Internal threaded anchor RG MI		M8	M10	M12	M16	M20
Effective embedment depth	h <sub>ef</sub> [mm]	90	90	125	160	200
Related capsule RSB		10	12	16	16 E	20 E / 24

Figures not to scale

fischer Superbond

**Intended use**


Dimensions of the capsules; Assignment of the capsule to the fischer anchor rod RG M and fischer internal threaded anchor RG MI

**Annex B 9**

**Table B10.1:** Parameters of the cleaning brush BS / BSB (steel brush)

The size of the cleaning brush refers to the drill hole diameter

Nominal drill hole diameter	$d_0$	[mm]	10	12	14	16	18	20	24	25	28	30	32	35	40
Steel brush diameter	$d_b$		11	14	16		20		25	26	27	30		40	42

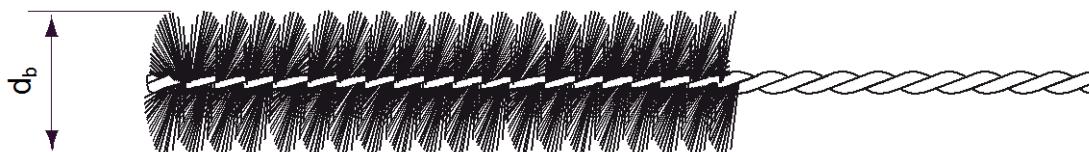

**Table B10.2:** Maximum processing time of the mortar and minimum curing time

(During the curing time of the mortar the concrete temperature may not fall below the listed minimum temperature. Minimal cartridge temperature +5 °C; minimal resin capsule temperature -15 °C)





Temperature at anchoring base [°C]	Maximum processing time $t_{work}$		Minimum curing time $t_{cure}$		
	FIS SB	FIS SB High Speed	FIS SB	FIS SB High Speed	RSB
-30 to -20	---	---	---	---	120 h
> -20 to -15	---	60 min	---	24 h	48 h
> -15 to -10	60 min	30 min	36 h	8 h	30 h
> -10 to -5	30 min	15 min	24 h	3 h	16 h
> -5 to ±0	20 min	10 min	8 h	2 h	10 h
> ±0 to +5	13 min	5 min	4 h	1 h	45 min
> +5 to +10	9 min	3 min	2 h	45 min	30 min
> +10 to +20	5 min	2 min	1 h	30 min	20 min
> +20 to +30	4 min	1 min	45 min	15 min	5 min
> +30 to +40	2 min	---	30 min	---	3 min

Figures not to scale

fischer Superbond	<b>Annex B 10</b>
<b>Intended use</b> Cleaning brush (steel brush) Processing time and curing time	



## Installation instructions part 1; Injection mortar system FIS SB
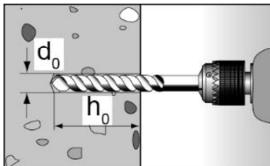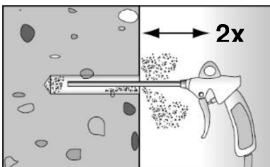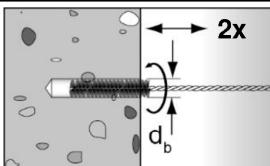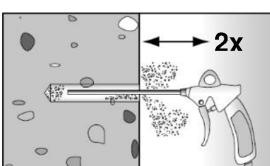
### Drilling and cleaning the hole (hammer drilling with standard drill bit)

1		Drill the hole. Nominal drill hole diameter $d_0$ and drill hole depth $h_0$ see tables B4.1, B6.1, B7.1, B8.1
2		Clean the drill hole: Blow out the drill hole twice, with oil free compressed air ( $p \geq 6$ bar) In uncracked concrete the use of the manual blow-out pump ABG is possible (Installation parameters: $d_0 < 18$ mm and $h_{ef} < 10d$ ) 
3		Brush the drill hole twice. For drill hole diameter $\geq 30$ mm use a power drill. For deep holes use an extension. Corresponding brushes see table B10.1
4		Clean the drill hole: Blow out the drill hole twice, with oil free compressed air ( $p \geq 6$ bar) In uncracked concrete the use of the manual blow-out pump ABG is possible (Installation parameters: $d_0 < 18$ mm and $h_{ef} < 10d$ ) 

Go to step 5 (Annex B 12)

### Drilling and cleaning the hole (hammer drilling with hollow drill bit)

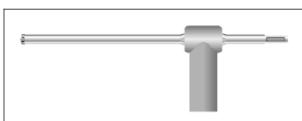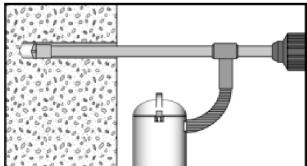1		Check a suitable hollow drill (see table B1.1) for correct operation of the dust extraction
2		Use a suitable dust extraction system, e. g. Bosch GAS 35 M AFC or a comparable dust extraction system with equivalent performance data. Drill the hole with hollow drill bit. The dust extraction system has to extract the drill dust nonstop during the drilling process and must be adjusted to maximum power. Nominal drill hole diameter $d_0$ and drill hole depth $h_0$ see tables B4.1, B6.1, B7.1, B8.1

Go to step 5 (Annex B 12)

fischer Superbond

**Intended use**  
Installation instructions part 1; injection mortar system FIS SB

**Annex B 11**

## Installation instructions part 2; injection mortar system FIS SB

### Preparing the cartridge

5		Remove the sealing cap Screw on the static mixer (the spiral in the static mixer must be clearly visible)	
6			Place the cartridge into the dispenser
7			Extrude approximately 10 cm of material out until the resin is evenly grey in colour. Do not use mortar that is not uniformly grey

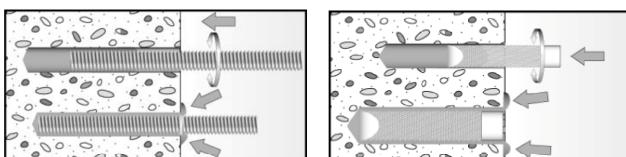

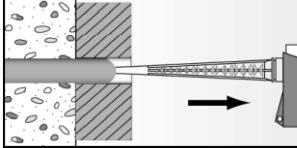
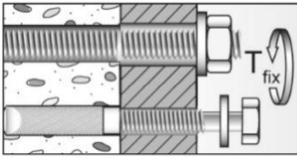
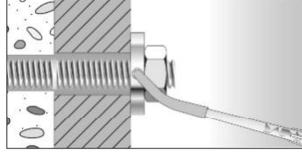
### Injection of the mortar

8			
	Fill approximately 2/3 of the drill hole with mortar. Always begin from the bottom of the hole and avoid bubbles	For drill hole depth $\geq 150$ mm use an extension tube	For overhead installation, deep holes ( $h_0 > 250$ mm) or drill hole diameter ( $d_0 \geq 40$ mm) use an injection-adapter




Go to step 9 (Annex B 13)

## Installation instructions part 3; injection mortar system FIS SB

### Installation of anchor rods or fischer internal threaded anchors RG MI

9		<p>Only use clean and oil-free anchor elements. Mark the setting depth of the anchor. Push the anchor rod or fischer internal threaded RG MI anchor down to the bottom of the hole, turning it slightly while doing so. After inserting the anchor element, excess mortar must be emerged around the anchor element. If not, pull out the anchor element immediately and reinject mortar.</p>
	 <p>For overhead installations support the anchor rod with wedges. (e. g. fischer centering wedges)</p>	 <p>For push through installation fill the annular gap with mortar</p>
11	 <p>Wait for the specified curing time <math>t_{\text{cure}}</math> see <b>table B10.2</b></p>	 <p>Mounting the fixture max <math>T_{\text{fix}}</math> see <b>tables B4.1 and B6.1</b></p>
Option		<p>After the minimum curing time is reached, the gap between anchor and fixture (annular clearance) may be filled with mortar via the fischer filling disc FFD. Compressive strength <math>\geq 50 \text{ N/mm}^2</math> (e.g. fischer injection mortars FIS HB, FIS SB, FIS V, FIS EM Plus) ATTENTION: Using fischer filling disk FFD reduces <math>t_{\text{fix}}</math> (usable length of the anchor)</p>

### Installation reinforcing bars and fischer rebar anchor FRA

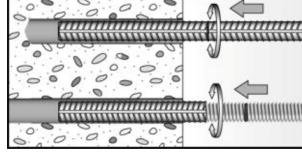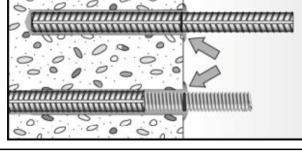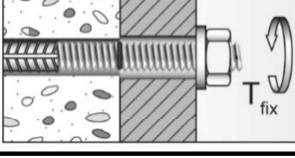10		<p>Only use clean and oil-free reinforcing bars or fischer FRA. Mark the setting depth. Turn while using force to push the reinforcement bar or the fischer FRA into the filled hole up to the setting depth mark</p>
		<p>When the setting depth mark is reached, excess mortar must be emerged from the mouth of the drill hole. If not, pull out the anchor element immediately and reinject mortar.</p>
11	 <p>Wait for the specified curing time <math>t_{\text{cure}}</math> see <b>table B10.2</b></p>	 <p>Mounting the fixture max <math>T_{\text{fix}}</math> see <b>table B8.1</b></p>

fischer Superbond



#### Intended use

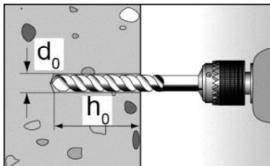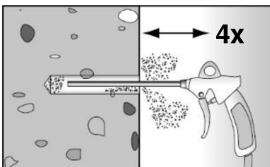Installation instructions part 3; injection mortar system FIS SB

Annex B 13







## Installation instructions part 4; resin capsule RSB

Drilling and cleaning the hole (hammer drilling with standard drill bit)

1		Drill the hole. Nominal drill hole diameter $d_0$ and drill hole depth $h_0$ see <b>tables B5.1 and B6.1</b>
2		Clean the drill hole: Blow out the drill hole four times, with oil free compressed air ( $p \geq 6$ bar) In uncracked concrete the use of the manual blow-out pump ABG is possible (Installation parameters: $d_0 < 18$ mm and $h_{ef} < 10$ d) 

Go to step 6 (Annex B 15)

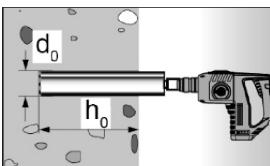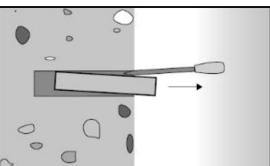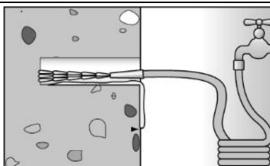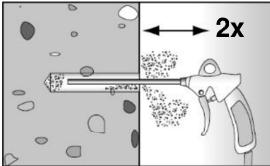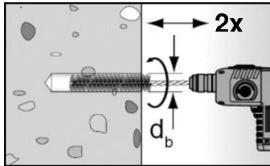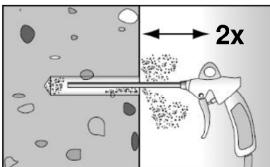Drilling and cleaning the hole (wet drilling with diamond drill bit)

1		Drill the hole. Drill hole diameter $d_0$ and drill hole depth $h_0$ see <b>tables B5.1 and B6.1</b>		Break the drill core and remove it
2		Flush the drill hole with clean water until it flows clear		
3		Blow out the drill hole twice, using oil-free compressed air ( $p > 6$ bar)		
4		Brush the drill hole twice using a power drill. Corresponding brushes see <b>table B10.1</b>		
5		Blow out the drill hole twice, using oil-free compressed air ( $p > 6$ bar)		

Go to step 6 (Annex B 15)






fischer Superbond

**Intended use**  
Installation instructions part 4; resin capsule RSB

**Annex B 14**
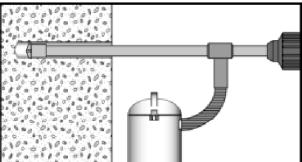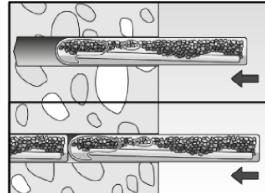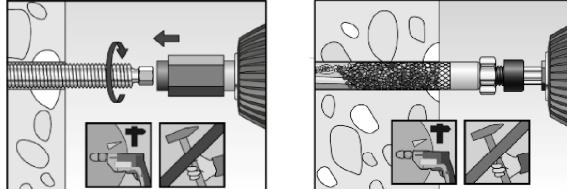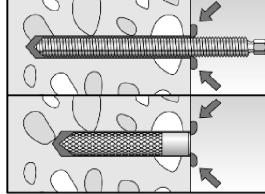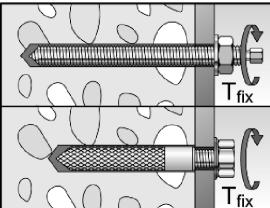
## Installation instructions part 5; resin capsule RSB

Drilling and cleaning the hole (hammer drilling with hollow drill bit)

1		Check a suitable hollow drill (see <b>table B2.1</b> ) for correct operation of the dust extraction
2		Use a suitable dust extraction system, e. g. Bosch GAS 35 M AFC or a comparable dust extraction system with equivalent performance data.  Drill the hole with hollow drill bit. The dust extraction system has to extract the drill dust nonstop during the drilling process and must be adjusted to maximum power. Nominal drill hole diameter $d_0$ and drill hole depth $h_0$ see <b>tables B5.1</b> and <b>B6.1</b>
Go to step 6 (Annex B 15)		
Installation fischer anchor rod RG M or fischer internal threaded anchor RG MI		
6		Insert the resin capsule into the drill hole by hand. Suitable resin capsule RSB or RSB mini see <b>table B9.2</b> .
		Depending on the anchor being installed, use a suitable setting tool
7		Only use clean and grease-free anchors. Using a suitable adapter, drive the fischer anchor rod RG M or the fischer internal threaded anchor RG MI into the capsule using a hammer drill set on rotary hammer action. Stop when the anchor reaches the bottom of the hole and is set to the correct embedment depth
8		When reaching the correct embedment depth, excess mortar must emerge from the mouth of the drill hole. If not, the anchor must be pulled out directly and a second resin capsule must be pushed into the drill hole. Setting process must be repeated (Step 7)
9		Wait for the specified curing time, $t_{cure}$ see <b>table B10.2</b>
10		 Mounting the fixture max $T_{fix}$ see <b>tables B5.1</b> and <b>B6.1</b>
fischer Superbond		
<b>Intended use</b> Installation instructions part 5; resin capsule RSB		<b>Annex B 15</b>

**Table C1.1:** Essential characteristics<sup>3)</sup> for the **steel bearing capacity** under tensile / shear load of **fischer anchor rods** and **standard threaded rods**

Anchor rod / standard threaded rod		M8	M10	M12	M16	M20	M24	M27	M30			
<b>Bearing capacity under tensile load, steel failure</b>												
Characteristic resistance $N_{Rk,s}$	Steel zinc plated	Property class	5.8	19(17)	29(27)	43	79	123	177	230	281	
			8.8	29(27)	47(43)	68	126	196	282	368	449	
			50	[kN]	19	29	43	79	123	177	230	281
			70		26	41	59	110	172	247	322	393
			80		30	47	68	126	196	282	368	449
	Stainless steel A4 and high corrosion resistant steel C		5.8									
			8.8									
			50									
			70									
			80									
<b>Partial factors<sup>1)</sup></b>												
Partial factor $\gamma_{Ms,N}$	Steel zinc plated	Property class	5.8									
			8.8									
			50	[ - ]								
	Stainless steel A4 and high corrosion resistant steel C		70									
			80									
<b>Bearing capacity under shear load, steel failure</b>												
<b>without lever arm</b>												
Characteristic resistance $V_{Rk,s}^0$	Steel zinc plated	Property class	5.8		9(8)	15(13)	21	39	61	89	115	141
			8.8		15(13)	23(21)	34	63	98	141	184	225
			50	[kN]	9	15	21	39	61	89	115	141
			70		13	20	30	55	86	124	161	197
			80		15	23	34	63	98	141	184	225
	Stainless steel A4 and high corrosion resistant steel C		5.8									
			8.8									
			50									
			70									
			80									
Ductility factor		k <sub>7</sub>	[ - ]								1,0	
<b>with lever arm</b>												
Characteristic resistance $M_{Rk,s}^0$	Steel zinc plated	Property class	5.8		19(16)	37(33)	65	166	324	560	833	1123
			8.8		30(26)	60(53)	105	266	519	896	1333	1797
			50	[Nm]	19	37	65	166	324	560	833	1123
			70		26	52	92	232	454	784	1167	1573
			80		30	60	105	266	519	896	1333	1797
	Stainless steel A4 and high corrosion resistant steel C		5.8									
			8.8									
			50									
			70									
			80									
<b>Partial factors<sup>1)</sup></b>												
Partial factor $\gamma_{Ms,V}$	Steel zinc plated	Property class	5.8									
			8.8									
			50	[ - ]								
	Stainless steel A4 and high corrosion resistant steel C		70									
			80									
<b>fischer Superbond</b>												
<b>Performance</b> Essential characteristics for the steel bearing capacity of fischer anchor rods and standard threaded rods								<b>Annex C 1</b>				

<sup>1)</sup> In absence of other national regulations

<sup>2)</sup> Only admissible for high corrosion resistant steel C, with  $f_y / f_{uk} \geq 0,8$  and  $A_s > 12\%$  (e.g. fischer anchor rods)

<sup>3)</sup> Values in brackets are valid for undersized threaded rods with smaller stress area  $A_s$  for hot dip galvanized standard threaded rods according to EN ISO 10684:2004+AC:2009

**Table C2.1:** Essential characteristics for the **steel bearing capacity** under tensile / shear load of **fischer internal threaded anchors RG MI**

fischer internal threaded anchors RG MI		M8	M10	M12	M16	M20	
<b>Bearing capacity under tensile load, steel failure</b>							
Charact. resistance with screw $N_{Rk,s}$	Property class 8.8	[kN]	19	29	43	79	
	Property class A4		29	47	68	108	
	Property class 70		26	41	59	110	
	C		26	41	59	110	
<b>Partial factors<sup>1)</sup></b>							
Partial factors $\gamma_{Ms,N}$	Property class 8.8	[-]			1,50		
	Property class A4				1,50		
	Property class 70				1,87		
	C				1,87		
<b>Bearing capacity under shear load, steel failure</b>							
<b>Without lever arm</b>							
Charact. resistance with screw $V^0_{Rk,s}$	Property class 8.8	[kN]	9,2	14,5	21,1	39,2	
	Property class A4		14,6	23,2	33,7	54,0	
	Property class 70		12,8	20,3	29,5	54,8	
	C		12,8	20,3	29,5	54,8	
Ductility factor		$k_7$	[-]			1,0	
<b>With lever arm</b>							
Charact. resistance with screw $M^0_{Rk,s}$	Property class 8.8	[Nm]	20	39	68	173	
	Property class A4		30	60	105	266	
	Property class 70		26	52	92	232	
	C		26	52	92	232	
<b>Partial factors<sup>1)</sup></b>							
Partial factors $\gamma_{Ms,V}$	Property class 8.8	[-]			1,25		
	Property class A4				1,25		
	Property class 70				1,56		
	C				1,56		
1) In absence of other national regulations							
<b>fischer Superbond</b>							
<b>Performance</b> Essential characteristics for the steel bearing capacity of fischer internal threaded anchor RG MI							
<b>Annex C 2</b>							

**Table C3.1:** Essential characteristics for the **steel bearing capacity** under tensile / shear load of **reinforcing bars**

Nominal diameter of the bar	$\phi$	8	10	12	14	16	20	25	28	32
<b>Bearing capacity under tensile load, steel failure</b>										
Characteristic resistance	$N_{Rk,s}$ [kN]									$A_s \cdot f_{uk}^1)$
<b>Bearing capacity under shear load, steel failure</b>										
<b>Without lever arm</b>										
Characteristic resistance	$V_{Rk,s}^0$ [kN]									$0,5 \cdot A_s \cdot f_{uk}^1)$
Ductility factor	$k_7$	[-]								0,8
<b>With lever arm</b>										
Characteristic resistance	$M_{Rk,s}^0$ [Nm]									$1,2 \cdot W_{el} \cdot f_{uk}^1)$

<sup>1)</sup>  $f_{uk}$  or  $f_{yk}$  respectively must be taken from the specifications of the reinforcing bar

**Table C3.2:** Essential characteristics for the **steel bearing capacity** under tensile / shear load of **fischer rebar anchors FRA**

fischer rebar anchor FRA	M12	M16	M20	M24	
<b>Bearing capacity under tensile load, steel failure</b>					
Characteristic resistance	$N_{Rk,s}$ [kN]	63	111	173	270
<b>Partial factor<sup>1)</sup></b>					
Partial factor	$\gamma_{Ms,N}$ [-]				1,4
<b>Bearing capacity under shear load, steel failure</b>					
<b>Without lever arm</b>					
Characteristic resistance	$V_{Rk,s}^0$ [kN]	30	55	86	124
Ductility factor	$k_7$	[-]			1,0
<b>With lever arm</b>					
Characteristic resistance	$M_{Rk,s}^0$ [Nm]	92	233	454	785
<b>Partial factor<sup>1)</sup></b>					
Partial factor	$\gamma_{Ms,V}$ [-]				1,56

<sup>1)</sup> In absence of other national regulations

fischer Superbond

**Performance**

Essential characteristics for the steel bearing capacity of reinforcing bars and fischer rebar anchors FRA

**Annex C 3**

**Table C4.1:** Essential characteristics under tensile / shear load

Size	All sizes															
<b>Tensile load</b>																
<b>Uncracked concrete</b>																
Uncracked concrete	$k_{ucr,N}$							11,0								
Cracked concrete	$k_{cr,N}$	[ $\cdot$ ]						7,7								
<b>Factors for the compressive strength of concrete &gt; C20/25</b>																
Increasing factor for $\tau_{Rk}$	C25/30	$\Psi_c$ [ $\cdot$ ]						1,02								
	C30/37							1,04								
	C35/45							1,07								
	C40/50							1,08								
	C45/55							1,09								
	C50/60							1,10								
<b>Splitting failure</b>																
Edge distance	$h / h_{ef} \geq 2,0$	$c_{cr,sp}$ [mm]						1,0 $h_{ef}$								
	$2,0 > h / h_{ef} > 1,3$							4,6 $h_{ef}$ - 1,8 $h$								
	$h / h_{ef} \leq 1,3$							2,26 $h_{ef}$								
Spacing	$s_{cr,sp}$							2 $c_{cr,sp}$								
<b>Concrete cone failure</b>																
Edge distance	$c_{cr,N}$	$[mm]$						1,5 $h_{ef}$								
Spacing	$s_{cr,N}$							2 $c_{cr,N}$								
<b>Factors for sustained tension load</b>																
Temperature range	[ $\cdot$ ]		24 °C / 40 °C	50 °C / 80 °C	72 °C / 120 °C	90 °C / 150 °C										
Factor	$\psi_{sus}^0$	[ $\cdot$ ]	0,84	0,86	0,84	0,84		0,91								
<b>Shear load</b>																
Installation factor	$\gamma_{inst}$	[ $\cdot$ ]						1,0								
<b>Concrete pry-out failure</b>																
Factor for pry-out failure	$k_8$	[ $\cdot$ ]						2,0								
<b>Concrete edge failure</b>																
value of $h_{ef}$ (= $l_i$ ) under shear load	[ $\cdot$ ]		Conditions according to EN 1992-4:2018: chapter 7.2.2.5; Section 6; formular 7.43													
<b>Calculation diameters</b>																
Size			M8	M10	M12	M16	M20	M24	M27	M30						
fischer anchor rods and standard threaded rods	$d_{nom}$	$[mm]$	8	10	12	16	20	24	27	30						
fischer internal threaded anchors RG MI	$d_{nom}$		12	16	18	22	28	-	-	-						
fischer rebar anchor FRA	$d_{nom}$		-	-	12	16	20	25	-	-						
Size (nominal diameter of the bar)	$\phi$		8	10	12	14	16	20	25	28	32					
Reinforcing bar	$d_{nom}$	[mm]	8	10	12	14	16	20	25	28	32					
fischer Superbond									<b>Annex C 4</b>							
<b>Performance</b> Essential characteristics under tensile / shear load																

**Table C5.1:** Essential characteristics of **tensile resistance** for **fischer anchor rods** and **standard threaded rods** in hammer drilled holes in combination with **injection mortar FIS SB; uncracked or cracked concrete**

Anchor rod / standard threaded rod	M8	M10	M12	M16	M20	M24	M27	M30
<b>Combined pullout and concrete cone failure</b>								
Thread diameter d [mm]	8	10	12	16	20	24	27	30
<b>Uncracked concrete</b>								
<b>Characteristic bond resistance in uncracked concrete C20/25</b>								
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)								
Tem- perature range	I: 24 °C / 40 °C II: 50 °C / 80 °C III: 72 °C / 120 °C IV: 90 °C / 150 °C	$\tau_{RK,ucr}$	[N/mm <sup>2</sup> ]	12 12 10 10	13 12 11 10	13 13 11 11	13 12 11 10	12 10 9,0 8,0
<b>Installation factors</b>								
Dry or wet concrete	$\gamma_{inst}$	[-]						1,0
<b>Cracked concrete</b>								
<b>Characteristic bond resistance in cracked concrete C20/25</b>								
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)								
Tem- perature range	I: 24 °C / 40 °C II: 50 °C / 80 °C III: 72 °C / 120 °C IV: 90 °C / 150 °C	$\tau_{RK,cr}$	[N/mm <sup>2</sup> ]	6,5 6,0 5,5 5,0	7,0 6,5 6,0 5,5	7,5 7,5 6,5 6,0	7,5 7,5 6,5 6,0	7,5 7,0 6,0 5,5
<b>Installation factors</b>								
Dry or wet concrete	$\gamma_{inst}$	[-]						1,0
<b>fischer Superbond</b>								
<b>Performance</b> Essential characteristics of tensile resistance for fischer anchor rod and standard threaded rods with injection mortar FIS SB								<b>Annex C 5</b>

**Table C6.1:** Essential characteristics of **tensile resistance** for **fischer anchor rods RG M** in hammer or diamond drilled holes in combination with **resin capsule RSB**; **uncracked or cracked concrete**

Anchor rod RG M		M8	M10	M12	M16	M20	M24	M30							
<b>Combined pullout and concrete cone failure</b>															
Thread diameter	d [mm]	8	10	12	16	20	24	30							
<b>Uncracked concrete</b>															
<b>Characteristic bond resistance in uncracked concrete C20/25</b>															
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete as well as water filled hole)															
Tem- pera- ture range	I: 24 °C / 40 °C	$\tau_{RK,ucr}$ [N/mm <sup>2</sup> ]	12	13	13	13	12	10							
	II: 50 °C / 80 °C		12	12	12	13	12	10							
	III: 72 °C / 120 °C		10	11	11	11	11	9,0							
	IV: 90 °C / 150 °C		10	10	10	11	10	8,0							
Diamond-drilling (dry or wet concrete as well as water filled hole)															
Tem- pera- ture range	I: 24 °C / 40 °C	$\tau_{RK,ucr}$ [N/mm <sup>2</sup> ]	13	13	14	14	13	11							
	II: 50 °C / 80 °C		12	13	13	14	13	10							
	III: 72 °C / 120 °C		11	12	12	12	11	9,5							
	IV: 90 °C / 150 °C		10	11	11	11	10	8,5							
<b>Installation factors</b>															
Dry or wet concrete	$\gamma_{inst}$ [-]	1,0													
Water filled hole	$\gamma_{inst}$ [-]	1,2													
<b>Cracked concrete</b>															
<b>Characteristic bond resistance in cracked concrete C20/25</b>															
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete as well as water filled hole)															
Tem- pera- ture range	I: 24 °C / 40 °C	$\tau_{RK,cr}$ [N/mm <sup>2</sup> ]	6,5	7,0	7,5	7,5	7,5	7,5							
	II: 50 °C / 80 °C		6,0	6,5	7,5	7,5	7,5	7,0							
	III: 72 °C / 120 °C		5,5	6,0	6,5	6,5	6,5	6,0							
	IV: 90 °C / 150 °C		5,0	5,5	6,0	6,0	6,0	5,5							
Diamond-drilling (dry or wet concrete as well as water filled hole)															
Tem- pera- ture range	I: 24 °C / 40 °C	$\tau_{RK,cr}$ [N/mm <sup>2</sup> ]	---	---	---	7,5	7,5	7,5							
	II: 50 °C / 80 °C		---	---	---	7,5	7,5	7,0							
	III: 72 °C / 120 °C		---	---	---	6,5	6,5	6,5							
	IV: 90 °C / 150 °C		---	---	---	6,0	6,0	6,0							
<b>Installation factors</b>															
Dry or wet concrete	$\gamma_{inst}$ [-]	1,0													
Water filled hole	$\gamma_{inst}$ [-]	1,2													
fischer Superbond															
<b>Performance</b> Essential characteristics of tensile resistance for fischer anchor rod RG M with resin capsule RSB															
<b>Annex C 6</b>															

**Table C7.1:** Essential characteristics of **tensile resistance** for **fischer internal threaded anchors RG MI** in hammer drilled holes in combination with **injection mortar FIS SB; uncracked or cracked concrete**

Internal threaded anchor RG MI		M8	M10	M12	M16	M20
<b>Combined pullout and concrete cone failure</b>						
Sleeve diameter	d [mm]	12	16	18	22	28
<b>Uncracked concrete</b>						
<b>Characteristic bond resistance in uncracked concrete C20/25</b>						
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)						
Tem- perature range	I: 24 °C / 40 °C	$\tau_{RK,ucr}$ [N/mm <sup>2</sup> ]	12	12	11	11
	II: 50 °C / 80 °C		12	11	11	10
	III: 72 °C / 120 °C		11	10	10	9,0
	IV: 90 °C / 150 °C		10	9,5	9,0	8,5
<b>Installation factors</b>						
Dry or wet concrete	$\gamma_{inst}$	[ - ]			1,0	
<b>Cracked concrete</b>						
<b>Characteristic bond resistance in cracked concrete C20/25</b>						
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)						
Tem- perature range	I: 24 °C / 40 °C	$\tau_{RK,cr}$ [N/mm <sup>2</sup> ]			5,0	
	II: 50 °C / 80 °C				5,0	
	III: 72 °C / 120 °C				4,5	
	IV: 90 °C / 150 °C				4,0	
<b>Installation factors</b>						
Dry or wet concrete	$\gamma_{inst}$	[ - ]			1,0	
fischer Superbond						
<b>Performance</b> Essential characteristics of tensile resistance for fischer internal threaded anchor RG MI with injection mortar FIS SB						
<b>Annex C 7</b>						

**Table C8.1:** Essential characteristics of **tensile resistance** for **fischer internal threaded anchors RG MI** in hammer or diamond drilled holes in combination with **resin capsule RSB**; uncracked or cracked concrete

Internal threaded anchor RG MI		M8	M10	M12	M16	M20				
<b>Combined pullout and concrete cone failure</b>										
Sleeve diameter	d [mm]	12	16	18	22	28				
<b>Uncracked concrete</b>										
<b>Characteristic bond resistance in uncracked concrete C20/25</b>										
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete as well as water filled hole)										
Tem- pera- ture range	I: 24 °C / 40 °C	$\tau_{RK,ucr}$ [N/mm <sup>2</sup> ]	12	12	11	11				
	II: 50 °C / 80 °C		12	11	11	10				
	III: 72 °C / 120 °C		11	10	10	9,0				
	IV: 90 °C / 150 °C		10	9,5	9,0	8,5				
Diamond-drilling (dry or wet concrete as well as water filled hole)										
Tem- pera- ture range	I: 24 °C / 40 °C	$\tau_{RK,ucr}$ [N/mm <sup>2</sup> ]	13	12	12	11				
	II: 50 °C / 80 °C		13	12	12	11				
	III: 72 °C / 120 °C		11	11	10	9,5				
	IV: 90 °C / 150 °C		10	10	9,5	9,0				
<b>Installation factors</b>										
Dry or wet concrete	$\gamma_{inst}$	[-]	1,0							
Water filled hole		[-]	1,2	1,0						
<b>Cracked concrete</b>										
<b>Characteristic bond resistance in cracked concrete C20/25</b>										
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete as well as water filled hole)										
Tem- pera- ture range	I: 24 °C / 40 °C	$\tau_{RK,cr}$ [N/mm <sup>2</sup> ]	5,0							
	II: 50 °C / 80 °C		5,0							
	III: 72 °C / 120 °C		4,5							
	IV: 90 °C / 150 °C		4,0							
Diamond-drilling (dry or wet concrete as well as water filled hole)										
Tem- pera- ture range	I: 24 °C / 40 °C	$\tau_{RK,cr}$ [N/mm <sup>2</sup> ]	---	5,0						
	II: 50 °C / 80 °C		---	5,0						
	III: 72 °C / 120 °C		---	4,5						
	IV: 90 °C / 150 °C		---	4,0						
<b>Installation factors</b>										
Dry or wet concrete	$\gamma_{inst}$	[-]	1,0							
Water filled hole		[-]	1,2	1,0						
fischer Superbond										
<b>Performance</b>										
Essential characteristics of tensile resistance for fischer internal threaded anchor RG MI with resin capsule RSB										
<b>Annex C 8</b>										

**Table C9.1:** Essential characteristics of **tensile resistance** for reinforcing bars in hammer drilled holes in combination with **injection mortar FIS SB**; **uncracked or cracked concrete**

Nominal diameter of the bar	$\phi$	8	10	12	14	16	20	25	28	32								
<b>Combined pullout and concrete cone failure</b>																		
Bar diameter	d [mm]	8	10	12	14	16	20	25	28	32								
<b>Uncracked concrete</b>																		
<b>Characteristic bond resistance in uncracked concrete C20/25</b>																		
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)																		
Tem- perature range	I: 24 °C / 40 °C	$\tau_{Rk,ucr}$ [N/mm <sup>2</sup> ]	8,0	8,5	9,0	9,5	9,5	10	9,5	9,0	7,5							
	II: 50 °C / 80 °C		8,0	8,5	9,0	9,0	9,5	9,5	9,0	8,5	7,5							
	III: 72 °C / 120 °C		7,0	7,5	8,0	8,0	8,5	8,5	8,0	7,5	6,5							
	IV: 90 °C / 150 °C		6,5	7,0	7,0	7,5	7,5	8,0	7,5	7,0	6,0							
<b>Installation factors</b>																		
Dry or wet concrete	$\gamma_{inst}$	[ - ]	1,0															
<b>Cracked concrete</b>																		
<b>Characteristic bond resistance in cracked concrete C20/25</b>																		
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)																		
Tem- perature range	I: 24 °C / 40 °C	$\tau_{Rk,cr}$ [N/mm <sup>2</sup> ]	4,5	6,0	6,0	6,0	7,0	6,0	6,0	6,0	6,0							
	II: 50 °C / 80 °C		4,5	5,5	5,5	5,5	6,5	6,0	6,0	6,0	6,0							
	III: 72 °C / 120 °C		4,0	5,0	5,0	5,0	6,0	5,5	5,5	5,5	5,5							
	IV: 90 °C / 150 °C		3,5	4,5	4,5	4,5	5,5	5,0	5,0	5,0	5,0							
<b>Installation factors</b>																		
Dry or wet concrete	$\gamma_{inst}$	[ - ]	1,0															
fischer Superbond																		
<b>Performance</b> Essential characteristics of tensile resistance for reinforcing bars with injection mortar FIS SB										<b>Annex C 9</b>								

**Table C10.1:** Essential characteristics of **tensile resistance** for **fischer rebar anchors FRA** in hammer drilled holes in combination with **injection mortar FIS SB**; **uncracked or cracked concrete**

fischer rebar anchor FRA		M12	M16	M20	M24			
<b>Combined pullout and concrete cone failure</b>								
Bar diameter	d [mm]	12	16	20	25			
<b>Uncracked concrete</b>								
<b>Characteristic bond resistance in uncracked concrete C20/25</b>								
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)								
Tem- perature range	I: 24 °C / 40 °C	$\tau_{Rk,ucr}$ [N/mm <sup>2</sup> ]	9,0	9,5	10			
	II: 50 °C / 80 °C		9,0	9,5	9,5			
	III: 72 °C / 120 °C		8,0	8,5	8,5			
	IV: 90 °C / 150 °C		7,0	7,5	8,0			
<b>Installation factors</b>								
Dry or wet concrete	$\gamma_{inst}$	[ - ]	1,0					
<b>Cracked concrete</b>								
<b>Characteristic bond resistance in cracked concrete C20/25</b>								
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)								
Tem- perature range	I: 24 °C / 40 °C	$\tau_{Rk,cr}$ [N/mm <sup>2</sup> ]	6,0	7,0	6,0			
	II: 50 °C / 80 °C		5,5	6,5	6,0			
	III: 72 °C / 120 °C		5,0	6,0	5,5			
	IV: 90 °C / 150 °C		4,5	5,5	5,0			
<b>Installation factors</b>								
Dry or wet concrete	$\gamma_{inst}$	[ - ]	1,0					
fischer Superbond								
<b>Performance</b> Essential characteristics of tensile resistance for fischer rebar anchors FRA with injection mortar FIS SB								
<b>Annex C 10</b>								

**Table C11.1: Displacements for anchor rods**

Anchor rod	M8	M10	M12	M16	M20	M24	M27	M30
<b>Displacement-Factors for tensile load<sup>1)</sup></b>								
<b>Uncracked or cracked concrete; Temperature range I, II, III, IV</b>								
$\delta_{N0}$ -Factor	[mm/(N/mm <sup>2</sup> )]	0,07	0,08	0,09	0,10	0,11	0,12	0,13
$\delta_{N\infty}$ -Factor		0,13	0,14	0,15	0,17	0,17	0,18	0,19
<b>Displacement-Factors for shear load<sup>2)</sup></b>								
<b>Uncracked or cracked concrete; Temperature range I, II, III, IV</b>								
$\delta_{V0}$ -Factor	[mm/kN]	0,18	0,15	0,12	0,09	0,07	0,06	0,05
$\delta_{V\infty}$ -Factor		0,27	0,22	0,18	0,14	0,11	0,09	0,08

<sup>1)</sup> Calculation of effective displacement:

$$\delta_{N0} = \delta_{N0}\text{-Factor} \cdot \tau_{Ed}$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-Factor} \cdot \tau_{Ed}$$

( $\tau_{Ed}$ : Design value of the applied tensile stress)

<sup>2)</sup> Calculation of effective displacement:

$$\delta_{V0} = \delta_{V0}\text{-Factor} \cdot V_{Ed}$$

$$\delta_{V\infty} = \delta_{V\infty}\text{-Factor} \cdot V_{Ed}$$

( $V_{Ed}$ : Design value of the applied shear force)

**Table C11.2: Displacements for fischer internal threaded anchors RG MI**

Internal threaded anchor RG MI	M8	M10	M12	M16	M20
<b>Displacement-Factors for tensile load<sup>1)</sup></b>					
<b>Uncracked or cracked concrete; Temperature range I, II, III, IV</b>					
$\delta_{N0}$ -Factor	[mm/(N/mm <sup>2</sup> )]	0,09	0,10	0,10	0,11
$\delta_{N\infty}$ -Factor		0,13	0,15	0,15	0,17
<b>Displacement-Factors for shear load<sup>2)</sup></b>					
<b>Uncracked or cracked concrete; Temperature range I, II, III, IV</b>					
$\delta_{V0}$ -Factor	[mm/kN]	0,12	0,09	0,08	0,07
$\delta_{V\infty}$ -Factor		0,18	0,14	0,12	0,10

<sup>1)</sup> Calculation of effective displacement:

$$\delta_{N0} = \delta_{N0}\text{-Factor} \cdot \tau_{Ed}$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-Factor} \cdot \tau_{Ed}$$

( $\tau_{Ed}$ : Design value of the applied tensile stress)

<sup>2)</sup> Calculation of effective displacement:

$$\delta_{V0} = \delta_{V0}\text{-Factor} \cdot V_{Ed}$$

$$\delta_{V\infty} = \delta_{V\infty}\text{-Factor} \cdot V_{Ed}$$

( $V_{Ed}$ : Design value of the applied shear force)

fischer Superbond

**Performance**

Displacements for anchor rods and fischer internal threaded anchors RG MI

**Annex C 11**

**Table C12.1: Displacements for reinforcing bars**

Nominal diameter of the bar $\phi$	8	10	12	14	16	20	25	28	32
<b>Displacement-Factors for tensile load<sup>1)</sup></b>									
<b>Uncracked or cracked concrete; Temperature range I, II, III, IV</b>									
$\delta_{N0}$ -Factor	[mm/(N/mm <sup>2</sup> )]	0,07	0,08	0,09	0,09	0,10	0,11	0,12	0,13
$\delta_{N\infty}$ -Factor		0,11	0,13	0,13	0,15	0,16	0,16	0,18	0,20
<b>Displacement-Factors for shear load<sup>2)</sup></b>									
<b>Uncracked or cracked concrete; Temperature range I, II, III, IV</b>									
$\delta_{V0}$ -Factor	[mm/kN]	0,18	0,15	0,12	0,10	0,09	0,07	0,06	0,05
$\delta_{V\infty}$ -Factor		0,27	0,22	0,18	0,16	0,14	0,11	0,09	0,08

<sup>1)</sup> Calculation of effective displacement:

$$\delta_{N0} = \delta_{N0}\text{-Factor} \cdot \tau_{Ed}$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-Factor} \cdot \tau_{Ed}$$

( $\tau_{Ed}$ : Design value of the applied tensile stress)

<sup>2)</sup> Calculation of effective displacement:

$$\delta_{V0} = \delta_{V0}\text{-Factor} \cdot V_{Ed}$$

$$\delta_{V\infty} = \delta_{V\infty}\text{-Factor} \cdot V_{Ed}$$

( $V_{Ed}$ : Design value of the applied shear force)

**Table C12.2: Displacements for fischer rebar anchors FRA**

fischer rebar anchor FRA	M12	M16	M20	M24
<b>Displacement-Factors for tensile load<sup>1)</sup></b>				
<b>Uncracked or cracked concrete; Temperature range I, II, III, IV</b>				
$\delta_{N0}$ -Factor	[mm/(N/mm <sup>2</sup> )]	0,09	0,10	0,11
$\delta_{N\infty}$ -Factor		0,13	0,15	0,16
<b>Displacement-Factors for shear load<sup>2)</sup></b>				
<b>Uncracked or cracked concrete; Temperature range I, II, III, IV</b>				
$\delta_{V0}$ -Factor	[mm/kN]	0,12	0,09	0,07
$\delta_{V\infty}$ -Factor		0,18	0,14	0,11

<sup>1)</sup> Calculation of effective displacement:

$$\delta_{N0} = \delta_{N0}\text{-Factor} \cdot \tau_{Ed}$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-Factor} \cdot \tau_{Ed}$$

( $\tau_{Ed}$ : Design value of the applied tensile stress)

<sup>2)</sup> Calculation of effective displacement:

$$\delta_{V0} = \delta_{V0}\text{-Factor} \cdot V_{Ed}$$

$$\delta_{V\infty} = \delta_{V\infty}\text{-Factor} \cdot V_{Ed}$$

( $V_{Ed}$ : Design value of the applied shear force)

fischer Superbond

**Performance**

Displacements for reinforcing bars and fischer rebar anchors FRA

**Annex C 12**

**Table C13.1:** Essential characteristics<sup>2)</sup> for the **steel bearing capacity** under tensile / shear load of **fischer anchor rods** and **standard threaded rods** under seismic action performance category **C1 or C2**

Anchor rod / standard threaded rod		M8	M10	M12	M16	M20	M24	M27	M30			
<b>Bearing capacity under tensile load, steel failure<sup>1)</sup></b>												
<b>fischer anchor rods and standard threaded rods, performance category C1</b>												
Characteristic resistance $N_{Rk,s,eq,C1}$	Steel zinc plated	5.8 [kN]	19	29(27)	43	79	123	177	230	281		
			30	47(43)	68	126	196	282	368	449		
			19	29	43	79	123	177	230	281		
			26	41	59	110	172	247	322	393		
			30	47	68	126	196	282	368	449		
	Stainless steel A4 and high corrosion resistant steel C		---	---	39	72	108	177	---	---		
			---	---	61	116	173	282	---	---		
			---	---	39	72	108	177	---	---		
			---	---	53	101	152	247	---	---		
			---	---	61	116	173	282	---	---		
<b>fischer anchor rods and standard threaded rods, performance category C2</b>												
Characteristic resistance $N_{Rk,s,eq,C2}$	Steel zinc plated	5.8 [-]	---	---	39	72	108	177	---	---		
			---	---	61	116	173	282	---	---		
			---	---	39	72	108	177	---	---		
			---	---	53	101	152	247	---	---		
			---	---	61	116	173	282	---	---		
	Stainless steel A4 and high corrosion resistant steel C		---	---	---	---	---	---	---	---		
			---	---	---	---	---	---	---	---		
			---	---	---	---	---	---	---	---		
			---	---	---	---	---	---	---	---		
			---	---	---	---	---	---	---	---		
<b>Bearing capacity under shear load, steel failure without lever arm<sup>1)</sup></b>												
<b>fischer anchor rods, performance category C1</b>												
Characteristic resistance $V_{Rk,s,eq,C1}$	Steel zinc plated	5.8 [kN]	9	15(13)	21	39	61	89	115	141		
			15	23(21)	34	63	98	141	184	225		
			9	15	21	39	61	89	115	141		
			13	20	30	55	86	124	161	197		
			15	23	34	63	98	141	184	225		
	Stainless steel A4 and high corrosion resistant steel C		6	11(9)	15	27	43	62	81	99		
			11	16(14)	24	44	69	99	129	158		
			6	11	15	27	43	62	81	99		
			9	14	21	39	60	87	113	138		
			11	16	24	44	69	99	129	158		
<b>Standard threaded rods, performance category C1</b>												
Characteristic resistance $V_{Rk,s,eq,C1}$	Steel zinc plated	5.8 [kN]	6	11(9)	15	27	43	62	81	99		
			11	16(14)	24	44	69	99	129	158		
			6	11	15	27	43	62	81	99		
			9	14	21	39	60	87	113	138		
			11	16	24	44	69	99	129	158		
<b>fischer anchor rods and standard threaded rods, performance category C2</b>												
Characteristic resistance $V_{Rk,s,eq,C2}$	Steel zinc plated	5.8 [-]	---	---	14	27	43	62	---	---		
			---	---	22	44	69	99	---	---		
			---	---	14	27	43	62	---	---		
			---	---	20	39	60	87	---	---		
			---	---	22	44	69	99	---	---		
	Stainless steel A4 and high corrosion resistant steel C		---	---	---	---	---	---	---	---		
			---	---	---	---	---	---	---	---		
			---	---	---	---	---	---	---	---		
			---	---	---	---	---	---	---	---		
			---	---	---	---	---	---	---	---		
<b>fischer Superbond</b>												
<b>Performance</b>												
Essential characteristics for the steel bearing capacity for fischer anchor rods and standard threaded rods under seismic action (performance category C1 / C2)												
<b>Annex C 13</b>												

<sup>1)</sup> Partial factors for performance category C1 or C2 see table C14.2; for fischer anchor rods FIS A / RG M the factor for steel ductility is 1,0

<sup>2)</sup> Values in brackets are valid for undersized threaded rods with smaller stress area  $A_s$  for hotdip galvanized standard threaded rods according to EN ISO 10684:2004+AC:2009.

**Table C14.1:** Essential characteristics for the **steel bearing capacity** under tensile / shear load of **reinforcing bars (B500B)** under seismic action performance category **C1**

Nominal diameter of the bar	Φ	8	10	12	14	16	20	25	28	32
<b>Bearing capacity under tensile load, steel failure<sup>1)</sup></b>										
<b>Reinforcing bar B500B acc. to DIN 488-2:2009-08, performance category C1</b>										
Characteristic resistance	$N_{Rk,s,eq,C1}$ [kN]	28	44	63	85	111	173	270	339	443
<b>Bearing capacity under shear load, steel failure without lever arm<sup>1)</sup></b>										
<b>Reinforcing bar B500B acc. to DIN 488-2:2009-08, performance category C1</b>										
Characteristic resistance	$V_{Rk,s,eq,C1}^0$ [kN]	10	15	22	30	39	61	95	119	155

<sup>1)</sup> Partial factors for performance category C1 see table C14.2

**Table C14.2: Partial factors for fischer anchor rods, standard threaded rods and reinforcing bars (B500B) under seismic action performance category C1 or C2**

Anchor rod / standard threaded rod		M8	M10	M12	M16	M20	M24	M27	M30	
Nominal diameter of the bar	Φ	8	10	12	14	16	20	25	28	32
<b>Tensile load, steel failure<sup>1)</sup></b>										
Steel zinc plated	5.8									1,50
	8.8									1,50
Stainless steel A4 and high corrosion resistant steel C	Property class 50	[-]								2,86
	70									1,50 <sup>2)</sup> / 1,87
	80									1,60
Reinforcing bar	B500B									1,40

Shear load, steel failure <sup>1)</sup>		5.8	8.8	50	70	80			
Partial factor $\gamma_{Ms,V}$									
<b>Steel zinc plated</b>									
Stainless steel A4 and high corrosion resistant steel C	Property class	[-]							
Reinforcing bar	B500B								

<sup>1)</sup> In absence of other national regulations

<sup>2)</sup> Only admissible for high corrosion resistant steel C, with  $f_{yk} / f_{uk} \geq 0,8$  and  $A_5 > 12\%$  (e.g. fischer anchor rods)

fischer Superbond	Annex C 14
<b>Performance</b> Essential characteristics for the steel bearing capacity for reinforcing bars under seismic action (performance category C1); partial factors (performance category C1 / C2)	

**Table C15.1:** Essential characteristics of **resistance** for **fischer anchor rods** and **standard threaded rods** in hammer drilled holes with **injection mortar FIS SB** or **resin capsule RSB** under seismic action performance category **C1**

Anchor rod / standard threaded rod		M8	M10	M12	M16	M20	M24	M27 <sup>1)</sup>	M30	
<b>Characteristic bond resistance, combined pullout and concrete cone failure</b>										
<b>Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete; resin capsule RSB additional in water filled holes)</b>										
I: 24 °C / 40 °C	$\tau_{Rk,eq,C1}$ [N/mm <sup>2</sup> ]	4,6	5,0	5,6	5,6	5,6	5,6	5,6	6,4	
II: 50 °C / 80 °C		4,3	4,6	5,6	5,6	5,6	5,6	5,3	6,0	
III: 72 °C / 120 °C		3,9	4,3	4,9	4,9	4,9	4,9	4,5	5,1	
IV: 90 °C / 150 °C		3,6	3,9	4,5	4,5	4,5	4,5	4,1	4,7	
<b>Installation factors</b>										
<b>Tensile load</b>										
Dry or wet concrete	$\gamma_{inst}$ [-]			1,0						
Water filled hole		1,2 <sup>2)</sup>		1,0 <sup>2)</sup>						
<b>Shear load</b>										
All installation conditions	$\gamma_{inst}$ [-]			1,0						

<sup>1)</sup> Only use with injection mortar FIS SB

<sup>2)</sup> Only use with resin capsule RSB in water filled hole

**Table C15.2:** Essential characteristics of **resistance** for **reinforcing bars** in hammer drilled holes with **injection mortar FIS SB** under seismic action performance category **C1**

Nominal diameter of the bar	$\phi$	8	10	12	14	16	20	25	28	32								
<b>Characteristic bond resistance, combined pullout and concrete cone failure</b>																		
<b>Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)</b>																		
I: 24 °C / 40 °C	$\tau_{Rk,eq,C1}$ [N/mm <sup>2</sup> ]	3,2	4,3	4,5	4,5	5,3	4,5	4,5	4,5	5,1								
II: 50 °C / 80 °C		3,2	3,9	4,1	4,1	4,9	4,5	4,5	4,5	5,1								
III: 72 °C / 120 °C		2,8	3,6	3,8	3,8	4,5	4,1	4,1	4,1	4,7								
IV: 90 °C / 150 °C		2,5	3,2	3,4	3,4	4,1	3,8	3,8	3,8	4,3								
<b>Installation factors</b>																		
<b>Tensile load</b>																		
Dry or wet concrete	$\gamma_{inst}$ [-]			1,0														
<b>Shear load</b>																		
All installation conditions	$\gamma_{inst}$ [-]			1,0														
<b>fischer Superbond</b>																		
<b>Performance</b>																		
Essential characteristics under seismic action (performance category C1) for fischer anchor rods, standard threaded rods and reinforcing bars																		
<b>Annex C 15</b>																		

**Table C16.1:** Essential characteristics of **resistance for fischer anchor rods** and **standard threaded rods** in hammer drilled holes with **injection mortar FIS SB** under seismic action performance category **C2**

Anchor rod / standard threaded rod	M12	M16	M20	M24	
<b>Characteristic bond resistance, combined pullout and concrete cone failure</b>					
<b>Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)</b>					
I: 24 °C / 40 °C	4,5	3,2	2,6	3,0	
Tem- perature range	II: 50 °C / 80 °C	4,5	3,2	2,6	
	III: 72 °C / 120 °C	3,9	2,7	2,3	
	IV: 90 °C / 150 °C	3,6	2,5	2,1	
<b>Installation factors</b>					
<b>Tensile load</b>					
Dry or wet concrete	$\gamma_{inst}$	[ $\cdot$ ]	1,0		
<b>Shear load</b>					
All installation conditions	$\gamma_{inst}$	[ $\cdot$ ]	1,0		
<b>Displacement-Factors for tensile load<sup>1)</sup></b>					
$\delta_{N,(DLS)}$ -Factor	[mm/(N/mm <sup>2</sup> )]	0,09	0,10	0,11	
$\delta_{N,(ULS)}$ -Factor		0,15	0,17	0,17	
<b>Displacement-Factors for shear load<sup>2)</sup></b>					
$\delta_{V,(DLS)}$ -Factor	[mm/kN]	0,18	0,10	0,07	
$\delta_{V,(ULS)}$ -Factor		0,25	0,14	0,11	
<sup>1)</sup> Calculation of effective displacement: $\delta_{N,(DLS)} = \delta_{N,(DLS)}\text{-Factor} \cdot \tau_{Ed}$ $\delta_{N,(ULS)} = \delta_{N,(ULS)}\text{-Factor} \cdot \tau_{Ed}$ ( $\tau_{Ed}$ : Design value of the applied tensile stress)		<sup>2)</sup> Calculation of effective displacement: $\delta_{V,(DLS)} = \delta_{V,(DLS)}\text{-Factor} \cdot V_{Ed}$ $\delta_{V,(ULS)} = \delta_{V,(ULS)}\text{-Factor} \cdot V_{Ed}$ ( $V_{Ed}$ : Design value of the applied shear force)			
fischer Superbond					
<b>Performance</b> Essential characteristics under seismic action (performance category C2) for fischer anchor rods and standard threaded rods				<b>Annex C 16</b>	