

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments



European Technical Assessment

ETA-16/0101
of 10 September 2019

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

PREBENA tack staples d = 1,52 mm d = 1,80 mm
d = 2,00 mm

Product family
to which the construction product belongs

Dowel-type fasteners with resin coating

Manufacturer

PREBENA
Wilfried Bornemann GmbH & Co. KG
Seestraße 20-26
63679 Schotten
DEUTSCHLAND

Manufacturing plant

PREBENA
Wilfried Bornemann GmbH & Co. KG
Seestraße 20-26
63679 Schotten
DEUTSCHLAND

This European Technical Assessment
contains

14 pages including 3 annexes which form an integral part
of this assessment

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

EAD 130019-00-0603

This version replaces

ETA-16/0101 issued on 18 July 2016

**European Technical Assessment
ETA-16/0101**

English translation prepared by DIBt

Page 2 of 14 | 10 September 2019

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part**1 Technical description of the product**

PREBENA tack staples are dowel type fasteners made of non-alloy steel rods according to EN ISO 16120 or made of stainless steel drawn from austenitic steel rods in accordance with EN 10088-1 for timber constructions. The staples have a special resin coating with a minimum length of 50 % of the legs.

The diameters of the staple legs are $d = 1,52 \text{ mm} \pm 0,01 \text{ mm}$, $d = 1,80 \text{ mm} \pm 0,01 \text{ mm}$ or $d = 2,00 \text{ mm} \pm 0,01 \text{ mm}$. Further dimensions are shown in Annex 1.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the PREBENA tack staples are used in compliance with the specifications and conditions given in Annex 1 to 3.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the PREBENA tack staples of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment**3.1 Mechanical resistance and stability (BWR 1)**

Essential characteristic	Performance
Dimensions	See Annex 1
Characteristic yield moment	See Annex 3
Withdrawal parameter for short-term and medium-term loads	See Annex 3
Withdrawal capacity for long term and permanent loads	See Annex 3
Characteristic head pull-through parameter	See Annex 3
Minimum tensile strength of the wire	See Annex 3
Minimum and maximum thickness of the connected material	See Annex 3
Durability against corrosion	See Annex 2
Durability of the resin coating	See Annex 2

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Euroclass A1

3.3 Safety and accessibility in use (BWR 4)

Same as BWR 1

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with EAD No.130019-00-0603, the applicable European legal act is: [1997/176/EC(EU)].

The system to be applied is: 3


5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable EAD

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.

Issued in Berlin on 10 September 2019 by Deutsches Institut für Bautechnik

Dr.-Ing. Lars Eckfeldt
p. p. Head of Department

beglaubigt:
Baumann

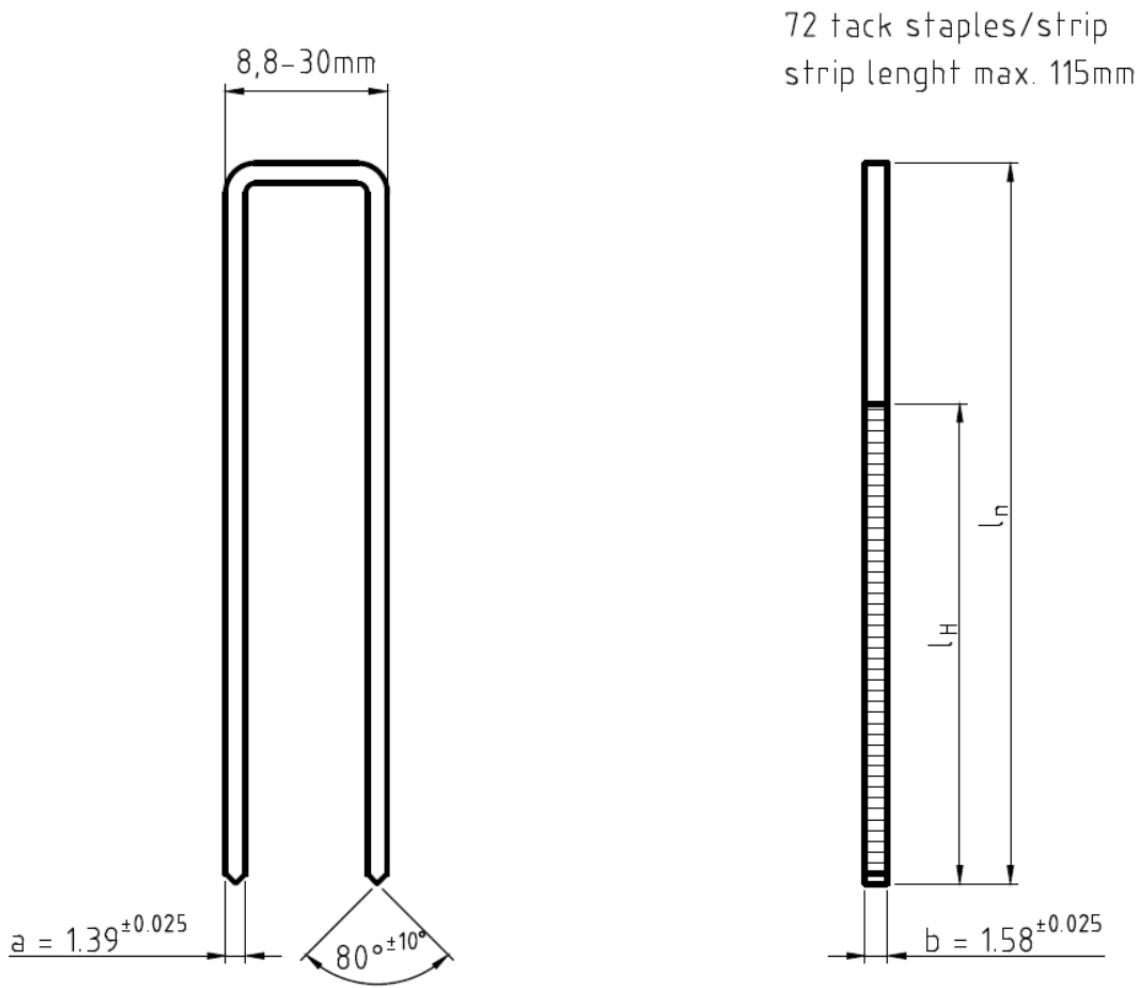


raw material: wire $\varnothing 1,52 \pm 0,01$ made of steel according DIN EN ISO 16120 with a minimum tensile strength of 900 N/mm^2
glue: type 3 according DIN EN 14592:2008+A1:2012, according to the manufacturer declaration
surface: strong galvanized with a layer thickness of at least 12μ

dimension l_n	dimension l_H (mind.)
31.85	21.2
34.85	23.2
37.85	25.2
39.85	26.6
43.85	29.2
49.85	33.2
54.85	36.6
55.85	37.2
59.85	40.0
63.35	42.2
66.85	44.6
69.85	46.6
74.75	50
79.60	53

tolerance according DIN ISO 2768 medium
all dimensions in mm / scale 2: 1

PREBENA tack staples d=1,52mm d=1,80mm d=2,00mm	Annex 1.1
Technical description of the product	
PREBENA tack staples d=1,52mm "strong galvanised"	

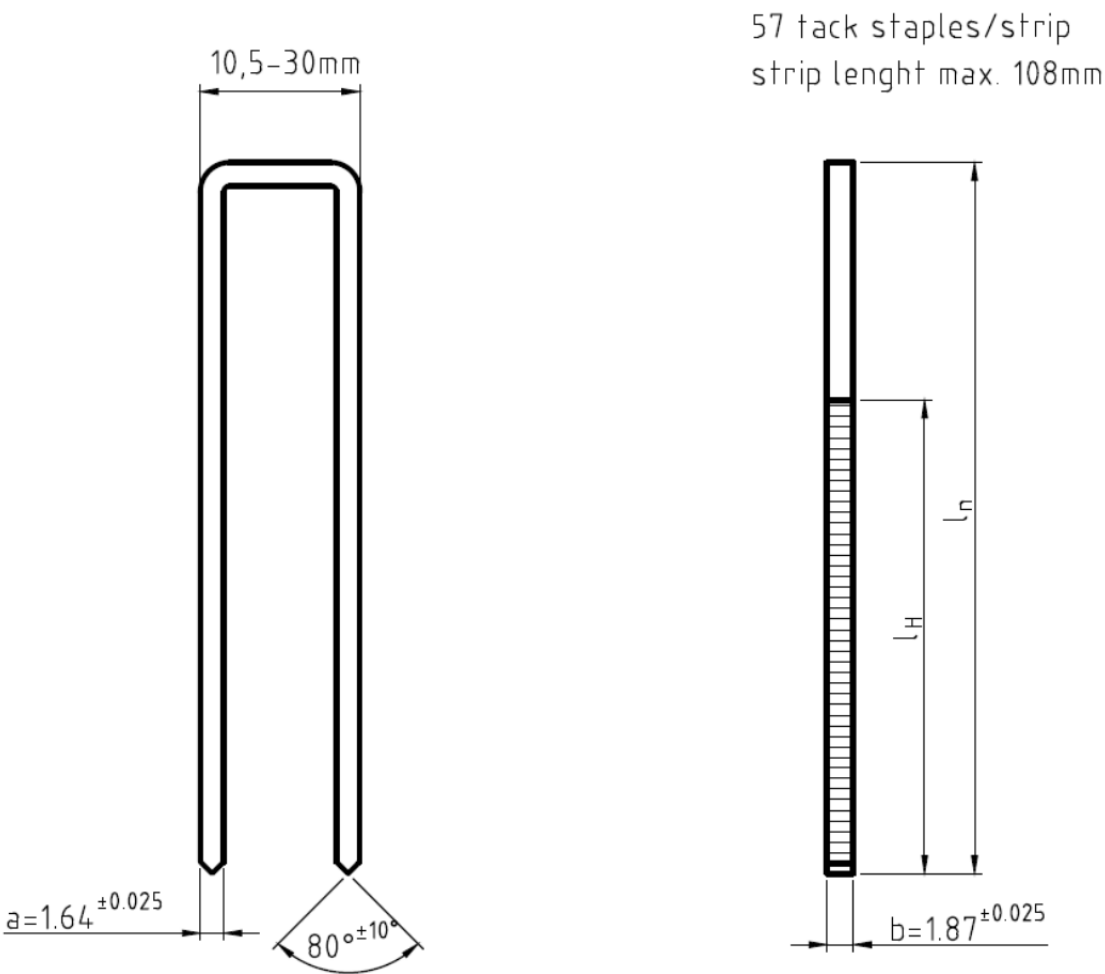


raw material: wire $\varnothing 1,80 \pm 0,01$ made of steel according DIN EN ISO 16120 with a minimum tensile strength of 900 N/mm
glue: type 3 according DIN EN 14592:2008+A1:2012, according to the manufacturer declaration
surface: strong galvanized with a layer thickness of at least 12 μ

dimension l_n	dimension l_H (mind.)
31.85	21.2
34.85	23.2
37.85	25.2
39.85	26.6
43.85	29.2
49.85	33.2
55.85	37.2
62.85	41.8
66.35	44.2
69.85	46.6
74.85	49.9
79.85	53.2

tolerance according DIN ISO 2768 medium
all dimension in mm / scale 2 : 1

PREBENA tack staples d=1,52mm d=1,80mm d=2,00mm	Annex 1,2
Technical description of the product	
PREBENA tack staples d=1,80mm "strong galvanised"	

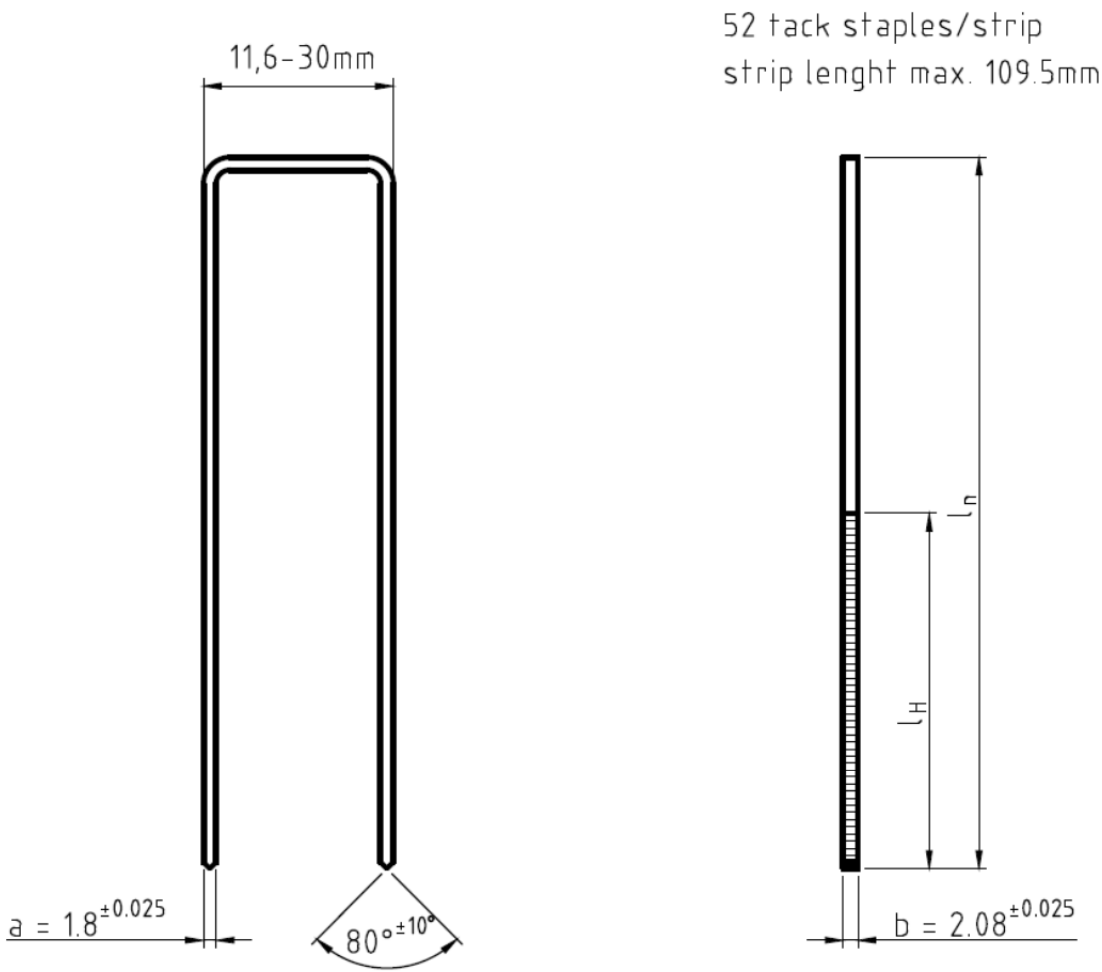


raw material: wire $\varnothing 2,00 \pm 0,01$ made of steel according DIN EN ISO 16120 with a minimum tensile strength of 900 N/mm^2
glue: type 3 according DIN EN 14592:2008+A1:2012, according to the manufacturer declaration
surface: strong galvanized with a layer thickness of at least 12μ


dimension l_n	dimension l_H (mind.)
75	37.5
85	42.5
90	45
100	50
110	55
120	60
130	65
140	70
150	75
160	80

tolerance according DIN ISO 2768 medium
all dimension in mm / scale 1 : 1

PREBENA tack staples $d=1,52\text{mm}$ $d=1,80\text{mm}$ $d=2,00\text{mm}$	Annex 1,3
Technical description of the product	
PREBENA tack staples $d=2,00\text{mm}$ "strong galvanised"	

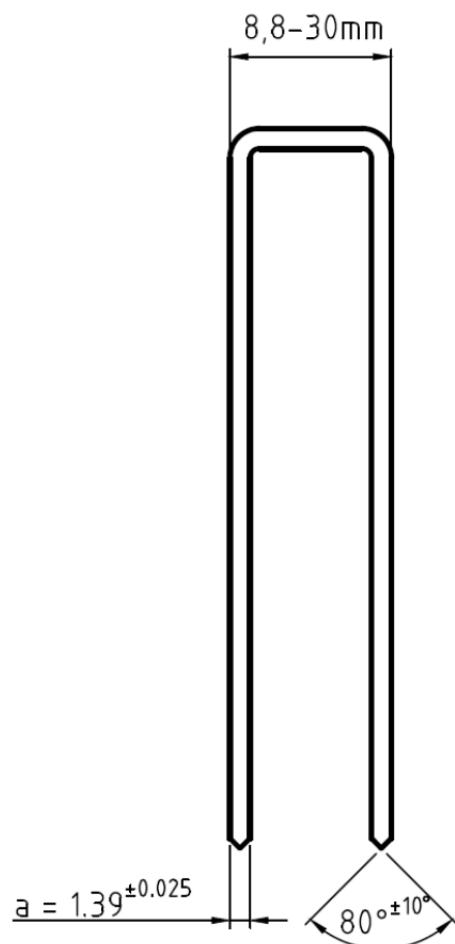

72 tack staples/strip
strip length max. 115mm

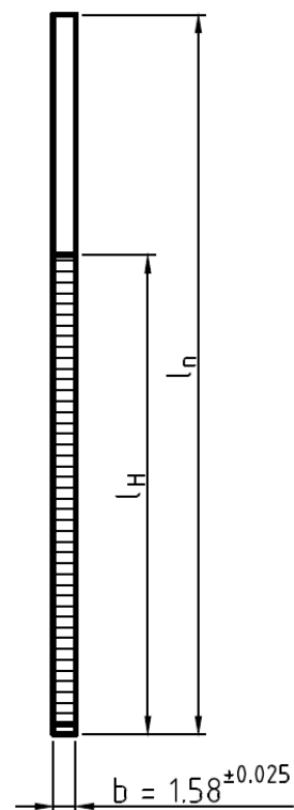

raw material: wire $\varnothing 1,52 \pm 0,01$ made of steel 1.4301 (X 5 Cr Ni 18 10 = V2a) according to DIN EN 10088-1 with a minimum tensile strength of 950 N/mm²

glue: type 3 according to DIN EN 14592:2008+A1:2012, according to the manufacturer declaration

surface: stainless

dimension l_n dimension l_H
(mind.)

31.85	21.2
34.85	23.2
37.85	25.2
39.85	26.6
43.85	29.2
49.85	33.2
54.85	36.6
55.85	37.2
59.85	40.0
63.35	42.2
66.85	44.6
69.85	46.6
74.75	50
79.60	53


tolerance according to DIN ISO 2768 medium
all dimensions in mm / scale 2: 1

PREBENA tack staples d=1,52mm d=1,80mm d=2,00mm

Technical description of the product

PREBENA tack staples d=1,52mm stainless steel (V2a)

Annex 1.4

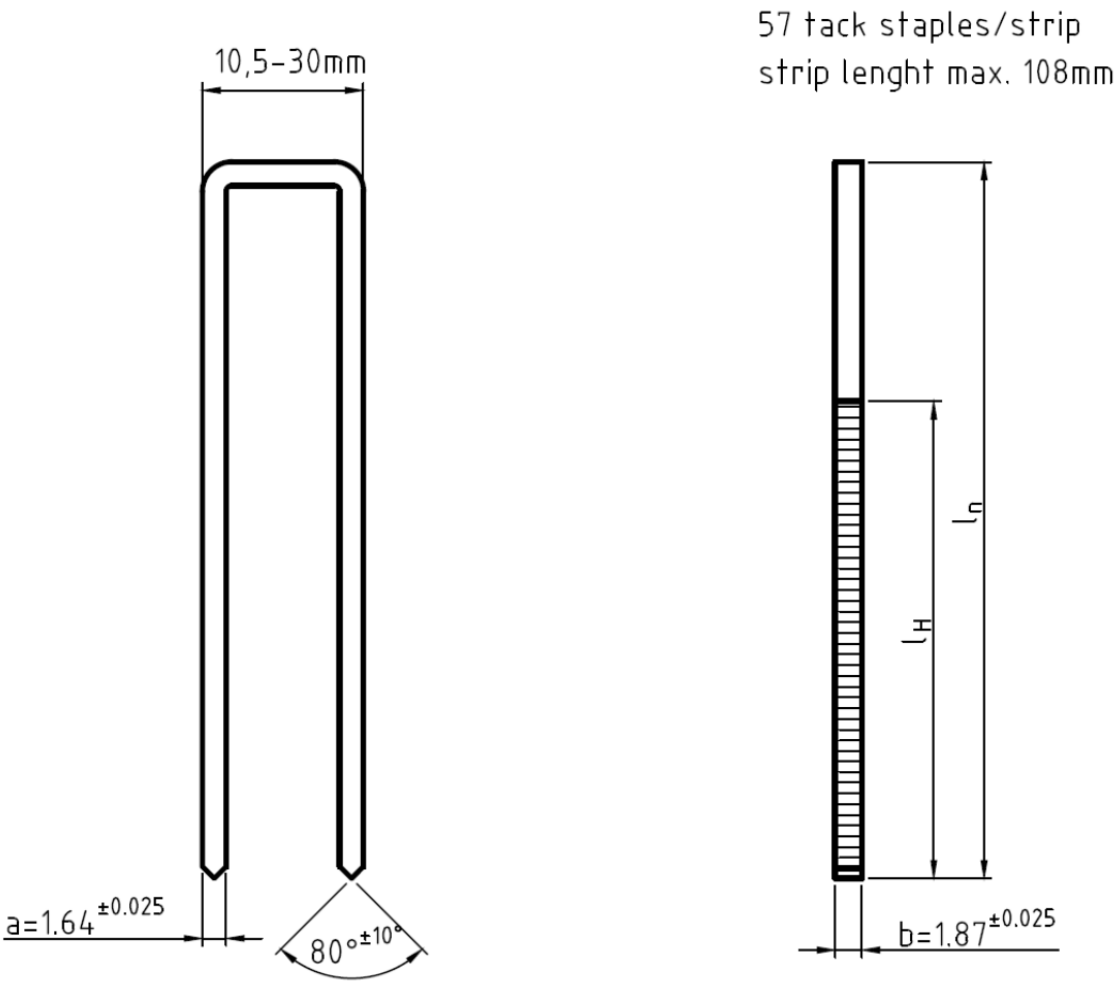


raw material: wire $\phi 1.80 \pm 0.01$ made of steel 1.4301 (X 5 Cr Ni 18 9 = V2a) according DIN 10088-1 with a minimum tensile strength of 950 N/mm^2
glue: type 3 according DIN EN 14592:2008+A1:2012, according to the manufacturer declaration
surface: stainless

dimension l_n	dimension l_H (mind.)
31.85	21.2
34.85	23.2
37.85	25.2
39.85	26.6
43.85	29.2
49.85	33.2
55.85	37.2
62.85	41.8
66.35	44.2
69.85	46.6
74.85	49.9
79.85	53.2

tolerance according DIN ISO 2768 medium
all dimension in mm / scale 2 : 1

PREBENA tack staples d=1,52mm d=1,80mm d=2,00mm	Annex 1.5
Technical description of the product	
PREBENA tack staples d=1,80mm stainless steel (V2a)	

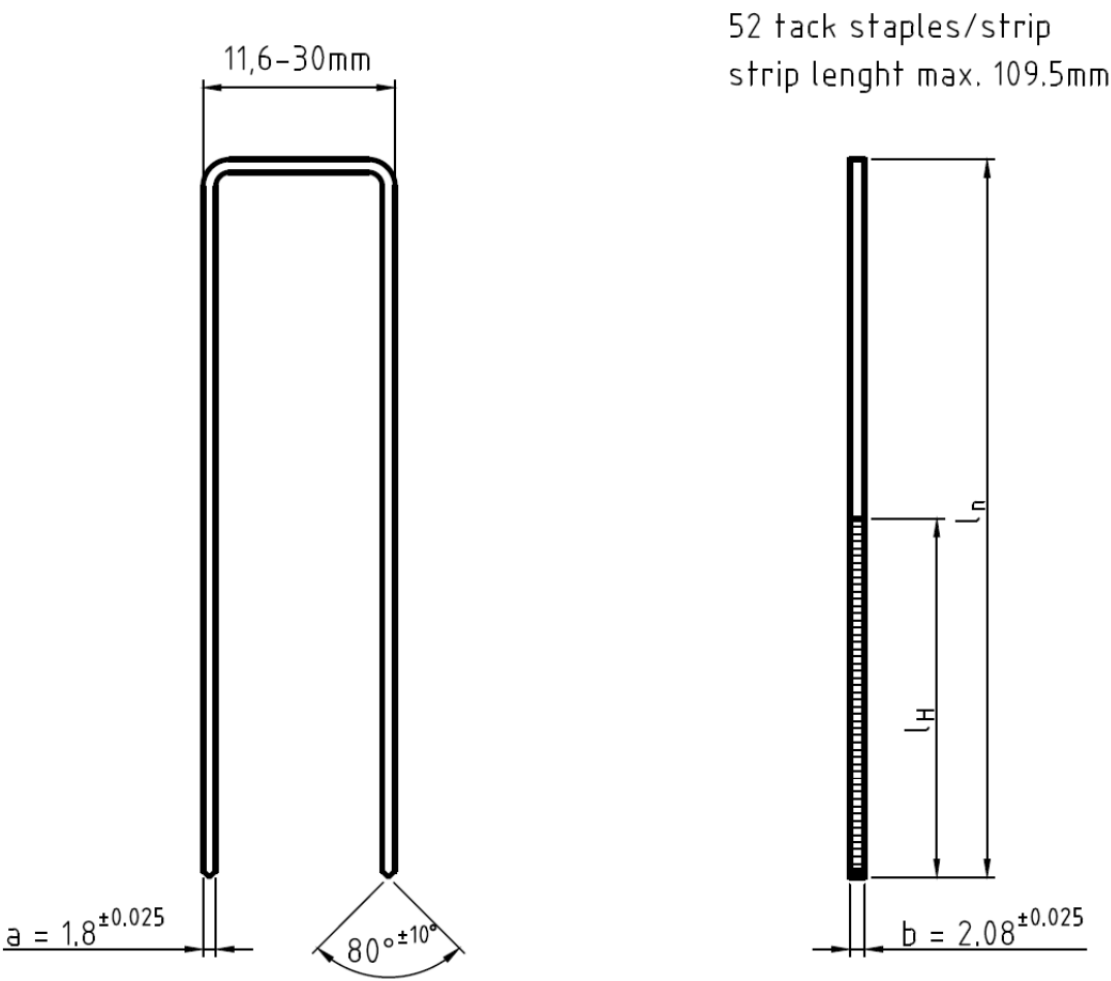

raw material: wire $\varnothing 2,00 \pm 0,01$ made of steel 1.4301 (X 5 Cr Ni 18 9 = V2a) according DIN EN 10088-1 with a minimum tensile strength 950 N/mm^2
glue: type 3 according DIN EN 14592:2008+A1:2012, according to the manufacturer declaration
surface: stainless

dimension l_n	dimension l_H (mind.)
75	37.5
85	42.5
90	45
100	50
110	55
120	60
130	65
140	70
150	75
160	80

tolerance according DIN ISO 2768 medium
all dimension in mm / scale 1 : 1

PREBENA tack staples d=1,52mm d=1,80mm d=2,00mm	Annex 1.6
Technical description of the product	
PREBENA tack staples d=2,00mm stainless steel (V2a)	

Annex 2 Specifications of intended use

A.2.1 Loading

- Static and quasi-static loads (not relevant to fatigue)
- Short-, medium-, longterm and permanent load duration on withdrawal as well as shear

A.2.2 Connection material

PREBENA tack staples are used for load bearing connections of the following material.

Material for base building components

- Solid timber (softwood) according to EN 338¹/ EN 14081-1²,
- Glued laminated timber (softwood) according to EN 14080³,
- Glued solid timber according to EN 14080,
- Laminated veneer lumber LVL according to EN 14374⁴,
- Cross-laminated timber according to European technical assessments or national provisions that apply at the installation site.

Material for connected building components

- Oriented Strand Board (OSB) according to EN 300⁵ and EN 13986⁶,
- Plywood according to EN 636⁷ and EN 13986,
- Cement-bonded particle boards according to EN 634-2⁸ and EN 13986,
- Fibreboards according to EN 622-2⁹, EN 622-3¹⁰ and EN 13986,
- Laminated veneer lumber LVL according to EN 13986 in connection with EN 14279¹¹ or EN 14374,
- Solid-wood panels according to EN 13353¹² and EN 13986,
- Gypsum boards according to EN 520¹³, density $\rho \geq 680 \text{ kg/m}^3$ but without Type D
Gypsum boards Type D, density $\rho \geq 800 \text{ kg/m}^3$
- Gypsum boards with mat reinforcement according to EN 15283-1¹⁴ and Gypsum fibre boards according to EN 15283-2¹⁵
- Fibre-cement flat sheets – Product specification and test methods according to EN 12467¹⁶
- Thermal insulation products for buildings – Factory made wood fibre (WF) products – Specification according to EN 13171¹⁷

1	EN 338:2016	Timber structures - Strength classes
2	EN 14081-1:2005+A1:2011	Timber structures – Strength graded structural timber with rectangular cross section – Part 1: General requirements
3	EN 14080:2013	Timber structures - Glued laminated timber and glued solid timber - Requirements
4	EN 14374:2004	Timber structures - Structural laminated veneer lumber - Requirements
5	EN 300:2006	Oriented strand boards (OSB) – Definition, classification and specifications
6	EN 13986:2004+A1:2015	Wood-based panels for use in construction - Characteristics, evaluation of conformity and marking
7	EN 636:2012+A1:2015	Plywood - Specifications
8	EN 634-2:2007	Cement-bonded particleboards – Specifications – Part 2: Requirements for OPC bonded particleboards for use in dry, humid and external conditions
9	EN 622-2:2004	Fibreboards - Specifications - Part 2: Requirements for hardboards
10	EN 622-3:2004	Fibreboards - Specifications - Part 3: Requirements for medium boards
11	EN 14279:2009	Laminated Veneer Lumber (LVL) – Definitions, classification and specifications
12	EN 13353:2008+A1:2011	Solid wood panels (SWP) – Requirements
13	EN 520:2004+A1:2009	Gypsum plasterboards – Definitions, requirements and test methods
14	EN 15283-1:2008+A1:2009	Gypsum boards with fibrous reinforcement – Definitions, requirements and test methods – Part 1: Gypsum boards with mat reinforcement
15	EN 15283-2:2008+A1:2009	Part 2: Gypsum fibre boards Gypsum boards with fibrous reinforcement – Definitions, requirements and test methods – Part 2: Gypsum fibre boards
16	EN 12467:2012	Fibre-cement flat sheets – Product specification and test methods
17	EN 13171:2012	Thermal insulation products for buildings – Factory made wood fibre (WF) products – Specification

A.2.3 Use conditions (environmental conditions)

A.2.3.1 Durability against corrosion

PREBENA tack staples made of non-alloy steel rods are "strong" galvanized. The mean thickness of the zinc coating is 12 µm. Steel no. 1.4301 (V2a) is used for PREBENA tack staples made of stainless steel.

A.2.3.2 Durability of the resin coating

The resin coating l_H of PREBENA tack staples has a minimum length of 50 % of the legs according to Annex 1. The following kinds of resin are used:

- WBG 310 Kombikleber
- WBG 710 Klebelack
- WBG 800 Nagelharz
- WBG 810 Nagelharz
- KP080

Data sheets of chemical compositions (as well as the process of application and drying for resin coatings) are deposited at Deutsches Institut für Bautechnik.

The resin coating fulfills the requirements of the EAD 130019-00-0603, clause 2.2.9 "durability of the resin coating".

A.2.3.3 Installation provisions

EN 1995-1-1¹⁸ in conjunction with the respective national annex applies for the installation.

The insertion of the staples has to be at least $14 \cdot d$.

For connections of wood fibre insulation material the maximum length of the leg is $l_n = 85 \cdot d$, the minimum width is $b=20\text{mm}$ and the maximum thickness of the insulation is $70 \cdot d$.

¹⁸ EN 1995-1-1:2004+A1:2008+A2:2014 Eurocode 5: Design of timber structures – Part 1-1: General - Common rules and rules for buildings

Annex 3 Specifications of essential characteristics

A.3.1 Characteristic yield moment according to EN 14592

Table A.3.1 Characteristic yield moment $M_{y,k}$ [Nm] of one leg of PREBENA tack staples

Nominal diameter d [mm]	1,52	1,80	2,00
"strong" galvanised	0,62	1,04	1,24
Stainless steel (V2a)	0,72	0,97	1,27

A.3.2 Withdrawal parameter for short-term and medium-term loads

The characteristic withdrawal parameter of one leg (at an angle of at least 30° between the width of staple crown and the direction of the grain) for short-term and medium-term withdrawal loads is:

$$f_{ax,k} = 5,0 \text{ N/mm}^2; \text{ for material with a characteristic density } \rho_k \geq 350 \text{ kg/m}^3$$

The withdrawal parameter has been determined for a maximum length of staples in the base building components of $14 \cdot d \leq t_2 \leq 20 \cdot d$.

A.3.3 Design value of withdrawal capacity for long-term and permanent loads

The design value of withdrawal capacity for long-term and permanent loads for service class 1 and 2 for one staple may be taken to:

$$R_{ax,d} = 70 \text{ N, with } \gamma_M = 1,3.$$

The design value of withdrawal capacity applies for a characteristic density of $\rho_k \geq 350 \text{ kg/m}^3$.

A.3.4 Maximum thickness of connected material

The maximum thickness t_1 according to Table A.3.2 applies for base building components (made of material according to chapter A.2.2) depending on the density of base building components.

Table A.3.2 Maximum thickness of connected material

Maximum thickness t_1 [mm]	Range of density ρ_k [kg/m ³]	Material of connected components Examples
80	$\rho_k \leq 400$	Solid timber of softwood
60	$400 < \rho_k \leq 650$	Wood-based panels and solid timber of hard- and softwood
40	$650 < \rho_k \leq 900$	Wood-based panels and gypsum boards
25	$900 < \rho_k \leq 1200$	Hardboards, gypsum fibreboards, cement-bonded particleboards
20	$1200 < \rho_k \leq 1600$	Highly compressed gypsum fibreboards

The maximum thickness of wood fibre insulation material is $t_1 \leq 70 \cdot d$.

A.3.5 Head pull-through capacity of wood and wood-based panels

The characteristic head pull-through parameter $f_{\text{head},k}$ for PREBENA tack staples (for material with a characteristic density of $\rho_k \geq 350 \text{ kg/m}^3$) the minimum thickness of material according to Table A.3.3 for one staple is:

$$f_{\text{head},k} = 29 \text{ N/mm}^2$$

Table A.3.3 Minimum thickness of wood and wood-based panels

Wood or wood-based panels	Minimum thickness t_1 [mm]
Solid timber (softwood)	24
Solid wood panels	$7d^*$
Plywood	6^*
Oriented Strand Boards OSB	8^*
Resin-bonded particleboards	8^*
Cement-bonded particleboards	8^*

* if staple crown is countersunk it has to be increased by 2 mm

The characteristic head pull-through capacity may be calculated according to equation (1)

$$R_{\text{ax},2,k} = f_{\text{head},k} \cdot b \cdot d \quad [\text{N}] \quad (1)$$

with:

$f_{\text{head},k}$: characteristic head pull-through parameter in $[\text{N/mm}^2]$

b : width of staple crown [mm], $b \leq 26,7 \text{ mm}$

d : nominal diameter of raw staple wire in [mm]

A.3.6 Head pull-through parameter of wood fibre insulation material

The characteristic head pull-through parameter $f_{\text{head},k}$ of PREBENA tack staples for wood fibre insulation material with a mean density of at least 200 kg/m^3 and a minimum thickness of the material of 60 mm is $f_{\text{head},k} = 7,31 \text{ N/mm}^2$ for one staple. The width of the staple crown has to be at least 20 mm.

A.3.7 Minimum tensile strength of the wire

Table A.3.4 Minimum tensile strength f_u $[\text{N/mm}^2]$ of the raw wire of PREBENA tack staples

Nominal diameter d [mm]	1,52	1,80	2,00
"strong" galvanised	900		
stainless steel (V2a)	950		