

Approval body for construction products  
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and  
Laender Governments



## European Technical Assessment

**ETA-16/0239**  
**of 30 August 2019**

English translation prepared by DIBt - Original version in German language

### General Part

Technical Assessment Body issuing the  
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Hilti HIT-MM Plus

Product family  
to which the construction product belongs

Injection system for use in masonry

Manufacturer

Hilti Aktiengesellschaft  
9494 SCHAAN  
FÜRSTENTUM LIECHTENSTEIN

Manufacturing plant

Hilti Werke

This European Technical Assessment  
contains

25 pages including 3 annexes which form an integral part  
of this assessment

This European Technical Assessment is  
issued in accordance with Regulation (EU)  
No 305/2011, on the basis of

EAD 330076-00-0604

This version replaces

ETA-16/0239 issued on 8 May 2019

**European Technical Assessment**  
**ETA-16/0239**

English translation prepared by DIBt

**Page 2 of 25 | 30 August 2019**

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

## Specific Part

### 1 Technical description of the product

The Injection system Hilti HIT-MM Plus for masonry is a bonded anchor (injection type) consisting of a mortar foil pack with injection mortar Hilti HIT-MM Plus, a perforated sieve sleeve and an anchor rod with hexagon nut and washer in the range of M8 to M12 or an internal threaded sleeve in the range of M8 to M12. The steel elements are made of zinc coated steel, stainless steel or high corrosion resistant steel.

The anchor rod is placed into a drilled hole filled with injection mortar and is anchored via the bond and/or mechanical interlock between steel element, injection mortar and masonry.

The product description is given in Annex A.

### 2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic values for resistance	See Annexes C1 to C6
Displacements	See Annex C3 to C6
Durability	See Annex B2

#### 3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1

#### 3.3 Hygiene, health and the environment (BWR 3)

Essential characteristic	Performance
Content, emission and/or release of dangerous substances	No performance assessed

### 4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with the European Assessment Document EAD 330076-00-0604 the applicable European legal act is: [97/177/EC].

The system to be applied is: 1

**5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document**

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.


Issued in Berlin on 30 August 2019 by Deutsches Institut für Bautechnik

BD Dipl.-Ing. Andreas Kummerow  
Head of Department


*beglaubigt:*  
Lange

Installed condition


**Figure A1:** Hollow brick with threaded rod, HAS-U-..., HIT-V-... and sieve sleeve HIT-SC (see Table B5) or with internally threaded sleeve HIT-IC and sieve sleeve HIT-SC (see Table B6)

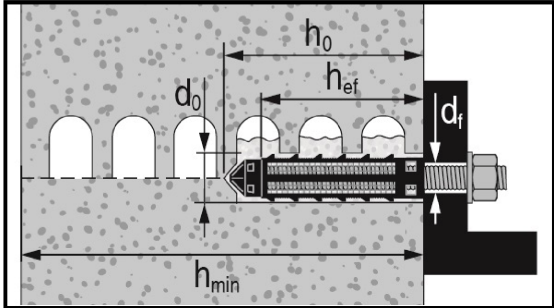

**Figure A2:** Solid brick with threaded rod, HAS-U-..., HIT-V-... (see Table B7)

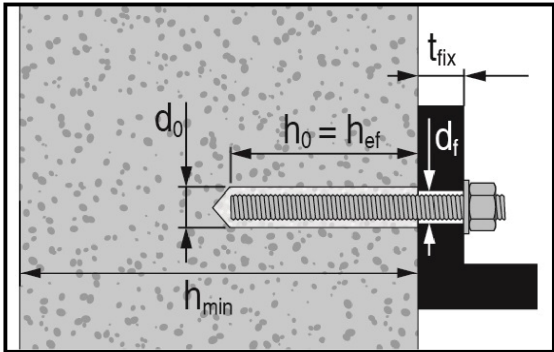

**Figure A3:** Solid brick with internally threaded sleeve HIT-IC (see Table B8)

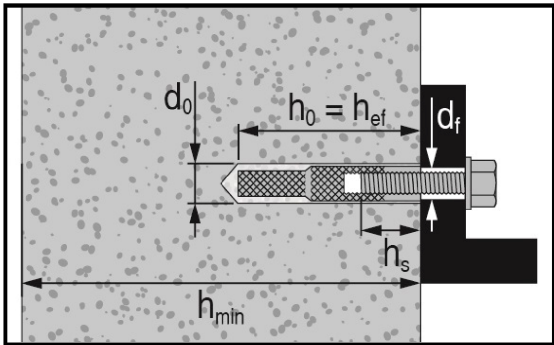

Hilti HIT-MM Plus

Product description  
Installed condition.

Annex A1

## Product description: Injection mortar and steel elements

**Injection mortar Hilti HIT-MM Plus:** hybrid system with aggregate  
330 ml and 500 ml

Marking  
HILTI HIT  
Production number and  
production line  
Expiry date mm/yyyy





Product name: "Hilti HIT-MM Plus"

### Static mixer Hilti HIT-RE-M




### Threaded rod, HAS-U-..., HIT-V-....:

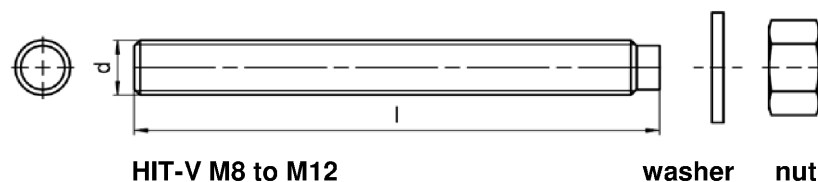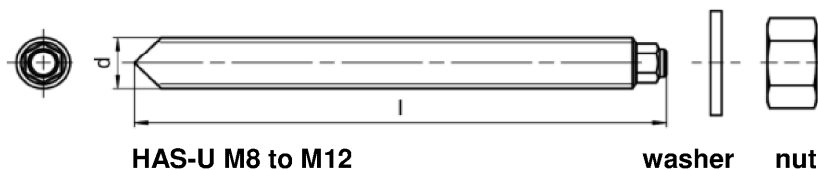

Commercial standard threaded rods with:

- Materials and mechanical properties according to Table A1.
- Inspection certificate 3.1 according to EN 10204:2004. The documents shall be stored.
- Marking of embedment depth.

### Internally threaded sleeve: HIT-IC M8 to M12



Marking:  
e. g. HIT-IC M8x80


## Hilti HIT-MM Plus

### Product description

Injection mortar / Static mixer / Steel elements.

Annex A2

Sieve sleeve HIT-SC 16 to 22



Electronic copy of the ETA by DIBt: ETA-16/0239

Hilti HIT-MM Plus	Annex A3
Product description Sieve sleeve.	

**Table A1: Materials**

Designation	Material
<b>Metal parts made of zinc coated steel</b>	
HAS-U-5.8 (HDG) HIT-V-5.8(F) Threaded rod	Strength class 5.8, $f_{uk} = 500 \text{ N/mm}^2$ , $f_{yk} = 400 \text{ N/mm}^2$ . Elongation at fracture ( $l_0 = 5d$ ) > 8% ductile. Electroplated zinc coated $\geq 5 \mu\text{m}$ , (F) or (HDG) Hot dip galvanized $\geq 45 \mu\text{m}$ .
HAS-U-8.8 (HDG) HIT-V-8.8(F) Threaded rod	Strength class 8.8, $f_{uk} = 800 \text{ N/mm}^2$ , $f_{yk} = 640 \text{ N/mm}^2$ . Elongation at fracture ( $l_0 = 5d$ ) > 12% ductile. Electroplated zinc coated $\geq 5 \mu\text{m}$ , (F) or (HDG) Hot dip galvanized $\geq 45 \mu\text{m}$ .
Internally threaded sleeve HIT-IC	$f_{uk} = 490 \text{ N/mm}^2$ , $f_{yk} = 390 \text{ N/mm}^2$ . Elongation at fracture ( $l_0 = 5d$ ) > 8% ductile. Electroplated zinc coated $\geq 5 \mu\text{m}$ .
Washer	Electroplated zinc coated $\geq 5 \mu\text{m}$ . Hot dip galvanized $\geq 45 \mu\text{m}$ .
Nut	Strength class of nut adapted to strength class of threaded rod. Electroplated zinc coated $\geq 5 \mu\text{m}$ , (F) Hot dip galvanized $\geq 45 \mu\text{m}$ .
<b>Metal parts made of stainless steel</b>	
HAS-U A4 HIT-V-R	Strength class 70 $f_{uk} = 700 \text{ N/mm}^2$ , $f_{yk} = 450 \text{ N/mm}^2$ . Elongation at fracture ( $l_0 = 5d$ ) > 8% ductile. Stainless steel A4 according to EN 10088-1: 2014
Threaded rod	Strength class 70 $f_{uk} = 700 \text{ N/mm}^2$ , $f_{yk} = 450 \text{ N/mm}^2$ . Elongation at fracture ( $l_0 = 5d$ ) > 8% ductile. Stainless steel 1.4401, 1.4404, 1.4578, 1.4571, 1.4439, 1.4362 EN 10088-1: 2014
Washer	Stainless steel A4 according to EN 10088-1: 2014
Nut	Strength class of nut adapted to strength class of threaded rod Stainless steel A4 according to EN 10088-1: 2014
<b>Metal parts made of high corrosion resistant steel</b>	
HAS-U HCR HIT-V-HCR	$f_{uk} = 800 \text{ N/mm}^2$ , $f_{yk} = 640 \text{ N/mm}^2$ . Elongation at fracture ( $l_0 = 5d$ ) > 8% ductile. High corrosion resistant steel according to EN 10088-1: 2014
Threaded rod	$f_{uk} = 800 \text{ N/mm}^2$ , $f_{yk} = 640 \text{ N/mm}^2$ . Elongation at fracture ( $l_0 = 5d$ ) > 8% ductile. High corrosion resistant steel 1.4529, 1.4565 EN 10088-1: 2014
Washer	High corrosion resistant steel according to EN 10088-1: 2014
Nut	Strength class of nut adapted to strength class of threaded rod. High corrosion resistant steel according to EN 10088-1: 2014
<b>Plastic parts</b>	
Sieve sleeve HIT-SC	Frame: FPP 20T. Sieve: PA6.6 N500/200.

**Hilti HIT-MM Plus**

**Product description**  
Materials

**Annex A4**




## Specifications of intended use

### Base materials:

- Solid brick masonry (use category b) according to Annex B3.  
Note: The characteristic resistances are also valid for larger brick sizes and larger compressive strengths of the masonry unit.
- Hollow brick masonry (use category c) according to Annex B3 and B5.
- Mortar strength class of the masonry: M2,5 at minimum according to EN 998-2:2010.
- For masonry made of other solid, hollow or perforated bricks, the characteristic resistance of the anchor may be determined by job site tests according to EOTA Technical Report TR 053, April 2016, under consideration of the  $\beta$ -factor given in Annex C1, Table C1.

**Table B1: Overview use categories**

Anchorages subject to:		HIT-MM Plus with threaded rod, HAS-U-..., HIT-V-... or HIT-IC	
		In solid bricks	In hollow bricks
Hole drilling 		Hammer mode, Rotary mode	Rotary mode
Static and quasi static loading		Annex: C2 (steel), C3, C4	Annex: C2 (steel), C5, C6
Use category: dry or wet structure		Category <b>d/d</b> - <b>Installation and use</b> in structures subject to <b>dry</b> internal conditions. Category <b>w/d</b> - <b>Installation in dry or wet</b> substrate <b>and use</b> in structures subject to <b>dry</b> internal conditions Category <b>w/w</b> - <b>Installation and use</b> in structures subject to <b>dry or wet</b> environmental conditions	
Installation direction		Horizontal	
Use category		b (solid masonry)	c (hollow or perforated masonry)
Temperature in the base material at installation		+5 °C to +40 °C (Table B9)	0 °C to +40 °C (Table B10)
In-service temperature	Temperature range Ta:	-40 °C to +40 °C	(max. long term temperature +24 °C and max. short term temperature +40 °C)
	Temperature range Tb:	-40 °C to +80 °C	(max. long term temperature +50 °C and max. short term temperature +80 °C)

**Hilti HIT-MM Plus**

**Intended Use**  
Specifications.

**Annex B1**

#### Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (zinc coated steel, stainless steel or high corrosion resistant steel).
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal conditions, if no particular aggressive conditions exist (stainless steel or high corrosion resistant steel).
- Structures subject to external atmospheric exposure and to permanently damp internal conditions, if other particular aggressive conditions exist (high corrosion resistant steel).

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing products are used).

#### Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and masonry work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e. g. position of the anchor relative to supports).
- Anchorages are designed in accordance with:  
ETA Technical Report TR 054, April 2016, Design method A.

#### Installation:





- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.

Hilti HIT-MM Plus

Intended Use  
Specifications.

Annex B2

**Table B2: Overview brick types and properties**





Brick type	Picture	Brick size [mm]	Compressive strength [N/mm <sup>2</sup> ]	Bulk density [kg/dm <sup>3</sup> ]	Annex
Solid clay brick EN 771-1		≥ 240x115x113	12	2,0	C3
Solid calcium silicate brick EN 771-2		≥ 240x115x113	12 / 28	2,0	C4
Hollow clay brick EN 771-1		300x240x238	12 / 20	1,4	C5
Hollow calcium silicate brick EN 771-2		248x240x238	12 / 20	1,4	C6

**Hilti HIT-MM Plus**

**Intended Use**  
Brick types and properties.

**Annex B3**

**Table B3: Overview fastening elements (including sizes) and corresponding brick types.**  
Embedment depth  $h_{ef} = 80$  mm

Brick type	Picture	HAS-U HIT-V <sup>1)</sup>	HIT-IC	HAS-U + HIT-SC HIT-V <sup>1)</sup> + HIT-SC	HIT-IC + HIT-SC	Annex
Solid clay brick EN 771-1		M8 to M12	M8 to M12	M8 to M12	M8 to M12	C3
Solid calcium silicate brick EN 771-2		M8 to M12	M8 to M12	M8 to M12	M8 to M12	C4
Hollow clay brick EN 771-1		-	-	M8 to M12	M8 to M12	C5
Hollow calcium silicate brick EN 771-2		-	-	M8 to M12	M8 to M12	C6

<sup>1)</sup> Commercial standard threaded rods can also be used.



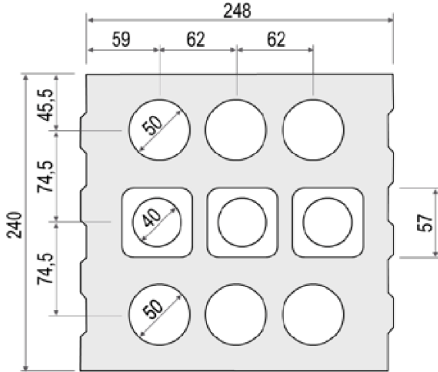

**Hilti HIT-MM Plus**

**Intended Use**

Fastening elements and corresponding brick types.

**Annex B4**

Table B4: Details of hollow bricks

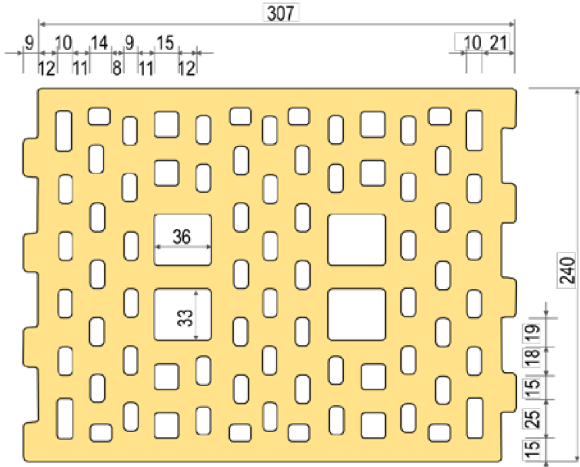
<div><div>Hollow clay brick EN 771-1</div><div>Rapis Ziegel Hlz 12-1,4-10DF</div><div></div></div>	<div><div>Hollow calcium silicate brick EN 771-2</div><div>KS Südbayern KSL-R(P) 12-1,4-8DF</div><div></div></div>
--	---

Hilti HIT-MM Plus


Intended Use  
Details of hollow bricks.

Annex B5

**Table B5: Installation parameters of threaded rod, HAS-U-..., HIT-V-... with sieve sleeve HIT-SC in hollow brick and solid brick (Figure A1)**

Threaded rod, HAS-U-..., HIT-V-...			M8	M10	M12
			<b>16x85</b>	<b>16x85</b>	<b>18x85</b>
Nominal diameter of drill bit	$d_0$	[mm]	16	16	18
Drill hole depth	$h_0$	[mm]	95	95	95
Effective embedment depth	$h_{ef}$	[mm]	80	80	80
Maximum diameter of clearance hole in the fixture	$d_f$	[mm]	9	12	14
Minimum wall thickness	$h_{min}$	[mm]	115	115	115
Brush HIT-RB	-	[-]	16	16	18
Maximum torque moment	$T_{max}$	[Nm]	3	4	6
Number of strokes HDM	-	[-]	6	6	8
Number of strokes HDE-500	-	[-]	5	5	6

**Table B6: Installation parameters of internally threaded sleeve HIT-IC with HIT-SC in hollow brick and solid brick (Figure A1)**


HIT-IC			M8x80	M10x80	M12x80
			<b>16x85</b>	<b>18x85</b>	<b>22x85</b>
Nominal diameter of drill bit	$d_0$	[mm]	16	18	22
Drill hole depth	$h_0$	[mm]	95	95	95
Effective embedment depth	$h_{ef}$	[mm]	80	80	80
Thread engagement length	$h_s$	[mm]	8...75	10...75	12...75
Maximum diameter of clearance hole in the fixture	$d_f$	[mm]	9	12	14
Minimum wall thickness	$h_{min}$	[mm]	115	115	115
Brush HIT-RB	-	[-]	16	18	22
Maximum torque moment	$T_{max}$	[Nm]	3	4	6
Number of strokes HDM	-	[-]	6	8	10
Number of strokes HDE-500	-	[-]	5	6	8

Hilti HIT-MM Plus


**Intended Use**  
Installation parameters.

**Annex B6**

**Table B7: Installation parameters of threaded rod, HAS-U-..., HIT-V-... in solid brick  
(Figure A2)**

Threaded rod, HAS-U-..., HIT-V-... 			M8	M10	M12
Nominal diameter of drill bit	$d_0$	[mm]	10	12	14
Drill hole depth = Effective embedment depth	$h_0 =$ $h_{ef}$	[mm]	80	80	80
Maximum diameter of clearance hole in the fixture	$d_f$	[mm]	9	12	14
Minimum wall thickness	$h_{min}$	[mm]	115	115	115
Brush HIT-RB	-	[-]	10	12	14
Maximum torque moment	$T_{max}$	[Nm]	5	8	10

**Table B8: Installation parameters of internally threaded sleeve HIT-IC in solid brick  
(Figure A3)**

HIT-IC 			M8x80	M10x80	M12x80
Nominal diameter of drill bit	$d_0$	[mm]	14	16	18
Drill hole depth = Effective embedment depth	$h_0 =$ $h_{ef}$	[mm]	80	80	80
Thread engagement length	$h_s$	[mm]	8...75	10...75	12...75
Maximum diameter of clearance hole in the fixture	$d_f$	[mm]	9	12	14
Minimum wall thickness	$h_{min}$	[mm]	115	115	115
Brush HIT-RB	-	[-]	14	16	18
Maximum torque moment	$T_{max}$	[Nm]	5	8	10

Hilti HIT-MM Plus

Intended Use  
Installation parameters.

Annex B7

**Table B9: Maximum working time and minimum curing time for solid bricks<sup>1)</sup>**

Temperature in the base material T	Maximum working time $t_{\text{work}}$	Minimum curing time $t_{\text{cure}}$
5 °C to 10 °C	8 min	3 h
> 10 °C to 20 °C	5 min	2 h
> 20 °C to 30 °C	3 min	60 min
> 30 °C to 40 °C	2 min	45 min

<sup>1)</sup> The curing time data are valid for dry base material only.  
In wet base material the curing times must be doubled.

**Table B10: Maximum working time and minimum curing time for hollow bricks<sup>1)</sup>**

Temperature in the base material T	Maximum working time $t_{\text{work}}$	Minimum curing time $t_{\text{cure}}$
> 0 °C to 5 °C	10 min	6 h
> 5 °C to 10 °C	8 min	3 h
> 10 °C to 20 °C	5 min	2 h
> 20 °C to 30 °C	3 min	60 min
> 30 °C to 40 °C	2 min	45 min

<sup>1)</sup> The curing time data are valid for dry base material only.  
In wet base material the curing times must be doubled.

**Table B11: Cleaning tools**

**Manual Cleaning (MC):**

Hilti hand pump for blowing out drill holes



**Compressed air cleaning (CAC)<sup>1)</sup>:**

air nozzle with an orifice opening of minimum 3,5 mm in diameter for blowing out drill hole



**Steel brush HIT-RB:**

according to tables B5 to B8 depending on drill hole diameter for MC and CAC



<sup>1)</sup> Compressed Air Cleaning (CAC) is also allowed.

**Hilti HIT-MM Plus**

**Intended Use**

Maximum working time and minimum curing time.  
Cleaning tools.

**Annex B8**




## Installation

### Hole drilling


If no significant resistance is felt over the entire depth of the hole when drilling (e.g. in unfilled butt joints), the anchor should not be set at this position.

### Drilling mode



#### In hollow and solid bricks (use category c): rotary mode

Drill hole to the required embedment depth with a hammer drill set in rotary mode using an appropriately sized carbide drill bit.




#### In solid bricks (use category b): hammer mode

Drill hole to the required embedment depth with a hammer drill set in hammer mode using an appropriately sized carbide drill bit.


### Drill hole cleaning

Just before setting the anchor, the drill hole must be free of dust and debris. Inadequate hole cleaning = poor load values.


### Manual Cleaning (MC): For hollow and solid bricks



Blow out at least 2 times from the back of the drill hole with the Hilti hand pump until return air stream is free of noticeable dust.



Brush 2 times with the specified steel brush (tables B5 to B8) by inserting the steel brush Hilti HIT-RB to the back of the hole in a twisting motion and removing it. The brush must produce natural resistance as it enters the drill hole (brush  $\varnothing \geq$  drill hole  $\varnothing$ ) - if not the brush is too small and must be replaced with the proper brush diameter.



Blow out again with the Hilti hand pump at least 2 times until return air stream is free of noticeable dust.


### Hilti HIT-MM Plus

### Intended Use


Installation instructions.

### Annex B9

### Injection preparation in masonry with holes or voids: installation with sieve sleeve HIT-SC




**Sieve sleeve HIT-SC**  
Close lid.




Insert sieve sleeve manually.

### For all applications



Tightly attach new Hilti mixing nozzle HIT-RE-M to foil pack manifold (snug fit). Do not modify the mixing nozzle. Observe the instruction for use of the dispenser and foil pack. Check foil pack holder for proper function. Do not use damaged foil packs / holders. Insert foil pack into foil pack holder and put holder into HIT-dispenser.




Discard initial adhesive. The foil pack opens automatically as dispensing is initiated. Depending on the size of the foil pack an initial amount of adhesive has to be discarded. Discarded quantities are:

2 strokes for 330 ml foil pack,  
3 strokes for 500 ml foil pack.


### Inject adhesive without forming air voids

#### Installation with sieve sleeve HIT-SC



#### Sieve sleeve HIT-SC

Insert mixer approximately 1 cm through the lid. Inject required amount of adhesive (see tables B5 and B6). Adhesive must emerge through the lid.



Control amount of injected mortar. Adhesive has to protrude into the lid.


After injection is completed, depressurize the dispenser by pressing the release trigger. This will prevent further adhesive discharge from the mixer.

**Hilti HIT-MM Plus**


**Intended Use**  
Installation instructions.

**Annex B10**

### Solid bricks: installation without sieve sleeve




Inject the adhesive starting at the back of the hole, slowly withdrawing the mixer with each trigger pull. Fill holes approximately 2/3 full to ensure that the annular gap between the anchor and the base material is completely filled with adhesive along the embedment length.



After injection is completed, depressurize the dispenser by pressing the release trigger. This will prevent further adhesive discharge from the mixer.


### Setting the element:

Before use verify that the element is dry and free of oil and other contaminants.




#### HAS-U-..., HIT-V-... or HIT-IC in hollow and solid bricks: Pre-setting (Figure A1 to Figure A3)

Mark the element to the required embedment depth  $h_{ef}$  acc. to Table B5 to B8.



Set element to the required embedment depth until working time  $t_{work}$  has elapsed. The working time  $t_{work}$  is given in Table B9 and Table B10.

### Loading the anchor



After required curing time  $t_{cure}$  (see Table B9 and Table B10) the anchor can be loaded.











The applied installation torque shall not exceed the values  $T_{max}$  given in Table B5 to Table B8.

Hilti HIT-MM Plus

Intended Use  
Installation instructions.

Annex B11

**Table C1:  $\beta$ -factor for job-site testing under tension loading**

Use categories		w/w and w/d		d/d	
Temperature range		Ta <sup>1)</sup>	Tb <sup>1)</sup>	Ta <sup>1)</sup>	Tb <sup>1)</sup>
Base material	Elements				
Solid clay brick EN 771-2	HAS-U, HIT-V <sup>2)</sup> or HIT-IC 	0,94	0,81	0,94	0,81
	HAS-U, HIT-V <sup>2)</sup> + HIT-SC 				
	HIT-IC + HIT-SC 				
Solid calcium silicate brick EN 771-2	HAS-U, HIT-V <sup>2)</sup> or HIT-IC 	0,93	0,82	0,94	0,82
	HAS-U, HIT-V <sup>2)</sup> + HIT-SC 	0,66	0,60	0,88	0,80
	HIT-IC with HIT-SC 				
Hollow clay brick EN 771-1	HAS-U, HIT-V <sup>2)</sup> + HIT-SC 	0,94	0,81	0,94	0,81
	HIT-IC + HIT-SC 				
Hollow calcium silicate brick EN 771-2	HAS-U, HIT-V <sup>2)</sup> + HIT-SC 	0,66	0,60	0,88	0,80
	HIT-IC + HIT-SC 				

<sup>1)</sup> Temperature range Ta / Tb see Annex B1.

<sup>2)</sup> Commercial standard threaded rods can also be used.


**Hilti HIT-MM Plus**

**Performances**


$\beta$ -factors for job-site testing under tension load.

**Annex C1**

**Table C2: Characteristic values of steel resistance for threaded rod, HAS-U-..., HIT-V-... under tension and shear loads in masonry**

Threaded rod, HAS-U-..., HIT-V-...		M8	M10	M12
Steel failure tension loads				
Characteristic steel resistance	$N_{Rk,s}$	[kN]	$A_s \cdot f_{uk}$	
Steel failure shear loads without lever arm				
Characteristic steel resistance	$V_{Rk,s}$	[kN]	$0,5 \cdot A_s \cdot f_{uk}$	
Steel failure shear loads with lever arm				
Characteristic bending moment	$M_{Rk,s}$	[Nm]	$1,2 \cdot W_{el} \cdot f_{uk}$	

**Table C3: Characteristic values of steel resistance for internally threaded sleeve HIT-IC under tension and shear loads in masonry**

HIT-IC		M8	M10	M12
Steel failure tension loads				
Characteristic steel resistance	$N_{Rk,s}$ [kN]	5,9	7,3	13,8
Partial safety factor	$\gamma_{Ms,N}$ [-]	1,50		
Steel failure shear loads without lever arm				
Characteristic steel resistance	$V_{Rk,s}$ [kN]	$0,5 \cdot A_s \cdot f_{uk}$		
Steel failure shear loads with lever arm				
Characteristic bending moment	$M_{Rk,s}$ [Nm]	$1,2 \cdot W_{el} \cdot f_{uk}$		

Hilti HIT-MM Plus


**Performances**

Characteristic resistances under tension and shear load – steel failure.

**Annex C2**

## Brick type: Solid clay brick Mz, 2DF

**Table C4: Description of brick**

Brick type	[-]	Solid Mz, 2DF	
Bulk density	$\rho$ [kg/dm <sup>3</sup> ]	$\geq 2,0$	
Compressive strength	$f_b$ [N/mm <sup>2</sup> ]	$\geq 12$	
Code	[-]	EN 771 - 1	
Producer	[-]	-	
Brick dimensions	[mm]	$\geq 240 \times 115 \times 113$	
Minimum wall thickness	$h_{min}$ [mm]	$\geq 115$	

**Table C5: Installation parameter for all anchor combinations (see Table B3)**

Anchor type	see Table B3	
Edge distance	$c_{min} = c_{cr}$ [mm]	115
Spacing	$s_{min \parallel} = s_{cr \parallel}$ [mm]	240
	$s_{min \perp} = s_{cr \perp}$ [mm]	115

**Table C6: Group factor for group fastenings**

Group factor	$\alpha_{q,N \parallel} \alpha_{q,V \parallel} \alpha_{q,N \perp} \alpha_{q,V \perp}$ [-]	2 at $c_{cr}$ and $s_{cr}$
--------------	---	----------------------------

**Table C7: Characteristic tension resistance at edge distance  $c \geq c_{cr}$**

Use category				w/w = w/d		d/d	
Service temperature range				(Ta)	(Tb)	(Ta)	(Tb)
Anchor type and size		$h_{ef}$ [mm]	$f_b$ [N/mm <sup>2</sup> ]	$N_{Rk}$ [kN]			
HAS-U, HIT-V <sup>1)</sup>	M8, M10, M12	80	12	2,5	2,0	2,5	2,0
HIT-IC	M8	80	12	2,5	2,0	2,5	2,0
	M10, M12			3,5	3,0	3,5	3,0
HAS-U, HIT-V <sup>1)</sup> + HIT-SC	M8, M10, M12	80	12	3,5	3,0	3,5	3,0
HIT-IC + HIT-SC	M8, M10, M12	80	12	3,5	3,0	3,5	3,0

<sup>1)</sup> Commercial standard threaded rods can also be used.

**Table C8: Characteristic shear resistance at edge distance  $c \geq c_{cr}$**

Use category				w/w = w/d		d/d	
Service temperature range				(Ta)	(Tb)	(Ta)	(Tb)
Anchor type and size		$h_{ef}$ [mm]	$f_b$ [N/mm <sup>2</sup> ]	$V_{Rk}$ [kN]			
All anchors	M8, M10, M12	80	12	3,0			

**Table C9: Displacements**

$h_{ef}$ [mm]	N [kN]	$\delta_{N0}$ [mm]	$\delta_{N\infty}$ [mm]	V [kN]	$\delta_{V0}$ [mm]	$\delta_{V\infty}$ [mm]
80	0,9	0,2	0,4	1,0	1,0	1,5

## Hilti HIT-MM Plus

### Performances solid clay brick Mz, 2DF


Installation parameters and group factor.

Characteristic values of resistance under tension and shear loads. Displacements.

## Annex C3

## Brick type: Solid calcium silicate brick KS, 2DF

**Table C10: Description of brick**

Brick type	[-]	Solid KS, 2DF	
Bulk density	$\rho$ [kg/dm³]	$\geq 2,0$	
Compressive strength	$f_b$ [N/mm²]	$\geq 12$ or $\geq 28$	
Code	[-]	EN 771 - 2	
Producer	[-]	-	
Brick dimensions	[mm]	$\geq 240 \times 115 \times 113$	
Minimum wall thickness	$h_{min}$ [mm]	$\geq 115$	





**Table C11: Installation parameter for all anchor combinations (see Table B3)**

Anchor type	see Table B3	
Edge distance	$c_{min} = c_{cr}$ [mm]	115
Spacing	$s_{min \parallel} = s_{cr \parallel}$ [mm]	240
	$s_{min \perp} = s_{cr \perp}$ [mm]	115

**Table C12: Group factor for group fastenings**

Group factor	$\alpha_{g,N \parallel} \alpha_{g,V \parallel} \alpha_{g,N \perp} \alpha_{g,V \perp}$ [-]	2 at $c_{cr}$ and $s_{cr}$
--------------	---	----------------------------

**Table C13: Characteristic tension resistance at edge distance  $c \geq c_{cr}$**

Use category			w/w = w/d		d/d	
Service temperature range			(Ta)	(Tb)	(Ta)	(Tb)
Anchor type and size	$h_{ef}$ [mm]	$f_b$ [N/mm²]	$N_{Rk}$ [kN]			
 HAS-U, HIT-V <sup>1)</sup>  HIT-IC M8, M10, M12	80	12	4,5	4,0	5,0	4,0
		28	7,0	6,0	7,0	6,0
 HAS-U, HIT-V <sup>1)</sup> + HIT-SC  HIT-IC + HIT-SC M8, M10, M12	80	12	3,5	2,5	4,5	4,0
		28	5,0	4,5	6,5	6,0

<sup>1)</sup> Commercial standard threaded rods can also be used.

**Table C14: Characteristic shear resistance at edge distance  $c \geq c_{cr}$**

Use category			w/w = w/d		d/d	
Service temperature range			(Ta)	(Tb)	(Ta)	(Tb)
Anchor type and size	$h_{ef}$ [mm]	$f_b$ [N/mm²]	$V_{Rk}$ [kN]			
All anchors M8, M10, M12	80	12	3,5			
		28	5,0			

**Table C15: Displacements**

$h_{ef}$ [mm]	N [kN]	$\delta_{N0}$ [mm]	$\delta_{N\infty}$ [mm]	V [kN]	$\delta_{V0}$ [mm]	$\delta_{V\infty}$ [mm]
80mm	2,3	0,2	0,4	1,5	1,2	1,8

## Hilti HIT-MM Plus

### Performances solid silica brick KS, 2DF


Installation parameters and group factor.

Characteristic values of resistance under tension and shear loads. Displacements.

## Annex C4

## Brick type: Hollow clay brick Hlz, 10DF

**Table C16: Description of brick**

Brick type	[-]	Hlz 12-1,4-10 DF	 <p>Drawing of the brick see Table B4</p>
Bulk density	$\rho$ [kg/dm <sup>3</sup> ]	$\geq 1,4$	
Compressive strength	$f_b$ [N/mm <sup>2</sup> ]	$\geq 12$ or $\geq 20$	
Code	[-]	EN 771 - 1	
Producer	[-]	Rapis (D)	
Brick dimensions	[mm]	300 x 240 x 238	
Minimum wall thickness	$h_{min}$ [mm]	$\geq 240$	



**Table C17: Installation parameter for all anchor combinations (see Table B3)**

Anchor type	see Table B3	
Edge distance	$c_{min} = c_{cr}$ [mm]	150
Spacing	$s_{min \parallel} = s_{cr \parallel}$ [mm]	300
	$s_{min \perp} = s_{cr \perp}$ [mm]	240

**Table C18: Group factor for group fastenings**



Group factor	$\alpha_{g,N \parallel} \alpha_{g,V \parallel} \alpha_{g,N \perp} \alpha_{g,V \perp}$ [-]	2 at $c_{cr}$ and $s_{cr}$
--------------	---	----------------------------

**Table C19: Characteristic tension resistance at edge distance  $c \geq c_{cr}$**

Use category			w/w = w/d		d/d	
Service temperature range			(Ta)	(Tb)	(Ta)	(Tb)
Anchor type and size	$h_{ef}$ [mm]	$f_b$ [N/mm <sup>2</sup> ]	$N_{Rk}$ [kN]			
HAS-U, HIT-V <sup>1)</sup> + HIT-SC  M8, M10, M12	80	12	2,5	2,0	2,5	2,0
HIT-IC + HIT-SC 		20	3,0	2,5	3,0	2,5

<sup>1)</sup> Commercial standard threaded rods can also be used.

**Table C20: Characteristic shear resistance at edge distance  $c \geq c_{cr}$**

Use category			w/w = w/d		d/d	
Service temperature range			(Ta)	(Tb)	(Ta)	(Tb)
Anchor type and size	$h_{ef}$ [mm]	$f_b$ [N/mm <sup>2</sup> ]	$V_{Rk}$ [kN]			
HAS-U, HIT-V <sup>1)</sup> + HIT-SC  M8, M10, M12	80	12	1,5			
HIT-IC + HIT-SC 		20	2,5			

<sup>1)</sup> Commercial standard threaded rods can also be used.

**Table C21: Displacements**

$h_{ef}$ [mm]	N [kN]	$\delta_{N0}$ [mm]	$\delta_{N\infty}$ [mm]	V [kN]	$\delta_{V0}$ [mm]	$\delta_{V\infty}$ [mm]
80	0,9	0,2	0,3	0,9	1,0	1,5

Hilti HIT-MM Plus

**Performances hollow clay brick Hlz, 10DF**

Installation parameters and group factor.


Characteristic values of resistance under tension and shear loads. Displacements.

**Annex C5**



## Brick type: Hollow calcium silicate brick KSL, 8DF

**Table C22: Description of brick**

Brick type	[-]	KSL-12-1,4-8 DF	 Drawing of the brick see Table B4
Bulk density	$\rho$ [kg/dm <sup>3</sup> ]	$\geq 1,4$	
Compressive strength	$f_b$ [N/mm <sup>2</sup> ]	$\geq 12$ or $\geq 20$	
Code	[-]	EN 771 – 2	
Producer	[-]	KS Südbayern (D)	
Brick dimensions	[mm]	248 x 240 x 238	
Minimum wall thickness	$h_{min}$ [mm]	$\geq 240$	



**Table C23: Installation parameter for all anchor combinations (see Table B3)**

Anchor type	see Table B3	
Edge distance	$c_{min} = c_{cr}$ [mm]	125
Spacing	$s_{min \parallel} = s_{cr \parallel}$ [mm]	248
	$s_{min \perp} = s_{cr \perp}$ [mm]	240

**Table C24: Group factor for group fastenings**



Group factor	$\alpha_{g,N \parallel} \alpha_{g,V \parallel} \alpha_{g,N \perp} \alpha_{g,V \perp}$ [-]	2 at $c_{cr}$ and $s_{cr}$
--------------	---	----------------------------

**Table C25: Characteristic tension resistance at edge distance  $c \geq c_{cr}$**

Use category			w/w = w/d		d/d		
Service temperature range			(Ta)	(Tb)	(Ta)	(Tb)	
Anchor type and size	$h_{ef}$ [mm]	$f_b$ [N/mm <sup>2</sup> ]	$N_{Rk}$ [kN]				
HAS-U, HIT-V <sup>1)</sup> + HIT-SC  M8, M10, M12	80	12	2,5	2,0	2,5	2,0	
HIT-IC + HIT-SC 		20	3,5	3,0	3,5	3,0	

<sup>1)</sup> Commercial standard threaded rods can also be used.

**Table C26: Characteristic shear resistance at edge distance  $c \geq c_{cr}$**

Use category			w/w = w/d		d/d		
Service temperature range			(Ta)	(Tb)	(Ta)	(Tb)	
Anchor type and size	$h_{ef}$ [mm]	$f_b$ [N/mm <sup>2</sup> ]	$V_{Rk}$ [kN]				
HAS-U, HIT-V <sup>1)</sup> + HIT-SC  M8, M10, M12	80	12	7,0				
HIT-IC + HIT-SC 		20	10,0				

<sup>1)</sup> Commercial standard threaded rods can also be used.

**Table C27: Displacements**

$h_{ef}$ [mm]	N [kN]	$\delta_{N0}$ [mm]	$\delta_{N\infty}$ [mm]	V [kN]	$\delta_{V0}$ [mm]	$\delta_{V\infty}$ [mm]
80	1,8	0,2	0,3	3,4	2,5	3,8

Hilti HIT-MM Plus

**Performances hollow silica brick KSL, 8DF**

Installation parameters and group factor.

Characteristic values of resistance under tension and shear loads. Displacements.

**Annex C6**