

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments



European Technical Assessment

ETA-19/0161
of 28 August 2019

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Hilti HIT-HY 170 with HAS-U

Product family
to which the construction product belongs

Metal Injection anchors for use in masonry

Manufacturer

Hilti Aktiengesellschaft
9494 SCHAAN
FÜRSTENTUM LIECHTENSTEIN

Manufacturing plant

Hilti Werke

This European Technical Assessment
contains

24 pages including 3 annexes which form an integral part
of this assessment

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

EAD 330076-00-0604

This version replaces

ETA-19/0161 issued on 8 May 2019

**European Technical Assessment
ETA-19/0161**

English translation prepared by DIBt

Page 2 of 24 | 28 August 2019

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part**1 Technical description of the product**

The Injection system Hilti HIT-HY 170 with HAS-U for masonry is a bonded anchor (injection type) consisting of a mortar foil pack with injection mortar Hilti HIT-HY 170, a perforated sieve sleeve and an anchor rod with hexagon nut and washer in the range of M8 to M12. The steel elements are made of zinc coated steel, stainless steel or high corrosion resistant steel.

The anchor rod is placed into a drilled hole filled with injection mortar and is anchored via the bond and/or mechanical interlock between steel element, injection mortar and masonry.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment**3.1 Mechanical resistance and stability (BWR 1)**

Essential characteristic	Performance
Characteristic values for resistance	See Annexes C1 to C7
Displacements	See Annex C2 to C7
Durability	See Annex B2

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1

3.3 Hygiene, health and the environment (BWR 3)

Essential characteristic	Performance
Content, emission and/or release of dangerous substances	No performance assessed

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with the European Assessment Document EAD 330076-00-0604 the applicable European legal act is: [97/177/EC].

The system to be applied is: 1

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.

Issued in Berlin on 28 August 2019 by Deutsches Institut für Bautechnik

BD Dipl.-Ing. Andreas Kummerow
Head of Department

beglaubigt:
Lange

Installed condition

Figure A1: Hollow brick with HAS-U-... and sieve sleeve HIT-SC
(see Table B5)


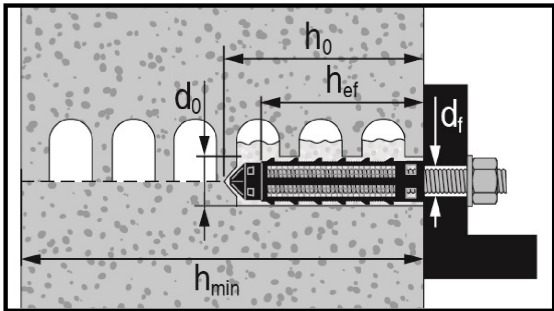


Figure A2: Solid brick with HAS-U-... (see Table B6)

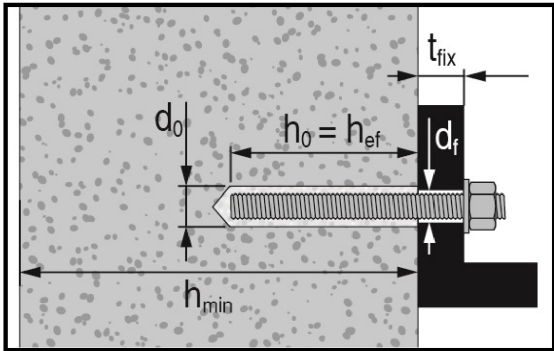

Hilti HIT-HY 170 with HAS-U

Product description
Installed condition

Annex A1

Product description: Injection mortar and steel elements

Injection mortar Hilti HIT-HY 170: hybrid system with aggregate
330 ml and 500 ml

Marking

HILTI HIT

Production number and
production line

Expiry date mm/yyyy




Product name: "Hilti HIT-HY 170"


Static mixer Hilti HIT-RE-M



HAS-U-...

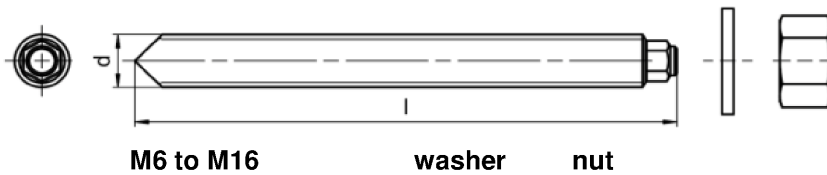

Sieve sleeve HIT-SC 16 to 22



Hilti HIT-HY 170 with HAS-U

Product description

Injection mortar / Static mixer / Steel elements / Sieve sleeve

Annex A2

Table A1: Materials

Designation	Material
Metal parts made of zinc coated steel	
HAS-U-5.8 (HDG)	Strength class 5.8, $f_{uk} = 500 \text{ N/mm}^2$, $f_{yk} = 400 \text{ N/mm}^2$. Elongation at fracture ($l_0 = 5d$) > 8% ductile. Electroplated zinc coated $\geq 5 \mu\text{m}$, (HDG) Hot dip galvanized $\geq 45 \mu\text{m}$.
HAS-U-8.8 (HDG)	Strength class 8.8, $f_{uk} = 800 \text{ N/mm}^2$, $f_{yk} = 640 \text{ N/mm}^2$. Elongation at fracture ($l_0 = 5d$) > 12% ductile. Electroplated zinc coated $\geq 5 \mu\text{m}$, (HDG) Hot dip galvanized $\geq 45 \mu\text{m}$.
Washer	Electroplated zinc coated $\geq 5 \mu\text{m}$. Hot dip galvanized $\geq 45 \mu\text{m}$.
Nut	Strength class of nut adapted to strength class of threaded rod. Electroplated zinc coated $\geq 5 \mu\text{m}$, (F) Hot dip galvanized $\geq 45 \mu\text{m}$.
Metal parts made of stainless steel	
HAS-U A4	Strength class 70 $f_{uk} = 700 \text{ N/mm}^2$, $f_{yk} = 450 \text{ N/mm}^2$. Elongation at fracture ($l_0 = 5d$) > 8% ductile. Stainless steel A4 according to EN 10088-1: 2014
Washer	Stainless steel A4 according to EN 10088-1: 2014
Nut	Strength class of nut adapted to strength class of threaded rod Stainless steel A4 according to EN 10088-1: 2014
Metal parts made of high corrosion resistant steel	
HAS-U HCR	$f_{uk} = 800 \text{ N/mm}^2$, $f_{yk} = 640 \text{ N/mm}^2$. Elongation at fracture ($l_0 = 5d$) > 8% ductile. High corrosion resistant steel according to EN 10088-1: 2014
Washer	High corrosion resistant steel according to EN 10088-1: 2014
Nut	Strength class of nut adapted to strength class of threaded rod. High corrosion resistant steel according to EN 10088-1: 2014
Plastic parts	
Sieve sleeve HIT-SC	Frame: FPP 20T. Sieve: PA6.6 N500/200.

Hilti HIT-HY 170 with HAS-U

Product description
Materials


Annex A3

Specifications of intended use

Base materials:

- Solid brick masonry (use category b) according to Annex B3.
Note: The characteristic resistances are also valid for larger brick sizes and larger compressive strengths of the masonry unit.
- Hollow brick masonry (use category c) according to Annex B3 and B4.
- Mortar strength class of the masonry: M2,5 at minimum according to EN 998-2:2010.
- For masonry made of other solid, hollow or perforated bricks, the characteristic resistance of the anchor may be determined by job site tests according to EOTA Technical Report TR 053, April 2016, under consideration of the β -factor given in Annex C1, Table C1.

Table B1: Overview use categories

Anchorages subject to:		HIT-HY 170 with HAS-U-...	
		In solid bricks	In hollow bricks
Hole drilling		Hammer mode, Rotary mode	Rotary mode
Static and quasi static loading		Annex: C1 (steel), C2, C3	Annex: C1 (steel), C4, C5, C6, C7
Use category: dry or wet structure		Category d/d - Installation and use in structures subject to dry internal conditions. Category w/d - Installation in dry or wet substrate and use in structures subject to dry internal conditions Category w/w - Installation and use in structures subject to dry or wet environmental conditions	
Installation direction		Horizontal	
Use category		b (solid masonry)	c (hollow or perforated masonry)
Temperature in the base material at installation		+5 °C to +40 °C (Table B7)	0 °C to +40 °C (Table B8)
In-service temperature	Temperature range Ta:	-40 °C to +40 °C	(max. long term temperature +24 °C and max. short term temperature +40 °C)
	Temperature range Tb:	-40 °C to +80 °C	(max. long term temperature +50 °C and max. short term temperature +80 °C)

Hilti HIT-HY 170 with HAS-U

Intended Use
Specifications

Annex B1

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (zinc coated steel, stainless steel or high corrosion resistant steel).
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal conditions, if no particular aggressive conditions exist (stainless steel or high corrosion resistant steel).
- Structures subject to external atmospheric exposure and to permanently damp internal conditions, if other particular aggressive conditions exist (high corrosion resistant steel).

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing products are used).

Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and masonry work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e. g. position of the anchor relative to supports).
- Anchorages under static or quasi-static loading are designed in accordance with: EOTA Technical Report TR 054, April 2016, Design method A.

Installation:







- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.

Hilti HIT-HY 170 with HAS-U

Intended Use
Specifications

Annex B2

Table B2: Overview brick types and properties









Brick type	Picture	Brick size [mm]	Compressive strength [N/mm ²]	Bulk density [kg/dm ³]	Annex
Solid clay brick EN 771-1		≥ 240x115x113	12	2,0	C2
Solid calcium silicate brick EN 771-2		≥ 240x115x113	12 / 28	2,0	C3
Hollow clay brick EN 771-1		300x240x238	12 / 20	1,4	C4
Hollow calcium silicate brick EN 771-2		248x240x238	12 / 20	1,4	C5
Hollow lightweight concrete brick EN 771-3		495x240x238	2 / 6	0,8	C6
Hollow normal weight concrete brick EN 771-3		500x200x200	4 / 10	1,0	C7

Hilti HIT-HY 170 with HAS-U

Intended Use
Brick types and properties

Annex B3

Table B3: Overview fastening elements (including sizes) and corresponding brick types.
Embedment depth $h_{ef} = 80 \text{ mm}$

Brick type	Picture	HAS-U 	HAS-U + HIT-SC 	Annex
Solid clay brick EN 771-1		M8 to M12	M8 to M12	C2
Solid calcium silicate brick EN 771-2		M8 to M12	M8 to M12	C3
Hollow clay brick EN 771-1		-	M8 to M12	C4
Hollow calcium silicate brick EN 771-2		-	M8 to M12	C5
Hollow lightweight concrete brick EN 771-3		-	M8 to M12	C6
Hollow normal weight concrete brick EN 771-3		-	M8 to M12	C7

Hilti HIT-HY 170 with HAS-U

Intended Use


Fastening elements and corresponding brick types

Annex B4

Table B4: Details of hollow bricks


Hollow clay brick
EN 771-1

Rapis Ziegel
Hlz 12-1,4-10DF

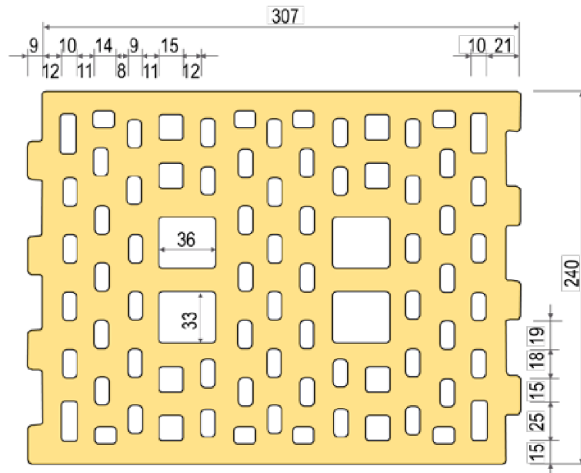


Hollow calcium silicate brick
EN 771-2

KS Südbayern
KSL-R(P) 12-1,4-8DF

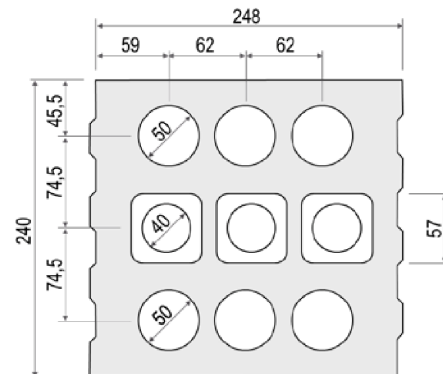


Hollow lightweight
concrete brick
EN 771-3

Knobel Betonwerk
Hbl 6-0,8-500x240x238

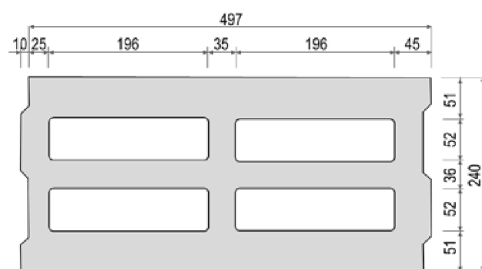

Hollow normal weight
concrete brick
EN 771-3

Parpaing creux
B40

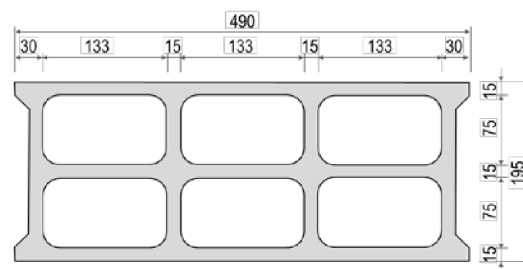

Hilti HIT-HY 170 with HAS-U

Intended Use
Details of hollow bricks

Annex B5

Table B5: Installation parameters of HAS-U-... with sieve sleeve HIT-SC in hollow brick and solid brick (Figure A1)




HAS-U-...		M8	M10	M12
with HIT-SC		16x85	16x85	18x85
Nominal diameter of drill bit	d_0 [mm]	16	16	18
Drill hole depth	h_0 [mm]	95	95	95
Effective embedment depth	h_{ef} [mm]	80	80	80
Maximum diameter of clearance hole in the fixture	d_f [mm]	9	12	14
Minimum wall thickness	h_{min} [mm]	115	115	115
Brush HIT-RB	- [-]	16	16	18
Maximum torque moment for all brick types except "parpaing creux"	T_{max} [Nm]	3	4	6
Maximum torque moment for "parpaing creux"	T_{max} [Nm]	2	2	3
Number of strokes HDM	- [-]	6	6	8
Number of strokes HDE-500	- [-]	5	5	6

Table B6: Installation parameters of threaded rod, HAS-U-... in solid brick (Figure A2)

HAS-U-...		M8	M10	M12
Nominal diameter of drill bit	d_0 [mm]	10	12	14
Drill hole depth = Effective embedment depth	$h_0 = h_{ef}$ [mm]	80	80	80
Maximum diameter of clearance hole in the fixture	d_f [mm]	9	12	14
Minimum wall thickness	h_{min} [mm]	115	115	115
Brush HIT-RB	- [-]	10	12	14
Maximum torque moment	T_{max} [Nm]	5	8	10

Hilti HIT-HY 170 with HAS-U

Intended Use
Installation parameters

Annex B6

Table B7: Maximum working time and minimum curing time for solid bricks¹⁾

Temperature in the base material T	Maximum working time t_{work}	Minimum curing time t_{cure}
5 °C to 10 °C	8 min	2,5 h
> 10 °C to 20 °C	5 min	1,5 h
> 20 °C to 30 °C	3 min	45 min
> 30 °C to 40 °C	2 min	30 min

¹⁾ The curing time data are valid for dry base material only.
In wet base material the curing times must be doubled.

Table B8: Maximum working time and minimum curing time for hollow bricks¹⁾

Temperature in the base material T	Maximum working time t_{work}	Minimum curing time t_{cure}
> 0 °C to 5 °C	10 min	5 h
> 5 °C to 10 °C	8 min	2,5 h
> 10 °C to 20 °C	5 min	1,5 h
> 20 °C to 30 °C	3 min	45 min
> 30 °C to 40 °C	2 min	30 min

¹⁾ The curing time data are valid for dry base material only.
In wet base material the curing times must be doubled.

Table B9: Cleaning tools

Manual Cleaning (MC):

Hilti hand pump for blowing out drill holes



Compressed air cleaning (CAC)¹⁾:

air nozzle with an orifice opening of minimum 3,5 mm in diameter for blowing out drill hole



Steel brush HIT-RB:

according to tables B5 to B6 depending on drill hole diameter for MC and CAC



¹⁾ Compressed Air Cleaning (CAC) is also allowed

Hilti HIT-HY 170 with HAS-U

Intended Use

Maximum working time and minimum curing time.
Cleaning tools


Annex B7

Installation

Hole drilling


If no significant resistance is felt over the entire depth of the hole when drilling (e.g. in unfilled butt joints), the anchor should not be set at this position.

Drilling mode



In hollow and solid bricks (use category c): rotary mode

Drill hole to the required embedment depth with a hammer drill set in rotary mode using an appropriately sized carbide drill bit.




In solid bricks (use category b): hammer mode

Drill hole to the required embedment depth with a hammer drill set in hammer mode using an appropriately sized carbide drill bit.


Drill hole cleaning

Just before setting the anchor, the drill hole must be free of dust and debris. Inadequate hole cleaning = poor load values.


Manual Cleaning (MC): For hollow and solid bricks



Blow out at least 2 times from the back of the drill hole with the Hilti hand pump until return air stream is free of noticeable dust.



Brush 2 times with the specified steel brush (tables B5 to B6) by inserting the steel brush Hilti HIT-RB to the back of the hole in a twisting motion and removing it. The brush must produce natural resistance as it enters the drill hole (brush $\varnothing \geq$ drill hole \varnothing) - if not the brush is too small and must be replaced with the proper brush diameter.



Blow out again with the Hilti hand pump at least 2 times until return air stream is free of noticeable dust.


Hilti HIT-HY 170 with HAS-U

Intended Use


Installation instructions

Annex B8

Injection preparation in masonry with holes or voids: installation with sieve sleeve HIT-SC




Sieve sleeve HIT-SC
Close lid.




Insert sieve sleeve manually.

For all applications



Tightly attach new Hilti mixing nozzle HIT-RE-M to foil pack manifold (snug fit). Do not modify the mixing nozzle. Observe the instruction for use of the dispenser and foil pack. Check foil pack holder for proper function. Do not use damaged foil packs / holders. Insert foil pack into foil pack holder and put holder into HIT-dispenser.




Discard initial adhesive. The foil pack opens automatically as dispensing is initiated. Depending on the size of the foil pack an initial amount of adhesive has to be discarded. Discarded quantities are:

2 strokes	for 330 ml foil pack,
3 strokes	for 500 ml foil pack.


Inject adhesive without forming air voids

Installation with sieve sleeve HIT-SC



Sieve sleeve HIT-SC

Insert mixer approximately 1 cm through the lid. Inject required amount of adhesive (see table B5). Adhesive must emerge through the lid.



Control amount of injected mortar. Adhesive has to protrude into the lid.


After injection is completed, depressurize the dispenser by pressing the release trigger. This will prevent further adhesive discharge from the mixer.

Hilti HIT-HY 170 with HAS-U


Intended Use
Installation instructions

Annex B9

Solid bricks: installation without sieve sleeve




Inject the adhesive starting at the back of the hole, slowly withdrawing the mixer with each trigger pull. Fill holes approximately 2/3 full to ensure that the annular gap between the anchor and the base material is completely filled with adhesive along the embedment length.



After injection is completed, depressurize the dispenser by pressing the release trigger. This will prevent further adhesive discharge from the mixer.


Setting the element:

Before use, verify that the element is dry and free of oil and other contaminants.




HAS-U-... in hollow and solid bricks: Pre-setting (Figure A1 to Figure A2)

Mark the element to the required embedment depth h_{ef} acc. to Table B5 and B6.



Set element to the required embedment depth until working time t_{work} has elapsed. The working time t_{work} is given in Table B7 and Table B8.

Loading the anchor



After required curing time t_{cure} (see Table B7 and Table B8) the anchor can be loaded.









The applied installation torque shall not exceed the values T_{max} given in Table B5 to Table B6.

Hilti HIT-HY 170 with HAS-U

Intended Use
Installation instructions

Annex B10

Table C1: β -factor for job-site testing under tension loading

Use categories		w/w and w/d		d/d	
Temperature range		Ta ¹⁾	Tb ¹⁾	Ta ¹⁾	Tb ¹⁾
Base material	Elements				
Solid clay brick EN 771-2	HAS-U 	0,97	0,83	0,97	0,83
	HAS-U + HIT-SC 				
Solid calcium silicate brick EN 771-2	HAS-U 	0,96	0,84	0,97	0,84
	HAS-U + HIT-SC 	0,69	0,62	0,91	0,82
Hollow clay brick EN 771-1	HAS-U + HIT-SC 	0,97	0,83	0,97	0,83
Hollow calcium silicate brick EN 771-2	HAS-U + HIT-SC 	0,69	0,62	0,91	0,82
Hollow light weight concrete brick EN 771-3	HAS-U + HIT-SC 	0,89	0,81	0,97	0,86
Hollow normal weight concrete brick EN 771-3	HAS-U + HIT-SC 	0,97	0,80	0,97	0,80

¹⁾ Temperature range Ta / Tb see Annex B1.

Table C2: Characteristic values of steel resistance for HAS-U-... under tension and shear loads in masonry

HIT-HY 170 with HAS-U-...	M8	M10	M12
Steel failure tension loads			
Characteristic steel resistance	$N_{Rk,s}$ [kN]	$A_s \cdot f_{uk}$	
Steel failure shear loads without lever arm			
Characteristic steel resistance	$V_{Rk,s}$ [kN]	$0,5 \cdot A_s \cdot f_{uk}$	
Steel failure shear loads with lever arm			
Characteristic bending moment	$M_{Rk,s}$ [kN]	$1,2 \cdot W_{el} \cdot f_{uk}$	

Hilti HIT-HY 170 with HAS-U

Performances

β -factors for job-site testing under tension load

Characteristic resistances under tension and shear load – steel failure

Annex C1

Brick type: Solid clay brick Mz, 2DF

Table C3: Description of brick


Brick type	[-]	Solid Mz, 2DF	
Bulk density	ρ [kg/dm ³]	$\geq 2,0$	
Compressive strength	f_b [N/mm ²]	≥ 12	
Code	[-]	EN 771 - 1	
Producer	[-]	-	
Brick dimensions	[mm]	$\geq 240 \times 115 \times 113$	
Minimum wall thickness	h_{min} [mm]	≥ 115	

Table C4: Installation parameter for all anchor combinations (see Table B3)

Anchor type	see Table B3	
Edge distance	$c_{min} = c_{cr}$ [mm]	115
Spacing	$s_{min \parallel} = s_{cr \parallel}$ [mm]	240
	$s_{min \perp} = s_{cr \perp}$ [mm]	115

Table C5: Group factor for group fastenings

Group factor	$\alpha_{q,N \parallel} \alpha_{q,V \parallel} \alpha_{q,N \perp} \alpha_{q,V \perp}$ [-]	2 at c_{cr} and s_{cr}
--------------	---	----------------------------

Table C6: Characteristic tension resistance at edge distance $c \geq c_{cr}$



Use category				w/w = w/d		d/d	
Service temperature range				(Ta)	(Tb)	(Ta)	(Tb)
Anchor type and size	h_{ef} [mm]	f_b [N/mm²]	N_{Rk} [kN]				
HAS-U  M8, M10, M12	80	12	3,0	2,5	3,0	2,5	
HAS-U + HIT-SC  M8, M10, M12	80	12	4,0	3,5	4,0	3,5	

Table C7: Characteristic shear resistance at edge distance $c \geq c_{cr}$

Use category				w/w = w/d		d/d	
Service temperature range				(Ta)	(Tb)	(Ta)	(Tb)
Anchor type and size	h_{ef} [mm]	f_b [N/mm ²]	V_{Rk} [kN]				
All anchors M8, M10, M12	80	12	3,5				

Table C8: Displacements

h_{ef} [mm]	N [kN]	δ_{N0} [mm]	$\delta_{N\infty}$ [mm]	V [kN]	δ_{V0} [mm]	$\delta_{V\infty}$ [mm]
80	0,9	0,2	0,4	1,0	1,0	1,5

Hilti HIT-HY 170 with HAS-U

Performances solid clay brick Mz, 2DF

Installation parameters and group factor.

Characteristic values of resistance under tension and shear loads. Displacements

Annex C2

Brick type: Solid calcium silicate brick KS, 2DF

Table C9: Description of brick


Brick type	[-]	Solid KS, 2DF	
Bulk density	ρ [kg/dm³]	$\geq 2,0$	
Compressive strength	f_b [N/mm²]	≥ 12 or ≥ 28	
Code	[-]	EN 771 - 2	
Producer	[-]	-	
Brick dimensions	[mm]	$\geq 240 \times 115 \times 113$	
Minimum wall thickness	h_{min} [mm]	≥ 115	

Table C10: Installation parameter for all anchor combinations (see Table B3)

Anchor type	see Table B3	
Edge distance	$c_{min} = c_{cr}$ [mm]	115
Spacing	$s_{min \parallel} = s_{cr \parallel}$ [mm]	240
	$s_{min \perp} = s_{cr \perp}$ [mm]	115

Table C11: Group factor for group fastenings

Group factor	$\alpha_{g,N \parallel} \alpha_{g,V \parallel} \alpha_{g,N \perp} \alpha_{g,V \perp}$ [-]	2 at c_{cr} and s_{cr}
--------------	---	----------------------------

Table C12: Characteristic tension resistance at edge distance $c \geq c_{cr}$



Use category			w/w = w/d		d/d	
Service temperature range			(Ta)	(Tb)	(Ta)	(Tb)
Anchor type and size	h_{ef} [mm]	f_b [N/mm²]	N_{Rk} [kN]			
 M8, M10, M12	80	12	5,5	5,0	6,0	5,0
		28	8,5	7,5	8,5	7,5
 M8, M10, M12	80	12	4,0	3,5	5,5	5,0
		28	6,0	5,5	8,0	7,5

Table C13: Characteristic shear resistance at edge distance $c \geq c_{cr}$

Use category			w/w = w/d		d/d	
Service temperature range			(Ta)	(Tb)	(Ta)	(Tb)
Anchor type and size	h_{ef} [mm]	f_b [N/mm²]	V_{Rk} [kN]			
All anchors M8, M10, M12	80	12	4,0			
		28	6,0			

Table C14: Displacements

h_{ef} [mm]	N [kN]	δ_{N0} [mm]	$\delta_{N\infty}$ [mm]	V [kN]	δ_{V0} [mm]	$\delta_{V\infty}$ [mm]
80mm	2,3	0,2	0,4	1,5	1,2	1,8

Hilti HIT-HY 170 with HAS-U

Performances solid silica brick KS, 2DF

Installation parameters and group factor.

Characteristic values of resistance under tension and shear loads. Displacements

Annex C3

Brick type: Hollow clay brick H1z, 10DF

Table C15: Description of brick


Brick type	[-]	H1z 12-1,4-10 DF	 <p>Drawing of the brick see Table B4</p>
Bulk density	ρ [kg/dm ³]	$\geq 1,4$	
Compressive strength	f_b [N/mm ²]	≥ 12 or ≥ 20	
Code	[-]	EN 771 - 1	
Producer	[-]	Rapis (D)	
Brick dimensions	[mm]	300 x 240 x 238	
Minimum wall thickness	h_{min} [mm]	≥ 240	

Table C16: Installation parameter for all anchor combinations (see Table B3)

Anchor type	see Table B3	
Edge distance	$c_{min} = c_{cr}$ [mm]	150
Spacing	$s_{min \parallel} = s_{cr \parallel}$ [mm]	300
	$s_{min \perp} = s_{cr \perp}$ [mm]	240

Table C17: Group factor for group fastenings

Group factor	$\alpha_{g,N \parallel} \alpha_{g,V \parallel} \alpha_{g,N \perp} \alpha_{g,V \perp}$ [-]	2 at c_{cr} and s_{cr}
--------------	---	----------------------------

Table C18: Characteristic tension resistance at edge distance $c \geq c_{cr}$


Use category			w/w = w/d		d/d	
Service temperature range			(Ta)	(Tb)	(Ta)	(Tb)
Anchor type and size	h_{ef} [mm]	f_b [N/mm ²]	N_{Rk} [kN]			
 M8, M10, M12	80	12	3,0	2,5	3,0	2,5
		20	3,5	3,0	3,5	3,0

Table C19: Characteristic shear resistance at edge distance $c \geq c_{cr}$


Use category			w/w = w/d		d/d	
Service temperature range			(Ta)	(Tb)	(Ta)	(Tb)
Anchor type and size	h_{ef} [mm]	f_b [N/mm ²]	V_{Rk} [kN]			
 M8, M10, M12	80	12	2,0			
		20	3,0			

Table C20: Displacements

h_{ef} [mm]	N [kN]	δ_{N0} [mm]	$\delta_{N\infty}$ [mm]	V [kN]	δ_{V0} [mm]	$\delta_{V\infty}$ [mm]
80	0,9	0,2	0,3	0,9	1,0	1,5

Hilti HIT-HY 170 with HAS-U

Performances hollow clay brick H1z, 10DF

Installation parameters and group factor.

Characteristic values of resistance under tension and shear loads. Displacements

Annex C4

Brick type: Hollow calcium silicate brick KSL, 8DF

Table C21: Description of brick


Brick type	[-]	KSL-12-1,4-8 DF	 Drawing of the brick see Table B4
Bulk density	ρ [kg/dm ³]	$\geq 1,4$	
Compressive strength	f_b [N/mm ²]	≥ 12 or ≥ 20	
Code	[-]	EN 771 – 2	
Producer	[-]	KS Südbayern (D)	
Brick dimensions	[mm]	248 x 240 x 238	
Minimum wall thickness	h_{min} [mm]	≥ 240	

Table C22: Installation parameter for all anchor combinations (see Table B3)

Anchor type	see Table B3	
Edge distance	$c_{min} = c_{cr}$ [mm]	125
Spacing	$s_{min \parallel} = s_{cr \parallel}$ [mm]	248
	$s_{min \perp} = s_{cr \perp}$ [mm]	240

Table C23: Group factor for group fastenings

Group factor	$\alpha_{g,N \parallel} \alpha_{g,V \parallel} \alpha_{g,N \perp} \alpha_{g,V \perp}$ [-]	2 at c_{cr} and s_{cr}
--------------	---	----------------------------

Table C24: Characteristic tension resistance at edge distance $c \geq c_{cr}$


Use category			w/w = w/d		d/d	
Service temperature range			(Ta)	(Tb)	(Ta)	(Tb)
Anchor type and size	h_{ef} [mm]	f_b [N/mm ²]	N_{Rk} [kN]			
 M8, M10, M12	80	12	3,0	2,5	3,5	3,0
		20	4,0	3,5	5,0	4,5

Table C25: Characteristic shear resistance at edge distance $c \geq c_{cr}$


Use category			w/w = w/d		d/d	
Service temperature range			(Ta)	(Tb)	(Ta)	(Tb)
Anchor type and size	h_{ef} [mm]	f_b [N/mm ²]	V_{Rk} [kN]			
 M8, M10, M12	80	12	8,5			
		20	12,0			

Table C26: Displacements

h_{ef} [mm]	N [kN]	δ_{N0} [mm]	$\delta_{N\infty}$ [mm]	V [kN]	δ_{V0} [mm]	$\delta_{V\infty}$ [mm]
80	1,8	0,2	0,3	3,4	2,5	3,8

Hilti HIT-HY 170 with HAS-U

Performances hollow silica brick KSL, 8DF

Installation parameters and group factor.

Characteristic values of resistance under tension and shear loads. Displacements

Annex C5

Brick type: Hollow lightweight concrete brick Hbl, 16DF

Table C27: Description of brick


Brick type	[-]	Hbl-4-0,7	 Drawing of the brick see Table B4
Bulk density	ρ [kg/dm ³]	$\geq 0,8$	
Compressive strength	f_b [N/mm ²]	≥ 2 or ≥ 6	
Code	[-]	EN 771-3	
Producer	[-]	Knobel (D)	
Brick dimensions	[mm]	495 x 240 x 238	
Minimum wall thickness	h_{min} [mm]	≥ 240	

Table C28: Installation parameter for all anchor combinations (see Table B3)

Anchor type	see Table B3	
Edge distance	$c_{min} = c_{cr}$ [mm]	250
Spacing	$s_{min \parallel} = s_{cr \parallel}$ [mm]	240
	$s_{min \perp} = s_{cr \perp}$ [mm]	240

Table C29: Group factor for group fastenings

Group factor	$\alpha_{g,N \parallel} \alpha_{g,V \parallel} \alpha_{g,N \perp} \alpha_{g,V \perp}$ [-]	2 at c_{cr} and s_{cr}
--------------	---	----------------------------

Table C30: Characteristic tension resistance at edge distance $c \geq c_{cr}$


Use category			w/w = w/d		d/d	
Service temperature range			(Ta)	(Tb)	(Ta)	(Tb)
Anchor type and size	h_{ef} [mm]	f_b [N/mm ²]	N_{Rk} [kN]			
 M8, M10, M12	80	2	1,2	0,9	1,5	1,2
		6	2,0	1,5	2,5	2,0

Table C31: Characteristic shear resistance at edge distance $c \geq c_{cr}$


Use category			w/w = w/d		d/d	
Service temperature range			(Ta)	(Tb)	(Ta)	(Tb)
Anchor type and size	h_{ef} [mm]	f_b [N/mm ²]	V_{Rk} [kN]			
 M8, M10, M12	80	2	2,5			
		6	4,0			

Table C32: Displacements

h_{ef} [mm]	N [kN]	δ_{N0} [mm]	$\delta_{N\infty}$ [mm]	V [kN]	δ_{V0} [mm]	$\delta_{V\infty}$ [mm]
80	2,4	0,2	0,4	3,4	1,3	1,9

Hilti HIT-HY 170 with HAS-U

Performances hollow lightweight concrete brick Hbl 16DF

Installation parameters and group factor.

Characteristic values of resistance under tension and shear loads. Displacements

Annex C6

Brick type: Hollow normal weight concrete brick - parpaing creux

Table C33: Description of brick


Brick type	[-]	B40	 Drawing of the brick see Table B4
Bulk density	ρ [kg/dm ³]	$\geq 1,0$	
Compressive strength	f_b [N/mm ²]	≥ 4 or ≥ 10	
Code	[-]	EN 771-3	
Producer	[-]	Fabemi (F)	
Brick dimensions	[mm]	500 x 200 x 200	
Minimum wall thickness	h_{min} [mm]	≥ 200	

Table C34: Installation parameter for all anchor combinations (see Table B3)

Anchor type	see Table B3	
Edge distance	$c_{min} = c_{cr}$ [mm]	200
Spacing	$s_{min \parallel} = s_{cr \parallel}$ [mm]	200
	$s_{min \perp} = s_{cr \perp}$ [mm]	200

Table C35: Group factor for group fastenings

Group factor	$\alpha_{g,N \parallel} \alpha_{g,V \parallel} \alpha_{g,N \perp} \alpha_{g,V \perp}$ [-]	2 at c_{cr} and s_{cr}
--------------	---	----------------------------

Table C36: Characteristic tension resistance at edge distance $c \geq c_{cr}$


Use category			w/w = w/d		d/d	
Service temperature range			(Ta)	(Tb)	(Ta)	(Tb)
Anchor type and size	h_{ef} [mm]	f_b [N/mm ²]	N_{Rk} [kN]			
 HAS-U + HIT-SC M8, M10, M12	80	4	0,9	0,9	0,9	0,9
		10	1,2	1,2	1,5	1,5

Table C37: Characteristic shear resistance at edge distance $c \geq c_{cr}$


Use category			w/w = w/d		d/d	
Service temperature range			(Ta)	(Tb)	(Ta)	(Tb)
Anchor type and size	h_{ef} [mm]	f_b [N/mm ²]	V_{Rk} [kN]			
 HAS-U + HIT-SC M8, M10, M12	80	4	2,5			
		10	4,0			

Table C38: Displacements

h_{ef} [mm]	N [kN]	δ_{N0} [mm]	$\delta_{N\infty}$ [mm]	V [kN]	δ_{V0} [mm]	$\delta_{V\infty}$ [mm]
80	1,0	0,6	1,2	2,3	0,6	0,9

Hilti HIT-HY 170 with HAS-U

Performances hollow normal weight concrete brick - parpaing creux
Installation parameters and group factor.
Characteristic values of resistance under tension and shear loads. Displacements

Annex C7