

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments



European Technical Assessment

ETA-16/0929
of 19 May 2020

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Anchor channels (PEC-TA) with channel bolts (HBC)

Product family
to which the construction product belongs

Anchor channels

Manufacturer

PEC Europe GmbH
Obere Kaiserswerther Straße 56
47249 Duisburg
DEUTSCHLAND

Manufacturing plant

Hilti Werke

This European Technical Assessment
contains

27 pages including 3 annexes which form an integral part
of this assessment

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

EAD 330008-03-0601

This version replaces

ETA-16/0929 issued on 9 August 2018

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The anchor channels (PEC-TA) with channel bolts (HBC) are a system consisting of C-shaped channel profile of carbon steel or stainless steel and at least two metal anchors non-detachably fixed to the channel back and channel bolts.

The anchor channel is embedded surface-flush in the concrete. Channel bolts (HBC) with appropriate hexagon nuts and washers are fixed to the channel.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor channel is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor channel of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance under tension load (static and quasi-static loading)	See Annex A4, B3 and B5, C1 to C4 and C8
Characteristic resistance under shear load (static and quasi-static loading)	See Annex C6 to C9
Characteristic resistance under combined tension and shear (static and quasi-static loading)	See Annex C7
Characteristic resistance under cyclic fatigue tension load	No performance assessed
Displacements (static and quasi-static loading)	See Annex C5 and C7
Durability	See Annex B1

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Characteristic resistance to fire	See Annex C10

English translation prepared by DIBt

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with EAD No. 330008-03-0601, the applicable European legal act is: [2000/273/EC].

The system to be applied is: 1

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable EAD


Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.

Issued in Berlin on 19 May 2020 by Deutsches Institut für Bautechnik

BD Dipl.-Ing. Andreas Kummerow
Head of Department


beglaubigt:
Müller

Product and installation condition

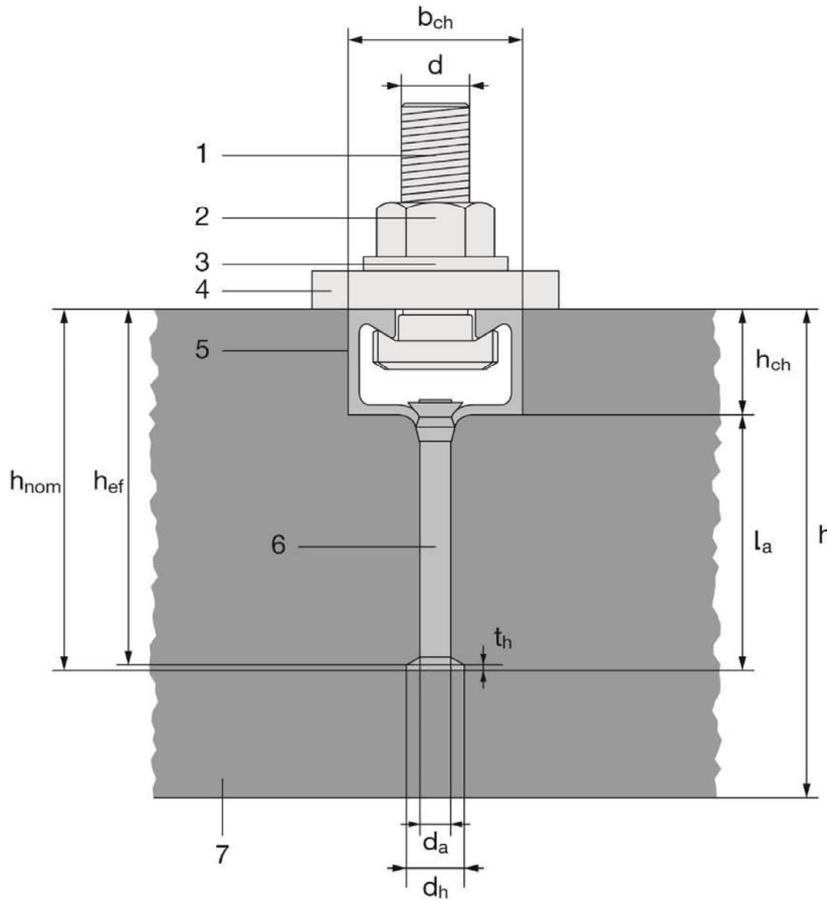

Key

- 1 channel bolt
- 2 hexagonal nut
- 3 washer
- 4 fixture
- 5 channel profile
- 6 anchor
- 7 concrete member

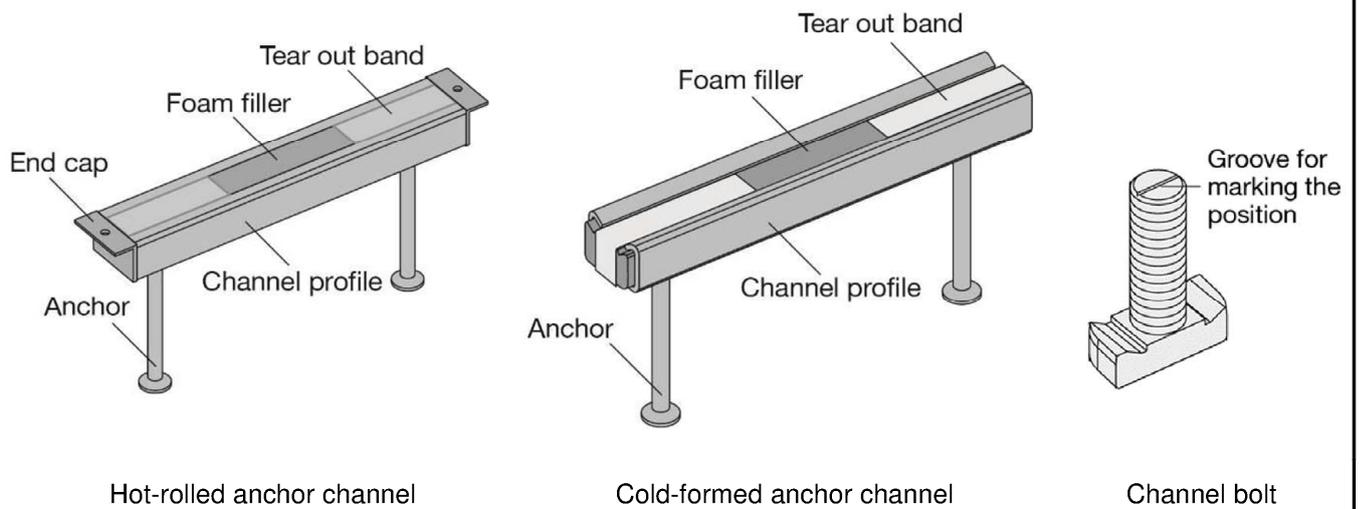

Anchor channels (PEC-TA) with channel bolts (HBC)


Product Description
Installed condition

Annex A1


Anchor channel types

Cold-formed anchor channel


Hot-rolled anchor channel

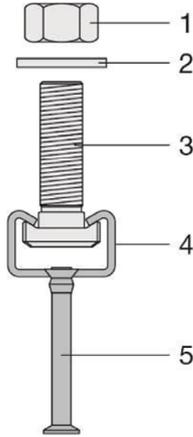

Round anchor

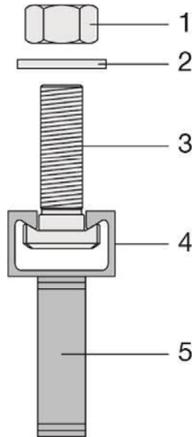

I-anchor

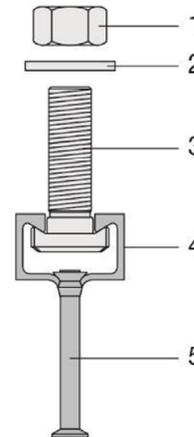

Round anchor

Key

- 1 hexagonal nut
- 2 washer
- 3 channel bolt
- 4 channel profile
- 5 anchor

Marking of the anchor channels:

PEC-TA(-I) XZ (P)




- PEC-TA = Identifying mark of the manufacturer
- P = Additional marking for premium line
- I = Additional marking for I-anchors (no marking in the case of round anchors)
- X = Size of the channel
- Z = Corrosion class / Material
 - F = Hot-dip galvanized
 - A4 = Stainless steel

(e.g. PEC-TA 40/22 F)

- 40/22 = Anchor channel size 40/22
- F = Hot-dip galvanized

Marking of the channel bolt:

HBC-X YZ



- HBC = Identifying mark of the manufacturer
- X = Channel bolt
- Y = Steel grade (4.6, 8.8, 70)
- Z = Corrosion class / Material
 - F = Hot-dip galvanized
 - R = Stainless steel

(e.g. HBC-40/22 8.8F)

- 40 = Channel bolt in combination with PEC-TA 40/22F
- 8.8 = Steel grade
- F = Hot-dip galvanized


Anchor channels (PEC-TA) with channel bolts (HBC)

Product Description

Anchor channel types and marking

Annex A2


Channel profiles

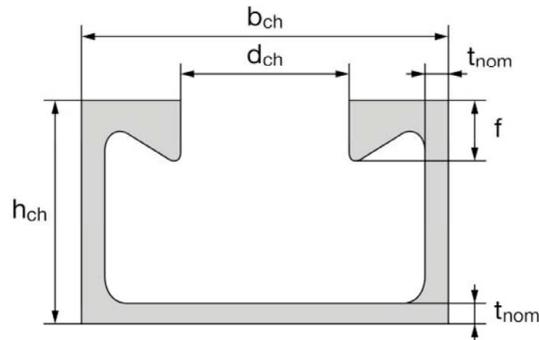


PEC-TA 40/22 (P), PEC-TA 50/30 (P), PEC-TA 52/34

Table 1: Dimensions of hot-rolled channel profile

Anchor channel	b_{ch}	h_{ch}	t_{nom}	d	f	I_y
	[mm]					[mm ⁴]
PEC-TA 40/22 (P)	40,1	23,0	2,7	18,0	6,0	21504
PEC-TA 50/30 (P)	49,6	30,0	3,2	22,5	8,1	57781
PEC-TA 52/34	52,5	34,0	4,0	22,5	11,5	97606

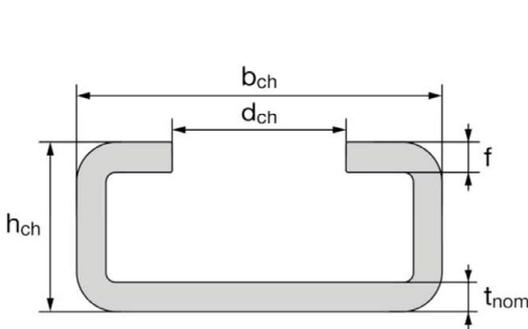

PEC-TA 28/15, PEC-TA 38/17

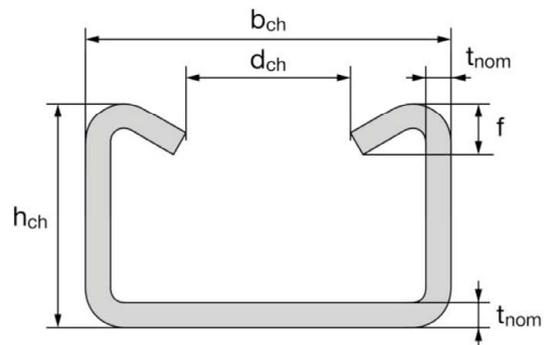

PEC-TA 40/25, PEC-TA 49/30, PEC-TA 54/33

Table 2: Dimensions of cold-formed channel profile


Anchor channel	b_{ch}	h_{ch}	t_{nom}	d	f	I_y
	[mm]					[mm ⁴]
PEC-TA 28/15	28,0	15,5	2,3	12,0	2,3	4277
PEC-TA 38/17	38,0	17,3	3,0	18,0	3,0	8224
PEC-TA 40/25	40,0	25,0	2,75	18,0	5,6	20122
PEC-TA 49/30	50,0	30,0	3,25	22,0	7,4	43105
PEC-TA 54/33	53,5	33,0	5,0	21,5	8,0	74706

Anchor channels (PEC-TA) with channel bolts (HBC)

Product Description
Channel profiles (PEC-TA)

Annex A3

Anchors

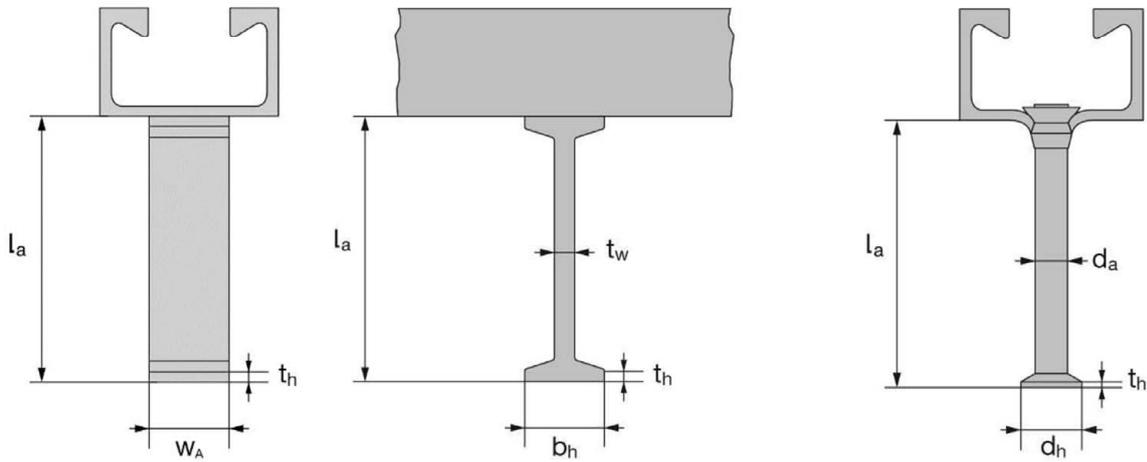

**Table 3: Dimensions of anchor
(welded I-anchor or round anchor)**

Anchor channel	I-anchor						Round anchor				
	min l_a	t_w	b_h	t_h	w_A	A_h	min l_a	d_a	d_h	t_h	A_h
	[mm]						[mm]				
PEC-TA 28/15	1)						31,0	6,0	12,0	1,3	85
PEC-TA 38/17	1)						60,8	8,0	16,0	2,0	151
PEC-TA 40/25	1)						56,0				
PEC-TA 40/22	62,0	5,0	20,0	5,0	20,0	300	58,0	10,0	21,5	2,2	285
PEC-TA 40/22 P	62,0	5,0	20,0	5,0	20,0	300	70,0				
PEC-TA 49/30	1)						66,0	10,0	20,0	2,2	236
PEC-TA 50/30	69,0	5,0	20,0	5,0	25,0	375					
PEC-TA 50/30 P	69,0	5,0	20,0	5,0	25,0	375	78,0	11,0	26,0	2,5	436
PEC-TA 54/33	1)						124,5	11,0	24,3	2,5	369
PEC-TA 52/34	125,0	6,0	25,0	5,0	40,0	760					


1) Product not available

Anchor channels (PEC-TA) with channel bolts (HBC)


Product Description
Anchors

Annex A4

Channel bolts



HBC-28/15, HBC-38/17



HBC-40/22, HBC-50/30

Table 4: Dimensions of channel bolt

Appropriate anchor channel	Channel bolt	Dimensions			
		b ₁	b ₂	k	d
		[mm]			
PEC-TA 28/15	HBC-28/15	10,1	22,2	5,0	8
		11,0		6,0	10
PEC-TA 38/17	HBC-38/17	13,0	30,5	6,0	10
		16,0		7,0	12
PEC-TA 40/22 (P) PEC-TA 40/25	HBC-40/22	14,0	33,0	10,5	10
		17,0		11,5	12
PEC-TA 49/30 PEC-TA 50/30 (P) PEC-TA 52/34 PEC-TA 54/33	HBC-50/30	17,0	42,0	14,5	12
		21,0		15,5	16

Table 5: Steel grade and corrosion class

Channel Bolt	Carbon steel ¹⁾		Stainless steel ¹⁾	
Steel grade	4.6	8.8	A4-50	A4-70
f _{uk} [N/mm ²]	400	800 / 830 ²⁾	500	700
f _{yk} [N/mm ²]	240	640 / 660 ²⁾	210	450
Corrosion class	G ³⁾ F ⁴⁾		R ⁵⁾	

¹⁾ Material properties according to Annex A6

²⁾ Material properties according to EN ISO 898-1: 2013

³⁾ Electroplated

⁴⁾ Hot-dip galvanized

⁵⁾ Stainless steel

Anchor channels (PEC-TA) with channel bolts (HBC)

Product Description
Channel bolts (HBC)

Annex A5

Table 6: Materials

Component	Carbon steel			Stainless steel
	Mechanical properties	Coating		Mechanical properties
1	2a	2b	2c	3
Channel Profile	1.0038, 1.0044, 1.0045 according to EN 10025: 2005 1.0976, 1.0979 according to EN 10149: 2013	Hot dip galvanized $\geq 50 \mu\text{m}$ according to EN ISO 10684: 2004/AC: 2009		1.4362, 1.4401 1.4404, 1.4571, 1.4578 according to EN 10088: 2005
Anchor	1.0038, 1.0213, 1.0214 according to EN 10025: 2005 1.5523, 1.5535 according to EN 10263: 2002-02			
Channel bolt	Steel grade 4.6 and 8.8 according to EN ISO 898-1: 2013	Electroplated according to EN ISO 4042: 1999	Hot dip galvanized $\geq 50 \mu\text{m}$ according to EN ISO 10684: 2004/AC: 2009	Grade 50 or 70 according to EN ISO 3506: 2009
Plain washer ¹⁾ according to ISO 7089: 2000 and ISO 7093-1: 2000	Hardness class A $\geq 200 \text{ HV}$	Electroplated according to EN ISO 4042: 1999	Hot dip galvanized $\geq 50 \mu\text{m}$ according to EN ISO 10684: 2004/AC: 2009	1.4401, 1.4404 1.4571, 1.4578 according to EN 10088: 2005
Hexagonal nut according to ISO 4032: 2012 or DIN 934: 1987-10 ²⁾	Property class 5 or 8 according to EN ISO 898-2: 2012	Electroplated according to EN ISO 4042: 1999	Hot dip galvanized $\geq 50 \mu\text{m}$ according to EN ISO 10684: 2004/AC: 2009	Property class 50, 70 or 80 according to EN ISO 3506: 2009

¹⁾ Not in the scope of delivery

²⁾ Hexagonal nuts according to DIN 934: 1987-10 for channel bolts made from carbon steel (4.6) and stainless steel

Anchor channels (PEC-TA) with channel bolts (HBC)

Product Description
Materials

Annex A6

Specifications of intended use

Anchor channels and channel bolts subject to:

- Static and quasi-static loads in tension and shear perpendicular to the longitudinal axis of the channel.
- Fire exposure: only for concrete class C20/25 to C50/60.

Base materials:

- Reinforced or unreinforced normal weight concrete according to EN 206-1: 2000.
- Strength classes C12/15 to C90/105 according to EN 206-1: 2000.
- Cracked or uncracked concrete.

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (e.g. accommodations, bureaus, schools, hospitals, shops, exceptional internal conditions with usual humidity)
(anchor channels and channel bolts according to Annex A6, Table 6, column 2 and 3).
- Structures subject to internal conditions with usual humidity (e.g. kitchen, bath and laundry in residential buildings, exceptional permanent damp conditions and application under water)
(anchor channels and channel bolts according to Annex A6, Table 6, column 2c and 3).
- The stainless steel anchor channels (PEC-TA (P)) and channel bolts (HBC), washers and nuts may be used in structures subject to external atmospheric conditions (including industrial and marine environment) or exposure in permanently damp internal conditions, if no particular aggressive conditions (e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with chemical pollution e.g. desulphurization plants or road tunnels where de-icing materials are used) exist
(anchor channels and channel bolts according to Annex A6, Table 6, column 3).

Design:

- Anchor channels are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor channel and channel bolts are indicated on the design drawings (e.g. position of the anchor channel relative to the reinforcement or to supports).
- For static and quasi-static loading as well as fire exposure the anchor channels are designed in accordance with EOTA TR 047 "Calculation Method for the Performance of Anchor Channels", March 2018 or EN 1992-4: 2018.
- The characteristic resistances are calculated with the minimum effective embedment depth.

Anchor channels (PEC-TA) with channel bolts (HBC)

Intended Use
Specifications

Annex B1

Installation:

- The installation of anchor channels is carried out by appropriately qualified personnel under the supervision of the person responsible for the technical matters on site.
- Use of the anchor channels only as supplied by the manufacturer - without any manipulations, repositioning or exchanging of channel components.
- Cutting of anchor channels is allowed only if pieces according to Annex B3, Table 7 and Table 8 are generated including end spacing and minimum channel length and in case of hot-dip galvanised anchor channels only to be used in dry internal conditions.
- Installation in accordance with the manufacturer's specifications given in Annexes B5 and B6
- The anchor channels are fixed on the formwork, reinforcement or auxiliary construction such that no movement of the channels will occur during the time of laying the reinforcement and of placing and compacting the concrete.
- The concrete around the head of the anchors are properly compacted. The channels are protected from penetration of concrete into the internal space of the channels.
- Washer may be chosen according to Annex A6 and provided separately by the user.
- Orientating the channel bolt (groove according to Annex B6) rectangular to the channel axis.
- The required installation torques given in Annex B4 must be applied and must not be exceeded.

Anchor channels (PEC-TA) with channel bolts (HBC)	Annex B2
Intended Use Specifications	

Table 7: Installation parameters for hot-rolled anchor channel

Anchor channel			PEC-TA 40/22	PEC-TA 40/22 P	PEC-TA 50/30	PEC-TA 50/30 P	PEC-TA 52/34	
Minimum effective embedment depth	$h_{ef,min}$	[mm]	79	91	94	106	155	
Minimum spacing	s_{min}		100	50	100	50	100	
Maximum spacing	s_{max}		250					
End spacing	x		25 ¹⁾					35 ²⁾
Minimum channel length	l_{min}		150	100	150	100	170 ³⁾	
Minimum edge distance	c_{min}		50		75		100	
Minimum thickness of concrete member	h_{min}		100		120		180	

¹⁾ The end spacing may be increased from 25 mm to 35 mm

²⁾ $x = 25$ mm for welded I-anchors

³⁾ $l_{min} = 150$ mm for welded I-anchors

Table 8: Installation parameters for cold-formed anchor channel

Anchor channel			PEC-TA 28/15	PEC-TA 38/17	PEC-TA 40/25	PEC-TA 49/30	PEC-TA 54/33
Minimum effective embedment depth	$h_{ef,min}$	[mm]	45	76	79	94	155
Minimum spacing	s_{min}		50	100			
Maximum spacing	s_{max}		200		250		
End spacing	x		25 ¹⁾				
Minimum channel length	l_{min}		100	150			
Minimum edge distance	c_{min}		40	50		75	100
Minimum thickness of concrete member	h_{min}		70	100		120	180

¹⁾ The end spacing may be increased from 25 mm to 35 mm

Anchor channels (PEC-TA) with channel bolts (HBC)

Intended Use
Installation parameters for anchor channels (PEC-TA)

Annex B3

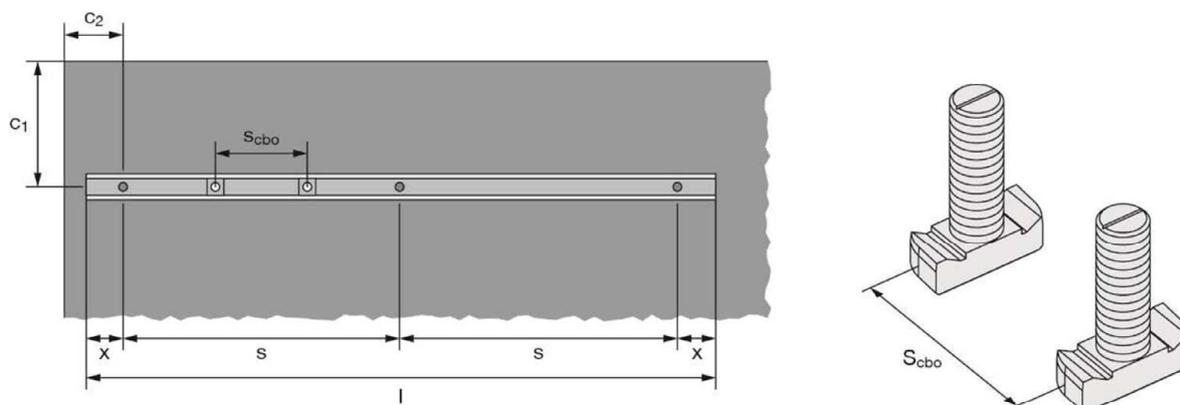


Table 9: Minimum spacing for channel bolts

Channel bolt			M8	M10	M12	M16	M20
Minimum spacing between channel bolts	$S_{cbo, min}$	[mm]	40	50	60	80	100

s_{cbo} = spacing between channel bolts

Anchor channels (PEC-TA) with channel bolts (HBC)

Intended Use

Installation parameters for anchor channels (PEC-TA)

Annex B4

Table 10: Required installation torque T_{inst}



Channel bolt		T_{inst} ¹⁾ [Nm]				
		General 4.6, 8.8, A4-50, A4-70	Steel - steel contact			
			4.6	8.8	A4-50	A4-70
28/15	M8	7	2)	20	7	15
	M10	10		40		30
	M12	13		60		50
38/17	M10	15	13	2)	2)	22
	M12	25	2)	45		50
	M16	40		100		90
40/22	M10	15	13	2)	2)	22
	M12	25	2)	45		50
	M16	30		100		90
50/30	M12	25	2)	45	2)	50
	M16	55		100		130
	M20	55		360		250

¹⁾ T_{inst} must not be exceeded

²⁾ Product not available

General: The fixture is in contact with the channel profile and the concrete surface

Steel-steel contact: Fixture is not in contact with the concrete surface. The fixture is fastened to the anchor channel by suitable steel part (e.g. washer)

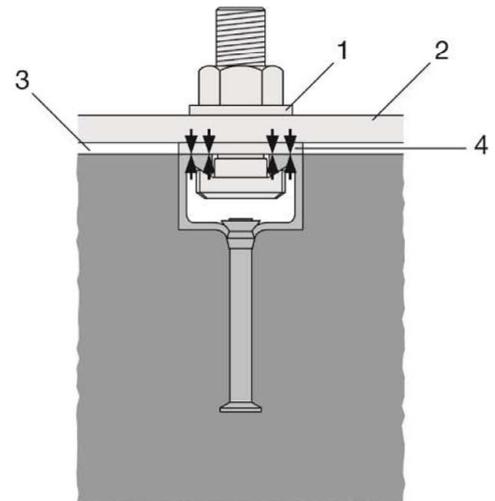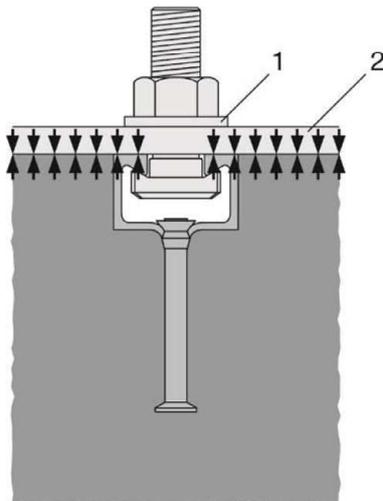


Key

- 1 washer
- 2 fixture
- 3 gap
- 4 suitable steel part

Anchor channels (PEC-TA) with channel bolts (HBC)

Intended Use
Installation parameters for channel bolts (HBC)

Annex B5

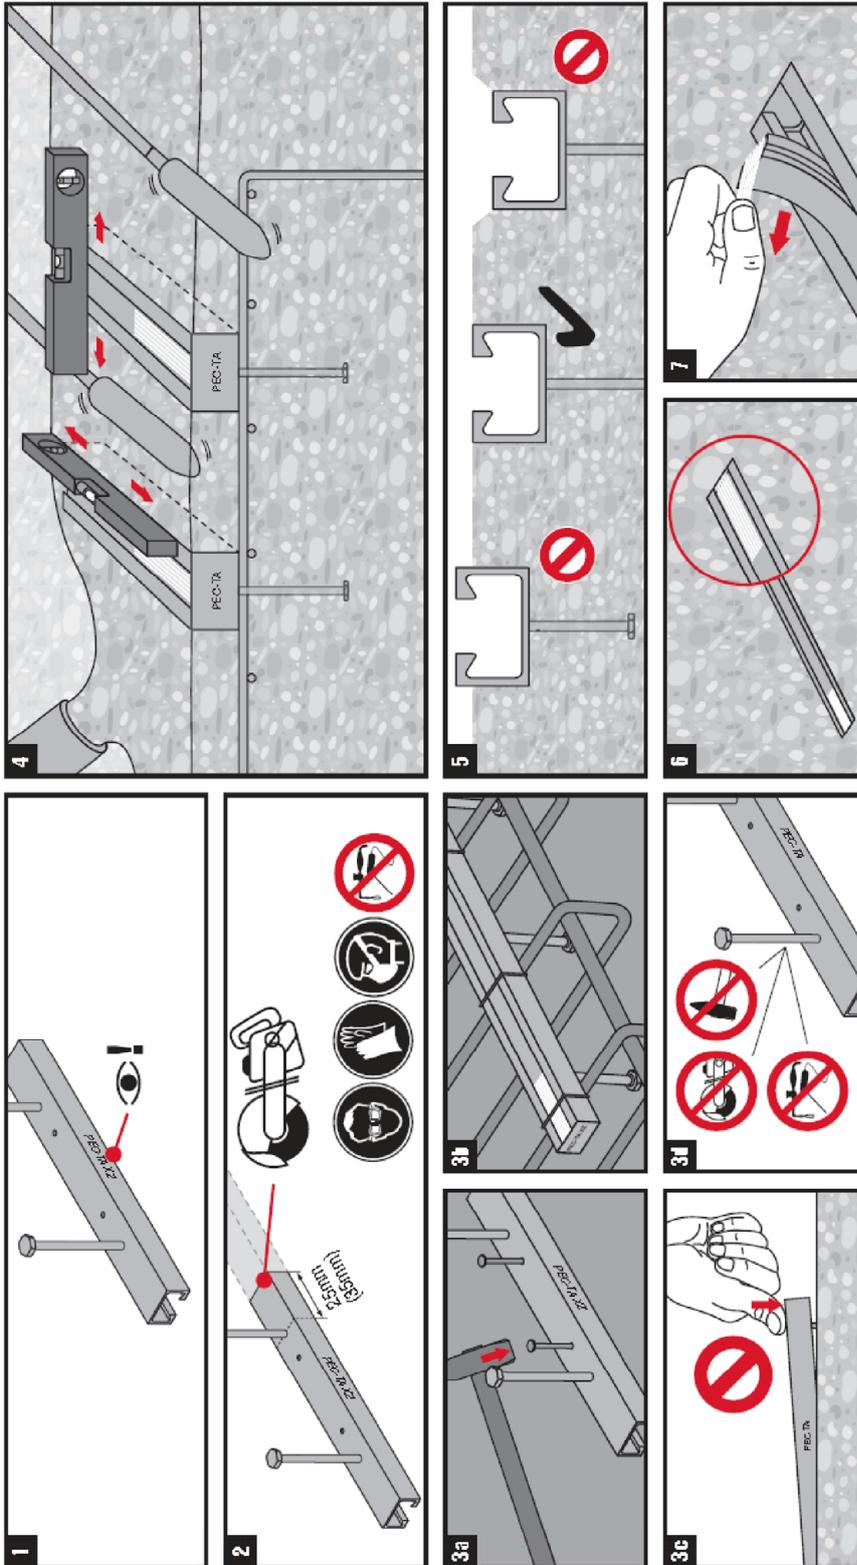


Anchor channels (PEC-TA) with channel bolts (HBC)

Intended Use

Installation instructions for anchor channels (PEC-TA)

Annex B6

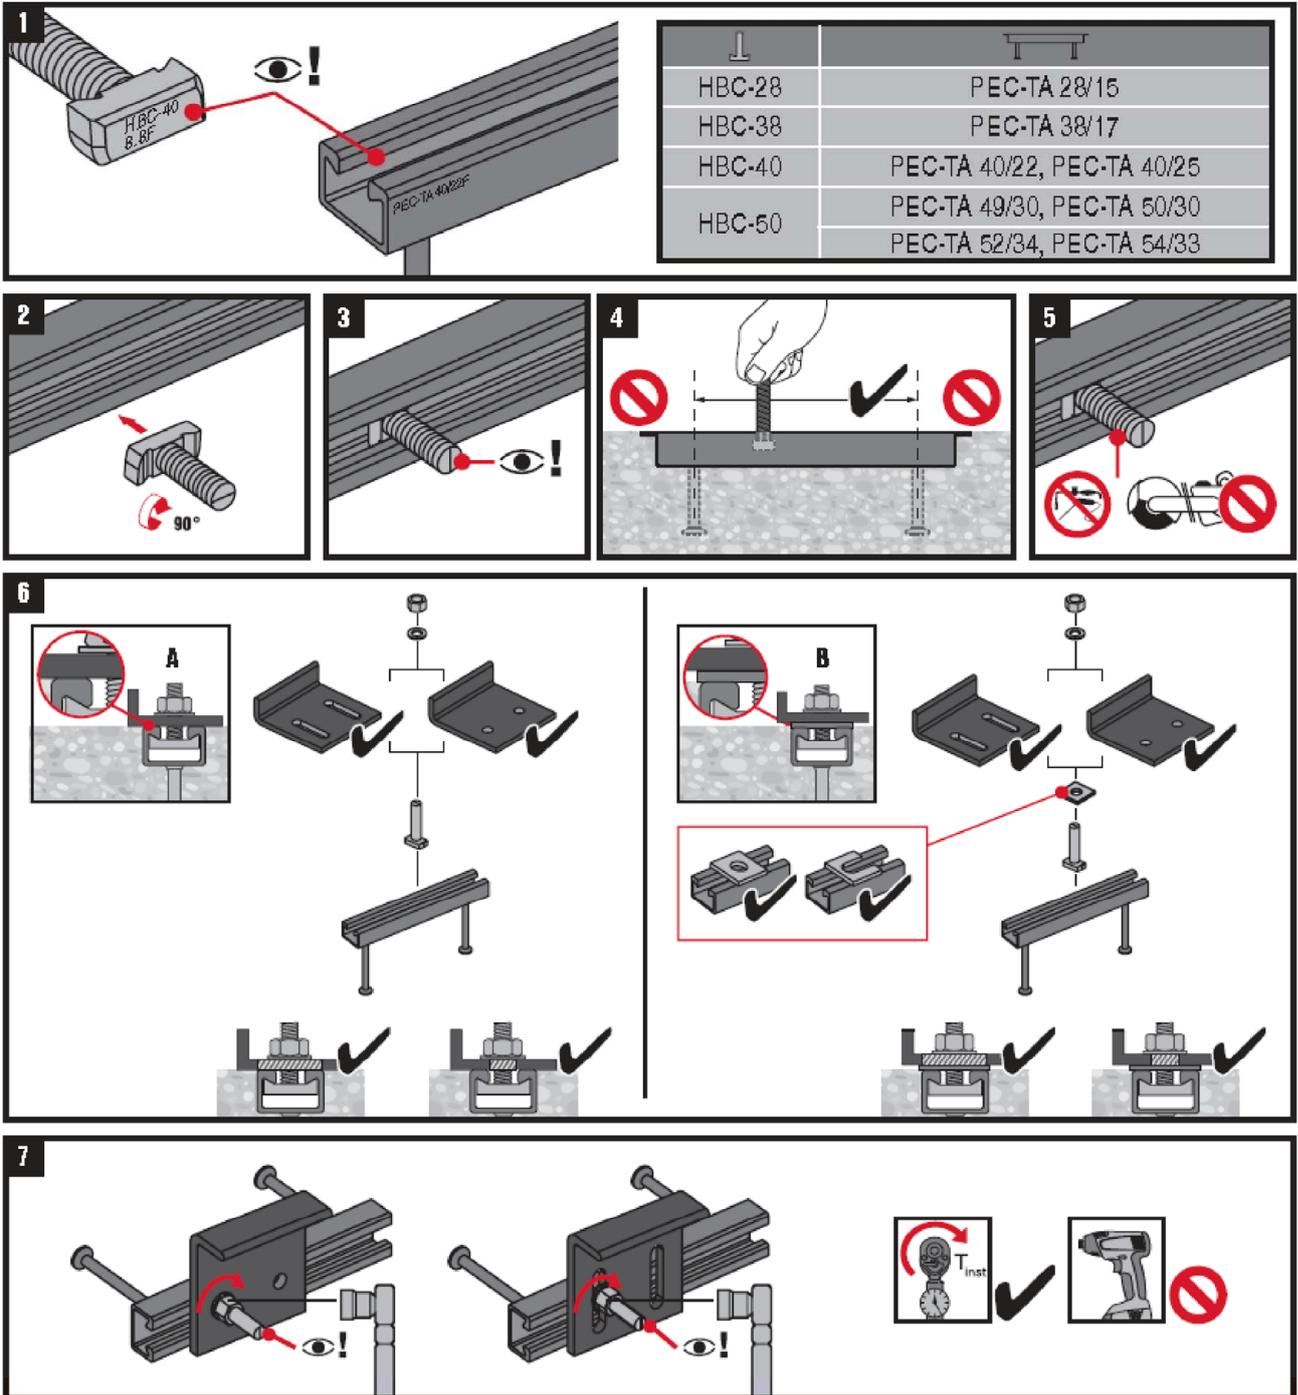

Anchor channels (PEC-TA) with channel bolts (HBC)

Intended Use
Installation instructions for channel bolts (HBC)

Annex B7

Table 11: Characteristic resistances under tension load – steel failure of hot-rolled anchor channels

Anchor channel			PEC-TA 40/22		PEC-TA 40/22 P		PEC-TA 50/30		PEC-TA 50/30 P		PEC-TA 52/34	
Type of anchor			I	R	I	R	I	R	I	R	I	R
Steel failure: Anchor												
Characteristic resistance	$N_{Rk,s,a}$	[kN]	20	31	32	31	39	55	55			
Partial factor	$\gamma_{Ms}^{1)}$	[-]	1,8									
Steel failure: Connection between anchor and channel												
Characteristic resistance	$N_{Rk,s,c}$	[kN]	20	32	31	43	55					
Partial factor	$\gamma_{Ms,ca}^{1)}$	[-]	1,8									
Steel failure: Local flexure of channel lips												
Characteristic spacing of the channel bolts for $N_{Rk,s,l}$	$s_{l,N}$	[mm]	79	79	98	98	105					
Characteristic resistance	$N_{Rk,s,l}^0$	[kN]	40	40	45	45	65					
Partial factor	$\gamma_{Ms,l}^{1)}$	[-]	1,8									

¹⁾ In absence of other national regulations

Table 12: Characteristic resistances under tension load – steel failure of cold-formed anchor channels

Anchor channel			PEC-TA 28/15		PEC-TA 38/17		PEC-TA 40/25		PEC-TA 49/30		PEC-TA 54/33	
Type of anchor			R	R	R	R	R	R	R			
Steel failure: Anchor												
Characteristic resistance	$N_{Rk,s,a}$	[kN]	9	18	20	31	55					
Partial factor	$\gamma_{Ms}^{1)}$	[-]	1,8									
Steel failure: Connection between anchor and channel												
Characteristic resistance	$N_{Rk,s,c}$	[kN]	9	18	20	31	55					
Partial factor	$\gamma_{Ms,ca}^{1)}$	[-]	1,8									
Steel failure: Local flexure of channel lips												
Characteristic spacing of the channel bolts for $N_{Rk,s,l}$	$s_{l,N}$	[mm]	56	76	80	100	107					
Characteristic resistance	$N_{Rk,s,l}^0$	[kN]	9	18	20	31	55					
Partial factor	$\gamma_{Ms,l}^{1)}$	[-]	1,8									

¹⁾ In absence of other national regulations

Anchor channels (PEC-TA) with channel bolts (HBC)

Performance Data

Characteristic resistances of anchor channels under tension load

Annex C1

Table 13: Characteristic flexural resistance of hot-rolled anchor channels under tension load

Anchor channel			PEC-TA 40/22	PEC-TA 40/22 P	PEC-TA 50/30	PEC-TA 50/30 P	PEC-TA 52/34
Steel failure: Flexure of channel							
Characteristic flexural resistance of channel	$M_{Rk,s,flex}$	[Nm]	1013	1828	2084	3885	3435
Partial factor	$\gamma_{Ms,flex}^{1)}$	[-]	1,15				

¹⁾ In absence of other national regulations

Table 14: Characteristic flexural resistance of cold-formed anchor channels under tension load

Anchor channel			PEC-TA 28/15	PEC-TA 38/17	PEC-TA 40/25	PEC-TA 49/30	PEC-TA 54/33
Steel failure: Flexure of channel							
Characteristic flexural resistance of channel	carbon steel	$M_{Rk,s,flex}$	316	538	979	1669	2929
	stainless steel			527		1702	2832
Partial factor	$\gamma_{Ms,flex}^{1)}$	[-]	1,15				

¹⁾ In absence of other national regulations

Anchor channels (PEC-TA) with channel bolts (HBC)

Performance Data

Characteristic resistances of anchor channels under tension load

Annex C2

Table 15: Characteristic resistances under tension load – concrete failure of hot-rolled anchor channels

Anchor channel			PEC-TA 40/22		PEC-TA 40/22 P		PEC-TA 50/30		PEC-TA 50/30 P		PEC-TA 52/34	
Type of anchor			I	R	I	R	I	R	I	R	I	R
Concrete failure: Pull-out failure												
Characteristic resistance in cracked concrete C12/15	$N_{Rk,p}$	[kN]	27,0	13,6	27,0	25,6	33,8	21,2	33,8	39,2	68,4	33,2
Characteristic resistance in uncracked concrete C12/15			37,8	19,0	37,8	35,8	47,3	29,7	47,3	54,9	95,8	46,5
Factor for $N_{Rk,p}$	C16/20	ψ_c [-]	1,33									
	C20/25		1,67									
	C25/30		2,08									
	C30/37		2,50									
	C35/45		2,92									
	C40/50		3,33									
	C45/55		3,75									
	C50/60		4,17									
	C55/67		4,58									
	\geq C60/75		5,00									
Partial factor	$\gamma_{Mp} = \gamma_{Mc}^{1)}$	[-]	1,5									
Concrete failure: Concrete cone failure												
Product factor k_1	cracked concrete	$k_{cr,N}$	[-]	7,9	8,0	8,1	8,2	8,7				
	uncracked concrete	$k_{ucr,N}$	[-]	11,2	11,5	11,6	11,7	12,4				
Partial factor	$\gamma_{Mc}^{1)}$	[-]	1,5									
Concrete failure: Splitting												
Characteristic edge distance	$c_{cr,sp}$	[mm]	237	273	282	318	465					
Partial factor	$\gamma_{Msp} = \gamma_{Mc}^{1)}$	[-]	1,5									

¹⁾ In absence of other national regulations

Anchor channels (PEC-TA) with channel bolts (HBC)

Performance Data

Characteristic resistances of anchor channels under tension load

Annex C3

Table 16: Characteristic resistances under tension load – concrete failure of cold-formed anchor channels

Anchor channel			PEC-TA 28/15	PEC-TA 38/17	PEC-TA 40/25	PEC-TA 49/30	PEC-TA 54/33	
Type of anchor			R	R	R	R	R	
Concrete failure: Pull-out failure								
Characteristic resistance in cracked concrete C12/15	$N_{Rk,p}$	[kN]	7,6	13,6	13,6	21,2	33,2	
Characteristic resistance in uncracked concrete C12/15			10,7	19,0	19,0	29,7	46,5	
Factor for $N_{Rk,p}$	C16/20	ψ_c [-]	1,33					
	C20/25		1,67					
	C25/30		2,08					
	C30/37		2,50					
	C35/45		2,92					
	C40/50		3,33					
	C45/55		3,75					
	C50/60		4,17					
	C55/67		4,58					
\geq C60/75	5,00							
Partial factor	$\gamma_{Mp} = \gamma_{Mc}^{1)}$	[-]	1,5					
Concrete failure: Concrete cone failure								
Product factor k_1	cracked concrete	$k_{cr,N}$	[-]	7,2	7,8	7,9	8,1	8,7
	uncracked concrete	$k_{ucr,N}$	[-]	10,3	11,2	11,2	11,6	12,4
Partial factor	$\gamma_{Mc}^{1)}$	[-]	1,5					
Concrete failure: Splitting								
Characteristic edge distance	$C_{cr,sp}$	[mm]	135	228	237	282	465	
Partial factor	$\gamma_{Msp} = \gamma_{Mc}^{1)}$	[-]	1,5					

¹⁾ In absence of other national regulations

Anchor channels (PEC-TA) with channel bolts (HBC)

Performance Data

Characteristic resistances of anchor channels under tension load

Annex C4

Table 17: Displacements of hot-rolled anchor channels under tension load

Anchor channel			PEC-TA 40/22	PEC-TA 40/22 P	PEC-TA 50/30	PEC-TA 50/30 P	PEC-TA 52/34
Tension load	N	[kN]	13,9	15,3	14,3	28,4	25,8
Short-term displacement ¹⁾	δ_{N0}	[mm]	2,3	1,1	2,2	1,8	1,4
Long-term displacement ¹⁾	$\delta_{N\infty}$	[mm]	4,6	2,2	4,4	3,6	2,8

¹⁾ Displacements in midspan of the anchor channel, including slip of channel bolt, deformation of channel lips, bending of the channel and slip of the anchor channel in concrete

Table 18: Displacements of cold-formed anchor channels under tension load

Anchor channel			PEC-TA 28/15	PEC-TA 38/17	PEC-TA 40/25	PEC-TA 49/30	PEC-TA 54/33
Tension load	N	[kN]	3,6	7,1	7,9	12,3	21,8
Short-term displacement ¹⁾	δ_{N0}	[mm]	0,6	1,3	1,4	1,4	1,6
Long-term displacement ¹⁾	$\delta_{N\infty}$	[mm]	1,2	2,6	2,8	2,8	3,2

¹⁾ Displacements in midspan of the anchor channel, including slip of channel bolt, deformation of channel lips, bending of the channel and slip of the anchor channel in concrete

Anchor channels (PEC-TA) with channel bolts (HBC)

Performance Data
Displacements under tension load

Annex C5

Table 19: Characteristic resistances under shear load – steel failure of hot-rolled anchor channel

Anchor channel			PEC-TA 40/22	PEC-TA 40/22 P	PEC-TA 50/30	PEC-TA 50/30 P	PEC-TA 52/34
Steel failure: Anchor							
Characteristic resistance	$V_{Rk,s,a,y}$	[kN]	26,0	38,0	40,3	60,0	71,5
Partial factor	$\gamma_{Ms}^{1)}$	[-]	1,5				
Steel failure: Connection between anchor and channel							
Characteristic resistance	$V_{Rk,s,c,y}$	[kN]	26,0	38,0	40,3	60,0	71,5
Partial factor	$\gamma_{Ms,ca}^{1)}$	[-]	1,8				
Steel failure: Local flexure of channel lips under shear load perpendicular to the longitudinal axis of the channel							
Characteristic spacing of channel bolts for $V_{Rk,s,l}$	$s_{l,v}$	[mm]	80	80	99	99	105
Characteristic resistance	$V^0_{Rk,s,l,y}$	[kN]	38,0	38,0	60,0	60,0	71,5
Partial factor	$\gamma_{Ms,l}^{1)}$	[-]	1,8				

¹⁾ In absence of other national regulations

Table 20: Characteristic resistances under shear load – steel failure of cold-formed anchor channel

Anchor channel			PEC-TA 28/15	PEC-TA 38/17	PEC-TA 40/25	PEC-TA 49/30	PEC-TA 54/33
Steel failure: Anchor							
Characteristic resistance	$V_{Rk,s,a,y}$	[kN]	9,0	18,0	20,0	31,0	55,0
Partial factor	$\gamma_{Ms}^{1)}$	[-]	1,5				
Steel failure: Connection between anchor and channel							
Characteristic resistance	$V_{Rk,s,c,y}$	[kN]	9,0	18,0	20,0	31,0	55,0
Partial factor	$\gamma_{Ms,ca}^{1)}$	[-]	1,8				
Steel failure: Local flexure of channel lips under shear load perpendicular to the longitudinal axis of the channel							
Characteristic spacing of channel bolts for $V_{Rk,s,l}$	$s_{l,v}$	[mm]	56	76	80	100	107
Characteristic resistance	$V^0_{Rk,s,l,y}$	[kN]	9,0	18,0	20,0	31,0	55,0
Partial factor	$\gamma_{Ms,l}^{1)}$	[-]	1,8				

¹⁾ In absence of other national regulations

Anchor channels (PEC-TA) with channel bolts (HBC)

Performance Data

Characteristic resistances of anchor channels under shear load

Annex C6

Table 21: Characteristic resistances under shear load – concrete failure of anchor channel

Anchor channel		PEC-TA 28/15	PEC-TA 38/17	PEC-TA 40/25	PEC-TA 40/22 (P)	PEC-TA 49/30	PEC-TA 50/30 (P)	PEC-TA 54/33	PEC-TA 52/34
Concrete failure: Pry out									
Product factor	k_8	[-]	1,0	2,0					
Partial factor	$\gamma_{Mc}^{1)}$	[-]	1,5						
Concrete failure: Concrete edge									
Product factor k_{12}	cracked concrete	$k_{cr,V}$	[-]	6,9	7,5				
	uncracked concrete	$k_{ucr,V}$	[-]	9,6	10,5				
Partial factor	$\gamma_{Mc}^{1)}$	[-]	1,5						

¹⁾ In absence of other national regulations

Table 22: Displacements under shear load of hot-rolled anchor channel

Anchor channel			PEC-TA 40/22	PEC-TA 40/22 P	PEC-TA 50/30	PEC-TA 50/30 P	PEC-TA 52/34
Shear load	V_y	[kN]	10,3	29,0	16,0	39,7	28,4
Short-term displacement ¹⁾	$\delta_{V0,y}$	[mm]	2,1	2,0	2,6	2,7	3,7
Long-term displacement ¹⁾	$\delta_{V\infty,y}$	[mm]	3,1	3,5	3,9	4,0	5,5

¹⁾ Displacements in midspan of the anchor channel, including slip of channel bolt, deformation of channel lips and slip of the anchor channel in concrete

Table 23: Displacements under shear load of cold-formed anchor channel

Anchor channel			PEC-TA 28/15	PEC-TA 38/17	PEC-TA 40/25	PEC-TA 49/30	PEC-TA 54/33
Shear load	V_y	[kN]	3,6	7,1	7,9	12,3	21,8
Short-term displacement ¹⁾	$\delta_{V0,y}$	[mm]	0,6	1,3	1,4	1,4	1,6
Long-term displacement ¹⁾	$\delta_{V\infty,y}$	[mm]	0,9	2,0	2,1	2,1	2,4

¹⁾ Displacements in midspan of the anchor channel, including slip of channel bolt, deformation of channel lips and slip of the anchor channel in concrete

Table 24: Characteristic resistances under combined tension and shear load of anchor channel

Anchor channel		PEC-TA 28/15	PEC-TA 38/17	PEC-TA 40/25	PEC-TA 40/22 (P)	PEC-TA 49/30	PEC-TA 50/30 (P)	PEC-TA 54/33	PEC-TA 52/34
Steel failure: Local flexure of channel lips and flexure of channel									
Product factor	k_{13}	[-]	Values according to EN 1992-4:2018, Section 7.4.3.1 or EOTA TR 047, Section B.6.3.1.3						
Steel failure: Anchor and connection between anchor and channel									
Product factor	k_{14}	[-]	Values according to EN 1992-4:2018, Section 7.4.3.1 or EOTA TR 047, Section B.6.3.1.4						

Anchor channels (PEC-TA) with channel bolts (HBC)

Performance Data

Characteristic resistances and displacements of anchor channels under shear load
Characteristic resistances under combined tension and shear load

Annex C7

Table 25: Characteristic resistances under tension and shear load – steel failure of channel bolts

Channel bolt					M8	M10	M12	M16	M20				
Steel failure													
Characteristic resistance (tension load)	$N_{Rk,s}$	[kN]	HBC-28/15	4.6	1)								
				8.8	22,4	35,4	44,3	1)					
				A4-50 ²⁾	17,2	1)							
				A4-70 ²⁾	25,6	38,9	51,3	1)					
			HBC-38/17	4.6	1)	23,2	1)						
				8.8		-	35,4	55,8	1)				
				A4-70 ²⁾		20,5	47,2	53,0	1)				
			HBC-40/22	4.6		23,2	1)						
				8.8		1)	67,4	125,6	1)				
				A4-70 ²⁾		20,5	59,0	91,0	1)				
			HBC-50/30	4.6		1)							
				8.8		1)	67,4	125,6	147,1				
				A4-70 ²⁾			59,0	109,9	121,2				
			Partial factor	$\gamma_{Ms}^{3)}$		[-]	HBC-28/15	4.6	2,00				
							HBC-38/17	8.8	1,50				
							HBC-40/22	A4-50 ²⁾	2,86				
							HBC-50/30	A4-70 ²⁾	1,87				
Characteristic resistance (shear load)	$V_{Rk,s}$	[kN]	HBC-28/15	4.6		1)							
				8.8		14,6	23,2	33,7	1)				
				A4-50 ²⁾		11,0	1)						
				A4-70		15,4	24,4	35,4	1)				
			HBC-38/17	4.6	1)	13,9	1)						
				8.8		1)	33,7	62,8	1)				
				A4-70 ²⁾		24,4	35,4	65,9	1)				
			HBC-40/22	4.6		13,9	1)						
				8.8		23,2	33,7	62,8	1)				
				A4-70 ²⁾		24,4	35,4	65,9	1)				
			HBC-50/30	4.6		1)							
				8.8		1)	33,7	62,8	101,7				
A4-70 ²⁾	35,4	65,9		102,9									
Partial factor	$\gamma_{Ms}^{3)}$	[-]	HBC-28/15	4.6		1,67							
			HBC-38/17	8.8		1,25							
			HBC-40/22	A4-50 ²⁾		2,38							
			HBC-50/30	A4-70	1,56								

- 1) Product not available
2) Materials according to Table 6, Annex A6
3) In absence of other national regulations

Anchor channels (PEC-TA) with channel bolts (HBC)

Performance Data


Characteristic resistances of channel bolts under tension and shear load

Annex C8

Table 26: Characteristic resistances under shear load with lever arm – steel failure of channel bolts

Channel bolt				M8	M10	M12	M16	M20		
Steel failure										
Characteristic flexural resistance	$M^{0}_{Rk,s}{}^{5)}$	[Nm]	HBC-28/15	4.6	4)	29,9 ³⁾	4)			
			HBC-38/17	8.8	30,0	59,8	104,8	266,4	538,7	
			HBC-40/22	A4-50 ²⁾	18,7	4)				
			HBC-50/30	A4-70 ²⁾	26,2	52,3	91,7	233,1	454,4	
Partial factor	$\gamma_{Ms}{}^{1)}$	[-]	HBC-28/15	4.6	1,67					
			HBC-38/17	8.8	1,25					
			HBC-40/22	A4-50 ²⁾	2,38					
			HBC-50/30	A4-70 ²⁾	1,56					
Internal lever arm	a	[mm]	HBC-28/15	28/15	17,3	18,7	20,0	4)		
			HBC-38/17	38/17	4)	23,0	24,3	26,3	4)	
			HBC-40/22	40/22		24,3	25,7	27,3		
			HBC-50/30	50/30	4)	29,9	31,7	33,9		

- 1) In absence of other national regulations
 2) Materials according to Table 6, Annex A6
 3) Not applicable for HBC-28/15 and HBC-50/30
 4) Product not available

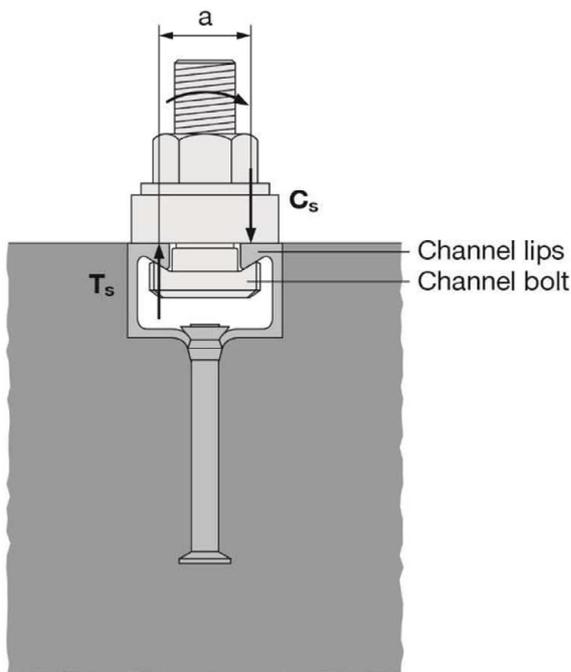

5) The characteristic flexure resistance according to Table 26 is limited as follows:

$$M^{0}_{Rk,s} \leq 0,5 \cdot N_{Rk,s,l} \cdot a \quad (N_{Rk,s,l} \text{ according to Table 11 and Table 12})$$

$$M^{0}_{Rk,s} \leq 0,5 \cdot N_{Rk,s} \cdot a \quad (N_{Rk,s} \text{ according to Table 25})$$

a = internal lever arm according to Table 26

T_s = tension force acting on the channel lip

C_s = compression force acting on the channel lip

Anchor channels (PEC-TA) with channel bolts (HBC)

Performance Data

Characteristic flexural resistances of channel bolts under shear load with lever arm

Annex C9

Table 27: Characteristic resistance $F_{Rd,s,fi}$ [kN] of anchor channels under fire exposure

Channel bolt			M10	M12	$\geq M16$
Steel failure: Anchor, connection between anchor and channel, local flexure of channel lip					
Characteristic resistance in cracked concrete C20/25	PEC-TA 28/15	R60	0,8		2)
		R90	0,6		
		R120	0,5		
	PEC-TA 38/17	R60	2)		1,9
		R90	2)		1,3
		R120	2)		1,0
	PEC-TA 40/25 PEC-TA 40/22 (P)	R60	1,7	3,5	
		R90	1,2	2,2	
		R120	0,9	1,5	
	PEC-TA 49/30 PEC-TA 50/30 (P) PEC-TA 52/34	R60	2)	3,8	3,9
		R90		2,5	2,9
		R120		1,9	2,4
Partial factor		$\gamma_{Ms,fi}$ ¹⁾	[-]		1,0


¹⁾ In absence of other national regulations

²⁾ No performance assessed


Table 28: Minimum axis distance

Anchor channel		PEC-TA 28/15	PEC-TA 38/17	PEC-TA 40/25	PEC-TA 40/22 (P)	PEC-TA 49/30	PEC-TA 50/30 (P)	PEC-TA 54/33	PEC-TA 52/34
Min. axis distance	R60	35				50	50	50	50
	R90	45							
	R120	55							

Fire exposure from one side only

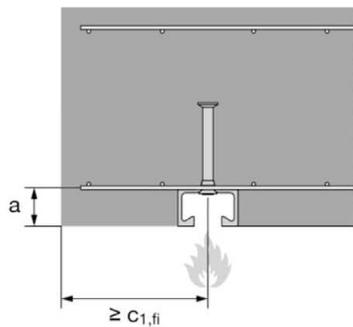

Fire exposure from more than one side

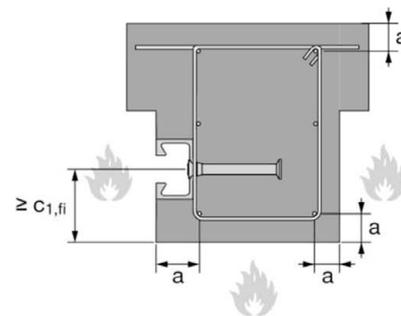

Anchor channels (PEC-TA) with channel bolts (HBC)

Performance Data

Characteristic resistance of anchor channels and channel bolts under fire exposure

Annex C10