

Approval body for construction products  
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and  
Laender Governments



## European Technical Assessment

**ETA-17/0288**  
**of 23 September 2020**

English translation prepared by DIBt - Original version in German language

### General Part

Technical Assessment Body issuing the  
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Upat Sleeve Anchor UHS, UHS-I

Product family  
to which the construction product belongs

Mechanical fastener for use in concrete

Manufacturer

Upat Vertriebs GmbH  
Bebelstraße 11  
79108 Freiburg im Breisgau  
DEUTSCHLAND

Manufacturing plant

Upat

This European Technical Assessment  
contains

25 pages including 3 annexes which form an integral part  
of this assessment

This European Technical Assessment is  
issued in accordance with Regulation (EU)  
No 305/2011, on the basis of

EAD 330232-00-0601, Edition 10/2016

This version replaces

ETA-17/0288 issued on 22 August 2017

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

## Specific Part

### 1 Technical description of the product

The Upat Sleeve Anchor UHS, UHS-I is an anchor made of galvanised steel (sizes with external diameter 10, 12, 15, 18, 24, 28 and 32, sizes with internal thread 12/M6 I, 12/M8 I, 15/M10 I and 15/M12 I) or stainless steel (sizes with external diameter 10, 12, 15, 18 and 24, sizes with internal thread 12/M6 I, 12/M8 I, 15/M10 I and 15/M12 I) which is placed into a drilled hole and anchored by torque-controlled expansion.

The product description is given in Annex A.

### 2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the fastener is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the fastener of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading)	See Annex C 1, C 2, C 7
Characteristic resistance to shear load (static and quasi-static loading)	See Annex C 3 and C 4
Displacements (static and quasi-static loading)	See Annex C 10, C 11
Characteristic resistance and displacements for seismic performance categories C1 and C2	See Annex C 8, C 9, C 11
Durability	See Annex B 1

#### 3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	See Annex C 5, C 6

### 4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with the European Assessment Document EAD 330232-01-0601 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1


**5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document**

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.

Issued in Berlin on 23 September 2020 by Deutsches Institut für Bautechnik

BD Dipl.-Ing. Andreas Kummerow  
Head of Department

*beglaubigt:*  
Baderschneider

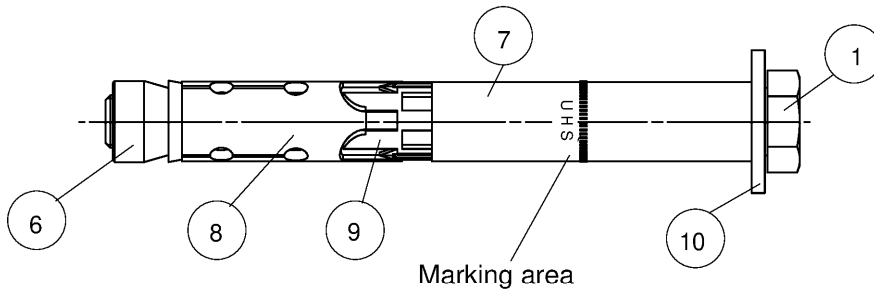

Type hexagon screw **S**  
UHS 10 - 32 S  
UHS 10 - 24 S R

Product label, example:

UHS 15/25 R


Type of fastener

UHS

15/25 R

Identification R


Nominal drill hole diameter/max. thickness of fixture ( $t_{fix}$ )



Type countersunk screw **SK**

UHS 10 - 18 SK


UHS 10 - 18 SK R



Type hexagon nut **B**

UHS 10 - 32 B

UHS 10 - 24 B R



Type cap nut **H**


UHS 10 - 24 H

UHS 10 - 24 H R

- 1 Hexagon screw
- 2 Countersunk screw
- 3 Cap nut
- 4 Hexagon nut

- 5 Threaded rod
- 6 Cone nut
- 7 Distance sleeve
- 8 Expansion sleeve

- 9 Plastic sleeve
- 10 Washer
- 11 Conical washer
- 12 Internal thread socket

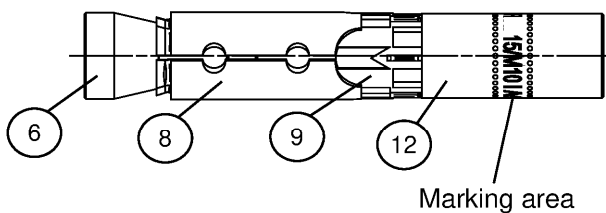

Type internal threaded anchor **I**  
UHS 12 M6-I or M8-I  
UHS 15 M10-I or M12-I

Product label, example:

UHS 12/M8-I R

Type of fastener

UHS

12/M8-I R

Identification R


Nominal drill hole diameter / size of internal thread  
(Fig. not to scale)

Upat Sleeve Anchor UHS, UHS-I

**Product description**

Anchor types UHS, UHS R, UHS-I, UHS-I R

**Annex A 1**

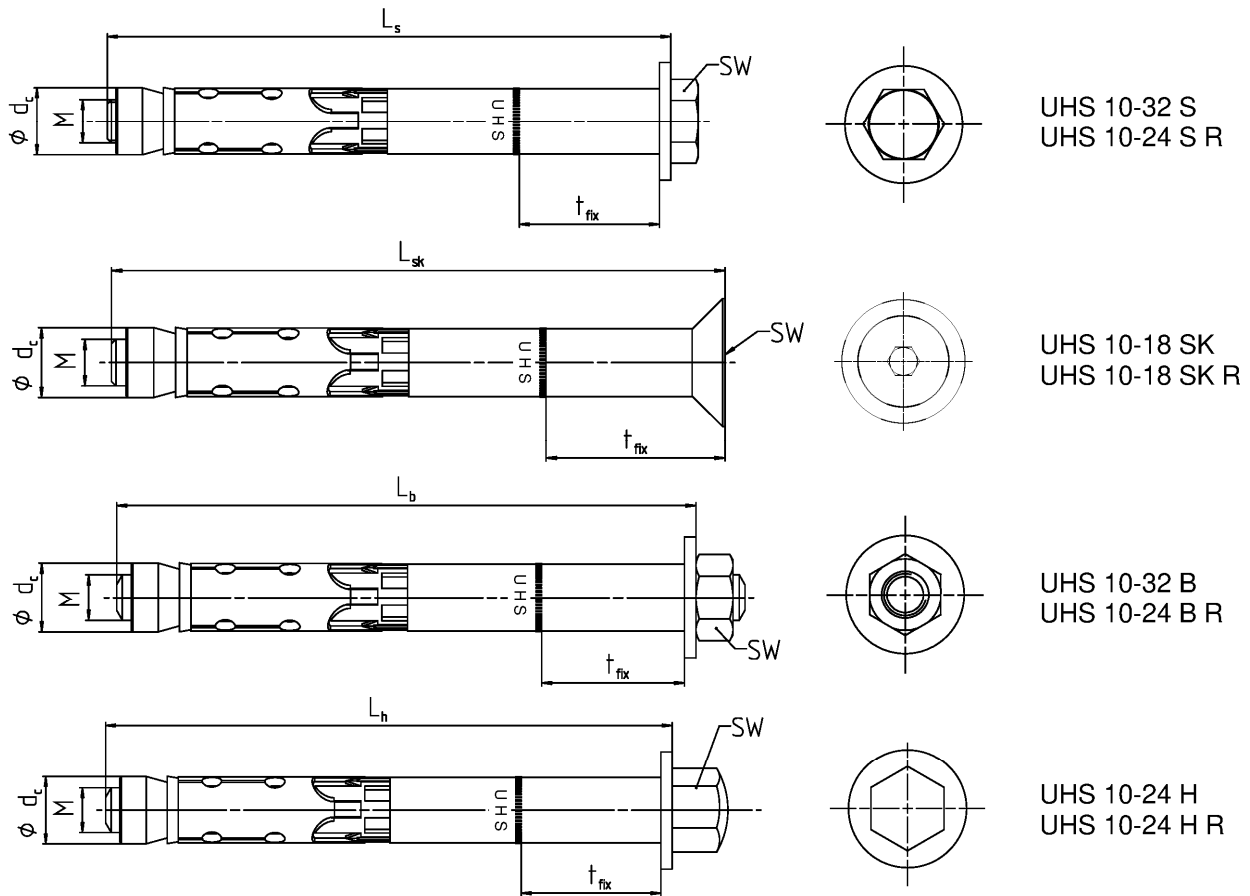

**Table A2.1:** Dimensions [mm] UHS and UHS R

Anchor type		UHS 10	UHS 12	UHS 15	UHS 18	UHS 24	UHS 28	UHS 32
Thread	M	6	8	10	12	16	20	24
Diameter cone nut	d <sub>c</sub>	10	12	14,8	17,8	23,7	27,5	31,5
Wrench size SW	UHS-S, -B	10	13	17	19	24	30	36
	UHS-SK <sup>1)</sup>	4	5	6	8	3)		
	UHS-H	13	17	17	19	24	3)	
	UHS-S R, -B R, -H R	10	13	17	19	24	3)	
	UHS-SK R <sup>1)</sup>	4	5	6	8	3)		
t <sub>fix</sub> UHS-S, -B, -H + UHS-S R, -B R, -H R	min	0	0	0	0	0	0	0
t <sub>fix</sub> UHS-SK + UHS-SK R <sup>2)</sup>	min	5	6	6	8	3)		
Length of screw / bolt	L <sub>s</sub> , L <sub>h</sub> , L <sub>b</sub> (- t <sub>fix</sub> )	≥ 49	≥ 74	≥ 89	≥ 99	≥ 124	≥ 149	≥ 174
Length of countersunk screw	L <sub>sk</sub> (- t <sub>fix</sub> )	≥ 54	≥ 79	≥ 95	≥ 107	3)		

<sup>1)</sup> Internal hexagon

<sup>2)</sup> The influence of the thickness of fixture to the characteristic resistance for shear loads, steel failure without lever arm is taken into account, see tables C3.1, C8.1 and C9.1

<sup>3)</sup> Anchor type not part of assessment

(Fig. not to scale)


Upat Sleeve Anchor UHS, UHS-I

**Product description**

Anchor types and dimensions UHS, UHS R

**Annex A 2**

<b>Table A3.1: Material UHS and UHS R</b>			
No.	Designation	Material	
		UHS	UHS R
	Steel grade	Steel	Stainless steel R
		Zinc plated $\geq 5 \mu\text{m}$ , ISO 4042:2018	Acc. to EN 10088:2014
1	Hexagon screw	Steel class 8.8; EN ISO 898-1:2013	Class 80 EN ISO 3506:2020
2	Countersunk screw		
3	Cap nut		
4	Hexagon nut		
		Steel class 8	
5	Threaded rod	Steel $f_{uk} \geq 800 \text{ N/mm}^2; f_{yk} \geq 640 \text{ N/mm}^2$	Stainless steel EN 10088:2014 $f_{uk} \geq 800 \text{ N/mm}^2; f_{yk} \geq 640 \text{ N/mm}^2$
6	Cone nut	Steel EN 10277:2018	Stainless steel EN 10088:2014
7	Distance sleeve	Steel EN 10305:2016	
8	Expansion sleeve	Steel EN 10139:2020/ EN 10277:2018	
9	Plastic sleeve	ABS (plastic)	
10	Washer	Steel EN 10139:2020	Stainless steel EN 10088:2014
11	Conical washer	Steel EN 10277:2018	
Upat Sleeve Anchor UHS, UHS-I			<b>Annex A 3</b>
<b>Product description</b> Materials UHS and UHS R			

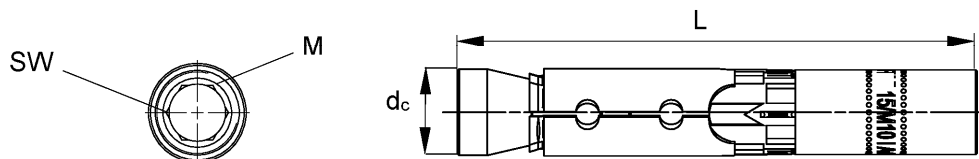

**Table A4.1:** Anchor Dimensions [mm] UHS-I and UHS-I R

Anchor type UHS-I, UHS-I R		UHS 12/M6 I	UHS 12/M8 I	UHS 15/M10 I	UHS 15/M12 I
Thread	M	6	8	10	12
Diameter cone nut	d <sub>c</sub>	12	12	14,8	14,8
Wrench size internal hexagon	SW	6	8	6	8
Anchor length	L	77,5	77,5	90	90

**Table A4.2:** Material UHS-I and UHS-I R

No.	Designation	Material	
		UHS-I	UHS-I R
	Steel grade	Steel	Stainless steel R
		Zinc plated ≥ 5 µm, ISO 4042:2018	Acc. to EN 10088:2014
6	Cone nut	Steel EN 10277:2018	Stainless steel EN 10088:2014
8	Expansion sleeve	Steel EN 10139:2020 / EN 10277:2018	
9	Plastic sleeve	ABS (plastic)	
12	Internal thread bolt	Steel EN 10277:2018 f <sub>uk</sub> ≥ 750 N/mm <sup>2</sup> , f <sub>yk</sub> ≥ 600 N/mm <sup>2</sup>	Stainless steel EN 10088:2014 f <sub>uk</sub> ≥ 750 N/mm <sup>2</sup> , f <sub>yk</sub> ≥ 600 N/mm <sup>2</sup>
Requirements for fixing elements		Steel strength class 5.8, 6.8 or 8.8 EN ISO 898-1:2013	Steel strength class A50, A70 or A80 EN ISO 3506:2010 1.4362, 1.4401, 1.4404, 1.4571, 1.4529



(Fig. not to scale)


Upat Sleeve Anchor UHS, UHS-I

**Product description**  
Anchor types, dimensions and materials UHS-I, UHS I-R

**Annex A 4**



Specifications of intended use							
Anchorages subject to:							
Size		10	12	15	18	24	28 32
High Performance Anchor	UHS-S, -B				✓		
	UHS-H, -S R, -B R, -H R			✓			1)
	UHS-SK, UHS-SK R		✓				1)
High Performance Anchor	UHS-I, UHS-I R	1)	✓				1)
Hammer drilling with standard drill bit							
Hammer drilling with hollow drill bit with automatic cleaning					✓		
Static and quasi-static loads					✓		
Cracked and uncracked concrete					✓		
Fire exposure							
Seismic performance category	C1 UHS					✓	
	C1 UHS R	2)		✓			1)
	C2 UHS					✓	
	C2 UHS R			✓			1)
	C1 UHS-I, UHS-I R	1)		2)			1)
	C2 UHS-I, UHS-I R						
<p>1) Anchor type not part of the assessment</p> <p>2) No performance assessed</p> <p><b>Base materials:</b></p> <ul style="list-style-type: none"> <li>• Compacted reinforced or unreinforced normal weight concrete without fibres (cracked and uncracked) of strength classes C20/25 to C50/60 according to EN 206:2013+A1:2016</li> </ul> <p><b>Use conditions (Environmental conditions):</b></p> <ul style="list-style-type: none"> <li>• Structures subject to dry internal conditions (UHS, UHS R, UHS-I, UHS-I R)</li> <li>• Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal conditions, if no particular aggressive conditions exist (UHS R, UHS-I R)</li> </ul> <p>Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where deicing materials are used)</p> <p><b>Design:</b></p> <ul style="list-style-type: none"> <li>• Anchorages are to be designed under the responsibility of an engineer experienced in anchorages and concrete work</li> <li>• Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.)</li> <li>• Design of fastenings according to EN 1992-4:2018 and EOTA Technical Report TR 055, Edition February 2018</li> </ul>							
Upat Sleeve Anchor UHS, UHS-I						<b>Annex B 1</b>	
<b>Intended use Specifications</b>							

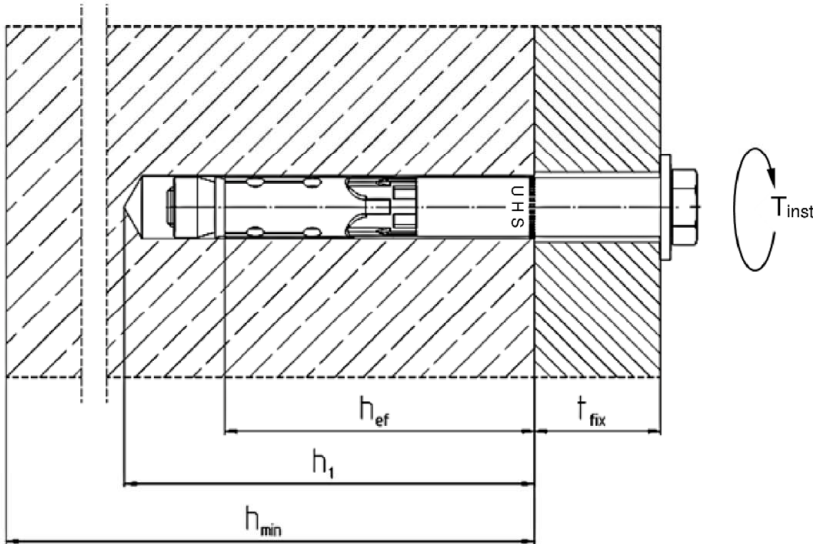

- $h_{ef}$  = Effective embedment depth
- $t_{fix}$  = Thickness of the fixture
- $h_1$  = Depth of drill hole to deepest point
- $h_{min}$  = Minimum thickness of concrete member
- $T_{inst}$  = Required setting torque

**Table B2.1:** Installation parameters UHS and UHS R

Anchor type UHS S, -SK, -B, -H and UHS S R, -SK R, -B R, -H R	UHS 10	UHS 12	UHS 15	UHS 18	UHS 24	UHS 28	UHS 32	
Nominal drill hole diameter $d_0$	10	12	15	18	24	28	32	
Maximum diameter of drill bit $d_{cut} \leq$	10,45	12,50	15,50	18,50	24,55	28,55	32,70	
Depth of drill hole to deepest $h_1 \geq$	55	80	90	105	125	155	180	
Diameter of clearance hole $d_f \leq$	12	14	17	20	26	31	35	
Diameter of counter sunk UHS SK	18	22	25	32	1)			
Depth of counter sunk, 90° UHS SK R	5,0	5,8	5,8	8,0				
Required setting torque $T_{inst}$ [Nm]	10	UHS S	22,5	40	80	160	180	200
		UHS B	17,5	38		120	180	200
		UHS H	22,5	40		90	1)	
	UHS SK	1)						
	15	UHS S R, UHS B R	25	40	100	160	1)	
		UHS H R				1)		
10	1)							


1) Anchor type not part of assessment

(Fig. not to scale)

Upat Sleeve Anchor UHS, UHS-I

**Intended use**  
Installation parameters UHS, UHS R

**Annex B 2**

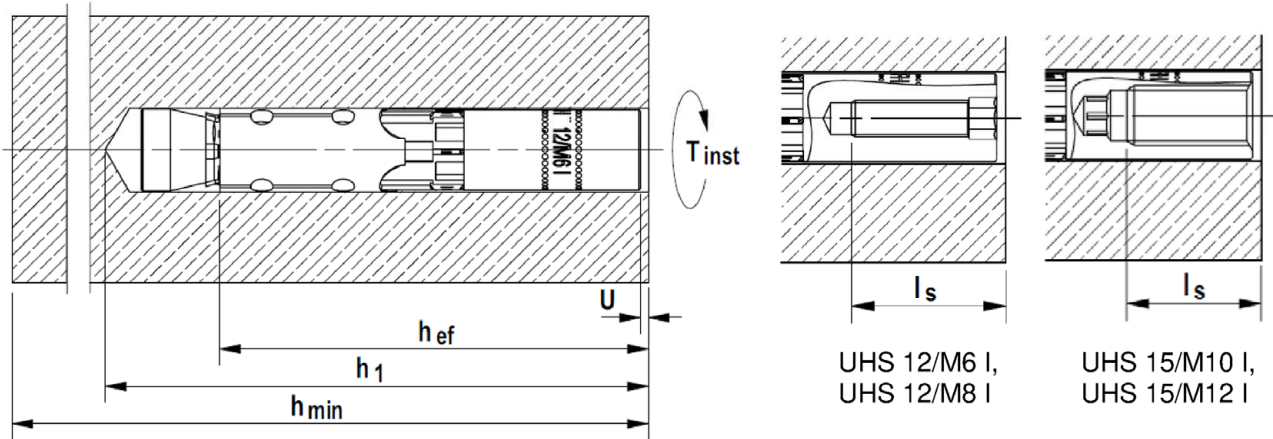

- $h_{ef}$  = Effective embedment depth
- $h_1$  = Depth of drill hole to deepest point
- $h_{min}$  = Minimum thickness of concrete member
- $T_{inst}$  = Required setting torque
- $U$  = Required gap after torquing
- $l_s$  = Screw-in depth

**Table B3.1:** Installation parameters UHS-I and UHS-I R

Anchor type UHS-I and UHS-I R		UHS 12/M6 I	UHS 12/M8 I	UHS 15/M10 I	UHS 15/M12 I
Nominal drill hole diameter	$d_0$	12		15	
Maximum bit diameter	$d_{cut} \leq$	12,50		15,50	
Depth of drill hole	$h_1 \geq$ [mm]	85		95	
Diameter of clearance hole	$d_f \leq$	7	9	12	14
Required gap after torquing <sup>1)</sup>	$U$	3 - 5			
Required setting torque <sup>1)</sup>	$T_{inst}$ [Nm]	15		25	
Minimum screw-in depth	$l_s \geq$	11 + U	13 + U	10 + U	12 + U
Maximum screw-in depth	$l_s \leq$ [mm]	20 + U			
Maximum torque on fixture in combination with screws and threaded rods strength class $\geq 5.8$ resp. $\geq A50$	$\max T_{fix}$ [Nm]	3	8	15	20

<sup>1)</sup> At least one of the requirements concerning the gap  $U$  or the required setting torque  $T_{inst}$  have to be fulfilled

(Fig. not to scale)

Upat Sleeve Anchor UHS, UHS-I

**Intended use**  
Installation parameters UHS-I, UHS-I R






**Annex B 3**

### Installation instructions:



- Fastener installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- Use of the fastener only as supplied by the manufacturer without exchanging the components of the fastener
- Checking before placing the fastener to ensure that the strength class of the concrete in which the fastener is to be placed is in the range given and is not lower than that of the concrete to which the characteristic loads apply
- Check of concrete being well compacted, e.g. without significant voids
- Hammer or hollow drilling according to Annex B5 and B6
- Drill hole created perpendicular  $\pm 5^\circ$  to concrete surface, positioning without damaging the reinforcement
- In case of aborted hole: new drilling at a minimum distance twice the depth of the aborted drill hole or smaller distance if the aborted drill hole is filled with high strength mortar and if under shear or oblique tension load it is not in the direction of load application

Upat Sleeve Anchor UHS, UHS-I	<b>Annex B 4</b>
<b>Intended Use</b> Installation instructions	

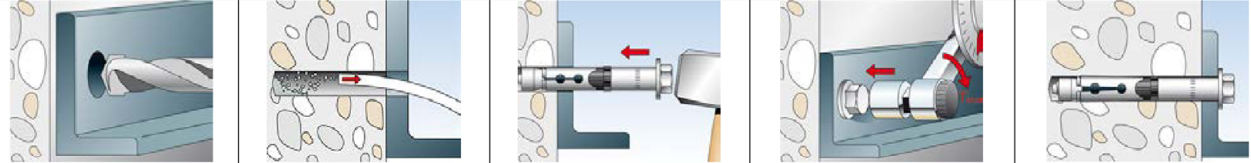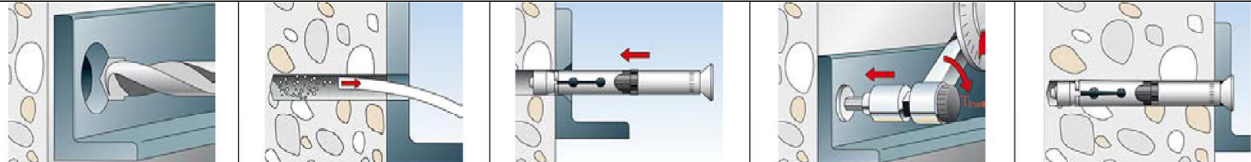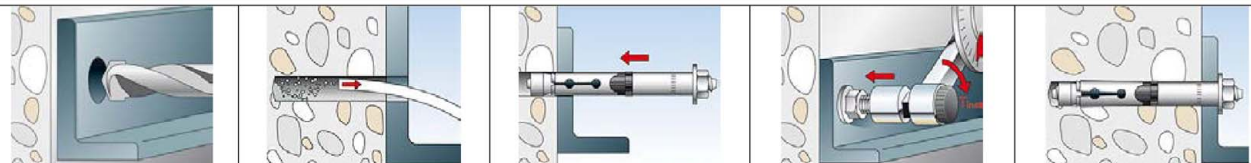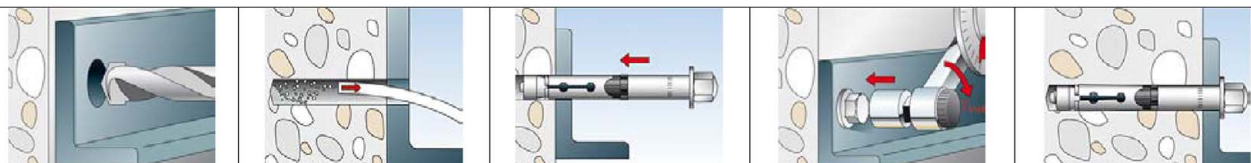Installation instruction for the fischer High-Performance anchor  
**UHS 10 - UHS 32 and UHS 10 R - UHS 24 R**







<b>Hollow drilling</b>						Continue with step 3, 4 and 5
						Installation instruction UHS 10 - 32 S and UHS 10 - 24 S R
<b>Hammer drilling</b>						Installation instruction UHS 10 - 18 SK and UHS 10 - 18 SK R
						Installation instruction UHS 10 - 32 B and UHS 10 - 24 B R
						Installation instruction UHS 10 - 24 H and UHS 10 - 24 H R
Step	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	

Step	Description	
1	Create drill hole with hammer drill	Create drill hole with hollow drill and vacuum cleaner
2	Clean the hole	-
3	Set the fastener	
4	Apply $T_{inst}$	
5	Installed fastener	

Types of drill bits	
Hammer drill	
Hollow drill	



Upat Sleeve Anchor UHS, UHS-I	<b>Annex B 5</b>
<b>Intended use</b> Installation instructions UHS, UHS R	

Installation instruction for the fischer High-Performance anchor internal thread  
**UHS-I and UHS-I R**

<b>Hollow drilling</b>		Continue with step 2, 3, and 4			
<b>Hammer drilling</b>					
Step	1	2	3	4	

Step	Description	
1	Create drill hole with hammer drill, clean drill hole	Create drill hole with hollow drill and vacuum cleaner
2	Hammering in the anchor flushed with the surface of the concrete	
3	Tighten the anchor. The included hexagon bit in the package should be used. Other tightening methods are allowed. Tighten the anchor in the concrete until the gap U is 3 - 5 mm or the required setting torque $T_{inst}$ is reached. Only one of the above requirements has to be fulfilled.	
4	Attach the fixture and use a suitable screw or anchor rod. The length of the screw or anchor rod should be determined depending on the thickness of fixture $t_{fix}$ , admissible tolerances, and available thread length $l_{s,max}$ and $l_{s,min}$ including the gap U. Tighten the screw with the torque $\leq \max T_{fix}$ ( $\max T_{fix}$ see table B3.1)	

Types of drill bits

Hammer drill	
Hollow drill	

Upat Sleeve Anchor UHS, UHS-I

**Intended use**  
Installation instructions UHS-I, UHS-I R

**Annex B 6**

<b>Table C1.1: Performance characteristics of tension resistance under static and quasi-static loads for UHS and UHS R</b>											
Anchor type UHS-S, -SK, -B, -H and UHS-S R, -SK R, -B R, -H R			UHS 10	UHS 12	UHS 15	UHS 18	UHS 24	UHS 28	UHS 32		
<b>Steel failure</b>											
UHS-S, -B,			16,1	29,3	46,4	67,4	125,3	195,8	282,0		
UHS-H, UHS-H R, -B R			$N_{Rk,s}$	[kN]	16,1	29,3	46,4	67,4	125,3	2)	
UHS-SK			16,1	29,3	46,4	67,4	2)				
Partial factor			$\gamma_{Ms}^{1)}$	[-]	1,5						
UHS-S R			$N_{Rk,s}$	[kN]	16,1	29,3	46,4	67,4	125,3	2)	
UHS-SK R			16,1	29,3	46,4	67,4	2)				
Partial factor			$\gamma_{Ms}^{1)}$	[-]	1,6						
<b>Pullout failure</b>											
Characteristic resistance in cracked concrete C20/25 UHS and UHS R			$N_{Rk,p}$	[kN]	7,5	12,0	16,0	25,0	34,4	48,1	63,3
Characteristic resistance in uncracked concrete C20/25 UHS			12,5	22,9	28,8	35,2	49,2	68,8	90,4		
Characteristic resistance in uncracked concrete C20/25 UHS R			12,5	20,0	28,8	35,2	49,2	2)			
Increasing factors for $N_{Rk,p}$ for cracked and uncracked concrete			$\psi_c$	C25/30	1,12						
				C30/37	1,22						
				C35/45	1,32						
				C40/50	1,41						
				C45/55	1,50						
				C50/60	1,58						
Installation factor			$\gamma_{Inst}$	[-]	1,0						
<b>Concrete cone failure and splitting failure</b>											
Effective embedment depth			$h_{ef}$	[mm]	40	60	70	80	100	125	150
Factor for cracked concrete			$k_{cr,N}$	[-]	7,7 <sup>3)</sup>						
Factor for uncracked concrete			$k_{ucr,N}$		11,0 <sup>3)</sup>						
Spacing			$s_{cr,N}$		120	180	210	240	300	375	450
Edge distance			$c_{cr,N}$	[mm]	60	90	105	120	150	187,5	225
Spacing (splitting)			$s_{cr,sp}$		190	300	320	340	380	480	570
Edge distance (splitting)			$c_{cr,sp}$		95	150	160	170	190	240	285
Characteristic resistance (splitting)			$N_{Rk,sp}^0$	[kN]	min $\{N_{Rk,c}^0, N_{Rk,p}^0\}$ <sup>4)</sup>						
<sup>1)</sup> In absence of other national regulations <sup>2)</sup> Anchor type no performance assessed <sup>3)</sup> Based on concrete strength as cylinder strength <sup>4)</sup> $N_{Rk,c}^0$ acc. EN 1992-4:2018											
Upat Sleeve Anchor UHS, UHS-I									<b>Annex C 1</b>		
<b>Performances</b> Performance characteristics of tension resistance for UHS and UHS R											

<b>Table C2.1: Performance characteristics of tension resistance under static and quasi-static loads for UHS-I and UHS-I R</b>					
Anchor type UHS-I and UHS-I R		UHS 12/M6 I	UHS 12/M8 I	UHS 15/M10 I	UHS 15/M12 I
<b>Steel failure</b>					
<b>Anchor in combination with screw / threaded rod of galvanised steel complying with DIN EN ISO 898</b>					
Strength class 5.8		10	19	29	43
Strength class 6.8	$N_{Rk,s}$ [kN]	12	23	35	44
Strength class 8.8		16	27	44	44
Partial factor	$\gamma_{Ms}^{1)}$ [-]	1,5			
<b>Anchor in combination with screw / threaded rod of stainless steel complying with DIN EN ISO 3506</b>					
Screw/thread strength class A50	$N_{Rk,s}$ [kN]	10	19	29	43
Partial factor	$\gamma_{Ms}^{1)}$ [-]	2,86			
Screw/thread strength class A70	$N_{Rk,s}$ [kN]	14	26	41	54
Partial factor	$\gamma_{Ms}^{1)}$ [-]	1,87			
Screw/thread strength class A80	$N_{Rk,s}$ [kN]	16	29	46	46
Partial factor	$\gamma_{Ms}^{1)}$ [-]	1,60			
<b>Pullout failure</b>					
Characteristic resistance in cracked concrete C20/25	$N_{Rk,p}$ [kN]	9,0		12,0	
Characteristic resistance in uncracked concrete C20/25		20,0		28,8	
Increasing factors for $N_{Rk,p}$ for cracked and uncracked concrete	$\psi_c$	C25/30	1,12		
		C30/37	1,22		
		C35/45	1,32		
		C40/50	1,41		
		C45/55	1,50		
		C50/60	1,58		
Installation factor	$\gamma_{inst}$ [-]	1,0			
<b>Concrete cone failure and splitting failure</b>					
Effective embedment depth	$h_{ef}$ [mm]	60		70	
Factor for cracked concrete	$k_{cr,N}$ [-]	7,7 <sup>2)</sup>			
Factor for uncracked concrete	$k_{ucr,N}$ [-]	11,0 <sup>2)</sup>			
Spacing	$s_{cr,N}$	180		210	
Edge distance	$c_{cr,N}$ [mm]	90		105	
Spacing (splitting)	$s_{cr,sp}$	300		320	
Edge distance (splitting)	$c_{cr,sp}$	150		160	
Characteristic resistance (splitting)	$N^0_{Rk,sp}$ [kN]	$\min \{N^0_{Rk,c}, N_{Rk,p}\}^{3)}$			
<sup>1)</sup> In absence of other national regulations <sup>2)</sup> Based on concrete strength as cylinder strength <sup>3)</sup> $N^0_{Rk,c}$ acc. EN 1992-4:2018					
Upat Sleeve Anchor UHS, UHS-I					<b>Annex C 2</b>
<b>Performances</b> Performance characteristics of tension resistance for UHS-I and UHS-I R					



<b>Table C3.1: Performance characteristics of shear resistance for UHS and UHS R under static and quasi-static loads</b>										
Anchor type UHS-S, -SK, -B, -H and UHS-S R, -SK R, -B R, -H R			UHS 10	UHS 12	UHS 15	UHS 18	UHS 24	UHS 28	UHS 32	
Installation factor $\gamma_{inst}$ [-]			1,0							
<b>Steel failure without lever arm</b>										
UHS-S			18,0	33,0	59,0	76,0	146,0	176,4	217,0	
UHS-B $V^0_{Rk,s}$ [kN]			16,0	27,2	42,8	61,9	119,0	148,8	169,0	
UHS-H			16,0	27,2	42,8	61,9	119,0	3)		
UHS-SK			$t_{fix}^{2)}$ [mm]	$\geq 10$		$\geq 15$		3)		
			$V^0_{Rk,s}$ [kN]	18,0	33,0	59,0	76,0			
			$t_{fix}^{2)}$ [mm]	$< 10$		$< 15$				
			$V^0_{Rk,s}$ [kN]	8,0	14,0	23,0	34,0			
Partial factor $\gamma_{Ms}^{1)}$ [-]			1,25							
Factor for ductility $k_7$			1,0							
UHS-S R $V^0_{Rk,s}$ [kN]			18,0	33,0	59,0	76,0	146,0	3)		
Partial factor $\gamma_{Ms}^{1)}$ [-]			1,33							
UHS-B R, -H R $V^0_{Rk,s}$ [kN]			16,0	27,2	42,8	61,9	119,0	3)		
Partial factor $\gamma_{Ms}^{1)}$ [-]			1,25							
UHS-SK R			$t_{fix}^{2)}$ [mm]	$\geq 10$		$\geq 15$		3)		
			$V^0_{Rk,s}$ [kN]	18,0	33,0	59,0	76,0			
			$t_{fix}^{2)}$ [mm]	$< 10$		$< 15$				
			$V^0_{Rk,s}$ [kN]	8,0	14,0	23,0	34,0			
Partial factor $\gamma_{Ms}^{1)}$ [-]			1,33							
Factor for ductility $k_7$			1,0							
<b>Steel failure with lever arm and concrete pryout failure</b>										
Characteristic bending resistance UHS-S, -SK, -B, -H $M^0_{Rk,s}$ [Nm]			12	30	60	105	266	518	896	
Partial factor $\gamma_{Ms}^{1)}$ [-]			1,25							
Characteristic bending resistance UHS R $M^0_{Rk,s}$ [Nm]			12	30	60	105	266	3)		
Partial factor $\frac{UHS-B R, -H R}{UHS-S R, -SK R}$ $\gamma_{Ms}^{1)}$ [-]			1,25							
			1,33							
Factor for pryout failure $k_8$ [-]			1,0	2,0						
<b>Concrete edge failure</b>										
Effective embedment depth for calculation $l_f =$ [mm]			$h_{ef}$							
Outside diameter of a fastener $d_{nom}$			10	12	15	18	24	28	32	
<sup>1)</sup> In absence of other national regulations <sup>2)</sup> The thickness of the fixture has influence to the characteristic resistance for shear loads, steel failure without lever arm <sup>3)</sup> No performance assessed										
Upat Sleeve Anchor UHS, UHS-I							<b>Annex C 3</b>			
<b>Performances</b> Performance characteristics of shear resistance for UHS and UHS R										

<b>Table C4.1: Performance characteristics of shear resistance for UHS-I and UHS-I R under static and quasi-static loads</b>					
Anchor type UHS-I and UHS-I R		<b>UHS 12/M6 I</b>	<b>UHS 12/M8 I</b>	<b>UHS 15/M10 I</b>	<b>UHS 15/M12 I</b>
Installation factor	$\gamma_{inst}$ [-]	1,0			
<b>Steel failure without lever arm</b>					
<b>Anchor in combination with screw / threaded rod of galvanised steel complying with DIN EN ISO 898:2013</b>					
Strength class 5.8		5	9	15	21
Strength class 6.8	$V_{Rk,s}^0$ [kN]	6	11	18	24
Strength class 8.8		8	14	23	24
Partial factor	$\gamma_{Ms}^{(1)}$ [-]	1,25			
Factor for ductility	$k_7$	1,0			
<b>Anchor in combination with screw / threaded rod of stainless steel complying with DIN EN ISO 3506:2010</b>					
Strength class A50	$V_{Rk,s}^0$ [kN]	5	9	15	21
Partial factor	$\gamma_{Ms}^{(1)}$ [-]	2,38			
Strength class A70	$V_{Rk,s}^0$ [kN]	7	13	20	30
Partial factor	$\gamma_{Ms}^{(1)}$ [-]	1,56			
Strength class A80	$V_{Rk,s}^0$ [kN]	8	15	23	32
Partial factor	$\gamma_{Ms}^{(1)}$ [-]	1,33			
Factor for ductility	$k_7$	1,0			
<b>Steel failure with lever arm and concrete pryout failure</b>					
<b>Anchor in combination with screw / threaded rod of galvanised steel complying with DIN EN ISO 898:2013</b>					
Strength class 5.8		8	19	37	65
Strength class 6.8	$M_{Rk,s}^0$ [Nm]	9	23	44	78
Strength class 8.8		12	30	60	105
Partial factor	$\gamma_{Ms}^{(1)}$ [-]	1,25			
Factor for ductility	$k_7$	1,0			
<b>Anchor in combination with screw / threaded rod of stainless steel complying with DIN EN ISO 3506:2010</b>					
Strength class A50	$M_{Rk,s}^0$ [Nm]	8	19	37	65
Partial factor	$\gamma_{Ms}^{(1)}$ [-]	2,38			
Strength class A70	$M_{Rk,s}^0$ [Nm]	11	26	52	92
Partial factor	$\gamma_{Ms}^{(1)}$ [-]	1,56			
Strength class A80	$M_{Rk,s}^0$ [Nm]	12	30	60	105
Partial factor	$\gamma_{Ms}^{(1)}$ [-]	1,33			
Factor for ductility	$k_7$	1,0			
Factor for pryout failure	$k_8$	2,0			
<b>Concrete edge failure</b>					
Effective embedment depth for calculation	$l_f =$ [mm]	$h_{ef}$			
Outside diameter of fastener	$d_{nom}$	12		15	
1) In absence of other national regulations					
Upat Sleeve Anchor UHS, UHS-I				<b>Annex C 4</b>	
<b>Performances</b> Performance characteristics of shear resistance for UHS-I and UHS-I R					

**Table C5.1: Performance characteristics of tension resistance under fire exposure**

Anchor type	R30			R60		
	$N_{Rk,s,fi,30}$ [kN]	$N_{Rk,p,fi,30}$ [kN]	$N^0_{Rk,c,fi,30}$ [kN]	$N_{Rk,s,fi,60}$ [kN]	$N_{Rk,p,fi,60}$ [kN]	$N^0_{Rk,c,fi,60}$ [kN]
UHS 10, UHS 10 R	0,2	1,8	1,8	0,2	1,8	1,8
UHS 12, UHS 12 R	2,0	3,0	5,0	1,3	3,0	5,0
UHS 15, UHS 15 R	3,2	4,0	7,4	2,3	4,0	7,4
UHS 18, UHS 18 R	4,8	6,3	10,3	3,9	6,3	10,3
UHS 24, UHS 24 R	8,9	9,0	18,0	7,3	9,0	18,0
UHS 28	13,9	12,6	31,4	11,3	12,6	31,4
UHS 32	20,0	16,5	49,6	16,3	16,5	49,6
UHS 12/M6-I, 5.8, A50 <sup>1)</sup>	0,1	2,3	5,0	0,1	2,3	5,0
UHS 12/M6-I R 8.8, A70, A80 <sup>1) 2)</sup>	0,2			0,2		
UHS 12/M8-I, 5.8, A50 <sup>1)</sup>	1,3			0,8		
UHS 12/M8-I R 8.8, A70, A80 <sup>1) 2)</sup>	2,0			1,3		
UHS 15/M10-I, 5.8, A50 <sup>1)</sup>	2,0	3,0	7,4	1,4	3,0	7,4
UHS 15/M10-I R 8.8, A70, A80 <sup>1) 2)</sup>	3,2			2,3		
UHS 15/M12-I, 5.8/A50 <sup>1)</sup>	3,0			2,4		
UHS 15/M12-I R 8.8, A70, A80 <sup>1) 2)</sup>	4,8			3,9		
Anchor type	R90			R120		
	$N_{Rk,s,fi,90}$ [kN]	$N_{Rk,p,fi,90}$ [kN]	$N^0_{Rk,c,fi,90}$ [kN]	$N_{Rk,s,fi,120}$ [kN]	$N_{Rk,p,fi,120}$ [kN]	$N^0_{Rk,c,fi,120}$ [kN]
UHS 10, UHS 10 R	0,1	1,8	1,8	0,1	1,5	1,5
UHS 12, UHS 12 R	0,6	3,0	5,0	0,2	2,4	4,0
UHS 15, UHS 15 R	1,4	4,0	7,4	1,0	3,2	5,9
UHS 18, UHS 18 R	3,0	6,3	10,3	2,6	5,0	8,2
UHS 24, UHS 24 R	5,6	9,0	18,0	4,8	7,2	14,4
UHS 28	8,8	12,6	31,4	7,5	10,1	25,2
UHS 32	12,6	16,5	49,6	10,8	13,2	39,7
UHS 12/M6-I, 5.8, A50 <sup>1)</sup>	0,1	2,3	5,0	0,1	1,8	4,0
UHS 12/M6-I R 8.8, A70, A80 <sup>1) 2)</sup>	0,1			0,1		
UHS 12/M8-I, 5.8, A50 <sup>1)</sup>	0,4			0,1		
UHS 12/M8-I R 8.8, A70, A80 <sup>1) 2)</sup>	0,6			0,2		
UHS 15/M10-I, 5.8, A50 <sup>1)</sup>	0,9	3,0	7,4	0,6	2,4	5,9
UHS 15/M10-I R 8.8, A70, A80 <sup>1) 2)</sup>	1,4			1,0		
UHS 15/M12-I, 5.8/A50 <sup>1)</sup>	1,9			1,6		
UHS 15/M12-I R 8.8, A70, A80 <sup>1) 2)</sup>	3,0			2,6		
<sup>1)</sup> Intermediate values by linear interpolation <sup>2)</sup> In combination with screw / threaded rod strength class 8.8, A70, A80						
Upat Sleeve Anchor UHS, UHS-I					<b>Annex C 5</b>	
<b>Performances</b> Performance characteristics of tension resistance under fire exposure						

**Table C6.1:** Performance characteristics of **shear resistance** under **fire exposure**

Anchor type	R30		R60	
	$V_{Rk,s,fi,30}$ [kN]	$M^0_{Rk,s,fi,30}$ [Nm]	$V_{Rk,s,fi,60}$ [kN]	$M^0_{Rk,s,fi,60}$ [Nm]
UHS 10, UHS 10 R	0,3	0	0,3	0
UHS 12, UHS 12 R	2,0	2	1,3	1
UHS 15, UHS 15 R	3,2	4	2,3	3
UHS 18, UHS 18 R	4,8	7	3,9	6
UHS 24, UHS 24 R	8,9	19	7,3	15
UHS 28	13,9	37	11,3	30
UHS 32	20,0	64	16,3	52
UHS 12/M6 I, 5.8, A50 <sup>1)</sup>	0,2	0	0,2	0
UHS 12/M6 I R 8.8, A70, A80 <sup>1) 2)</sup>	0,3	0	0,3	0
UHS 12/M8 I, 5.8, A50 <sup>1)</sup>	1,3	1	0,8	1
UHS 12/M8-I R 8.8, A70, A80 <sup>1) 2)</sup>	2,0	2	1,3	1
UHS 15/M10 I, 5.8, A50 <sup>1)</sup>	2,0	3	1,4	2
UHS 15/M10-I R 8.8, A70, A80 <sup>1) 2)</sup>	3,2	4	2,3	3
UHS 15/M12-I, 5.8/A50 <sup>1)</sup>	3,0	4	2,4	4
UHS 15/M12-I R 8.8, A70, A80 <sup>1) 2)</sup>	4,8	7	3,9	6
Anchor type	R90		R120	
	$V_{Rk,s,fi,90}$ [kN]	$M^0_{Rk,s,fi,90}$ [Nm]	$V_{Rk,s,fi,120}$ [kN]	$M^0_{Rk,s,fi,120}$ [Nm]
UHS 10, UHS 10 R	0,2	0	0,1	0
UHS 12, UHS 12 R	0,6	1	0,2	0
UHS 15, UHS 15 R	1,4	2	1,0	1
UHS 18, UHS 18 R	3,0	5	2,6	4
UHS 24, UHS 24 R	5,6	12	4,8	10
UHS 28	8,8	23	7,5	20
UHS 32	12,6	40	10,8	34
UHS 12/M6-I, 5.8, A50 <sup>1)</sup>	0,1	0	0,1	0
UHS 12/M6-I R 8.8, A70, A80 <sup>1) 2)</sup>	0,2	0	0,1	0
UHS 12/M8-I, 5.8, A50 <sup>1)</sup>	0,4	1	0,1	0
UHS 12/M8-I R 8.8, A70, A80 <sup>1) 2)</sup>	0,6	1	0,2	0
UHS 15/M10 I, 5.8, A50 <sup>1)</sup>	0,9	2	0,6	1
UHS 15/M10-I R 8.8, A70, A80 <sup>1) 2)</sup>	1,4	3	1,0	1
UHS 15/M12 I, 5.8/A50 <sup>1)</sup>	1,9	4	1,6	3
UHS 15/M12-I R 8.8, A70, A80 <sup>1) 2)</sup>	3,0	6	2,6	4

<sup>1)</sup> Intermediate values by linear interpolation

<sup>2)</sup> In combination with screw / threaded rod strength class 8.8, A70, A80

**Table C6.2:** Minimum spacings and minimum edge distances of anchors under **fire exposure** for tension and shear loads

Anchor type	UHS 10	UHS 12 UHS 12-I	UHS 15 UHS 15-I	UHS 18	UHS 24	UHS 28	UHS 32
Spacing $\frac{S_{cr,N,fi}}{S_{min,fi}}$	4x h <sub>ef</sub>						
	40	50	60	70	80	100	120
Edge distance $\frac{C_{cr,N,fi}}{C_{min,fi}}$ [mm]	2 x h <sub>ef</sub>						
	C <sub>min,fi</sub> = 2 x h <sub>ef</sub> , for fire exposure from more than one side C <sub>min,fi</sub> ≥ 300 mm						

Upat Sleeve Anchor UHS, UHS-I

**Performances**

Performance characteristics of shear resistance under fire exposure  
Minimum spacings and minimum edge distances of anchors under fire exposure

**Annex C 6**

**Table C7.1:** Minimum thickness of concrete member, minimum spacing and minimum edge distances  
**UHS, UHS R**

Anchor type UHS-S, -SK, -B, -H and UHS-S R, -SK R, -B R, -H R		<b>UHS 10</b>	<b>UHS 12</b>	<b>UHS 15</b>	<b>UHS 18</b>	<b>UHS 24</b>	<b>UHS 28</b>	<b>UHS 32</b>
Minimum thickness of concrete member	$h_{min}$ [mm]	80	120	140	160	200	250	300
Minimum spacing, cracked concrete	$s_{min}$	40	50	60	70	80	100	120
	for $c \geq$	40	80	120	140	180	200	260
Minimum edge distance, cracked concrete	$c_{min}$	40	50	60	70	80	100	120
	for $s \geq$	40	80	120	160	200	220	280
Minimum spacing, uncracked concrete	$s_{min}$	40	60	70	80	100	120	160
	for $c \geq$	70	100	100	160	200	220	360
Minimum edge distance, uncracked concrete	$c_{min}$	40	60	70	80	100	120	180
	for $s \geq$	70	100	140	200	220	240	380

Intermediate values may be calculated by linear interpolation

**Table C7.2:** Minimum thickness of concrete member, minimum spacing and minimum edge distances  
**UHS-I, UHS-I R**

Anchor type UHS-I and UHS-I R		<b>UHS 12/M6 I UHS 12/M8 I</b>	<b>UHS 15/M10 I UHS 15/M12 I</b>
Minimum thickness of concrete member	$h_{min}$ [mm]	125	150
Minimum spacing, cracked concrete	$s_{min}$	50	60
	for $c \geq$	80	120
Minimum edge distance, cracked concrete	$c_{min}$	50	60
	for $s \geq$	80	120
Minimum spacing, uncracked concrete	$s_{min}$	60	70
	for $c \geq$	100	100
Minimum edge distance, uncracked concrete	$c_{min}$	60	70
	for $s \geq$	100	140

Intermediate values may be calculated by linear interpolation.

Upat Sleeve Anchor UHS, UHS-I

**Performances**  
Minimum thickness of concrete member, minimum spacing and minimum edge distances

**Annex C 7**

**Table C8.1:** Performance characteristics of **tension and shear resistance** for **seismic performance category C1** for UHS-S, -SK, -B, -H and UHS-S R, -SK R, -B R, -H R

Anchor type UHS-S, -SK, -B, -H and UHS-S R, -SK R, -B R, -H R		UHS 12	UHS 15	UHS 18	UHS 24	UHS 28	UHS 32		
<b>Steel failure</b>									
Characteristic resistance of tension load <b>C1</b>	UHS-S, -B	$N_{Rk,s,C1}$ [kN]	29,3	46,4	67,4	125,3	195,8	282,0	
	UHS-H, -H R, -B R	$N_{Rk,s,C1}$ [kN]	29,3	46,4	67,4	125,3	3)		
	UHS-SK	$N_{Rk,s,C1}$ [kN]	29,3	46,4	67,4	3)			
	Partial factor	$\gamma_{Ms,C1}^{1)}$ [-]	1,5						
	UHS-S R	$N_{Rk,s,C1}$ [kN]	29,3	46,4	67,4	125,3	3)		
	UHS-SK R	$N_{Rk,s,C1}$ [kN]	29,3	46,4	67,4	3)			
	Partial factor	$\gamma_{Ms,C1}^{1)}$ [-]	1,6						
<b>Pullout failure</b>									
Characteristic resistance of tension load in cracked concrete C1		$N_{Rk,p,C1}$ [kN]	12,0	16,0	25,0	36,0	50,3	66,1	
		$\gamma_{Mp,C1}^{1)}$ [-]	1,5						
<b>Steel failure without lever arm</b>									
<b>Characteristic resistance of shear load C1</b>									
UHS-S	$V_{Rk,s,C1}$ [kN]		25,0	41,0	60,0	123,0	141,0	200,0	
UHS-B			17,0	30,0	46,0	103,0	117,0	169,0	
UHS-H			17,0	30,0	46,0	103,0			
UHS-SK	$t_{fix}^{2)}$ [mm]		$\geq 10$	$\geq 15$		3)			
	$V_{Rk,s,C1}$ [kN]		25,0	41,0	60,0				
	$t_{fix}^{2)}$ [mm]		$< 10$	$< 15$					
	$V_{Rk,s,C1}$ [kN]		11,0	16,0	27,0				
Partial factor	$\gamma_{Ms,C1}^{1)}$ [-]		1,25						
UHS-S R	$V_{Rk,s,C1}$ [kN]		25,0	41,0	60,0	123,0	-		
Partial factor	$\gamma_{Ms,C1}^{1)}$ [-]		1,33						
UHS-B R, -H R	$V_{Rk,s,C1}$ [kN]		17,0	30,0	46,0	103,0	-		
Partial factor	$\gamma_{Ms,C1}^{1)}$ [-]		1,25						
UHS-SK R	$t_{fix}^{2)}$ [mm]		$\geq 10$	$\geq 15$		3)			
	$V_{Rk,s,C1}$ [kN]		25,0	41,0	60,0				
	$t_{fix}^{2)}$ [mm]		$< 10$	$< 15$					
	$V_{Rk,s,C1}$ [kN]		11,0	16,0	27,0				
Partial factor	$\gamma_{Ms,C1}^{1)}$ [-]		1,33						
Factor for annular gap	$\alpha_{gap}$		0,50						

<sup>1)</sup> In absence of other national regulations

<sup>2)</sup> The thickness of the fixture has influence to the characteristic resistance for shear loads, steel failure without lever arm

<sup>3)</sup> No performance assessed

Upat Sleeve Anchor UHS, UHS-I

**Performances**  
Performance characteristics of tension and shear resistance for seismic performance category C1

**Annex C 8**

**Table C9.1:** Performance characteristics of **tension and shear resistance** for **seismic performance category C2** for UHS-S, -SK, -B, -H and UHS-S R, -SK R, -B R, -H R

Anchor type UHS-S, -SK, -B, -H and UHS-S R, -SK R, -B R, -H R				UHS 12	UHS 15	UHS 18	UHS 24	UHS 28	UHS 32
<b>Steel failure</b>									
Characteristic resistance of tension load <b>C2</b>	UHS-S, -B	$N_{Rk,s,C2}$ [kN]	[kN]	29,3	46,4	67,4	125,3	195,8	
	UHS-H, -H R, -B R			29,3	46,4	67,4	125,3	3)	
	UHS-SK	29,3	46,4	67,4	3)				
	Partial factor	$\gamma_{Ms,C2}^{1)}$	[-]	1,5					
	UHS-S R	$N_{Rk,s,C2}$ [kN]	[kN]	29,3	46,4	67,4	125,3	3)	
	UHS-SK R			29,3	46,4	67,4	3)		
	Partial factor	$\gamma_{Ms,C2}^{1)}$	[-]	1,6					
<b>Pullout failure</b>									
Characteristic resistance of tension load in cracked concrete C2	$N_{Rk,p,C2}$ [kN]	[kN]	6,2	11,3	21,8	43,0	65,9		
	$\gamma_{Mp,C2}^{1)}$	[-]	1,5						
<b>Steel failure without lever arm</b>									
<b>Characteristic resistance of shear load C2</b>									
UHS-S	$V_{Rk,s,C2}$ [kN]	[kN]	14,7	28,9	41,0	100,7			
UHS-B			9,8	20,9	34,1	61,9	67,2		
UHS-H			9,8	20,9	34,1	61,9	3)		
UHS-SK	$t_{fix}^{2)}$ [mm]	[mm]	$\geq 10$	$\geq 15$		3)			
	$V_{Rk,s,C2}$ [kN]	[kN]	14,8	23,3	33,8				
	$t_{fix}^{2)}$ [mm]	[mm]	$< 10$	$< 15$					
	$V_{Rk,s,C2}$ [kN]	[kN]	6,3	9,1	15,1				
Partial factor	$\gamma_{Ms,C2}^{1)}$	[-]	1,25						
UHS-S R	$V_{Rk,s,C2}$ [kN]	[kN]	14,7	28,9	41,0	100,7	3)		
Partial factor	$\gamma_{Ms,C2}^{1)}$	[-]	1,33						
UHS-B R, -H R	$V_{Rk,s,C2}$ [kN]	[kN]	9,8	20,9	34,1	61,9	3)		
Partial factor	$\gamma_{Ms,C2}^{1)}$	[-]	1,25						
UHS-SK R	$t_{fix}^{2)}$ [mm]	[mm]	$\geq 10$	$\geq 15$		3)			
	$V_{Rk,s,C2}$ [kN]	[kN]	14,8	23,3	33,8				
	$t_{fix}^{2)}$ [mm]	[mm]	$< 10$	$< 15$					
	$V_{Rk,s,C2}$ [kN]	[kN]	6,3	9,1	15,1				
Partial factor	$\gamma_{Ms,C2}^{1)}$	[-]	1,33						
Factor for annular gap	$\alpha_{gap}$	[-]	0,50						
1) In absence of other national regulations									
2) The thickness of the fixture has influence to the characteristic resistance for shear loads, steel failure without lever arm									
3) No performance assessed									
Upat Sleeve Anchor UHS, UHS-I								<b>Annex C 9</b>	
<b>Performances</b> Performance characteristics of tension and shear resistance for seismic performance category C2									

**Table C10.1:** Displacements under static and quasi static **tension loads** for UHS and UHS R

Anchor type UHS-S, -SK, -B, -H and UHS-S R, -SK R, -B R, -H R			UHS 10	UHS 12	UHS 15	UHS 18	UHS 24	UHS 28	UHS 32
Tension load cracked concrete	N	[kN]	3,6	5,7	7,6	11,9	17,1	24,0	31,5
Corresponding displacements	$\frac{\delta_{N0}}{\delta_{N\infty}}$	[mm]	1,0	1,0	1,0	1,0	1,0	0,7	0,7
			1,7	1,6	1,6	1,6	1,8	1,3	1,1
Tension load uncracked concrete	N	[kN]	6,0	11,2	14,1	17,2	24,0	33,6	44,2
Corresponding displacements	$\frac{\delta_{N0}}{\delta_{N\infty}}$	[mm]	0,6	1,0	1,0	1,0	1,0	0,3	0,3
			1,7	1,6	1,6	1,6	1,8	1,3	1,1

**Table C10.2:** Displacements under static and quasi static **tension loads** for UHS-I and UHS-I R

Anchor type UHS-I and UHS-I R			UHS 12/M6 I UHS 12/M8 I	UHS 15/M10 I UHS 15/M12 I
Tension load cracked concrete	N	[kN]	4,3	5,7
Tension load uncracked concrete			9,5	14,1
Corresponding displacements	$\frac{\delta_{N0}}{\delta_{N\infty}}$	[mm]	1,7	1,9
			2,2	2,9

**Table C10.3:** Displacements under static and quasi static **shear loads** for UHS-S and UHS-SK

Anchor type UHS-S and UHS-SK			UHS 10	UHS 12	UHS 15	UHS 18	UHS 24	UHS 28	UHS 32
Shear load in cracked and uncracked concrete	V	[kN]	10,3	18,9	33,7	43,4	83,4	99,4	124,0
Corresponding displacements	$\frac{\delta_{V0}}{\delta_{V\infty}}$	[mm]	2,4	2,7	4,4	5,0	7,0	6,0	8,0
			3,6	4,1	6,6	7,5	10,5	9,0	12,0

**Table C10.4:** Displacements under static and quasi static **shear loads** for UHS-B and UHS-H

Anchor type UHS-B and UHS-H			UHS 10	UHS 12	UHS 15	UHS 18	UHS 24	UHS 28	UHS 32
Shear load in cracked and uncracked concrete	V	[kN]	8,9	15,4	23,4	35,4	68,0	83,4	96,6
Corresponding displacements	$\frac{\delta_{V0}}{\delta_{V\infty}}$	[mm]	2,2	2,3	3,0	5,0	7,0	5,0	5,0
			3,3	3,5	4,5	7,5	10,5	7,5	7,5

Upat Sleeve Anchor UHS, UHS-I

**Performances**  
Displacements under tension and shear loads

**Annex C 10**



<b>Table C11.1: Displacements under static and quasi static shear loads for UHS-S R, UHS-SK R, UHS-B R and UHS-H R</b>								
Anchor type UHS-S R, -SK R, -B R, -H R			<b>UHS 10</b>	<b>UHS 12</b>	<b>UHS 15</b>	<b>UHS 18</b>	<b>UHS 24</b>	
Shear load in cracked and uncracked concrete	V	[kN]	10,3	16,0	24,6	37,7	68,0	
Corresponding displacements	$\frac{\delta_{V0}}{\delta_{V\infty}}$	[mm]	3,5	3,5	3,7	5,7	9,0	
			5,3	5,3	5,6	8,6	13,5	
<b>Table C11.2: Displacements under static and quasi static shear loads for UHS-I and UHS-I R</b>								
Anchor type: UHS-I and UHS-I R			<b>UHS 12/M6 I</b>	<b>UHS 12/M8 I</b>	<b>UHS 15/M10 I</b>	<b>UHS 15/M12 I</b>		
Shear load in cracked and uncracked concrete	V	[kN]	4,6	8,3	13,3	13,7		
Corresponding displacements	$\frac{\delta_{V0}}{\delta_{V\infty}}$	[mm]	2,6	2,6	2,2	2,2		
			3,9	3,9	3,3	3,3		
<b>Table C11.3: Displacements under tension loads for seismic performance category C2 for UHS and UHS R</b>								
Anchor type UHS-S, -SK, -B, -H and UHS-S R, -SK R, -B R, -H R			<b>UHS 12</b>	<b>UHS 15</b>	<b>UHS 18</b>	<b>UHS 24</b>	<b>UHS 28</b>	<b>UHS 32</b>
Displacement DLS	$\delta_{N,C2}$ (DLS)	[mm]	1,55	2,63	2,04	4,26	3,06	
Displacement ULS	$\delta_{N,C2}$ (ULS)		8,71	11,07	7,30	11,70	11,44	
<b>Table C11.4: Displacements under shear loads for seismic performance category C2 for UHS and UHS R</b>								
Anchor type UHS-S, -SK and UHS-S R, -SK R			<b>UHS 12</b>	<b>UHS 15</b>	<b>UHS 18</b>	<b>UHS 24</b>	<b>UHS 28</b>	<b>UHS 32</b>
Displacement DLS	$\delta_{V,C2}$ (DLS)	[mm]	3,53	4,18	4,67	5,59	4,79	
Displacement ULS	$\delta_{V,C2}$ (ULS)		6,62	7,38	9,03	14,09	9,95	
Anchor type UHS-B, -H and UHS-B R, -H R			<b>UHS 12</b>	<b>UHS 15</b>	<b>UHS 18</b>	<b>UHS 24</b>	<b>UHS 28</b>	<b>UHS 32</b>
Displacement DLS	$\delta_{V,C2}$ (DLS)	[mm]	3,42	4,26	4,29	4,79		
Displacement ULS	$\delta_{V,C2}$ (ULS)		5,26	6,66	7,95	7,69	9,95	
Upat Sleeve Anchor UHS, UHS-I							<b>Annex C 11</b>	
<b>Performances</b> Displacements under tension and shear loads								