

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments

★ ★ ★
★ Designated
according to
Article 29 of Regula-
tion (EU) No 305/2011
and member of EOTA
(European Organi-
sation for Technical
Assessment)
★ ★ ★
★ ★

European Technical Assessment

ETA-19/0849
of 28 January 2020

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Trade name of the construction product

Product family
to which the construction product belongs

Manufacturer

Manufacturing plant

This European Technical Assessment
contains

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

Deutsches Institut für Bautechnik

Spitec Oy Injection system Lionfix, Lionfix N for concrete

Bonded fastener for use in concrete

Spitec Oy
Kirvesmiehenkatu 6
00880 HELSINKI
FINNLAND

Spitec Plant 1

31 pages including 3 annexes which form an integral part
of this assessment

EAD 330499-01-0601

European Technical Assessment

ETA-19/0849

English translation prepared by DIBt

Page 2 of 31 | 28 January 2020

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

European Technical Assessment**ETA-19/0849**

English translation prepared by DIBt

Page 3 of 31 | 28 January 2020

Specific Part**1 Technical description of the product**

The "Spitec Oy Injection system Lionfix, Lionfix N for concrete" is a bonded anchor consisting of a cartridge with injection Lionfix or Lionfix N and a steel element. The steel element consists of a commercial threaded rod with washer and hexagon nut in the range of M8 to M30 or reinforcing bar in the range of Ø 8 to Ø 32 mm or an internal threaded anchor rod IG-M6 to IG-M20.

The steel element is placed into a drilled hole filled with injection mortar and is anchored via the bond between metal part, injection mortar and concrete.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment**3.1 Mechanical resistance and stability (BWR 1)**

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading)	See Annex C 1 to C 3, C 5, C 7
Characteristic resistance to shear load (static and quasi-static loading)	See Annex C1, C 4, C 6, C 8
Displacements (static and quasi-static loading)	See Annex C 9 to C 11
Characteristic resistance and displacements for seismic performance categories C1	See Annex C 12 to C 16
Characteristic resistance and displacements for seismic performance categories C2	No performance assessed
Durability	See Annex B 1

3.2 Hygiene, health and the environment (BWR 3)

Essential characteristic	Performance
Content, emission and/or release of dangerous substances	No performance assessed

European Technical Assessment

ETA-19/0849

English translation prepared by DIBt

Page 4 of 31 | 28 January 2020

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with the European Assessment Document EAD 330499-01-0601 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document


Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.

Issued in Berlin on 28 January 2020 by Deutsches Institut für Bautechnik


BD Dipl.-Ing. Andreas Kummerow
Head of Department

beglaubigt:
Baderschneider


Installation threaded rod M8 up to M30

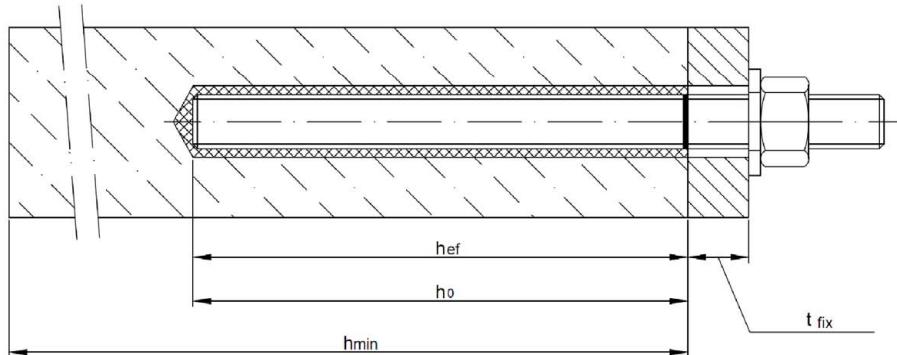

Installation reinforcing bar Ø8 up to Ø32

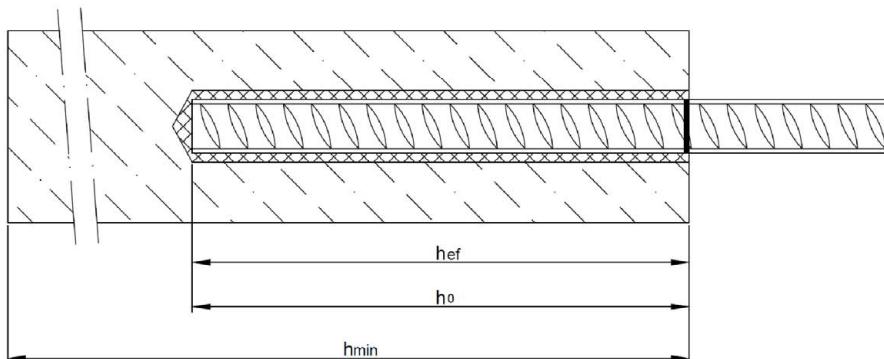

Installation internal threaded anchor rod IG-M6 up to IG-M20

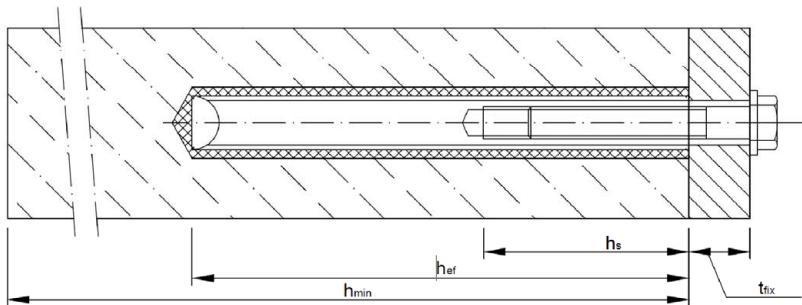

t_{fix} = thickness of fixture

h_{ef} = effective anchorage depth

h_0 = depth of drill hole

h_{min} = minimum thickness of member


Spitec Oy Injection system Lionfix, Lionfix N for concrete

Product description
Installed condition


Annex A 1

Cartridge: Lionfix or Lionfix N


150 ml, 280 ml, 300 ml up to 333 ml and 380 ml up to 420 ml cartridge (Type: coaxial)

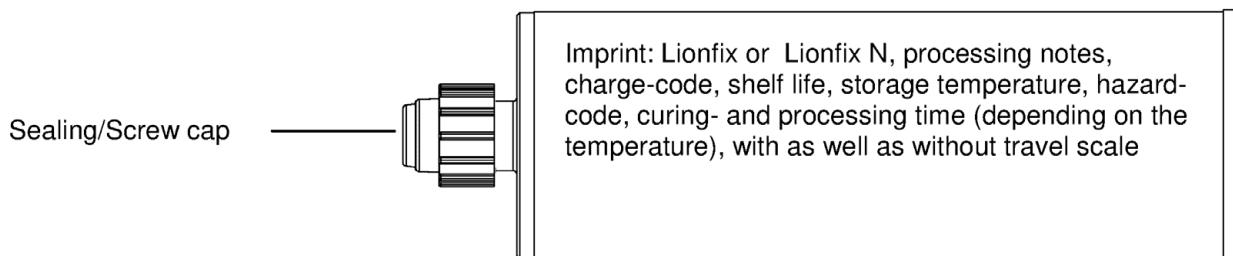



235 ml, 345 ml up to 360 ml and 825 ml cartridge (Type: "side-by-side")

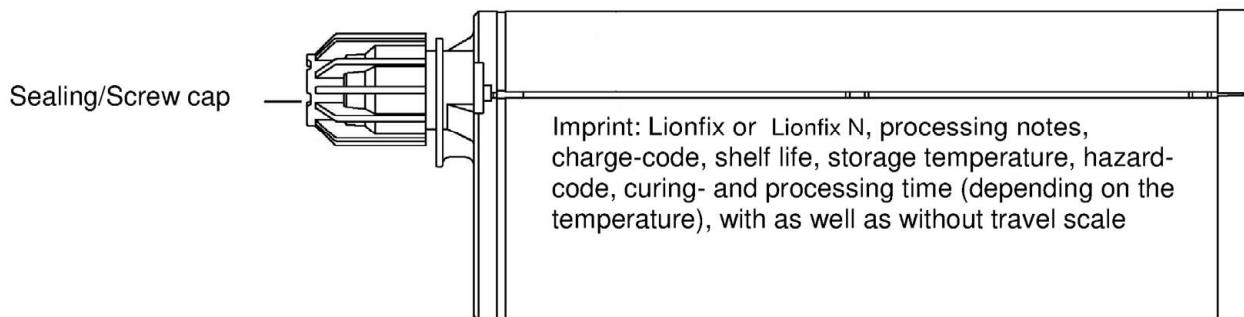

165 ml and 300 ml cartridge (Type: "foil tube")

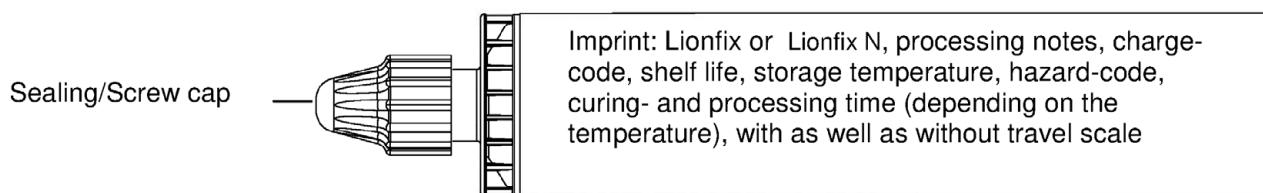

Static Mixer

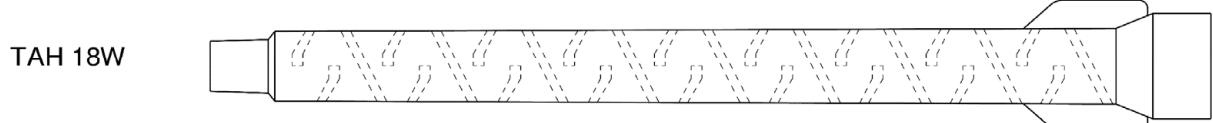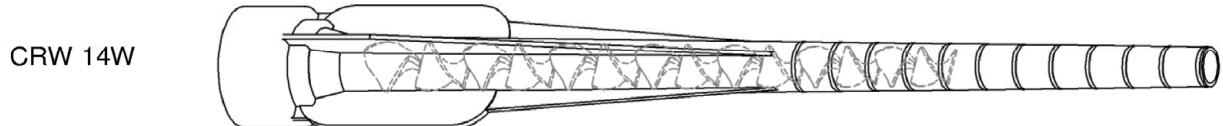


Spitec Oy Injection system Lionfix, Lionfix N for concrete

Product description
Injection system

Annex A 2

English translation prepared by DI
Bt

Threaded rod M8, M10, M12, M16, M20, M24, M27, M30 with washer and hexagon nut

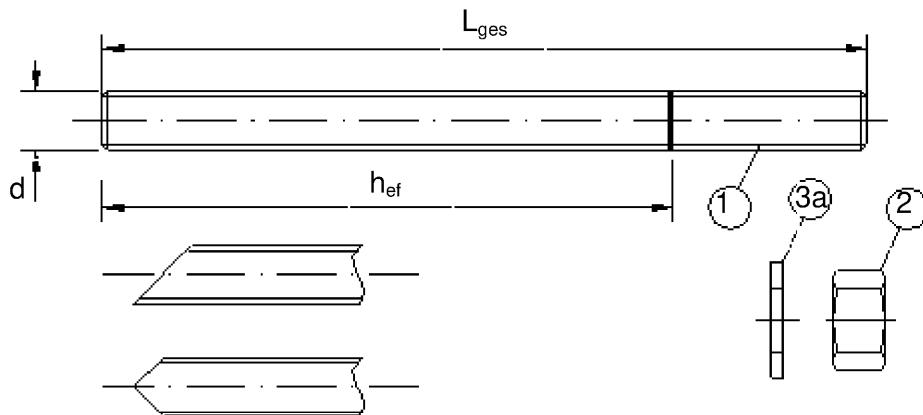


Commercial standard threaded rod with:


- Materials, dimensions and mechanical properties acc. Table A1
- Inspection certificate 3.1 acc. to EN 10204:2004
- Marking of embedment depth

Internal threaded anchor rod IG-M6, IG-M8, IG-M10, IG-M12, IG-M16, IG-M20

Threaded rod or screw

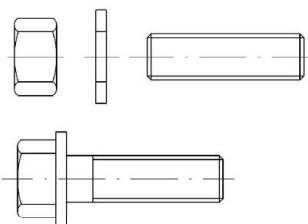

Mark of the producer

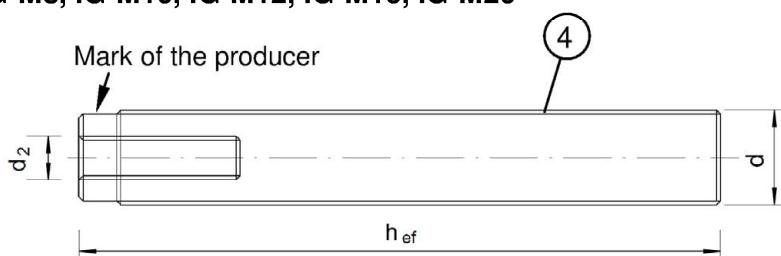

Marking: e.g.

 M8
I Marking Internal thread



 Mark

M8 Thread size (Internal thread)

A4 additional mark for stainless steel

HCR additional mark for high-corrosion resistance steel

Filling washer and mixer reduction nozzle for filling the annular gap between anchor rod and fixture

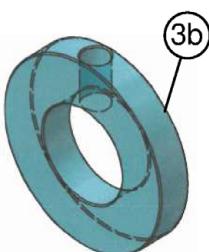

Spitec Oy Injection system Lionfix, Lionfix N for concrete

Product description


Threaded rod, internal threaded rod and filling washer

Annex A 3

Table A1: Materials

Part	Designation	Material			
Steel, zinc plated (Steel acc. to EN 10087:1998 or EN 10263:2001)					
-	zinc plated	$\geq 5 \mu\text{m}$	acc. to EN ISO 4042:1999 or		
-	hot-dip galvanised	$\geq 40 \mu\text{m}$	acc. to EN ISO 1461:2009 and EN ISO 10684:2004+AC:2009 or		
-	sherardized	$\geq 45 \mu\text{m}$	acc. to EN ISO 17668:2016		
1	Threaded rod	Property class	Characteristic tensile strength	Characteristic yield strength	Elongation at fracture
		acc. to EN ISO 898-1:2013	4.6 $f_{uk} = 400 \text{ N/mm}^2$	$f_{yk} = 240 \text{ N/mm}^2$	$A_5 > 8\%$
			4.8 $f_{uk} = 400 \text{ N/mm}^2$	$f_{yk} = 320 \text{ N/mm}^2$	$A_5 > 8\%$
			5.6 $f_{uk} = 500 \text{ N/mm}^2$	$f_{yk} = 300 \text{ N/mm}^2$	$A_5 > 8\%$
			5.8 $f_{uk} = 500 \text{ N/mm}^2$	$f_{yk} = 400 \text{ N/mm}^2$	$A_5 > 8\%$
			8.8 $f_{uk} = 800 \text{ N/mm}^2$	$f_{yk} = 640 \text{ N/mm}^2$	$A_5 \geq 8\%$
2	Hexagon nut	4	for threaded rod class 4.6 or 4.8		
		5	for threaded rod class 5.6 or 5.8		
		8	for threaded rod class 8.8		
3a	Washer	Steel, zinc plated, hot-dip galvanised or sherardized (e.g.: EN ISO 887:2006, EN ISO 7089:2000, EN ISO 7093:2000 or EN ISO 7094:2000)			
3b	Filling washer	Steel, zinc plated, hot-dip galvanised or sherardized			
4	Internal threaded anchor rod	Property class	Characteristic tensile strength	Characteristic yield strength	Elongation at fracture
		acc. to EN ISO 898-1:2013	5.8 $f_{uk} = 500 \text{ N/mm}^2$	$f_{yk} = 400 \text{ N/mm}^2$	$A_5 > 8\%$
			8.8 $f_{uk} = 800 \text{ N/mm}^2$	$f_{yk} = 640 \text{ N/mm}^2$	$A_5 > 8\%$
Stainless steel A2 (Material 1.4301 / 1.4307 / 1.4311 / 1.4567 or 1.4541, acc. to EN 10088-1:2014)					
Stainless steel A4 (Material 1.4401 / 1.4404 / 1.4571 / 1.4362 or 1.4578, acc. to EN 10088-1:2014)					
High corrosion resistance steel (Material 1.4529 or 1.4565, acc. to EN 10088-1:2014)					
1	Threaded rod ¹⁽³⁾	Property class	Characteristic tensile strength	Characteristic yield strength	Elongation at fracture
		acc. to EN ISO 3506-1:2009	50 $f_{uk} = 500 \text{ N/mm}^2$	$f_{yk} = 210 \text{ N/mm}^2$	$A_5 \geq 8\%$
			70 $f_{uk} = 700 \text{ N/mm}^2$	$f_{yk} = 450 \text{ N/mm}^2$	$A_5 \geq 8\%$
			80 $f_{uk} = 800 \text{ N/mm}^2$	$f_{yk} = 600 \text{ N/mm}^2$	$A_5 \geq 8\%$
2	Hexagon nut ¹⁽³⁾	acc. to EN ISO 3506-1:2009	50	for threaded rod class 50	
			70	for threaded rod class 70	
			80	for threaded rod class 80	
3a	Washer	A2: Material 1.4301 / 1.4307 / 1.4311 / 1.4567 or 1.4541, acc. to EN 10088-1:2014 A4: Material 1.4401 / 1.4404 / 1.4571 / 1.4362 or 1.4578, acc. to EN 10088-1:2014 HCR: Material 1.4529 or 1.4565, acc. to EN 10088-1:2014 (e.g.: EN ISO 887:2006, EN ISO 7089:2000, EN ISO 7093:2000 or EN ISO 7094:2000)			
3b	Filling washer	Stainless steel A4, High corrosion resistance steel			
		Property class	Characteristic tensile strength	Characteristic yield strength	Elongation at fracture
4	Internal threaded anchor rod ¹⁽²⁾	acc. to EN ISO 3506-1:2009	50 $f_{uk} = 500 \text{ N/mm}^2$	$f_{yk} = 210 \text{ N/mm}^2$	$A_5 > 8\%$
			70 $f_{uk} = 700 \text{ N/mm}^2$	$f_{yk} = 450 \text{ N/mm}^2$	$A_5 > 8\%$
¹⁾ Property class 70 for threaded rods up to M24 and Internal threaded anchor rods up to IG-M16,					
²⁾ for IG-M20 only property class 50					
³⁾ Property class 80 only for stainless steel A4					
Spitec Oy Injection system Lionfix, Lionfix N for concrete					
Product description Materials threaded rod and internal threaded rod			Annex A 4		

Reinforcing bar Ø 8, Ø 10, Ø 12, Ø 14, Ø 16, Ø 20, Ø 25, Ø 28, Ø 32

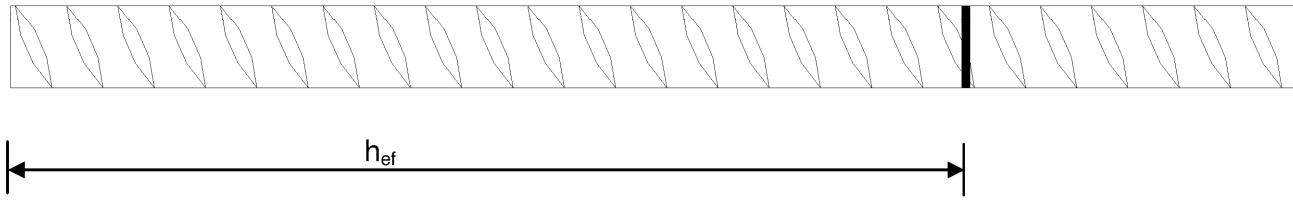

- Minimum value of related rip area $f_{R,min}$ according to EN 1992-1-1:2004+AC:2010
- Rib height of the bar shall be in the range $0,05d \leq h \leq 0,07d$
(d: Nominal diameter of the bar; h: Rip height of the bar)

Table A2: Materials

Part	Designation	Material
Reinforcing bars		
1	Rebar EN 1992-1-1:2004+AC:2010, Annex C	Bars and de-coiled rods class B or C f_{yk} and k according to NDP or NCL of EN 1992-1-1/NA $f_{uk} = f_{tk} = k \cdot f_{yk}$
Spitec Oy Injection system Lionfix, Lionfix N for concrete		
Product description Materials reinforcing bar		Annex A 5

Specifications of intended use

Anchorage subject to:

- Static and quasi-static loads: M8 to M30, Rebar Ø8 to Ø32, IG-M6 to IG-M20.
- Seismic action for Performance Category C1: M8 to M30, Rebar Ø8 to Ø32.

Base materials:

- Compacted, reinforced or unreinforced normal weight concrete without fibres according to EN 206:2013 + A1:2016.
- Strength classes C20/25 to C50/60 according to EN 206:2013 + A1:2016.
- Non-cracked concrete: M8 to M30, Rebar Ø8 to Ø32, IG-M6 to IG-M20.
- Cracked concrete: M8 to M30, Rebar Ø8 to Ø32, IG-M6 to IG-M20.

Temperature Range:

- I: - 40 °C to +40 °C (max long term temperature +24 °C and max short term temperature +40 °C)
- II: - 40 °C to +80 °C (max long term temperature +50 °C and max short term temperature +80 °C)
- III: - 40 °C to +120 °C (max long term temperature +72 °C and max short term temperature +120 °C)

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (all materials).
- For all other conditions according to EN 1993-1-4:2006+A1:2015 corresponding to corrosion resistance class:
 - Stainless steel Stahl A2 according to Annex A 4, Table A1: CRC II
 - Stainless steel Stahl A4 according to Annex A 4, Table A1: CRC III
 - High corrosion resistance steel HCR according to Annex A 4, Table A1: CRC V

Design:

- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e. g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- The anchorages are designed in accordance to EN 1992-4:2018 and Technical Report TR055, Edition February 2018

Installation:

- Dry or wet concrete: M8 to M30, Rebar Ø8 to Ø32, IG-M6 to IG-M20.
- Flooded holes (not sea water): M8 to M16, Rebar Ø8 to Ø16, IG-M6 to IG-M10.
- Hole drilling by hammer (HD), hollow (HDB) or compressed air drill mode (CD).
- Overhead installation allowed.
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- The injection mortar is assessed for installation at minimum concrete temperature of -10°C resp. -20°C, where subsequently the temperature in the concrete does not rise at a rapid rate, i.e. from the minimum installation temperature to 24°C within a 12-hour period.

Spitec Oy Injection system Lionfix, Lionfix N for concrete

Annex B 1

Intended Use
Specifications

Table B1: Installation parameters for threaded rod

Anchor size		M8	M10	M12	M16	M20	M24	M27	M30
Outer diameter of anchor	$d_{\text{nom}} [\text{mm}] =$	8	10	12	16	20	24	27	30
Nominal drill hole diameter	$d_0 [\text{mm}] =$	10	12	14	18	24	28	32	35
Effective embedment depth	$h_{\text{ef},\text{min}} [\text{mm}] =$	60	60	70	80	90	96	108	120
	$h_{\text{ef},\text{max}} [\text{mm}] =$	160	200	240	320	400	480	540	600
Diameter of clearance hole in the fixture	$d_f [\text{mm}] \leq$	9	12	14	18	22	26	30	33
Diameter of steel brush	$d_b [\text{mm}] \geq$	12	14	16	20	26	30	34	37
Maximum torque moment	$T_{\text{inst}} [\text{Nm}] \leq$	10	20	40	80	120	160	180	200
Minimum thickness of member	$h_{\text{min}} [\text{mm}]$	$h_{\text{ef}} + 30 \text{ mm} \geq 100 \text{ mm}$			$h_{\text{ef}} + 2d_0$				
Minimum spacing	$s_{\text{min}} [\text{mm}]$	40	50	60	80	100	120	135	150
Minimum edge distance	$c_{\text{min}} [\text{mm}]$	40	50	60	80	100	120	135	150

Table B2: Installation parameters for rebar

Rebar size		$\varnothing 8$	$\varnothing 10$	$\varnothing 12$	$\varnothing 14$	$\varnothing 16$	$\varnothing 20$	$\varnothing 25$	$\varnothing 28$	$\varnothing 32$
Outer diameter of anchor	$d_{\text{nom}} [\text{mm}] =$	8	10	12	14	16	20	25	28	32
Nominal drill hole diameter	$d_0 [\text{mm}] =$	12	14	16	18	20	24	32	35	40
Effective embedment depth	$h_{\text{ef},\text{min}} [\text{mm}] =$	60	60	70	75	80	90	100	112	128
	$h_{\text{ef},\text{max}} [\text{mm}] =$	160	200	240	280	320	400	500	580	640
Diameter of steel brush	$d_b [\text{mm}] \geq$	14	16	18	20	22	26	34	37	41,5
Minimum thickness of member	$h_{\text{min}} [\text{mm}]$	$h_{\text{ef}} + 30 \text{ mm} \geq 100 \text{ mm}$			$h_{\text{ef}} + 2d_0$					
Minimum spacing	$s_{\text{min}} [\text{mm}]$	40	50	60	70	80	100	125	140	160
Minimum edge distance	$c_{\text{min}} [\text{mm}]$	40	50	60	70	80	100	125	140	160

Table B3: Installation parameters for internal threaded anchor rod

Size Internal threaded anchor rod		IG-M6	IG-M8	IG-M10	IG-M12	IG-M16	IG-M20
Internal diameter of anchor	$d_2 [\text{mm}] =$	6	8	10	12	16	20
Outer diameter of anchor ¹⁾	$d_{\text{nom}} [\text{mm}] =$	10	12	16	20	24	30
Nominal drill hole diameter	$d_0 [\text{mm}] =$	12	14	18	22	28	35
Effective embedment depth	$h_{\text{ef},\text{min}} [\text{mm}] =$	60	70	80	90	96	120
	$h_{\text{ef},\text{max}} [\text{mm}] =$	200	240	320	400	480	600
Diameter of clearance hole in the fixture	$d_f [\text{mm}] =$	7	9	12	14	18	22
Maximum torque moment	$T_{\text{inst}} [\text{Nm}] \leq$	10	10	20	40	60	100
Thread engagement length min/max	$l_{\text{IG}} [\text{mm}] =$	8/20	8/20	10/25	12/30	16/32	20/40
Minimum thickness of member	$h_{\text{min}} [\text{mm}]$	$h_{\text{ef}} + 30 \text{ mm} \geq 100 \text{ mm}$			$h_{\text{ef}} + 2d_0$		
Minimum spacing	$s_{\text{min}} [\text{mm}]$	50	60	80	100	120	150
Minimum edge distance	$c_{\text{min}} [\text{mm}]$	50	60	80	100	120	150

¹⁾ With metric threads according to EN 1993-1-8:2005+AC:2009

Spitec Oy Injection system Lionfix, Lionfix N for concrete

Intended Use
Installation parameters

Annex B 2

Table B4: Parameter cleaning and setting tools

						Installation direction and use of piston plug			
Threaded Rod	Rebar	Internal threaded Anchor rod	d_0 Drill bit - Ø HD, HDB, CA	d_b Brush - Ø	$d_{b,min}$ min. Brush - Ø	Piston plug	Installation direction and use of piston plug		
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]				
M8			10	RBT10	12	10,5	No piston plug required		
M10	8	IG-M6	12	RBT12	14	12,5			
M12	10	IG-M8	14	RBT14	16	14,5			
	12		16	RBT16	18	16,5			
M16	14	IG-M10	18	RBT18	20	18,5	VS18	$h_{ef} > 250 \text{ mm}$	all
	16		20	RBT20	22	20,5	VS20		
M20	20	IG-M12	24	RBT24	26	24,5	VS24		
M24		IG-M16	28	RBT28	30	28,5	VS28		
M27	25		32	RBT32	34	32,5	VS32		
M30	28	IG-M20	35	RBT35	37	35,5	VS35		
	32		40	RBT40	41,5	40,5	VS40		



MAC - Hand pump (volume 750 ml)

Drill bit diameter (d_0): 10 mm to 20 mm


Drill hole depth (h_0): < 10 d_{nom}

Only in non-cracked concrete



CAC - Rec. compressed air tool (min 6 bar)

Drill bit diameter (d_0): all diameters



Piston plug for overhead or horizontal installation VS

Drill bit diameter (d_0): 18 mm to 40 mm










Steel brush RBT

Drill bit diameter (d_0): all diameters




Spitec Oy Injection system Lionfix, Lionfix N for concrete

Intended Use
Cleaning and setting tools

Annex B 3

Installation instructions	
Drilling of the bore hole	
	<p>1. Drill with hammer drill a hole into the base material to the size and embedment depth required by the selected anchor (Table B1, B2, or B3), with hammer (HD), hollow (HDB) or compressed air (CD) drilling. The use of a hollow drill bit is only in combination with a sufficient vacuum permitted. In case of aborted drill hole: The drill hole shall be filled with mortar</p>
	<p>Attention! Standing water in the bore hole must be removed before cleaning.</p>
MAC: Cleaning for bore hole diameter $d_0 \leq 20\text{mm}$ and bore hole depth $h_0 \leq 10d_{\text{nom}}$ (uncracked concrete only!)	
  	<p>2a. Starting from the bottom or back of the bore hole, blow the hole clean by a hand pump ¹⁾ (Annex B 3) a minimum of four times.</p> <p>2b. Check brush diameter (Table B4). Brush the hole with an appropriate sized wire brush $> d_{b,\min}$ (Table B4) a minimum of four times in a twisting motion. If the bore hole ground is not reached with the brush, a brush extension must be used.</p> <p>2c. Finally blow the hole clean again with a hand pump (Annex B 3) a minimum of four times.</p> <p>¹⁾ It is permitted to blow bore holes with diameter between 14 mm and 20 mm and an embedment depth up to $10d_{\text{nom}}$ also in cracked concrete with hand-pump.</p>
CAC: Cleaning for all bore hole diameter in uncracked and cracked concrete	
  	<p>2a. Starting from the bottom or back of the bore hole, blow the hole clean with compressed air (min. 6 bar) (Annex B 3) a minimum of four times until return air stream is free of noticeable dust. If the bore hole ground is not reached an extension must be used.</p> <p>2b. Check brush diameter (Table B4). Brush the hole with an appropriate sized wire brush $> d_{b,\min}$ (Table B4) a minimum of four times in a twisting motion. If the bore hole ground is not reached with the brush, a brush extension must be used.</p> <p>2c. Finally blow the hole clean again with compressed air (min. 6 bar) (Annex B 3) a minimum of four times until return air stream is free of noticeable dust. If the bore hole ground is not reached an extension must be used.</p>
	<p>After cleaning, the bore hole has to be protected against re-contamination in an appropriate way, until dispensing the mortar in the bore hole. If necessary, the cleaning has to be repeated directly before dispensing the mortar. In-flowing water must not contaminate the bore hole again.</p>
Spitec Oy Injection system Lionfix, Lionfix N for concrete	
Intended Use Installation instructions	Annex B 4


Installation instructions (continuation)




3. Attach the supplied static-mixing nozzle to the cartridge and load the cartridge into the correct dispensing tool. Cut off the foil tube clip before use. For every working interruption longer than the recommended working time (Annex B 6) as well as for new cartridges, a new static-mixer shall be used.

4. Prior to inserting the anchor rod into the filled bore hole, the position of the embedment depth shall be marked on the anchor rods.

5. Prior to dispensing into the anchor hole, squeeze out separately a minimum of three full strokes and discard non-uniformly mixed adhesive components until the mortar shows a consistent grey colour. For foil tube cartridges it must be discarded a minimum of six full strokes.



6. Starting from the bottom or back of the cleaned anchor hole, fill the hole up to approximately two-thirds with adhesive. Slowly withdraw the static mixing nozzle as the hole fills to avoid creating air pockets. If the bottom or back of the anchor hole is not reached, an appropriate extension nozzle must be used. Observe the gel-/ working times given in Annex B 6.




7. Piston plugs and mixer nozzle extensions shall be used according to Table B4 for the following applications:


- Horizontal assembly (horizontal direction) and ground erection (vertical downwards direction): Drill bit- $\varnothing d_0 \geq 18$ mm and embedment depth $h_{ef} > 250$ mm
- Overhead assembly (vertical upwards direction): Drill bit- $\varnothing d_0 \geq 18$ mm

8. Push the threaded rod or reinforcing bar into the anchor hole while turning slightly to ensure positive distribution of the adhesive until the embedment depth is reached.


The anchor shall be free of dirt, grease, oil or other foreign material.



9. Be sure that the anchor is fully seated at the bottom of the hole and that excess mortar is visible at the top of the hole. If these requirements are not maintained, the application has to be renewed. For overhead application the anchor rod shall be fixed (e.g. wedges).



10. Allow the adhesive to cure to the specified time prior to applying any load or torque. Do not move or load the anchor until it is fully cured (attend Annex B 6).



11. After full curing, the add-on part can be installed with up to the max. torque (Table B1 or B3) by using a calibrated torque wrench. It can be optional filled the annular gap between anchor and fixture with mortar. Therefor substitute the washer by the filling washer and connect the mixer reduction nozzle to the tip of the mixer. The annular gap is filled with mortar, when mortar oozes out of the washer.

Spitec Oy Injection system Lionfix, Lionfix N for concrete

Intended Use
Installation instructions (continuation)

Annex B 5

Table B5: Maximum working time and minimum curing time Lionfix

Concrete temperature		Gelling- / working time	Minimum curing time in dry concrete ¹⁾
-10 °C	to	90 min ²⁾	24 h ²⁾
-5 °C	to	90 min	14 h
0 °C	to	45 min	7 h
+5 °C	to	25 min	2 h
+10 °C	to	15 min	80 min
+20 °C	to	6 min	45 min
+30 °C	to	4 min	25 min
+35 °C	to	2 min	20 min
+ 40 °C		1,5 min	15 min
Cartridge temperature			+5°C to +40°C

¹⁾ In wet concrete the curing time must be doubled.

²⁾ Cartridge temperature must be at min. +15°C.

Table B6: Maximum working time and minimum curing time Lionfix N

Concrete temperature		Gelling- / working time	Minimum curing time in dry concrete ¹⁾
-20 °C	to	75 min	24 h
-15 °C	to	55 min	16 h
-10 °C	to	35 min	10 h
-5 °C	to	20 min	5 h
0 °C	to	10 min	2,5 h
+5 °C	to	6 min	80 Min
+ 10 °C		6 min	60 Min
Cartridge temperature			-20°C to +10°C

¹⁾ In wet concrete the curing time must be doubled.

Table C1: Characteristic values for steel tension resistance and steel shear resistance of threaded rods

Size		M8	M10	M12	M16	M20	M24	M27	M30	
Cross section area	A_s [mm ²]	36,6	58	84,3	157	245	353	459	561	
Characteristic tension resistance, Steel failure ¹⁾										
Steel, Property class 4.6 and 4.8	$N_{Rk,s}$ [kN]	15 (13)	23 (21)	34	63	98	141	184	224	
Steel, Property class 5.6 and 5.8	$N_{Rk,s}$ [kN]	18 (17)	29 (27)	42	78	122	176	230	280	
Steel, Property class 8.8	$N_{Rk,s}$ [kN]	29 (27)	46 (43)	67	125	196	282	368	449	
Stainless steel A2, A4 and HCR, class 50	$N_{Rk,s}$ [kN]	18	29	42	79	123	177	230	281	
Stainless steel A2, A4 and HCR, class 70	$N_{Rk,s}$ [kN]	26	41	59	110	171	247	-	-	
Stainless steel A4 and HCR, class 80	$N_{Rk,s}$ [kN]	29	46	67	126	196	282	-	-	
Characteristic tension resistance, Partial factor ²⁾										
Steel, Property class 4.6 and 5.6	$\gamma_{Ms,N}$ [-]						2,0			
Steel, Property class 4.8, 5.8 and 8.8	$\gamma_{Ms,N}$ [-]						1,5			
Stainless steel A2, A4 and HCR, class 50	$\gamma_{Ms,N}$ [-]						2,86			
Stainless steel A2, A4 and HCR, class 70	$\gamma_{Ms,N}$ [-]						1,87			
Stainless steel A4 and HCR, class 80	$\gamma_{Ms,N}$ [-]						1,6			
Characteristic shear resistance, Steel failure ¹⁾										
Without lever arm	Steel, Property class 4.6 and 4.8	$V_{Rk,s}^0$ [kN]	9 (8)	14 (13)	20	38	59	85	110	135
	Steel, Property class 5.6 and 5.8	$V_{Rk,s}^0$ [kN]	11 (10)	17 (16)	25	47	74	106	138	168
	Steel, Property class 8.8	$V_{Rk,s}^0$ [kN]	15 (13)	23 (21)	34	63	98	141	184	224
	Stainless steel A2, A4 and HCR, class 50	$V_{Rk,s}^0$ [kN]	9	15	21	39	61	88	115	140
	Stainless steel A2, A4 and HCR, class 70	$V_{Rk,s}^0$ [kN]	13	20	30	55	86	124	-	-
	Stainless steel A4 and HCR, class 80	$V_{Rk,s}^0$ [kN]	15	23	34	63	98	141	-	-
With lever arm	Steel, Property class 4.6 and 4.8	$M_{Rk,s}^0$ [Nm]	15 (13)	30 (27)	52	133	260	449	666	900
	Steel, Property class 5.6 and 5.8	$M_{Rk,s}^0$ [Nm]	19 (16)	37 (33)	65	166	324	560	833	1123
	Steel, Property class 8.8	$M_{Rk,s}^0$ [Nm]	30 (26)	60 (53)	105	266	519	896	1333	1797
	Stainless steel A2, A4 and HCR, class 50	$M_{Rk,s}^0$ [Nm]	19	37	66	167	325	561	832	1125
	Stainless steel A2, A4 and HCR, class 70	$M_{Rk,s}^0$ [Nm]	26	52	92	232	454	784	-	-
	Stainless steel A4 and HCR, class 80	$M_{Rk,s}^0$ [Nm]	30	59	105	266	519	896	-	-
Characteristic shear resistance, Partial factor ²⁾										
Steel, Property class 4.6 and 5.6	$\gamma_{Ms,V}$ [-]						1,67			
Steel, Property class 4.8, 5.8 and 8.8	$\gamma_{Ms,V}$ [-]						1,25			
Stainless steel A2, A4 and HCR, class 50	$\gamma_{Ms,V}$ [-]						2,38			
Stainless steel A2, A4 and HCR, class 70	$\gamma_{Ms,V}$ [-]						1,56			
Stainless steel A4 and HCR, class 80	$\gamma_{Ms,V}$ [-]						1,33			
¹⁾ Values are only valid for the given stress area A_s . Values in brackets are valid for undersized threaded rods with smaller stress area A_s for hot-dip galvanised threaded rods according to EN ISO 10684:2004+AC:2009.										
²⁾ in absence of national regulation										
Spitec Oy Injection system Lionfix, Lionfix N for concrete								Annex C 1		
Performances Characteristic values for steel tension resistance and steel shear resistance of threaded rods										

Table C2: Characteristic values for Concrete cone failure and Splitting with all kind of action

Anchor size		All Anchor types and sizes			
Concrete cone failure					
Non-cracked concrete					
	$k_{ucr,N}$	[\cdot]	11,0		
Cracked concrete	$k_{cr,N}$	[\cdot]	7,7		
Edge distance	$c_{cr,N}$	[mm]	$1,5 h_{ef}$		
Axial distance	$s_{cr,N}$	[mm]	$2 c_{cr,N}$		
Splitting					
Edge distance	$h/h_{ef} \geq 2,0$	$c_{cr,sp}$	$1,0 h_{ef}$		
	$2,0 > h/h_{ef} > 1,3$		$2 \cdot h_{ef} \left(2,5 - \frac{h}{h_{ef}} \right)$		
	$h/h_{ef} \leq 1,3$		$2,4 h_{ef}$		
Axial distance		$s_{cr,sp}$	[mm]		
			$2 c_{cr,sp}$		
Spitec Oy Injection system Lionfix, Lionfix N for concrete					
Performances Characteristic values for Concrete cone failure and Splitting with all kind of action		Annex C 2			

Table C3: Characteristic values of tension loads under static and quasi-static action

Anchor size threaded rod		M8	M10	M12	M16	M20	M24	M27	M30								
Steel failure																	
Characteristic tension resistance $N_{Rk,s}$ [kN] $A_s \cdot f_{uk}$ (or see Table C1)																	
Characteristic tension resistance	$N_{Rk,s}$	[kN]	see Table C1														
Partial factor	$\gamma_{Ms,N}$	[-]															
Combined pull-out and concrete failure																	
Characteristic bond resistance in non-cracked concrete C20/25																	
I: 40°C/24°C	Dry, wet concrete	$\tau_{Rk,ucr}$ [N/mm ²]	[N/mm ²]	10	12	12	12	12	11	10	9						
II: 80°C/50°C				7,5	9	9	9	9	8,5	7,5	6,5						
III: 120°C/72°C				5,5	6,5	6,5	6,5	6,5	6,5	5,5	5,0						
I: 40°C/24°C	flooded bore hole			7,5	8,5	8,5	8,5	No Performance Assessed (NPA)									
II: 80°C/50°C				5,5	6,5	6,5	6,5										
III: 120°C/72°C				4,0	5,0	5,0	5,0										
Characteristic bond resistance in cracked concrete C20/25																	
I: 40°C/24°C	Dry, wet concrete	$\tau_{Rk,cr}$ [N/mm ²]	[N/mm ²]	4,0	5,0	5,5	5,5	5,5	5,5	6,5	6,5						
II: 80°C/50°C				2,5	3,5	4,0	4,0	4,0	4,0	4,5	4,5						
III: 120°C/72°C				2,0	2,5	3,0	3,0	3,0	3,0	3,5	3,5						
I: 40°C/24°C	flooded bore hole			4,0	4,0	5,5	5,5	No Performance Assessed (NPA)									
II: 80°C/50°C				2,5	3,0	4,0	4,0										
III: 120°C/72°C				2,0	2,5	3,0	3,0										
Reduktion factor ψ_{sus}^0 in cracked and non-cracked concrete C20/25																	
I: 40°C/24°C	Dry, wet concrete and flooded bore hole	ψ_{sus}^0	[-]	0,73													
II: 80°C/50°C				0,65													
III: 120°C/72°C				0,57													
Increasing factors for concrete Ψ_c				C25/30	1,02												
				C30/37	1,04												
				C35/45	1,07												
				C40/50	1,08												
				C45/55	1,09												
				C50/60	1,10												
Concrete cone failure																	
Relevant parameter				see Table C2													
Splitting																	
Relevant parameter				see Table C2													
Installation factor																	
for dry and wet concrete		γ_{inst}	[-]	1,0	1,2												
for flooded bore hole				1,4	NPA												
Spitec Oy Injection system Lionfix, Lionfix N for concrete								Annex C 3									
Performances Characteristic values of tension loads under static and quasi-static action																	

Table C4: Characteristic values of shear loads under static and quasi-static action

Anchor size threaded rod	M8	M10	M12	M16	M20	M24	M27	M30
Steel failure without lever arm								
Characteristic shear resistance Steel, strength class 4.6, 4.8, 5.6 and 5.8								
$V_{Rk,s}^0$	[kN]	$0,6 \cdot A_s \cdot f_{uk}$ (or see Table C1)						
Characteristic shear resistance Steel, strength class 8.8 Stainless Steel A2, A4 and HCR, all classes	$V_{Rk,s}^0$	[kN]	$0,5 \cdot A_s \cdot f_{uk}$ (or see Table C1)					
Partial factor	$\gamma_{Ms,V}$	[-]	see Table C1					
Ductility factor	k_7	[-]	1,0					
Steel failure with lever arm								
Characteristic bending moment	$M_{Rk,s}^0$	[Nm]	$1,2 \cdot W_{el} \cdot f_{uk}$ (or see Table C1)					
Elastic section modulus	W_{el}	[mm ³]	31	62	109	277	541	935
Partial factor	$\gamma_{Ms,V}$	[-]	see Table C1					
Concrete pry-out failure								
Factor	k_8	[-]	2,0					
Installation factor	γ_{inst}	[-]	1,0					
Concrete edge failure								
Effective length of fastener	l_f	[mm]	$\min(h_{ef}; 12 \cdot d_{nom})$					
Outside diameter of fastener	d_{nom}	[mm]	8	10	12	16	20	24
Installation factor	γ_{inst}	[-]	1,0					
Spitec Oy Injection system Lionfix, Lionfix N for concrete								
Performances Characteristic values of shear loads under static and quasi-static action							Annex C 4	

Table C5: Characteristic values of tension loads under static and quasi-static action

Anchor size internal threaded anchor rods			IG-M6	IG-M8	IG-M10	IG-M12	IG-M16	IG-M20									
Steel failure¹⁾																	
Characteristic tension resistance, Steel, strength class																	
5.8	N _{Rk,s}	[kN]	10	17	29	42	76	123									
8.8	N _{Rk,s}	[kN]	16	27	46	67	121	196									
Partial factor, strength class 5.8 and 8.8	γ _{Ms,N}	[-]	1,5														
Characteristic tension resistance, Stainless Steel A4 and HCR, Strength class 70 ²⁾	N _{Rk,s}	[kN]	14	26	41	59	110	124									
Partial factor	γ _{Ms,N}	[-]	1,87				2,86										
Combined pull-out and concrete cone failure																	
Characteristic bond resistance in non-cracked concrete C20/25																	
Temperature range	I: 40°C/24°C	Dry, wet concrete	τ _{Rk,ucr} [N/mm ²]	12	12	12	12	11									
	II: 80°C/50°C			9	9	9	9	8,5									
	III: 120°C/72°C			6,5	6,5	6,5	6,5	5,0									
Temperature range	I: 40°C/24°C	flooded bore hole		8,5	8,5	8,5	No Performance Assessed (NPA)										
	II: 80°C/50°C			6,5	6,5	6,5											
	III: 120°C/72°C			5,0	5,0	5,0											
Characteristic bond resistance in cracked concrete C20/25																	
Temperature range	I: 40°C/24°C	Dry, wet concrete	τ _{Rk,cr} [N/mm ²]	5,0	5,5	5,5	5,5	5,5									
	II: 80°C/50°C			3,5	4,0	4,0	4,0	4,0									
	III: 120°C/72°C			2,5	3,0	3,0	3,0	3,0									
Temperature range	I: 40°C/24°C	flooded bore hole		4,0	5,5	5,5	No Performance Assessed (NPA)										
	II: 80°C/50°C			3,0	4,0	4,0											
	III: 120°C/72°C			2,5	3,0	3,0											
Reduktion factor ψ ⁰ _{sus} in cracked and non-cracked concrete C20/25																	
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	ψ ⁰ _{sus} [-]	0,73													
	II: 80°C/50°C			0,65													
	III: 120°C/72°C			0,57													
Increasing factors for concrete ψ _c			C25/30	1,02													
			C30/37	1,04													
			C35/45	1,07													
			C40/50	1,08													
			C45/55	1,09													
			C50/60	1,10													
Concrete cone failure																	
Relevant parameter			see Table C2														
Splitting failure																	
Relevant parameter			see Table C2														
Installation factor																	
for dry and wet concrete		γ _{inst}	[-]	1,2													
for flooded bore hole				1,4		NPA											
¹⁾ Fastenings (incl. nut and washer) must comply with the appropriate material and property class of the internal threaded rod. The characteristic tension resistance for steel failure is valid for the internal threaded rod and the fastening element.																	
²⁾ For IG-M20 strength class 50 is valid																	
Spitec Oy Injection system Lionfix, Lionfix N for concrete							Annex C 5										
Performances Characteristic values of tension loads under static and quasi-static action																	

Table C6: Characteristic values of shear loads under static and quasi-static action

Anchor size for internal threaded anchor rods			IG-M6	IG-M8	IG-M10	IG-M12	IG-M16	IG-M20
Steel failure without lever arm¹⁾								
Characteristic shear resistance, Steel, strength class	5.8 8.8	$V_{Rk,s}^0$	[kN]	5 8	9 14	15 23	21 34	38 60
Partial factor, strength class 5.8 and 8.8		$\gamma_{Ms,V}$	[-]				1,25	
Characteristic shear resistance, Stainless Steel A4 and HCR, Strength class 70 ²⁾		$V_{Rk,s}^0$	[kN]	7	13	20	30	55
Partial factor		$\gamma_{Ms,V}$	[-]				1,56	2,38
Ductility factor		k_7	[-]				1,0	
Steel failure with lever arm¹⁾								
Characteristic bending moment, Steel, strength class	5.8 8.8	$M_{Rk,s}^0$	[Nm]	8 12	19 30	37 60	66 105	167 267
Partial factor, strength class 5.8 and 8.8		$\gamma_{Ms,V}$	[-]				1,25	
Characteristic bending moment, Stainless Steel A4 and HCR, Strength class 70 ²⁾		$M_{Rk,s}^0$	[Nm]	11	26	52	92	233
Partial factor		$\gamma_{Ms,V}$	[-]				1,56	2,38
Concrete pry-out failure								
Factor		k_8	[-]				2,0	
Installation factor		γ_{inst}	[-]				1,0	
Concrete edge failure								
Effective length of fastener	l_f	[mm]		$\min(h_{ef}; 12 \cdot d_{nom})$				$\min(h_{ef}; 300\text{mm})$
Outside diameter of fastener	d_{nom}	[mm]		10	12	16	20	24
Installation factor	γ_{inst}	[-]					1,0	
¹⁾ Fastenings (incl. nut and washer) must comply with the appropriate material and property class of the internal threaded rod. The characteristic tension resistance for steel failure is valid for the internal threaded rod and the fastening element.								
²⁾ For IG-M20 strength class 50 is valid								
Spitec Oy Injection system Lionfix, Lionfix N for concrete							Annex C 6	
Performances Characteristic values of shear loads under static and quasi-static action								

Table C7: Characteristic values of tension loads under static and quasi-static action

Anchor size reinforcing bar			Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32								
Steel failure																			
Characteristic tension resistance																			
Cross section area		N _{Rk,s}	[kN]	A _s · f _{uk} ¹⁾															
Partial factor		A _s	[mm ²]	50	79	113	154	201	314	491	616								
		γ _{Ms,N}	[-]	1,4 ²⁾															
Combined pull-out and concrete failure																			
Characteristic bond resistance in non-cracked concrete C20/25																			
Temperature range	I: 40°C/24°C	Dry, wet concrete	τ _{Rk,ucr}	[N/mm ²]	10	12	12	12	12	11	10								
	II: 80°C/50°C				7,5	9	9	9	9	8,0	7,0								
	III: 120°C/72°C				5,5	6,5	6,5	6,5	6,5	6,0	4,5								
	I: 40°C/24°C	flooded bore hole			7,5	8,5	8,5	8,5	8,5	No Performance Assessed (NPA)									
	II: 80°C/50°C				5,5	6,5	6,5	6,5	6,5										
	III: 120°C/72°C				4,0	5,0	5,0	5,0	5,0										
Characteristic bond resistance in cracked concrete C20/25																			
Temperature range	I: 40°C/24°C	Dry, wet concrete	τ _{Rk,cr}	[N/mm ²]	4,0	5,0	5,5	5,5	5,5	5,5	6,5								
	II: 80°C/50°C				2,5	3,5	4,0	4,0	4,0	4,0	4,5								
	III: 120°C/72°C				2,0	2,5	3,0	3,0	3,0	3,0	3,5								
	I: 40°C/24°C	flooded bore hole			4,0	4,0	5,5	5,5	5,5	No Performance Assessed (NPA)									
	II: 80°C/50°C				2,5	3,0	4,0	4,0	4,0										
	III: 120°C/72°C				2,0	2,5	3,0	3,0	3,0										
Reduktion factor ψ _{sus} ⁰ in cracked and non-cracked concrete C20/25																			
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	ψ _{sus} ⁰	[-]	0,73														
	II: 80°C/50°C				0,65														
	III: 120°C/72°C				0,57														
ψ _c	Increasing factors for concrete			C25/30	1,02														
				C30/37	1,04														
				C35/45	1,07														
				C40/50	1,08														
				C45/55	1,09														
				C50/60	1,10														
Concrete cone failure																			
Relevant parameter			see Table C2																
Splitting																			
Relevant parameter			see Table C2																
Installation factor																			
for dry and wet concrete		γ _{inst}	[-]	1,2	1,2														
for flooded bore hole				1,4	NPA														
1) f _{uk} shall be taken from the specifications of reinforcing bars 2) in absence of national regulation																			
Spitec Oy Injection system Lionfix, Lionfix N for concrete																			
Performances																			
Characteristic values of tension loads under static and quasi-static action																			
Annex C 7																			

Table C8: Characteristic values of shear loads under static and quasi-static action

Anchor size reinforcing bar		Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32	
Steel failure without lever arm											
Characteristic shear resistance	$V_{Rk,s}^0$	[kN]									
										$0,50 \cdot A_s \cdot f_{uk}^{1)}$	
Cross section area	A_s	[mm ²]	50	79	113	154	201	314	491	616	804
Partial factor	$\gamma_{Ms,V}$	[-]								1,5 ²⁾	
Ductility factor	k_7	[-]								1,0	
Steel failure with lever arm											
Characteristic bending moment	$M_{Rk,s}^0$	[Nm]								$1,2 \cdot W_{el} \cdot f_{uk}^{1)}$	
Elastic section modulus	W_{el}	[mm ³]	50	98	170	269	402	785	1534	2155	3217
Partial factor	$\gamma_{Ms,V}$	[-]								1,5 ²⁾	
Concrete pry-out failure											
Factor	k_8	[-]								2,0	
Installation factor	γ_{inst}	[-]								1,0	
Concrete edge failure											
Effective length of fastener	l_f	[mm]								$\min(h_{ef}; 12 \cdot d_{nom})$	
										$\min(h_{ef}; 300\text{mm})$	
Outside diameter of fastener	d_{nom}	[mm]	8	10	12	14	16	20	25	28	32
Installation factor	γ_{inst}	[-]								1,0	

¹⁾ f_{uk} shall be taken from the specifications of reinforcing bars

²⁾ in absence of national regulation

Spitec Oy Injection system Lionfix, Lionfix N for concrete

Performances

Characteristic values of shear loads under static and quasi-static action

Annex C 8

Table C9: Displacements under tension load¹⁾ (threaded rod)

Anchor size threaded rod			M8	M10	M12	M16	M20	M24	M27	M30
Non-cracked concrete C20/25 under static and quasi-static action										
Temperature range I: 40°C/24°C	δ_{N0} -factor	[mm/(N/mm²)]	0,021	0,023	0,026	0,031	0,036	0,041	0,045	0,049
	$\delta_{N\infty}$ -factor	[mm/(N/mm²)]	0,030	0,033	0,037	0,045	0,052	0,060	0,065	0,071
Temperature range II: 80°C/50°C	δ_{N0} -factor	[mm/(N/mm²)]	0,050	0,056	0,063	0,075	0,088	0,100	0,110	0,119
	$\delta_{N\infty}$ -factor	[mm/(N/mm²)]	0,072	0,081	0,090	0,108	0,127	0,145	0,159	0,172
Temperature range III: 120°C/72°C	δ_{N0} -factor	[mm/(N/mm²)]	0,050	0,056	0,063	0,075	0,088	0,100	0,110	0,119
	$\delta_{N\infty}$ -factor	[mm/(N/mm²)]	0,072	0,081	0,090	0,108	0,127	0,145	0,159	0,172
Cracked concrete C20/25 under static and quasi-static action										
Temperature range I: 40°C/24°C	δ_{N0} -factor	[mm/(N/mm²)]	0,090		0,070					
	$\delta_{N\infty}$ -factor	[mm/(N/mm²)]	0,105		0,105					
Temperature range II: 80°C/50°C	δ_{N0} -factor	[mm/(N/mm²)]	0,219		0,170					
	$\delta_{N\infty}$ -factor	[mm/(N/mm²)]	0,255		0,245					
Temperature range III: 120°C/72°C	δ_{N0} -factor	[mm/(N/mm²)]	0,219		0,170					
	$\delta_{N\infty}$ -factor	[mm/(N/mm²)]	0,255		0,245					

¹⁾ Calculation of the displacement

$\delta_{N0} = \delta_{N0}\text{-factor} \cdot \tau$; τ : action bond stress for tension

$\delta_{N\infty} = \delta_{N\infty}\text{-factor} \cdot \tau$;

Table C10: Displacements under shear load¹⁾ (threaded rod)

Anchor size threaded rod			M8	M10	M12	M16	M20	M24	M27	M30
Non-cracked concrete C20/25 under static and quasi-static action										
All temperature ranges	δ_{V0} -factor	[mm/kN]	0,06	0,06	0,05	0,04	0,04	0,03	0,03	0,03
	$\delta_{V\infty}$ -factor	[mm/kN]	0,09	0,08	0,08	0,06	0,06	0,05	0,05	0,05
Cracked concrete C20/25 under static and quasi-static action										
All temperature ranges	δ_{V0} -factor	[mm/kN]	0,12	0,12	0,11	0,10	0,09	0,08	0,08	0,07
	$\delta_{V\infty}$ -factor	[mm/kN]	0,18	0,18	0,17	0,15	0,14	0,13	0,12	0,10
¹⁾ Calculation of the displacement										
$\delta_V = \delta_{V0}\text{-factor} \cdot V$; V : action shear load										
$\delta_{V\infty} = \delta_{V\infty}\text{-factor} \cdot V$;										
Spitec Oy Injection system Lionfix, Lionfix N for concrete								Annex C 9		
Performances Displacements (threaded rods)								Annex C 9		

Table C11: Displacements under tension load¹⁾ (Internal threaded anchor rod)

Anchor size Internal threaded anchor rod			IG-M6	IG-M8	IG-M10	IG-M12	IG-M16	IG-M20
Non-cracked concrete C20/25 under static and quasi-static action								
Temperature range I: 40°C/24°C	δ_{N0} -factor	[mm/(N/mm²)]	0,023	0,026	0,031	0,036	0,041	0,049
	$\delta_{N\infty}$ -factor	[mm/(N/mm²)]	0,033	0,037	0,045	0,052	0,060	0,071
Temperature range II: 80°C/50°C	δ_{N0} -factor	[mm/(N/mm²)]	0,056	0,063	0,075	0,088	0,100	0,119
	$\delta_{N\infty}$ -factor	[mm/(N/mm²)]	0,081	0,090	0,108	0,127	0,145	0,172
Temperature range III: 120°C/72°C	δ_{N0} -factor	[mm/(N/mm²)]	0,056	0,063	0,075	0,088	0,100	0,119
	$\delta_{N\infty}$ -factor	[mm/(N/mm²)]	0,081	0,090	0,108	0,127	0,145	0,172
Cracked concrete C20/25 under static and quasi-static action								
Temperature range I: 40°C/24°C	δ_{N0} -factor	[mm/(N/mm²)]	0,090			0,070		
	$\delta_{N\infty}$ -factor	[mm/(N/mm²)]	0,105			0,105		
Temperature range II: 80°C/50°C	δ_{N0} -factor	[mm/(N/mm²)]	0,219			0,170		
	$\delta_{N\infty}$ -factor	[mm/(N/mm²)]	0,255			0,245		
Temperature range III: 120°C/72°C	δ_{N0} -factor	[mm/(N/mm²)]	0,219			0,170		
	$\delta_{N\infty}$ -factor	[mm/(N/mm²)]	0,255			0,245		

¹⁾ Calculation of the displacement

$$\delta_{N0} = \delta_{N0}\text{-factor} \cdot \tau; \quad \tau: \text{action bond stress for tension}$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-factor} \cdot \tau;$$

Table C12: Displacements under shear load¹⁾ (Internal threaded anchor rod)

Anchor size Internal threaded anchor rod			IG-M6	IG-M8	IG-M10	IG-M12	IG-M16	IG-M20
Non-cracked and cracked concrete C20/25 under static and quasi-static action								
All temperature ranges	δ_{V0} -factor	[mm/kN]	0,07	0,06	0,06	0,05	0,04	0,04
	$\delta_{V\infty}$ -factor	[mm/kN]	0,10	0,09	0,08	0,08	0,06	0,06

¹⁾ Calculation of the displacement

$$\delta_{V0} = \delta_{V0}\text{-factor} \cdot V; \quad V: \text{action shear load}$$

$$\delta_{V\infty} = \delta_{V\infty}\text{-factor} \cdot V;$$

Spitec Oy Injection system Lionfix, Lionfix N for concrete

Performances
Displacements (Internal threaded anchor rod)

Annex C 10

English translation prepared by DIbt

Table C13: Displacements under tension load¹⁾ (rebar)

Anchor size reinforcing bar		Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32
Non-cracked concrete C20/25 under static and quasi-static action										
Temperature range I: 40°C/24°C	δ_{N0} -factor [mm/(N/mm²)]	0,021	0,023	0,026	0,028	0,031	0,036	0,043	0,047	0,052
	$\delta_{N\infty}$ -factor [mm/(N/mm²)]	0,030	0,033	0,037	0,041	0,045	0,052	0,061	0,071	0,075
Temperature range II: 80°C/50°C	δ_{N0} -factor [mm/(N/mm²)]	0,050	0,056	0,063	0,069	0,075	0,088	0,104	0,113	0,126
	$\delta_{N\infty}$ -factor [mm/(N/mm²)]	0,072	0,081	0,090	0,099	0,108	0,127	0,149	0,163	0,181
Temperature range III: 120°C/72°C	δ_{N0} -factor [mm/(N/mm²)]	0,050	0,056	0,063	0,069	0,075	0,088	0,104	0,113	0,126
	$\delta_{N\infty}$ -factor [mm/(N/mm²)]	0,072	0,081	0,090	0,099	0,108	0,127	0,149	0,163	0,181
Cracked concrete C20/25 under static and quasi-static action										
Temperature range I: 40°C/24°C	δ_{N0} -factor [mm/(N/mm²)]	0,090		0,070						
	$\delta_{N\infty}$ -factor [mm/(N/mm²)]	0,105		0,105						
Temperature range II: 80°C/50°C	δ_{N0} -factor [mm/(N/mm²)]	0,219		0,170						
	$\delta_{N\infty}$ -factor [mm/(N/mm²)]	0,255		0,245						
Temperature range III: 120°C/72°C	δ_{N0} -factor [mm/(N/mm²)]	0,219		0,170						
	$\delta_{N\infty}$ -factor [mm/(N/mm²)]	0,255		0,245						

¹⁾ Calculation of the displacement

$$\delta_{N0} = \delta_{N0}\text{-factor} \cdot \tau; \quad \tau: \text{action bond stress for tension}$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-factor} \cdot \tau;$$

Table C14: Displacement under shear load¹⁾ (rebar)

Anchor size reinforcing bar		Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32
Non-cracked concrete C20/25 under static and quasi-static action										
All temperature ranges	δ_{V0} -factor [mm/kN]	0,06	0,05	0,05	0,04	0,04	0,04	0,03	0,03	0,03
	$\delta_{V\infty}$ -factor [mm/kN]	0,09	0,08	0,08	0,06	0,06	0,05	0,05	0,04	0,04
Cracked concrete C20/25 under static and quasi-static action										
All temperature ranges	δ_{V0} -factor [mm/kN]	0,12	0,12	0,11	0,11	0,10	0,09	0,08	0,07	0,06
	$\delta_{V\infty}$ -factor [mm/kN]	0,18	0,18	0,17	0,16	0,15	0,14	0,12	0,11	0,10
¹⁾ Calculation of the displacement										
$\delta_{V0} = \delta_{V0}\text{-factor} \cdot V; \quad V: \text{action shear load}$										
$\delta_{V\infty} = \delta_{V\infty}\text{-factor} \cdot V;$										
Spitec Oy Injection system Lionfix, Lionfix N for concrete								Annex C 11		
Performances Displacements (rebar)								Annex C 11		

Table C15: Characteristic values of tension loads under seismic action (performance category C1)

Anchor size threaded rod			M8	M10	M12	M16	M20	M24	M27	M30									
Steel failure																			
Characteristic tension resistance		N _{Rk,s,eq}	[kN]	1,0 · N _{Rk,s}															
Partial factor		γ _{Ms,N}	[-]	see Table C1															
Combined pull-out and concrete failure																			
Characteristic bond resistance in non-cracked and cracked concrete C20/25																			
Temperature range	I: 40°C/24°C	Dry, wet concrete	τ _{Rk,eq} [N/mm ²]	2,5	3,1	3,7	3,7	3,7	3,8	4,5	4,5								
	II: 80°C/50°C			1,6	2,2	2,7	2,7	2,7	2,8	3,1	3,1								
	III: 120°C/72°C			1,3	1,6	2,0	2,0	2,0	2,1	2,4	2,4								
	I: 40°C/24°C	flooded bore hole		2,5	2,5	3,7	3,7	No Performance Assessed (NPA)											
	II: 80°C/50°C			1,6	1,9	2,7	2,7												
	III: 120°C/72°C			1,3	1,6	2,0	2,0												
Reduktion factor ψ _{sus} ⁰ in cracked and non-cracked concrete C20/25																			
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	ψ _{sus} ⁰ [-]	0,73															
	II: 80°C/50°C			0,65															
	III: 120°C/72°C			0,57															
Increasing factors for concrete ψ _C			C25/30 to C50/60		1,0														
Concrete cone failure																			
Relevant parameter					see Table C2														
Splitting																			
Relevant parameter					see Table C2														
Installation factor																			
for dry and wet concrete			γ _{inst}	[-]	1,0	1,2													
for flooded bore hole					1,4		NPA												
Spitec Oy Injection system Lionfix, Lionfix N for concrete																			
Performances Characteristic values of tension loads under seismic action (performance category C1)																			
Annex C 12																			

Table C16: Characteristic values of shear loads under seismic action (performance category C1)

Anchor size threaded rod	M8	M10	M12	M16	M20	M24	M27	M30
Steel failure without lever arm								
Characteristic shear resistance (Seismic C1)	$V_{Rk,s,eq}$	[kN]						$0,70 \cdot V_{Rk,s}^0$
Partial factor	$\gamma_{Ms,V}$	[\cdot]						see Table C1
Ductility factor	k_7	[\cdot]						1,0
Steel failure with lever arm								
Characteristic bending moment	$M_{Rk,s,eq}^0$	[Nm]						No Performance Assessed (NPA)
Concrete pry-out failure								
Factor	k_8	[\cdot]						2,0
Installation factor	γ_{inst}	[\cdot]						1,0
Concrete edge failure								
Effective length of fastener	l_f	[mm]						$\min(h_{ef}; 12 \cdot d_{nom})$
Outside diameter of fastener	d_{nom}	[mm]	8	10	12	16	20	24
Installation factor	γ_{inst}	[\cdot]						1,0
Factor for annular gap	α_{gap}	[\cdot]						0,5 (1,0) ¹⁾
1) Value in brackets valid for filled annular gap between anchor and clearance hole in the fixture. Use of special filling washer Annex A 3 is required								
Spitec Oy Injection system Lionfix, Lionfix N for concrete								Annex C 13
Performances Characteristic values of shear loads under seismic action (performance category C1)								

Table C17: Characteristic values of tension loads under seismic action (performance category C1)

Anchor size reinforcing bar		Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32									
Steel failure																			
Characteristic tension resistance																			
Characteristic tension resistance	$N_{Rk,s,eq}$	[kN]																	
Cross section area	A_s	[mm ²]	50	79	113	154	201	314	491	616									
Partial factor	$\gamma_{Ms,N}$	[-]								804									
Combined pull-out and concrete failure																			
Characteristic bond resistance in non-cracked and cracked concrete C20/25																			
Temperature range	I: 40°C/24°C	Dry, wet concrete	$\tau_{Rk, eq}$	[N/mm ²]	2,5	3,1	3,7	3,7	3,7	3,8									
	II: 80°C/50°C				1,6	2,2	2,7	2,7	2,7	2,8									
	III: 120°C/72°C				1,3	1,6	2,0	2,0	2,0	3,1									
	I: 40°C/24°C	flooded bore hole			2,5	2,5	3,7	3,7	3,7	4,5									
	II: 80°C/50°C				1,6	1,9	2,7	2,7	2,7	3,1									
	III: 120°C/72°C				1,3	1,6	2,0	2,0	2,0	2,4									
Reduktion factor ψ_{sus}^0 in cracked and non-cracked concrete C20/25																			
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	ψ_{sus}^0	[-]						0,73									
	II: 80°C/50°C									0,65									
	III: 120°C/72°C									0,57									
Increasing factors for concrete ψ_c		C25/30 to C50/60								1,0									
Concrete cone failure																			
Relevant parameter					see Table C2														
Splitting																			
Relevant parameter					see Table C2														
Installation factor																			
for dry and wet concrete		γ_{inst}	[-]	1,2	1,2														
for flooded bore hole					1,4														
1) f_{uk} shall be taken from the specifications of reinforcing bars																			
2) in absence of national regulation																			
Spitec Oy Injection system Lionfix, Lionfix N for concrete																			
Performances																			
Characteristic values of tension loads under seismic action (performance category C1)																			
Annex C 14																			

Table C18: Characteristic values of shear loads under seismic action (performance category C1)

Anchor size reinforcing bar			Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32									
Steel failure without lever arm																				
Characteristic shear resistance	$V_{Rk,s,eq}$	[kN]			$0,35 \cdot A_s \cdot f_{uk}^{(2)}$															
Cross section area	A_s	[mm ²]	50	79	113	154	201	314	491	616	804									
Partial factor	$\gamma_{Ms,V}$	[-]			1,5 ⁽²⁾															
Ductility factor	k_7	[-]			1,0															
Steel failure with lever arm																				
Characteristic bending moment	$M_{Rk,s,eq}^0$	[Nm]	No Performance Assessed (NPA)																	
Concrete pry-out failure																				
Factor	k_8	[-]	2,0																	
Installation factor	γ_{inst}	[-]	1,0																	
Concrete edge failure																				
Effective length of fastener	l_f	[mm]	$\min(h_{ef}; 12 \cdot d_{nom})$						$\min(h_{ef}; 300\text{mm})$											
Outside diameter of fastener	d_{nom}	[mm]	8	10	12	14	16	20	25	28	32									
Installation factor	γ_{inst}	[-]	1,0																	
Factor for annular gap	α_{gap}	[-]	0,5 (1,0) ⁽³⁾																	
¹⁾ f_{uk} shall be taken from the specifications of reinforcing bars ²⁾ in absence of national regulation ³⁾ Value in brackets valid for filled annular gap between anchor and clearance hole in the fixture. Use of special filling washer Annex A 3 is required																				
Spitec Oy Injection system Lionfix, Lionfix N for concrete																				
Performances Characteristic values of shear loads under seismic action (performance category C1)																				
Annex C 15																				

English translation prepared by DIbt

Table C19: Displacements under tension load¹⁾ (threaded rod)

Anchor size threaded rod			M8	M10	M12	M16	M20	M24	M27	M30
Cracked and non-cracked concrete C20/25 under seismic C1 action										
Temperature range I: 40°C/24°C	δ_{N0} -factor	[mm/(N/mm ²)]		0,090						0,070
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]		0,105						0,105
Temperature range II: 80°C/50°C	δ_{N0} -factor	[mm/(N/mm ²)]		0,219						0,170
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]		0,255						0,245
Temperature range III: 120°C/72°C	δ_{N0} -factor	[mm/(N/mm ²)]		0,219						0,170
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]		0,255						0,245

Table C20: Displacements under tension load¹⁾ (rebar)

Anchor size reinforcing bar			Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32
Cracked and non-cracked concrete C20/25 under seismic C1 action											
Temperature range I: 40°C/24°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,090								0,070
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,105								0,105
Temperature range II: 80°C/50°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,219								0,170
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,255								0,245
Temperature range III: 120°C/72°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,219								0,170
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,255								0,245

¹⁾ Calculation of the displacement

$$\delta_{N0} = \delta_{N0}\text{-factor} \cdot \tau; \quad \tau: \text{action bond stress for tension}$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-factor} \cdot \tau;$$

Table C21: Displacements under shear load²⁾ (threaded rod)

Anchor size threaded rod			M8	M10	M12	M16	M20	M24	M27	M30
Cracked and non-cracked concrete C20/25 under seismic C1 action										
All temperature ranges	δ_{V0} -factor	[mm/kN]		0,12	0,12	0,11	0,10	0,09	0,08	0,08
	$\delta_{V\infty}$ -factor	[mm/kN]		0,18	0,18	0,17	0,15	0,14	0,13	0,12

Table C22: Displacement under shear load¹⁾ (rebar)

Anchor size reinforcing bar			Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32
Cracked and non-cracked concrete C20/25 under seismic C1 action											
All temperature ranges	δ_{V0} -factor	[mm/kN]	0,12		0,12	0,11	0,11	0,10	0,09	0,08	0,07
	$\delta_{V\infty}$ -factor	[mm/kN]	0,18		0,18	0,17	0,16	0,15	0,14	0,12	0,10

¹⁾ Calculation of the displacement

$$\delta_{V0} = \delta_{V0}\text{-factor} \cdot V; \quad V: \text{action shear load}$$

$$\delta_{V\infty} = \delta_{V\infty}\text{-factor} \cdot V;$$

Spitec Oy Injection system Lionfix, Lionfix N for concrete

Performances

Displacements under seismic C1 action (threaded rods and rebar)

Annex C 16