

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments

★ ★ ★
★ Designated
according to
Article 29 of Regula-
tion (EU) No 305/2011
and member of EOTA
(European Organi-
sation for Technical
Assessment)
★ ★ ★
★ ★

European Technical Assessment

ETA-20/0729
of 26 November 2020

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Trade name of the construction product

Product family
to which the construction product belongs

Manufacturer

Manufacturing plant

This European Technical Assessment
contains

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

Deutsches Institut für Bautechnik

fischer injection system FIS V Plus for masonry

Metal Injection anchors for use in masonry

fischerwerke GmbH & Co. KG
Otto-Hahn-Straße 15
79211 Denzlingen
DEUTSCHLAND

fischerwerke

139 pages including 3 annexes which form an integral
part of this assessment

EAD 330076-00-0604, Edition 11/2017

European Technical Assessment
ETA-20/0729
English translation prepared by DIBt

Page 2 of 139 | 26 November 2020

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

European Technical Assessment**ETA-20/0729**

English translation prepared by DIBt

Page 3 of 139 | 26 November 2020

Specific Part**1 Technical description of the product**

The fischer injection system FIS V Plus for masonry is a bonded anchor (injection type) consisting of a mortar cartridge with injection mortar fischer FIS V Plus, FIS VS Plus Low Speed and FIS VW Plus High Speed, a perforated sieve sleeve and an anchor rod with hexagon nut and washer or an internal threaded rod in the range of M6 to M16. The steel elements are made of zinc coated steel, stainless steel or high corrosion resistant steel.

The anchor rod is placed into a drilled hole filled with injection mortar and is anchored via the bond between steel element, injection mortar and masonry and mechanical interlock.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment**3.1 Mechanical resistance and stability (BWR 1)**

Essential characteristic	Performance
Characteristic values for resistance	See Annexes B20, C 1 to C 110
Displacements	See Annex C 110
Durability	See annex B 2

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1

3.3 Hygiene, health and the environment (BWR 3)

Essential characteristic	Performance
Content, emission and/or release of dangerous substances	No performance assessed

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with the European Assessment Document EAD 330076-00-0604 the applicable European legal act is: [97/177/EC].

The system to be applied is: 1

European Technical Assessment

ETA-20/0729

English translation prepared by DIBt

Page 4 of 139 | 26 November 2020

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.

Issued in Berlin on 26 November 2020 by Deutsches Institut für Bautechnik


Dipl.-Ing. Beatrix Wittstock
Head of Section

beglaubigt:
Baderschneider


Installation conditions part 1

Anchor rods with perforated sleeve FIS H K; Installation in perforated and solid brick masonry

Pre-positioned anchorage:

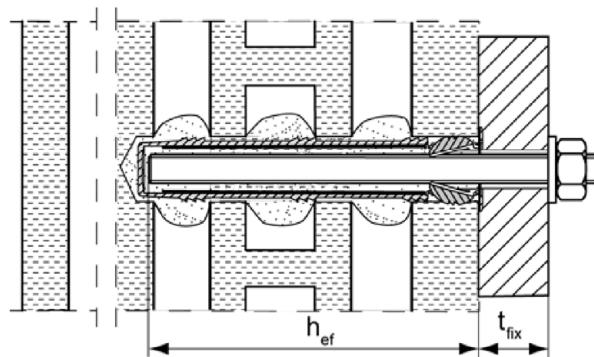


Installation with render bridge

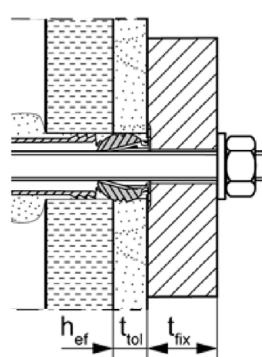


Size of the perforated sleeve:

FIS H 12x50 K FIS H 16x85 K FIS H 20x85 K FIS H 20x200 K
FIS H 12x85 K FIS H 16x130 K FIS H 20x130 K

Push through anchorage:

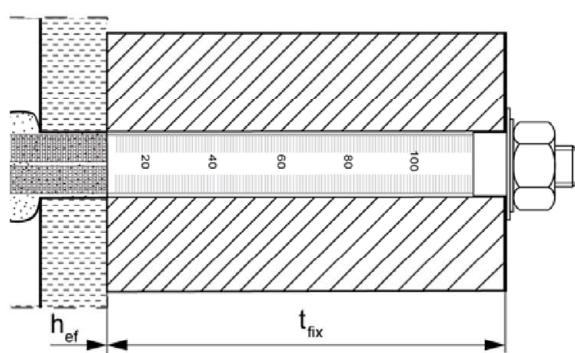

Installation with render bridge

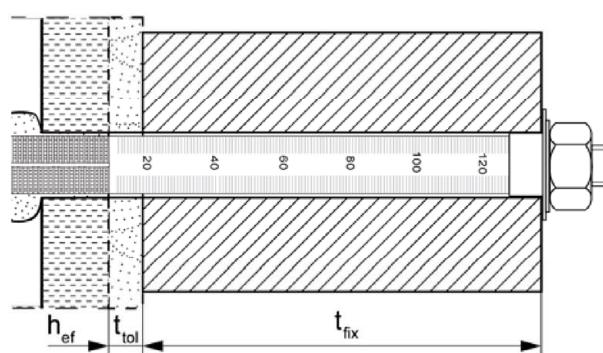


Size of the perforated sleeve:


FIS H 18x130/200 K FIS H 22x130/200 K

Internal threaded anchor FIS E with perforated sleeve FIS H K; Installation in perforated and solid brick masonry

Pre-positioned anchorage:

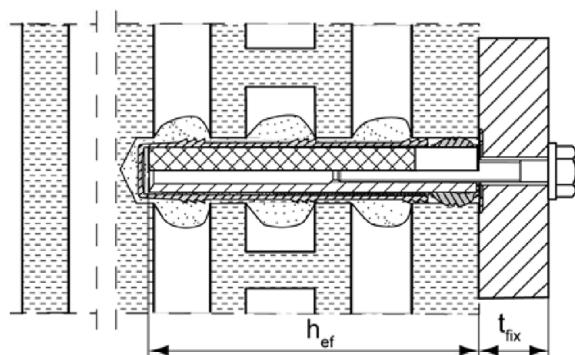

Installation with render bridge

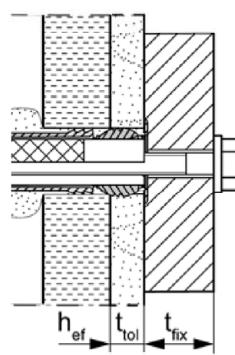

Pictures not to scale

h_{ef} = effective anchorage depth

t_{fix} = thickness of fixture

t_{tol} = thickness of unbearing layer (e.g. plaster)

fischer injection system FIS V Plus for masonry

Product description


Installation conditions part 1,
Anchor rods and internal threaded anchor with perforated sleeve

Annex A 1



Installation conditions part 2

Anchor rods without perforated sleeve FIS H K;
installation in solid brick masonry and autoclaved aerated concrete

Pre-positioned anchorage:

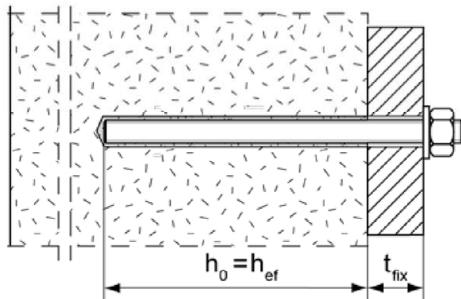


Push through anchorage: Annular gap filled with mortar

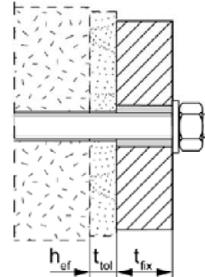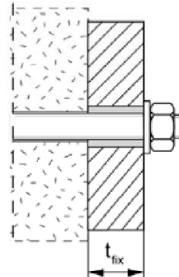


Installation with render bridge

Internal threaded anchors FIS E without perforated sleeve FIS H K;
installation in solid brick masonry and autoclaved aerated concrete

Pre-positioned anchorage:

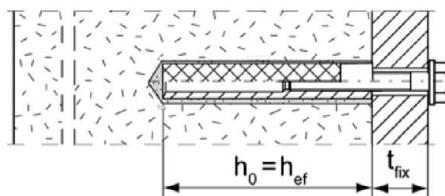


Installation with render bridge

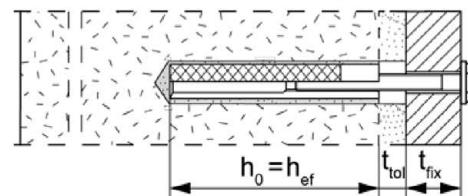

Anchor rods and internal threaded anchors FIS E without perforated sleeve FIS H K; installation with centring sleeve in autoclaved aerated concrete with conical drill hole
(installation with special conic drill bit PBB)


Pre-positioned anchorage:

anchor rods M8, M10, M12

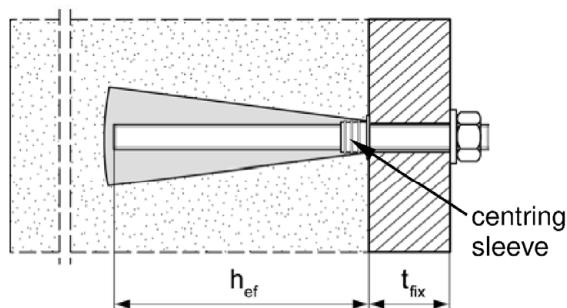

Pre-positioned anchorage:

Internal threaded anchor FIS E 11x85 M6 / M8

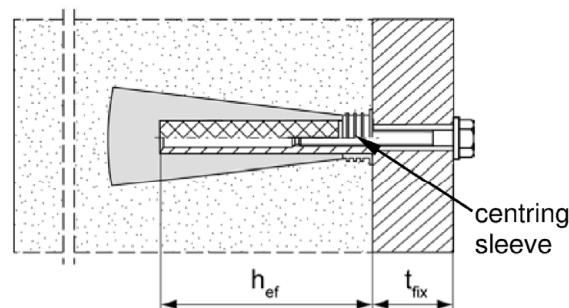

Pictures not to scale

h_0 = depth of drill hole

t_{tol} = thickness of unbearing layer (e.g. plaster)

h_{ef} = effective anchorage depth

t_{fix} = thickness of fixture

fischer injection system FIS V Plus for masonry

Product description

Installation conditions part 2, Anchor rods and internal threaded anchor without perforated sleeve / with centring sleeve

Annex A 2




Overview system components part 1

Mortar cartridge (shuttle cartridge) with sealing cap

1

Size: 350 ml, 360 ml, 390 ml, 550 ml, 825 ml

Imprint: fischer FIS V Plus or FIS VS Plus Low Speed or FIS VW Plus High Speed, processing notes, shelf-life, hazard code, piston travel scale (optional), curing time and processing time (depending on temperature), size, volume

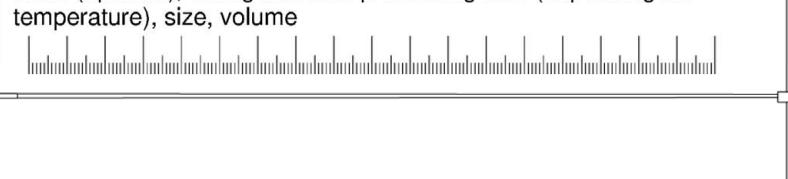



Mortar cartridge (coaxial cartridge) with sealing cap

1

Size: 100 ml, 150 ml, 300 ml, 380 ml, 400 ml, 410 ml

Imprint: fischer FIS V Plus or FIS VS Plus Low Speed or FIS VW Plus High Speed, processing notes, shelf-life, hazard code, piston travel scale (optional), curing time and processing time (depending on temperature), size, volume



Static mixer MR Plus with injection adapter and center sleeve for aerated concrete


centring sleeve




Injection adapter




Static mixer




Extension tube



Cleaning brush BS

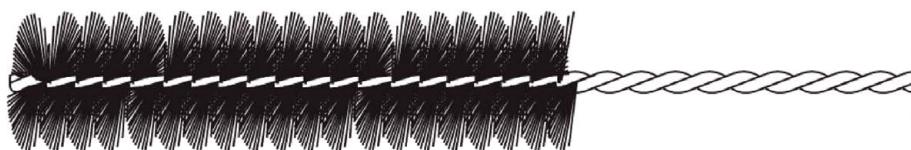

Blow-out pump ABG or ABP

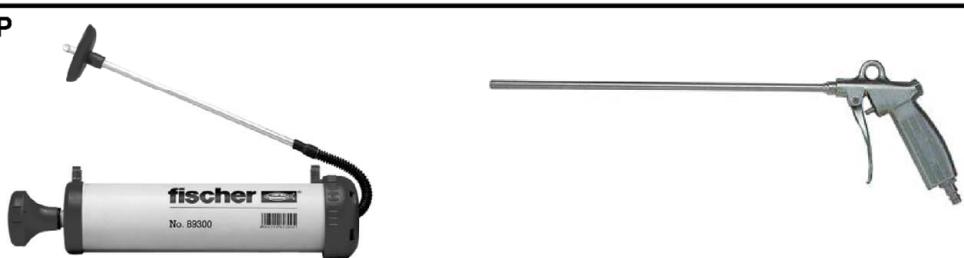

Pictures not to scale

fischer injection system FIS V Plus for masonry

Product description

Overview system components part 1: cartridge / static mixer / cleaning tools

Annex A 3

Overview system components part 2

fischer anchor rod

(2)



Size: M6, M8, M10, M12, M16

Internal threaded anchor FIS E


(5)



Size: 11x85 M6 / M8
15x85 M10 / M12

Perforated sleeve FIS H K

(7)



Size: FIS H 12x50 K
FIS H 12x85 K
FIS H 16x85 K
FIS H 20x85 K

(7)



Size: FIS H 16x130 K
FIS H 20x130 K
FIS H 20x200 K

Perforated sleeve FIS H K (push through anchorage)


(7)



Size:
FIS H 18x130/200 K
FIS H 22x130/200 K

Washer

(3)



Hexagon nut

(4)



Pictures not to scale

fischer injection system FIS V Plus for masonry

Product description

Overview system components part 2: steel parts / perforated sleeve

Annex A 4

Table A5.1: Materials

Part	Designation	Material		
1	Mortar cartridge	Mortar, hardener; filler		
		Steel	Stainless steel R	High corrosion-resistant steel HCR
		zinc plated	acc. to EN 10088-1:2014 Corrosion resistance class CRC III acc. to EN 1993-1-4:2015	acc. to EN 10088-1:2014 Corrosion resistance class CRC V acc. to EN 1993-1-4:2015
2	Anchor rod	Property class 4.6; 4.8; 5.8 oder 8.8; EN ISO 898-1: 2013 zinc plated $\geq 5\mu\text{m}$, ISO 4042:2018 Zn5/An(A2K) or hot-dip galvanised EN ISO 10684:2004 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8\%$ fracture elongation	Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; 1.4062; 1.4662; 1.4462; EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8\%$ fracture elongation	Property class 50 or 80 EN ISO 3506-1:2009 or property class 70 with $f_{yk} = 560 \text{ N/mm}^2$ 1.4565; 1.4529 EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8\%$ fracture elongation
3	Washer ISO 7089:2000	zinc plated $\geq 5\mu\text{m}$, ISO 4042:2018 Zn5/An(A2K) or hot-dip galvanised EN ISO 10684:2004	1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014	1.4565; 1.4529 EN 10088-1:2014
4	Hexagon nut	Property class 5 or 8; EN ISO 898-2:2012 zinc plated $\geq 5\mu\text{m}$, ISO 4042:2018 Zn5/An(A2K) or hot-dip galvanised ISO 10684:2004	Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014	Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014
5	Internal threaded anchor FIS E	Property class 5.8; EN 10277-1:2008-06 zinc plated $\geq 5\mu\text{m}$, ISO 4042:2018 Zn5/An(A2K)	Property class 70 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014	Property class 70 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014
6	Commercial standard screw or threaded rod for internal threaded anchor FIS E	Property class 5.8 or 8.8; EN ISO 898-1:2013 zinc plated $\geq 5\mu\text{m}$, ISO 4042:2018 Zn5/An(A2K)	Property class 70 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014	Property class 70 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014
7	Perforated sleeve and centring sleeve	PP / PE		
fischer injection system FIS V Plus for masonry				
Product description Materials				Annex A 5

Specifications of intended use (part 1)

Table B1.1: Overview use and performance categories

Anchorage subject to		fischer injection system FIS V Plus for masonry			
Hole drilling with hammer drill mode 		all bricks; without C28 to C48, C75 to C78			
Hole drilling with rotary drill mode 		all bricks			
Static and quasi static load, in masonry		all bricks			
Use category	dry or wet masonry	all bricks			
Installation	Pre-positioned anchorage	Anchor rod or internal threaded anchor (in solid brick masonry and autoclaved aerated concrete)	Perforated sleeve with anchor rod or internal threaded anchor (in perforated and solid brick masonry) Size: FIS H 12x50 K FIS H 12x85 K FIS H 16x85 K FIS H 16x130 K FIS H 20x85 K FIS H 20x130 K FIS H 20x200 K		
	Push through anchorage	Anchor rod; use only in cylindrical drill hole (in solid brick masonry and autoclaved aerated concrete)	Perforated sleeve with anchor rod (in perforated and solid brick masonry) Size: FIS H 18x130/200 K FIS H 22x130/200 K		
Installation conditions	category d/d	all bricks			
	category w/d				
	category w/w				
Installation direction	D3 (downward and horizontal and upwards (e.g. overhead) installation)				
Installation temperature	$T_{i,min} = 0 \text{ }^\circ\text{C}$ bis $T_{i,max} = +40 \text{ }^\circ\text{C}$				
In-service temperature	Temperature range Tb	-40 °C to +80 °C	(max. short term temperature +80 °C max. long term temperature +50 °C)		
	Temperature range Tc	-40 °C to +120 °C	(max. short term temperature +120 °C; max. long term temperature +72 °C)		
fischer injection system FIS V Plus for masonry					
Intended Use Specifications (part 1)			Annex B 1		

Specifications of intended use (part 2)

Anchorage subject to:

- Static and quasi-static loads

Base materials:

- Solid brick masonry (Use category b) and autoclaved aerated concrete (Use category d), acc. to Annex B 13 / B 14
- Hollow brick masonry (use category c), according to Annex B 13 / B 14
- For minimum thickness of masonry member is $h_{ef}+30\text{mm}$
- Mortar strength class of the masonry M2,5 at minimum according to EN 998-2:2010
- For other bricks in solid masonry, hollow or perforated masonry and autoclaved aerated concrete, the characteristic resistance of the anchor may be determined by job site tests according to EOTA Technical Report TR 053, Annex B under consideration of the β -factor according to Annex C 110, Table C110.1

Note (only applies to solid bricks and autoclaved aerated concrete):

The characteristic resistance is also valid for larger brick sizes, higher compressive strength and higher raw density of the masonry unit.

Temperature Range:

- **T_b**: From - 40°C to +80°C (max. short term temperature +80°C and max. long term temperature +50°C)
- **T_c**: From -40°C to +120°C (max. short term temperature +120°C and max. long term temperature +72°C)

Use conditions (Environmental conditions):

- **X1**: Structures subject to dry internal conditions exist
(zinc coated steel, stainless steel or high corrosion resistant steel)
- **X2**: Structures subject to external atmospheric exposure including industrial and marine environment or exposure to permanently damp internal condition, if no particularly aggressive conditions exist
(stainless steel or high corrosion resistant steel)
- **X3**: Structures subject to external atmospheric exposure and to permanently damp internal condition, if other particularly aggressive conditions exist (high corrosion resistant steel)

Note: Particularly aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used)

fischer injection system FIS V Plus for masonry

Intended Use
Specifications (part2)

Annex B 2

Specifications of intended use (part 2 continued)

Design:

- The anchorages have to be designed in accordance with EOTA Technical Report TR 054, Design method A under the responsibility of an engineer experienced in anchorages and masonry work.
- Applies to all bricks, if no other values are specified:

$$N_{Rk} = N_{Rk,b} = N_{Rk,p}$$

$$V_{Rk} = V_{Rk,b} = V_{Rk,c}$$

For the Calculation of pulling out a brick under tension load $N_{Rk,pb}$ or pushing out a brick under shear load $V_{Rk,pb}$ see EOTA Technical Report TR 054.

$N_{Rk,s}$, $V_{Rk,s}$ and $M^0_{Rk,s}$ see annex C1-C3

Factors for job site tests and displacements see Annex C110

- Verifiable calculation notes and drawings have to be prepared taking account the relevant masonry in the region of the anchorage, the loads to be transmitted and their transmission to the supports of the structure. The position of the anchor is indicated on the design drawings.

Installation:

- Category d/d: - Installation and use in dry structures
- Category w/w: - Installation and use in dry and wet structures
- Category w/d: - Installation in wet structures and use in dry structures
- Hole drilling see Annex C (drilling method)
- In case of aborted hole: The hole shall be filled with mortar
- Bridging of unbearing layer (e.g. plaster) at perforated brick masonry see Annex B 6, Table B6.1
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- Fastening screws or anchor rods (including nut and washer) must comply with the appropriate material and property class of the fischer internal threaded anchor FIS E.
- minimum curing time see Annex B 8, Table B8.2
- Commercial standard threaded rods, washers and hexagon nuts may also be used if the following requirements are fulfilled:

Material dimensions and mechanical properties of the metal parts according to the specifications are given in Annex A 5, Table 5.1

Conformation of material and mechanical properties of the metal parts by inspection certificate 3.1 according to EN 10204:2004, the documents shall be stored

Marking of the anchor rod with the envisaged embedment depth. This may be done by the manufacturer of the rod or by a person on job site

fischer injection system FIS V Plus for masonry

Intended Use
Specifications (part2 continued)

Annex B 3

Table B4.1: Installation parameters for anchor rods in solid bricks and autoclaved aerated concrete without perforated sleeves

Anchor rod	Thread	M6	M8	M10	M12	M16
Nominal drill hole diameter	d_0 [mm]	8	10	12	14	18
Effective anchorage depth $h_{\text{ef}}^{(1)}$ in AAC cylindrical drill hole	$h_{\text{ef,min}} = h_{\text{ef,max}}$ [mm]			100		
	$h_{\text{ef,max}}$ [mm]			200		
Effective anchorage depth $h_{\text{ef}}^{(1)}$ in AAC conical drill hole	h_0 [mm]			$h_{\text{ef}} + 5$		
	$h_{\text{ef},1}$ [mm]	-		75		
	$h_{\text{ef},2}$ [mm]			95		
Effective anchorage depth $h_{\text{ef}}^{(1)}$ in solid brick (depth of drill hole $h_0 = h_{\text{ef}}$)	$h_{\text{ef,min}}$ [mm]			50		
	$h_{\text{ef,max}}$ [mm]			$h - 30, \leq 200$		
Diameter of clearance hole in the fixture	pre-position $d_f \leq$ [mm] push through $d_f \leq$ [mm]	7 9	9 11	12 14	14 16	18 20
Diameter of cleaning brush	$d_b \geq$ [mm]			see Table B8.1		
Maximum installation torque	T_{inst} [Nm]			see parameters of brick		

⁽¹⁾ $h_{\text{ef,min}} \leq h_{\text{ef}} \leq h_{\text{ef,max}}$ is possible.


fischer anchor rods M6, M8, M10, M12, M16



Marking (on random place) fischer anchor rod:

Steel zinc plated PC ⁽¹⁾ 8.8	• or +	Steel hot-dip galvanised PC ⁽¹⁾ 8.8	•
High corrosion resistant steel HCR PC ⁽¹⁾ 50	•	High corrosion resistant steel HCR PC ⁽¹⁾ 70	—
High corrosion resistant steel HCR PC ⁽¹⁾ 80	(Stainless steel R property class 50	~
Stainless steel R property class 80	*		
Alternatively: Colour coding according to DIN 976-1: 2016; property class 4.6 marking according to EN ISO 898-1:2013	⁽¹⁾ PC = property class		

Installation conditions:

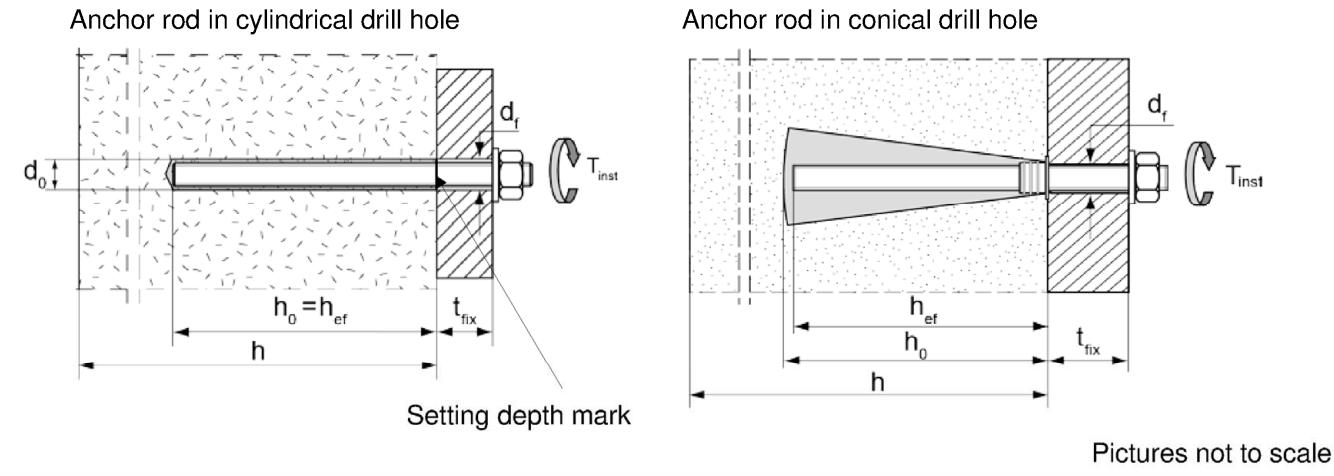

fischer injection system FIS V Plus for masonry

Intended Use


Installation parameters for anchor rods without perforated sleeve

Annex B 4

Table B5.1: Installation parameters for internal threaded anchors FIS E in solid bricks and autoclaved aerated concrete without perforated sleeves

Internal threaded anchor FIS E	11x85 M6	11x85 M8	15x85 M10	15x85 M12
Diameter of anchor d_H [mm]	11		15	
Nominal drill hole diameter d_0 [mm]		14		18
Length of anchor L_H [mm]			85	
Effective anchorage depth $h_0 = h_{\text{ef}}$ [mm]			85	
Effective anchorage depth h_{ef} [mm] in AAC (conical drill hole)	h_{ef} [mm]	100		-
Diameter of cleaning brush $d_b \geq$ [mm]			see Table B8.1	
Maximum installation torque T_{inst} [Nm]			see parameters of brick	
Diameter of clearance hole in the fixture d_f [mm]	7	9	12	14
Screw-in depth $l_{E,\text{min}}$ [mm]	6	8	10	12
			60	


fischer Internal threaded anchor FIS E

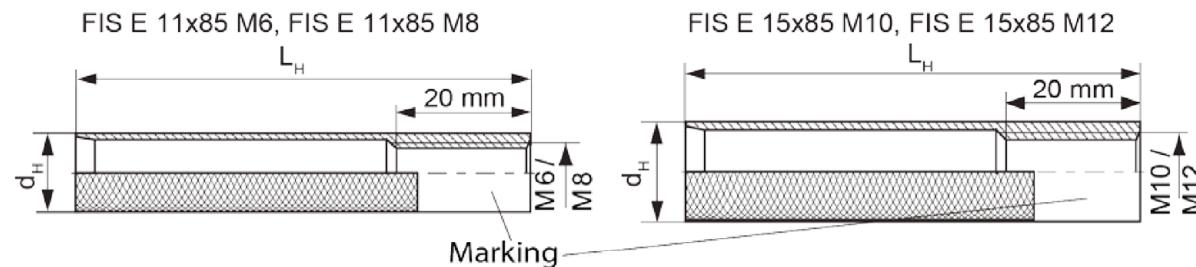

Marking:

Size, e.g. **M8**, Stainless steel: R, e.g. **M8 R**, High corrosion-resistant steel: HCR, e.g. **M8 HCR**

Installation conditions:

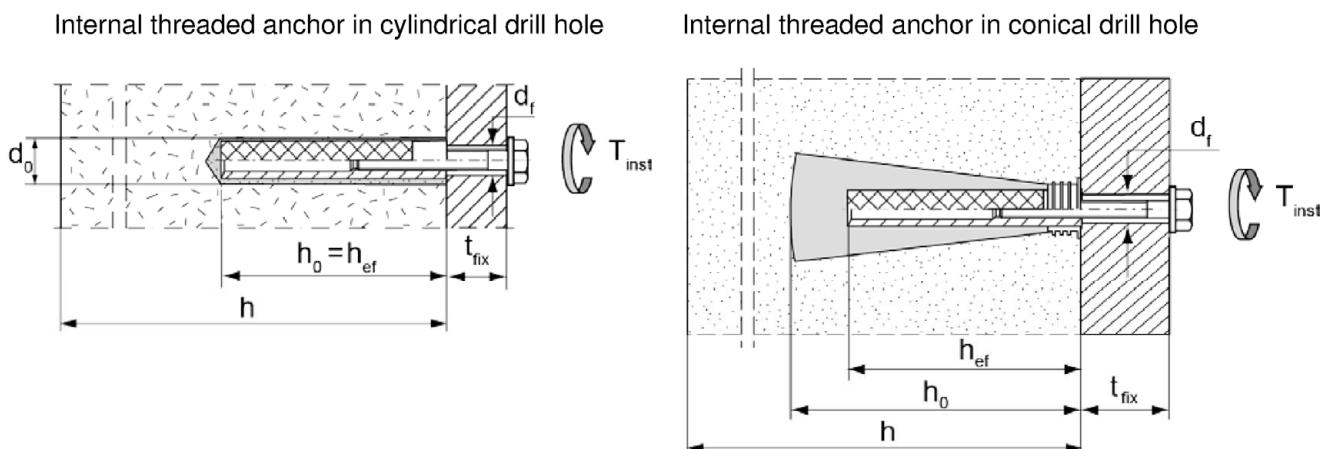

Pictures not to scale

fischer injection system FIS V Plus for masonry

Intended Use

Installation parameters for internal threaded rods FIS E without perforated sleeve

Annex B 5

Table B6.1: Installation parameters for anchor rods and internal threaded anchors FIS E with perforated sleeves (pre-positioned anchorage)

perforated sleeve FIS H K	12x50	12x85 ²⁾	16x85	16x130 ²⁾	20x85	20x130 ²⁾	20x200 ²⁾
Nominal drill hole diameter $d_0 = D_{\text{ sleeve,nom }}$	d ₀ [mm]	12		16		20	
Depth of drill hole	h ₀ [mm]	55	90	90	135	90	135
Effective anchorage depth	h _{ef,min} [mm]	50	65	85	110	85	110
	h _{ef,max} [mm]	50	85	85	130	85	130
Size of threaded rod	[-]	M6 und M8		M8 und M10		M12 und M16	
Size of internal threaded anchor FIS E	-	-	11x85	-	15x85	-	-
Diameter of cleaning brush ¹⁾	d _b ≥ [mm]				see Table B8.1		
Maximum installation torque	T _{inst} [Nm]				see parameters of brick		

¹⁾ Only for solid areas in hollow bricks and solid bricks.


²⁾ Bridging of unbearing layer (e.g. plaster) is possible. When reducing the effective anchorage depth h_{ef,min}, the values of the next shorter perforated sleeve of the same diameter must be used. The smaller value of characteristic resistance must be taken.

Perforated sleeve


FIS H 12x50 K; FIS H 12x85 K; FIS H 16x85 K; FIS H 16x130 K;
FIS H 20x85 K; FIS H 20x130 K; FIS H 20x200 K

Marking:

Size D_{sleeve,nom} x L_{sleeve}
(e.g.: 16x85)




D_{sleeve,nom}

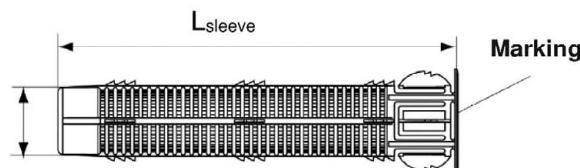


fischer Internal threaded anchor FIS E

FIS E 11x85 M6, FIS E 11x85 M8

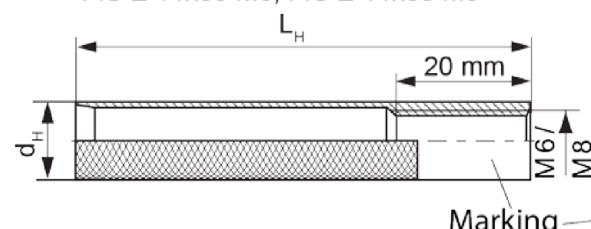


FIS E 15x85 M10, FIS E 15x85 M12

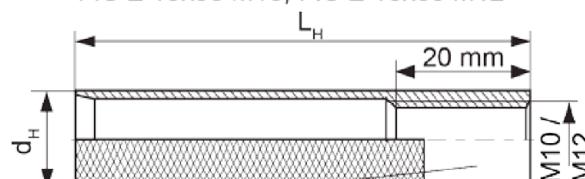


Installation conditions:

Anchor rod with perforated sleeve

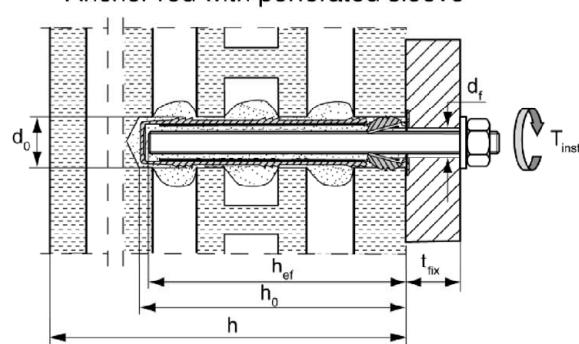

Internal threaded anchor with perforated sleeve

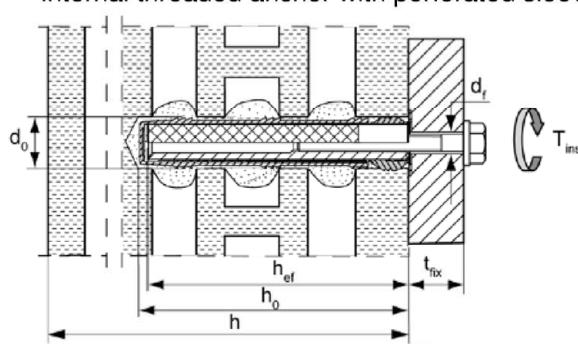

Pictures not to scale

fischer injection system FIS V Plus for masonry

Intended Use

Installation parameters for anchor rods and internal threaded anchors FIS E with perforated sleeve (pre-positioned anchorage)

Annex B 6


Table B7.1: Installation parameters for anchor rods with perforated sleeves (push through anchorage)

Perforated sleeve FIS H K	18x130/200	22x130/200
Nominal sleeve diameter $D_{sleeve,nom}$ [mm]	16	20
Nominal drill hole diameter d_0 [mm]	18	22
Depth of drill hole h_0 [mm]	135	
Effective anchorage depth h_{ef} [mm]		≥ 130
Diameter of cleaning brush ¹⁾ $d_b \geq$ [mm]		Siehe Tabelle B8.1
Size of threaded rod [-]	M10	M12
Maximum installation torque T_{inst} [Nm]		see parameters of brick
Thickness of fixture $t_{fix,max}$ [mm]		200

¹⁾ Only for solid areas in hollow bricks and solid bricks.


Perforated sleeve

FIS H 18x130/200 K; FIS H 22x130/200 K

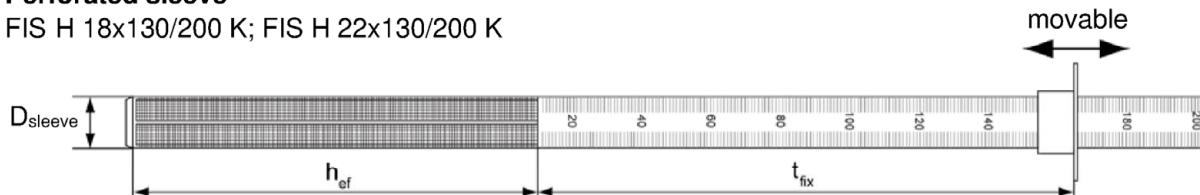

Installation conditions:

Anchor rod with perforated sleeve

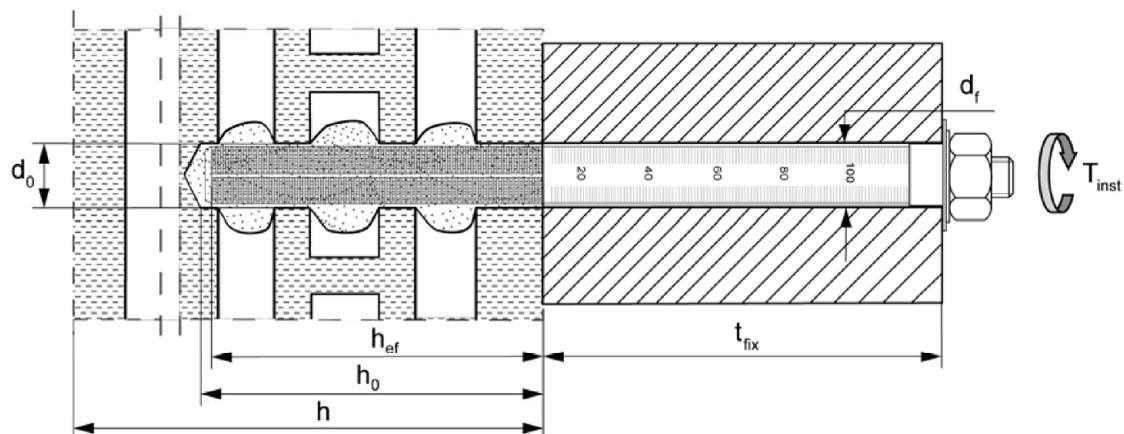

Pictures not to scale

fischer injection system FIS V Plus for masonry

Intended Use


Installation parameters for anchor rods with perforated sleeves (push through anchorage)

Annex B 7

Tabelle B8.1: Parameters of the cleaning brush BS (steel brush with steel bristles)

The size of the cleaning brush refers to the drill hole diameter

Drill hole diameter	d_0 [mm]	8	10	12	14	16	18	20	22
Brush diameter	d_b [mm]	9	11	14	16	20	20	25	25

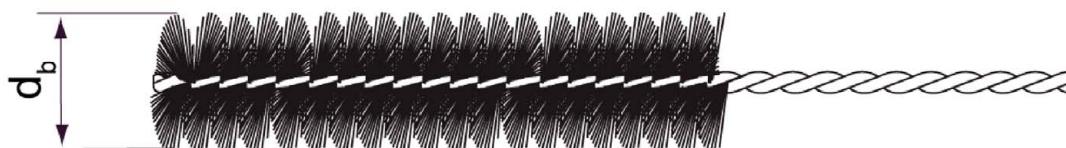

Only for solid bricks and autoclaved aerated concrete

Table B8.2: Maximum processing times and minimum curing times

(During the curing time of the mortar the masonry temperature may not fall below the listed minimum temperature)

Temperature at anchoring base [°C]	Maximum processing time t_{work}			Minimum curing time ¹⁾ t_{cure}		
	FIS VW Plus High Speed ³⁾	FIS V Plus ²⁾	FIS VS Plus Low Speed ²⁾	FIS VW Plus High Speed ³⁾	FIS V Plus ²⁾	FIS VS Plus Low Speed ²⁾
> 0 to 5	5 min	13 min	20 min	3 h	3 h	6 h
> 5 to 10	3 min	9 min	20 min	50 min	90 min	3 h
> 10 to 20	1 min	5 min	10 min	30 min	60 min	2 h
> 20 to 30	-	4 min	6 min	-	45 min	60 min
> 30 to 40	-	2 min	4 min	-	35 min	30 min

¹⁾ For wet bricks the curing time must be doubled

²⁾ Minimum cartridge temperature +5°C

³⁾ Minimum cartridge temperature ±0°C

Pictures not to scale

fischer injection system FIS V Plus for masonry

Intended use










Cleaning brush (steel brush)

Maximum processing times and minimum curing times

Annex B 8







Installation instruction part 1

Installation in solid brick and autoclaved aerated concrete (without perforated sleeve)

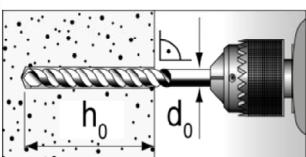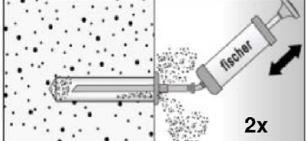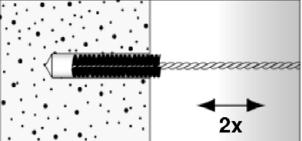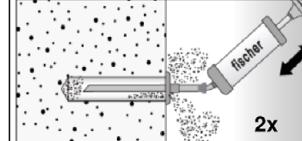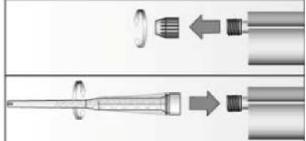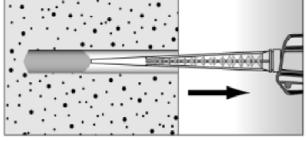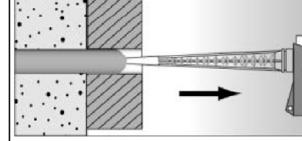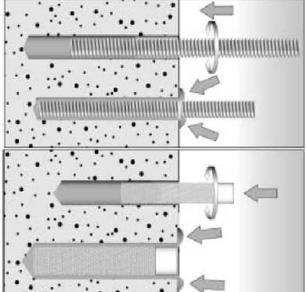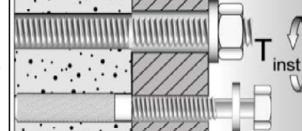	<p>Drill the hole (drilling method see Annex C of the respective brick) depth of drill hole h_0 and drill hole diameter d_0 see Table B4.1; B5.1</p>		
			<p>Blow out the drill hole twice. Brush twice and blow out twice again.</p>
	<p>Remove the sealing cap. Screw on the static mixer. (the spiral in the static mixer must be clearly visible)</p>		
	<p>Place the cartridge into a suitable dispenser</p>		<p>Press out approximately 10 cm of mortar until the resin is permanently grey in colour. Mortar which is not grey in colour will not cure and must be disposed of.</p>
	<p>Fill approximately 2/3 of the drill hole with mortar beginning from the bottom of the hole¹⁾. Avoid bubbles!</p>		<p>For push through anchorage fill the annular clearance with mortar.</p>
	<p>Only use clean and oil-free metal parts. Mark the anchor rod for setting depth. Insert the anchor rod or internal threaded anchor FIS E by hand using light turning motions. When reaching the setting depth marking, excess mortar must emerge from the mouth of the drill hole.</p>		
	<p>Do not touch. Minimum curing time see Table B8.2</p>		<p>Mounting the fixture. T_{inst} see parameter of brick.</p>
<p>¹⁾ Exact volume of mortar see manufacturer's specification.</p>			
<p>fischer injection system FIS V Plus for masonry</p>		<p>Annex B 9</p>	
<p>Intended use Installation instruction (without perforated sleeve) part 1</p>	<p>Annex B 9</p>		

Installation instruction part 2

Installation in perforated or solid brick with perforated sleeve (pre-positioned anchorage)

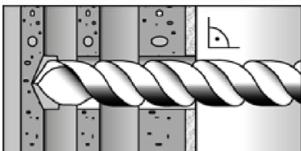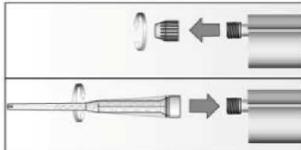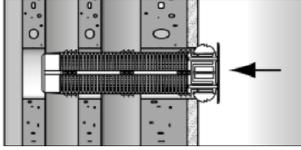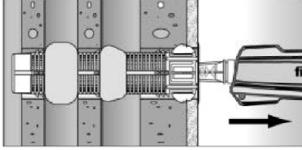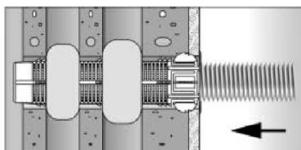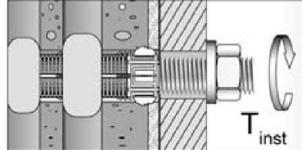1		Drill the hole (drilling method see Annex C of the respective brick). depth of drill hole h_0 and drill hole diameter d_0 see Table B6.1	When install perforated sleeves in solid bricks or solid areas of hollow bricks, also clean the hole by blowing out and brushing.
2		Remove the sealing cap. Screw on the static mixer. (the spiral in the static mixer must be clearly visible)	
3		Place the cartridge into a suitable dispenser.	 Press out approximately 10 cm of mortar until the resin is permanently grey in colour. Mortar which is not grey in colour will not cure and must be disposed of.
4		Insert the perforated sleeve flush with the surface of the masonry or plaster.	 Fill the perforated sleeve completely with mortar beginning from the bottom of the hole ¹⁾ .
5		Only use clean and oil-free metal parts. Mark the anchor rod for setting depth. Insert the anchor rod or the internal threaded anchor FIS E by hand using light turning motions until reaching the setting depth marking (anchor rod) or flush with the surface (internal threaded anchor).	
6		Do not touch. Minimum curing time see Table B8.2	 Mounting the fixture. T_{inst} see parameter of brick.

¹⁾ Exact volume of mortar see manufacturer's specification.

fischer injection system FIS V Plus for masonry









Intended use

Installation instruction (with perforated sleeve) part 2

Annex B 10

Installation instruction part 3

Installation in perforated or solid brick with perforated sleeve (push through anchorage)

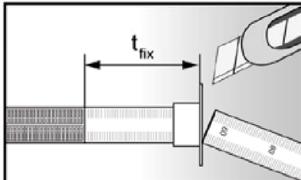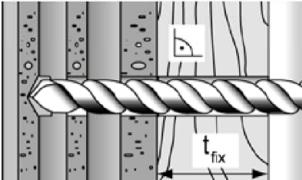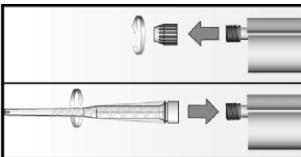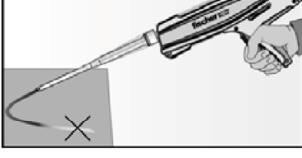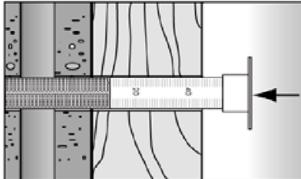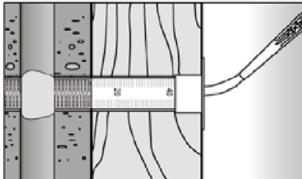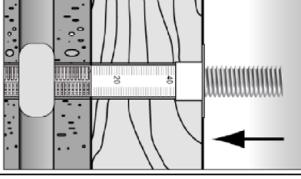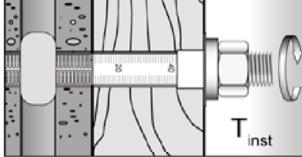1		Push the movable stop up to the correct thickness of fixture and cut the overlap.		Drill the hole through the fixture. Depth of drill hole ($h_0 + t_{fix}$) and drill hole diameter see Table B7.1
2		Remove the sealing cap. Screw on the static mixer. (the spiral in the static mixer must be clearly visible)		
3		Place the cartridge into a suitable dispenser.		Press out approximately 10 cm of mortar until the resin is permanently grey in colour. Mortar which is not grey in colour will not cure and must be disposed of.
4		Insert the perforated sleeve flush with the surface of the fixture into the drill hole.		Fill the sleeve with mortar beginning from the bottom of the hole. ¹⁾ For deep drill holes use an extension tube.
5		Only use clean and oil-free metal parts. Mark the anchor rod for setting depth. Insert the anchor rod or the internal threaded anchor FIS E by hand using light turning motions until reaching the setting depth marking (anchor rod) or flush with the surface (internal threaded anchor).		
6		Do not touch. Minimum curing time see Table B8.2		Mounting the fixture. T_{inst} see parameter of brick.

¹⁾ Exact volume of mortar see manufacturer's specification.

fischer injection system FIS V Plus for masonry












Intended use

Installation instruction (with perforated sleeve) part 3

Annex B 11

Installation instruction part 4

Installation in autoclaved aerated concrete with special conic drill bit PBB
(pre-positioned anchorage)

1		Position the movable drill bit arrester on the used drill hole depth (see Annex B 4, Table B4.1) For this, unlock the clamp screw and slide the arrester. Now fix the clamp screw.		
2		Drill the cylindrical hole with rotating drill until the arrester contact the material surface. (drilling method see Annex C of the respective brick)		
3		Deviate the working power drill circulate to generate a conic undercut in the material.		
4		Blow out the drill hole four times.		
5		Remove the sealing cap. Screw on the static mixer. (the spiral in the static mixer must be clearly visible)		
6		Place the cartridge into a suitable dispenser.		Press out approximately 10 cm of mortar until the resin is permanently grey in colour. Mortar which is not grey in colour will not cure and must be disposed of.
7		Put the center sleeve into the drill hole and adapt the injection adapter onto the static mixer.		Fill the drill hole with injection mortar.
8		Only use clean and oil-free metal parts. Mark the anchor rod for setting depth. Insert the anchor rod or internal threaded anchor FIS E by hand using light turning motions. When reaching the setting depth marking, excess mortar must emerge from the mouth of the drill hole.		
9		Do not touch. Minimum curing time see Table B8.2		Mounting the fixture. T_{inst} see parameter of brick.

fischer injection system FIS V Plus for masonry

Intended use

Installation instruction for autoclaved aerated concrete with special conic drill bit PBB
(pre-positioned anchorage) part 4

Annex B 12

Table B13.1: Overview of controlled bricks (part 1)

Kind of masonry	Brick format [mm]	Compressive strength f_b [N/mm ²]	Producing country	Density ρ [kg/dm ³]	Annex
Solid brick Mz					
Solid brick Mz	NF ≥240x115x71	12 - 20	Germany	≥1,8	C4 - C7
	2DF ≥240x115x113	10 - 16	Germany	≥1,8	C8/C9
	≥ 245x118x54	10 - 20	Italy	≥1,8	C10/C11
	≥ 230x108x55	10 - 20	Denmark	≥1,8	C12/C13
Solid sand- lime brick KS / perforated Sand- lime brick KSL					
Solid sand - lime brick KS	NF ≥240x115x71	12 - 28	Germany	≥2,0	C14/C15
	8DF ≥ 250x240x240	10 - 28	Germany	≥2,0	C16/C17
	≥ 997x214x538	10 - 36	Netherlands	≥1,8	C18/C19
Perforated sand - lime brick KSL	3DF 240x175x113	8 - 20	Germany	≥1,4	C20 - C23
Vertical perforated brick HLz					
Vertical perforated brick HLz	370x240x237	4 - 12	Germany	≥1,0	C24/C25
	500x175x237	4 - 12	Germany	≥1,0	C24/C25
	2DF 240x115x113	6 - 28	Germany	≥1,4	C26/C27
	248x365x248	4 - 8	Germany	≥0,6	C28 - C31
	248x365x249	8 - 12	Germany	≥0,7	C32 - C35
	248x365x249	4 - 6	Germany	≥0,5	C36 - C39
	248x425x248	4 - 8	Germany	≥0,8	C40 - C43
	248x425x248	4 - 8	Germany	≥0,6	C44 - C47
	500x200x315	4 - 8	France	≥0,6	C48 - C51
	500x200x300	4 - 10	France	≥0,7	C52 - C55
	500x200x315	2 - 8	France	≥0,7	C56 - C59
	560x200x275	4 - 8	France	≥0,7	C60/C61
	255x120x118	2 - 12	Italy	≥1,0	C62 - C64
	275x130x94	6 - 20	Spain	≥0,8	C65/C66
	220x190x290	6 - 10	Portugal	≥0,7	C67 - C70
	253x300x240	2 - 6	Austria	≥0,8	C71 - C74
	250x440x250	6 - 10	Austria	≥0,7	C75 - C78
	230x108x55	2 - 8	Denmark	≥1,4	C79/C80
Horizontal perforated brick LLz					
Horizontal perforated brick LLz	248x78x250	2 - 6	Italy	≥0,7	C81/C82
	128x88x275	2	Spain	≥0,8	C83/C84
Light-weight concrete hollow block Hbl					
Light-weight concrete hollow block Hbl	362x240x240	2 - 4	Germany	≥1,0	C85 - C88
	500x200x200	2 - 6	France	≥1,0	C89/C90
	440x215x215	4 - 10	Ireland	≥1,2	C91 - C94
fischer injection system FIS V Plus for masonry					
Intended use Overview of controlled bricks (part 1)					
Annex B 13					

Table B14.1: Overview of controlled bricks (part 2)

Kind of masonry	Brick format [mm]	Compressive strength f_b [N/mm ²]	Producing country	Density ρ [kg/dm ³]	Annex
Light-weight concrete solid block Vbl					
Light-weight concrete solid block Vbl	≥ 372x300x254	2	Germany	≥0,6	C95/C96
	≥ 250x240x239	4 - 8	Germany	≥1,6	C97 - C100
	≥ 440x100x215	4 - 10	Ireland	≥2,0	C101/C102
	≥ 440x95x215	6 - 12	England	≥2,0	C103/C104
Autoclaved aerated concrete (AAC)					
PP2 / AAC	-	2	Germany	0,35	C105 - C109
PP4 / AAC	-	4	Germany	0,5	C105 - C109
PP6 / AAC	-	6	Germany	0,65	C105 - C109


fischer injection system FIS V Plus for masonry

Intended use
Overview of controlled bricks (part 2)


Annex B 14

Table B15.1: Overview dimensions of perforated and hollow bricks (part 1)


Solid sand-lime brick KS, 8DF, EN 771-2:2015
according to Annex C 16

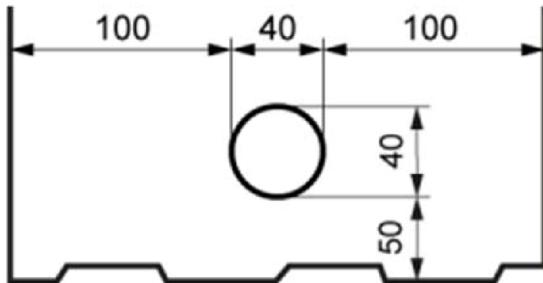


Perforated sand-lime brick KSL, 3DF, EN 771-2:2015; e.g. KS Wemding according to Annex C 20

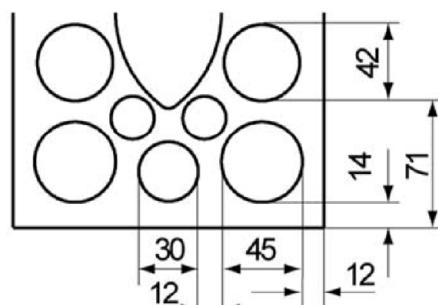


Vertical perforated brick HLz, EN 771-1:2015; e.g. Wienerberger, Poroton according to Annex C 24

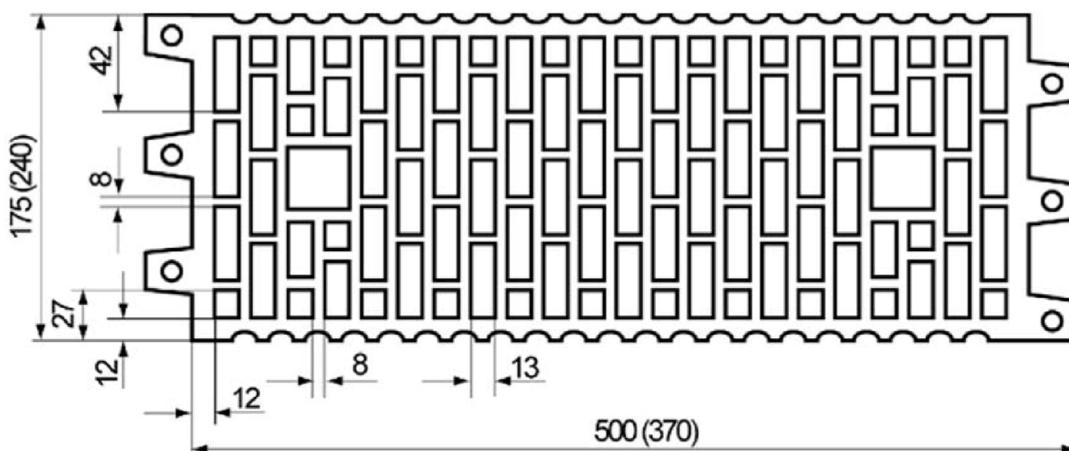

Vertical perforated brick HLz, 2DF, EN 771-1:2015; e.g. Wienerberger according to Annex C 26

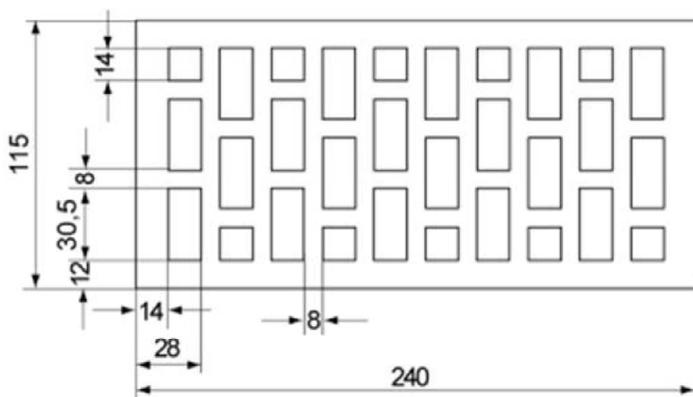

Vertical perforated brick HLz, T8, EN 771-1:2015;
according to Annex C 28

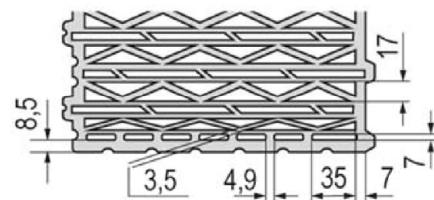

Pictures not to scale

fischer injection system FIS V Plus for masonry


Intended use

Overview dimensions of perforated and hollow bricks (part 1)


Annex B 15

Table B16.1: Overview dimensions of perforated and hollow bricks (part 2)


Vertical perforated brick HLz, T10, T11, EN 771-1:2015; according to Annex C32

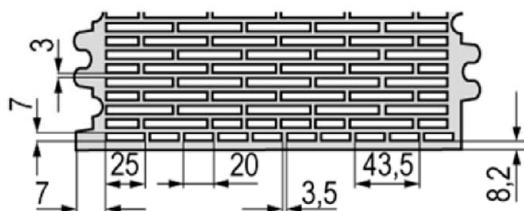


Vertical perforated brick HLz, T7 PF, filled with perlite, EN 771-1:2015; according to Annex C 36

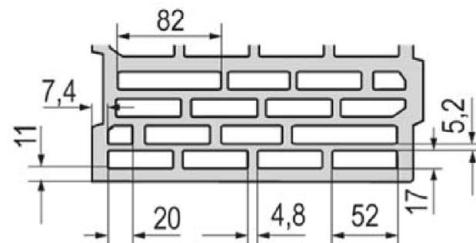


Vertical perforated brick HLz, S9 MW, filled with mineral wool, EN 771-1:2015; according to Annex C 40

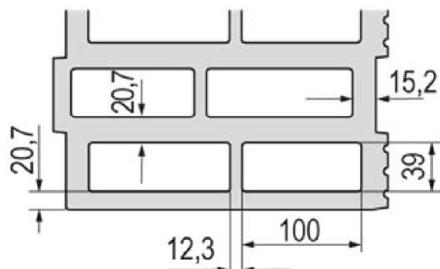

Vertical perforated brick HLz, T7 MW, filled with mineral wool, EN 771-1:2015; according to Annex C 44

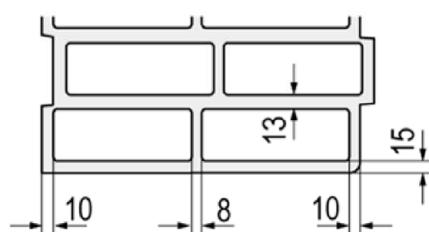

Vertical perforated brick HLz, EN 771-1:2015; e.g. Bouyer Leroux; According to Annex C 48

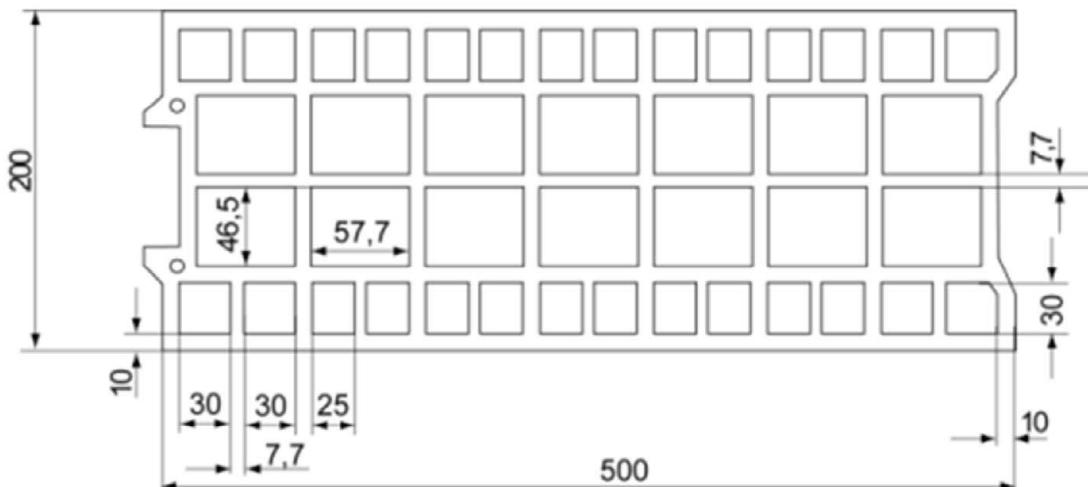

Pictures not to scale

fischer injection system FIS V Plus for masonry


Intended use

Overview dimensions of perforated and hollow bricks (part 2)


Annex B 16

Table B17.1: Overview dimensions of perforated and hollow bricks (part 3)


Vertical perforated brick HLz, EN 771-1:2015; e.g. Wienerberger according to Annex C 52

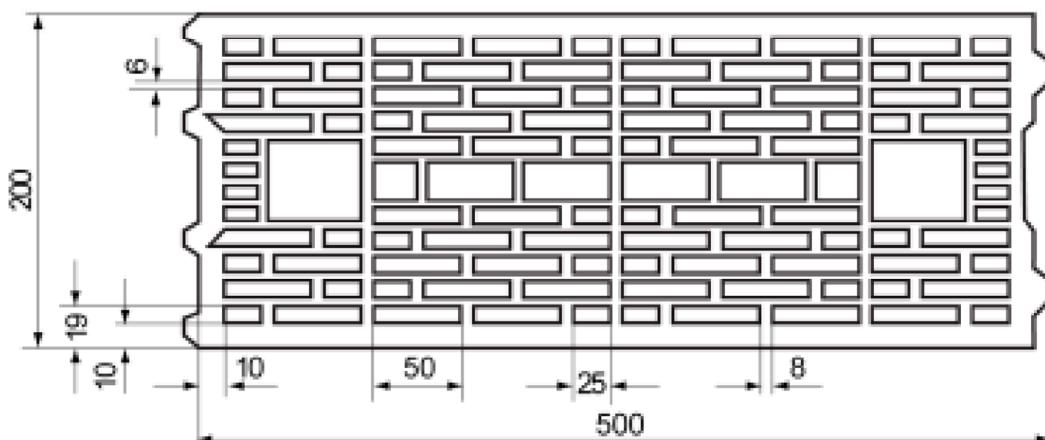

Vertical perforated brick HLz, EN 771-1:2015; e.g. Terreal according to Annex C 56

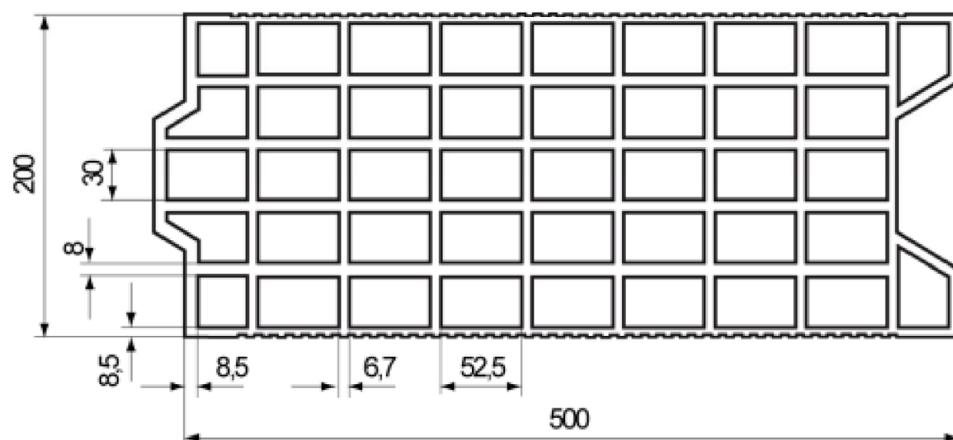

Vertical perforated brick HLz, EN 771-1:2015; e.g. Imery according to Annex C 60

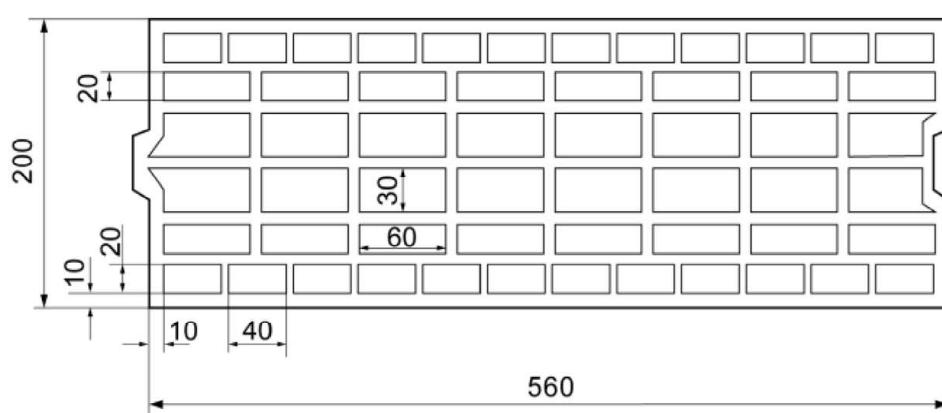

Pictures not to scale


fischer injection system FIS V Plus for masonry

Intended use
Overview dimensions of perforated and hollow bricks (part 3)


Annex B 17

Table B18.1: Overview dimensions of perforated and hollow bricks (part 4)


Vertical perforated brick HLz, EN 771-1:2015;
e.g. Wienerberger according to Annex C 62

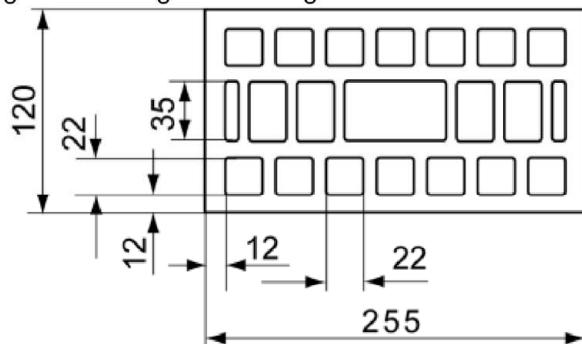


Vertical perforated brick HLz, EN 771-1:2015;
e.g. Germanica Farreny S.A. according to Annex C 65

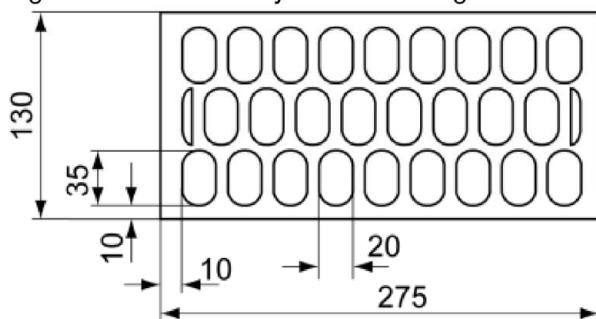


Vertical perforated brick HLz, EN 771-1:2015;
e.g. Perceram according to Annex C 67

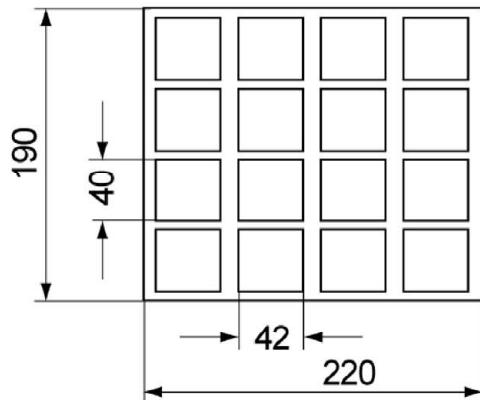


Vertical perforated brick HLz, EN 771-1:2015;
e.g. Ziegelwerk Brenna according to Annex C 71

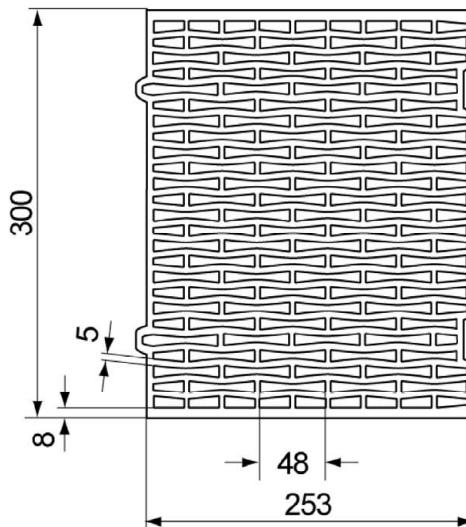

Vertical perforated brick HLz, Porotherm W 44, filled with mineral wool, EN 771-1:2015 according to Annex C 75

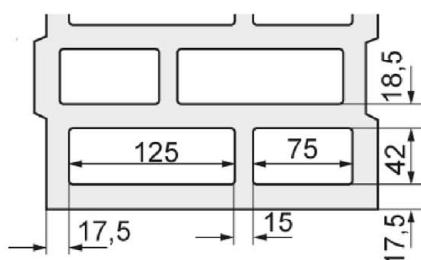

Vertical perforated brick HLz, EN 771-1:2015;
e.g. Wienerberger according to Annex C 79

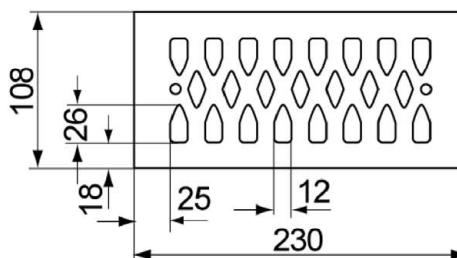

Pictures not to scale

fischer injection system FIS V Plus for masonry


Intended use

Overview dimensions of perforated and hollow bricks (part 4)


Annex B 18

Table B19.1: Overview dimensions of perforated and hollow bricks (part 5)


Horizontal perforated brick LLz, EN 771-1:2015;
according to Annex C 81

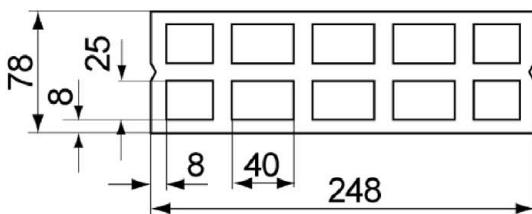


Horizontal perforated brick LLz, EN 771-1:2015;
e.g. Germanica Farreny S.A according to Annex C 83

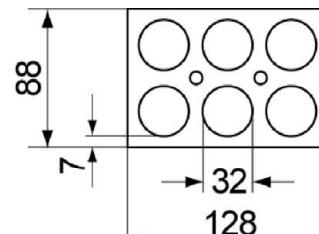


Light-weight concrete hollow block Hbl,
EN 771-3:2015; according to Annex C 85

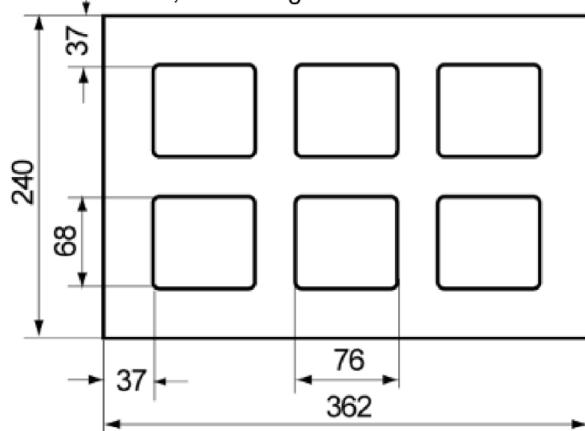


Light-weight concrete hollow block Hbl, EN 771-3:2015;
e.g. Sepa according to Annex C 89

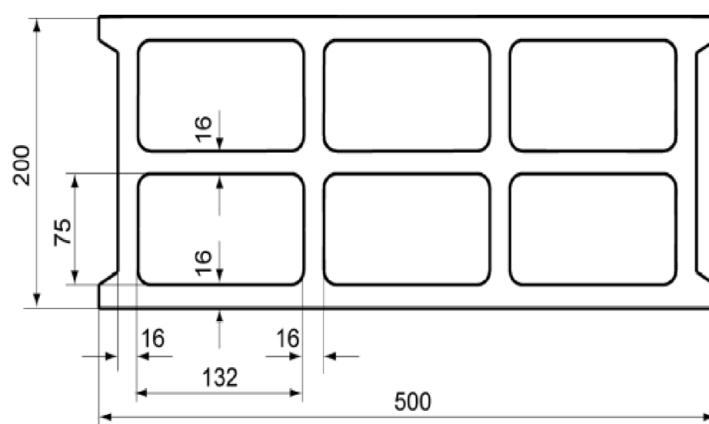

Light-weight concrete hollow block Hbl,
EN 771-3:2015;
e.g. Roadstone wood according to Annex C 91

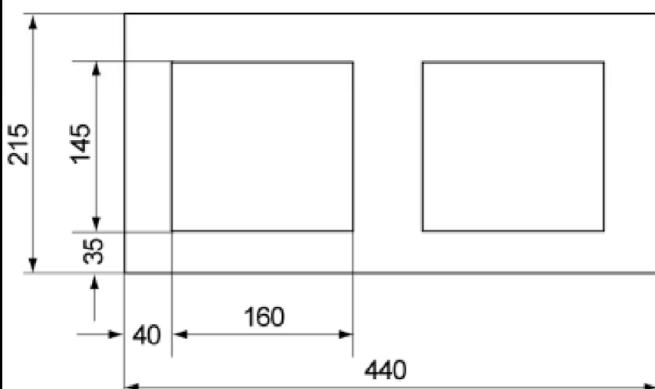

Light-weight concrete solid block Vbl, EN 771-3:2015;
e.g. Sepa according to Annex C 97

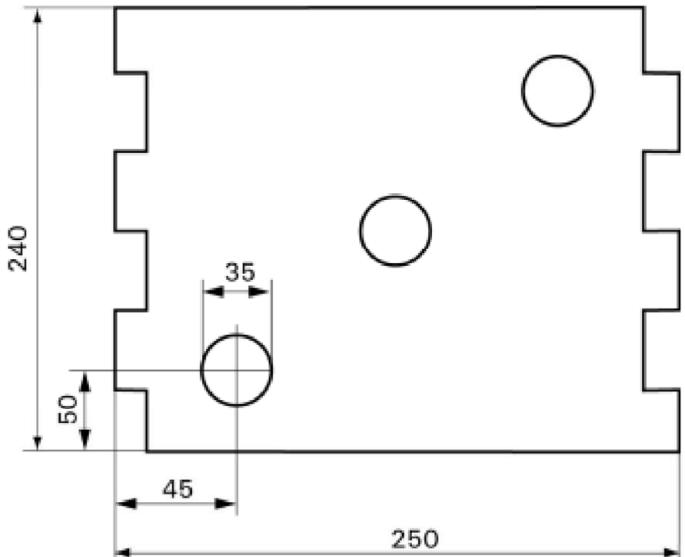


Pictures not to scale

fischer injection system FIS V Plus for masonry

Intended use
Overview dimensions of perforated and hollow bricks (part 5)

Annex B 19

Spacing and edge distance

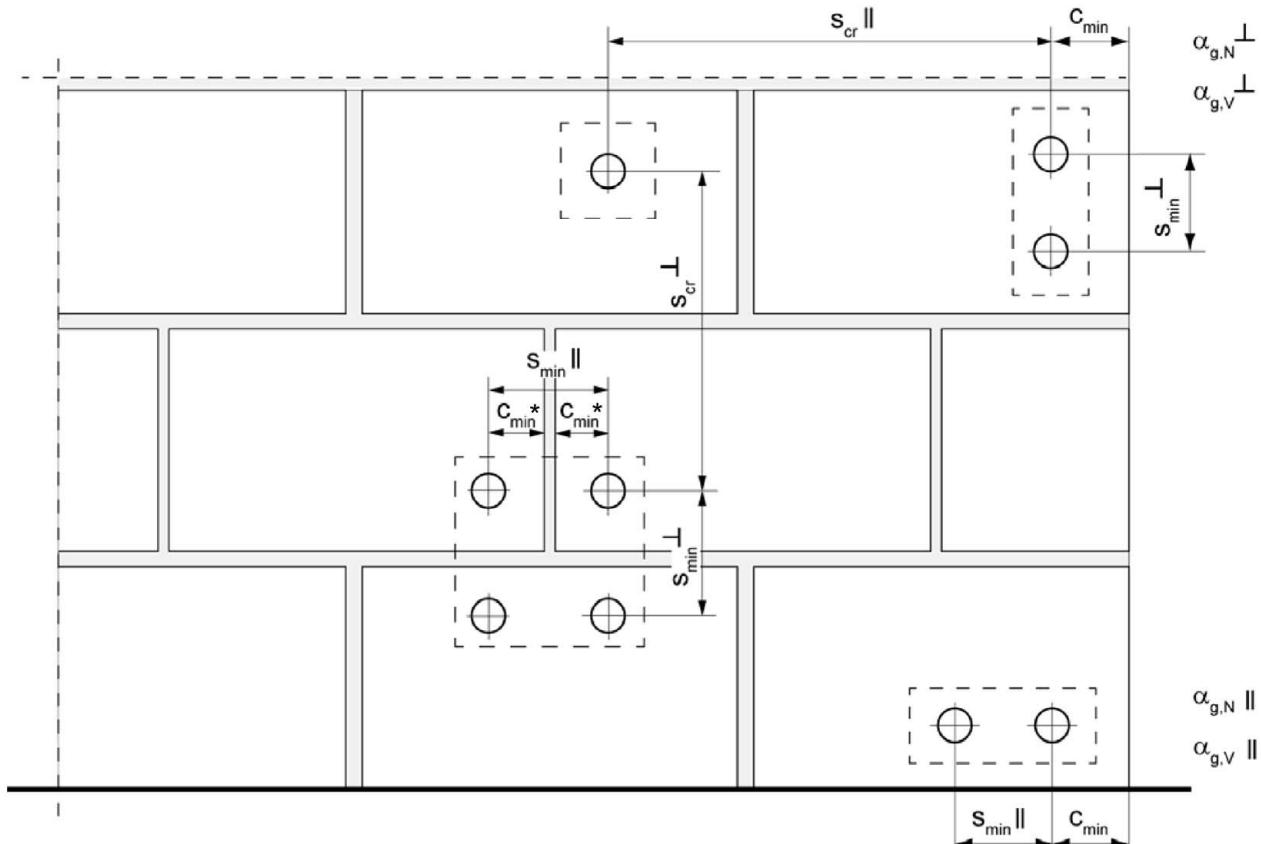

* Only, if vertical joints are not completely filled with mortar

$s_{min} \parallel$	= Minimum spacing parallel to bed joint
$s_{min} \perp$	= Minimum spacing vertical to bed joint
$s_{cr} \parallel$	= Characteristic spacing parallel to bed joint
$s_{cr} \perp$	= Characteristic spacing vertical to bed joint
$c_{cr} = c_{min}$	= Edge distance
$\alpha_{g,N} \parallel$	= Group factor for tension resistance, anchor group parallel to bed joint
$\alpha_{g,V} \parallel$	= Group factor for shear resistance, anchor group parallel to bed joint
$\alpha_{g,N} \perp$	= Group factor for tension resistance, anchor group vertical to bed joint
$\alpha_{g,V} \perp$	= Group factor for shear resistance, anchor group vertical to bed joint

For $s \geq s_{cr}$ $\alpha_g = 2$

For $s_{min} \leq s < s_{cr}$ α_g according to installation parameters of brick

$$N_{Rk}^g = \alpha_{g,N} \cdot N_{Rk}; \quad V_{Rk}^g = \alpha_{g,V} \cdot V_{Rk} \quad (\text{Group of 2 anchors})$$

$$N_{Rk}^g = \alpha_{g,N} \parallel \cdot \alpha_{g,N} \perp \cdot N_{Rk}; \quad V_{Rk}^g = \alpha_{g,V} \parallel \cdot \alpha_{g,V} \perp \cdot V_{Rk} \quad (\text{Group of 4 anchors})$$

fischer injection system FIS V Plus for masonry

Intended use
Spacing and edge distance

Annex B 20

Table C1.1: Characteristic values for the **resistance to steel failure** of anchor rods under tension load

Anchor rod		M6	M8	M10	M12	M16
Resistance under tension load, steel failure						
Characteristic resistance $N_{Rk,s}$	Steel zinc plated	4.6	8	15(13) ³⁾	23(21) ³⁾	33
		4.8	8	15(13) ³⁾	23(21) ³⁾	33
		5.8	10	19(17) ³⁾	29(27) ³⁾	43
		8.8	16	29(27) ³⁾	47(43) ³⁾	68
		50	10	19	29	43
	Stainless steel R and High corrosion resistant steel HCR	70	14	26	41	59
		80	16	30	47	68
						126

Partial factors¹⁾

Partial factor $\gamma_{Ms,N}$	Steel zinc plated	4.6	[-]	2,00
		4.8		1,50
		5.8		1,50
		8.8		1,50
		50		2,86
	Stainless steel R and High corrosion resistant steel HCR	70		1,50 ²⁾ / 1,87
		80		1,60

¹⁾ In absence of other national regulations

²⁾ Only for fischer FIS A made of high corrosion-resistant steel HCR

³⁾ Values in brackets are valid for undersized threaded rods with smaller stress area A_s for hot dip galvanised standard threaded rods according to EN ISO 10684:2004+AC:2009

fischer injection system FIS V Plus for masonry

Performance
Characteristic resistance to steel failure of anchor rods under tension load

Annex C 1


Table C2.1: Characteristic values for the **resistance to steel failure** of anchor rods under shear load

Anchor rod		M6	M8	M10	M12	M16		
Resistance under shear load, steel failure								
without lever arm								
Characteristic resistance $V_{Rk,s}$	Property class	4.6 4.8 5.8 8.8 50 70 80	[kN]	4 4 6 8 5 7 8	9(8) ³⁾ 9(8) ³⁾ 11(10) ³⁾ 15(13) ³⁾ 9 13 15	14(13) ³⁾ 14(13) ³⁾ 17(16) ³⁾ 23(21) ³⁾ 15 20 23	20 20 25 34 21 30 34	38 38 47 63 39 55 63
with lever arm								
Characteristic resistance $M_{Rk,s}$	Property class	4.6 4.8 5.8 8.8 50 70 80	[Nm]	6 6 7 12 7 10 12	15(13) ³⁾ 15(13) ³⁾ 19(16) ³⁾ 30(26) ³⁾ 19 26 30	30(27) ³⁾ 30(27) ³⁾ 37(33) ³⁾ 60(53) ³⁾ 37 52 60	52 52 65 105 65 92 105	133 133 166 266 166 232 266
Partial factors¹⁾								
Partial factor $\gamma_{M,V}$	Property class	4.6 4.8 5.8 8.8 50 70 80	-				1,67 1,25 1,25 1,25 2,38 1,25 ²⁾ / 1,56 1,33	
¹⁾ In absence of other national regulations								
²⁾ Only for fischer FIS A made of high corrosion-resistant steel HCR								
³⁾ Values in brackets are valid for undersized threaded rods with smaller stress area A_s for hot dip galvanised standard threaded rods according to EN ISO 10684:2004+AC:2009.								
fischer injection system FIS V Plus for masonry								
Performance Characteristic resistance to steel failure of anchor rods under shear load								
Annex C 2								

Table C3.1: Characteristic values for the **resistance to steel failure of internal threaded anchors FIS E** under tension / shear load

fischer internal threaded anchor FIS E			M6	M8	M10	M12				
Resistance under tension load, steel failure										
Characteristic resistance with screw $N_{Rk,s}$	Property class	5.8	[kN]	10	18	29				
	Property class R	R		14	26	41				
	Property class 70	HCR		14	26	41				
Partial factors¹⁾										
Partial factor $\gamma_{Ms,N}$	Property class	5.8	[-]	1,50						
	Property class R	R		1,87						
	Property class 70	HCR		1,87						
Resistance under shear load, steel failure										
without lever arm										
Characteristic resistance with screw $V_{Rk,s}$	Property class	5.8	[kN]	5	9	15				
	Property class R	R		7	13	20				
	Property class 70	HCR		7	13	20				
with lever arm										
Characteristic resistance $M_{Rk,s}^0$	Property class	5.8	[Nm]	8	19	37				
	Property class R	R		11	26	52				
	Property class 70	HCR		11	26	52				
Partial factors¹⁾										
Partial factor $\gamma_{Ms,V}$	Property class	5.8	[-]	1,25						
	Property class R	R		1,56						
	Property class 70	HCR		1,56						
¹⁾ In absence of other national regulations										
fischer injection system FIS V Plus for masonry										
Performance Characteristic resistance to steel failure of fischer internal threaded anchor FIS E										
Annex C 3										

Solid brick Mz, NF, EN 771-1:2015

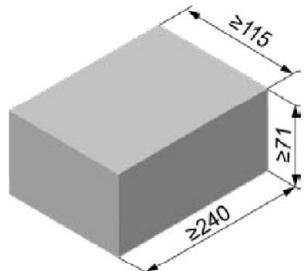

Solid brick Mz, NF, EN 771-1:2015		
Producer	e.g. Wienerberger	
Nominal dimensions [mm]	length L ≥ 240	width W ≥ 115
Density ρ [kg/dm ³]		height H ≥ 71
Compressive strength f_b [N/mm ²]		≥ 1,8
Standard or annex	12 / 20	
	EN 771-1:2015	

Table C4.1: Installation parameters for edge distance c=100mm

Anchor rod	M6	M8	M10	M12	-	-
Internal threaded anchor FIS E	-	-	-	-	M6 11x85	M10 15x85
Anchor rod and internal threaded anchor FIS E without perforated sleeve						
Effective anchorage depth h_{ef}	[mm]	50 80 200	50 80 200	50 80 200	85	
Max. installation torque T_{inst}	[Nm]	4	10		4	10
General installation parameters						
Edge distance c_{min}	[mm]	100		100		
Edge distance $h_{ef}=200$ c_{min}		150		- ¹⁾		
$s_{min} \parallel, N$		60		60		
$h_{ef}=200 s_{min} \parallel, N$		240		- ¹⁾		
$s_{min} \parallel, v$		240		240		
$s_{cr} \parallel$		240		240		
$s_{cr} \perp = s_{min} \perp$		75		75		

Drilling method

Hammer drilling with hard metal hammer drill

¹⁾ No performance assessed

Table C4.2: Group factors

Anchor rods	M6	M8	M10	M12	-	-
Internal threaded anchor FIS E	-	-	-	-	M6 11x85	M10 15x85
Edge distance c_{min}						
	100					
$\alpha_{g,N} \parallel$	1,5					
$\alpha_{g,v} \parallel$	2,0					
$h_{ef}=200 \alpha_{g,N} \parallel$	1,5					
$h_{ef}=200 \alpha_{g,v} \parallel$	2,0					
$\alpha_{g,N} \perp$	2,0					
$\alpha_{g,v} \perp$	2,0					
$h_{ef}=200 \alpha_{g,N} \perp$	2,0					
$h_{ef}=200 \alpha_{g,v} \perp$	2,0					

fischer injection system FIS V Plus for masonry

Performance

Solid brick Mz, NF, dimensions, installation parameters c=100mm

Annex C 4

Solid brick Mz, NF, EN 771-1:2015

Table C5.1: Characteristic resistance under tension load for edge distance c=100mm

Anchor rod	M6	M8	M10		M12		-	-
Internal threaded anchor FIS E	-	-	-		-		M6	M8
							11x85	15x85
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)								
compressive strength f_b	use categorie	≥ 50	≥ 50	50	80	200	50	80
		≥ 50	≥ 50	50	80	200	50	80
		≥ 50	≥ 50	50	80	200	50	80
								85
		w/w	w/d	2,5	2,5	2	3	7,5
				4	4	3,5	5	12
								3,5
								5,5
								5
								8
Factor for temperature range 72/120°C: 0,83								

Table C5.2: Characteristic resistance under shear load for edge distance c=100mm

Anchor rod	M6	M8	M10		M12		-	-
Internal threaded anchor FIS E	-	-	-		-		M6	M8
							11x85	15x85
$V_{Rk} = V_{Rk,p} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)								
compressive strength f_b	use categorie	≥ 50	≥ 50	≥ 50	200	≥ 50	200	85
		≥ 50	≥ 50	≥ 50	200	≥ 50	200	85
		≥ 50	≥ 50	≥ 50	200	≥ 50	200	85
		w/w	w/d	2,5	2,5	4	8,5	4
								11,5
								2,5
								4
								12
								4
Factor for job site tests and displacements see annex C110								

Factor for job site tests and displacements see annex C110

fischer injection system FIS V Plus for masonry

Performance

Solid brick Mz, NF, Characteristic resistance under tension and shear load c=100mm

Annex C 5

Solid brick Mz, NF, EN 771-1:2015

Table C6.1: Installation parameters for edge distance c=60mm

Anchor rod	M6	M8	M10	M12	M16	-	-
Internal threaded anchor FIS E	-	-	-	-	-	M6	M8
Anchor rod and internal threaded anchor FIS E without perforated sleeve							
Effective anchorage depth h_{ef}	[mm]	50	50	50	50	50	85
		100	100	100	100	100	
		200	200	200	200	200	
Max. installation torque T_{inst}	[Nm]	4		10		4	10
General installation parameters							
Edge distance c_{min}					60		
Edge distance c_{min}					60		
					80		
					80		
					80		
Spacing	$s_{min \parallel}$				3x h_{ef}		
	$s_{cr \parallel}$				80		
	$s_{min \perp}$				3x h_{ef}		
	$s_{cr \perp}$						
Drilling method							
Hammer drilling with hard metal hammer drill							

Table C6.2: Group factors

Anchor rods	M6	M8	M10	M12	M16	-	-
Internal threaded anchor FIS E	-	-	-	-	-	M6	M8
Edge distance							
c_{min}	[mm]				60		
					0,6		
					1,3		
					1,4		
					1,5		
					0,3		
					1,3		
					2,0		
					1,1		
fischer injection system FIS V Plus for masonry							
Performance	Solid brick Mz, NF, dimensions, installation parameters c=60mm						Annex C 6

Solid brick Mz, NF, EN 771-1:2015

Table C7.1: Characteristic resistance under tension load for edge distance c=60mm

Anchor rod		M6	M8	M10			M12			M16			-	-						
Internal threaded anchor FIS E		-	-	-			-			-			M6	M8	M10	M12				
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)																				
compressive strength f_b	use category	Effective anchorage depth h_{ef} [mm]										85								
		50	100	50	100	50	100	200	50	100	200	50	100	200	85					
12N/mm ²	w/w	w/d	1,5	2,0	2,0	2,0	2,5	- ¹⁾	2,0	2,5	- ¹⁾	2,0	5,5	- ¹⁾	- ¹⁾					
	d/d		2,5	3,0	4,0	3,0	4,0	9,5	3,0	4,0	9,5	3,0	8,5	9,5	- ¹⁾					
20N/mm ²	w/w	w/d	2,0	2,5	3,0	2,5	3,5	- ¹⁾	3,0	3,5	- ¹⁾	3,0	7,5	- ¹⁾	- ¹⁾					
	d/d		3,5	4,5	5,5	4,5	5,5	12	4,5	5,5	12	4,5	12	12	- ¹⁾					
28N/mm ²	w/w	w/d	2,5	3,0	4,0	3,0	4,0	- ¹⁾	3,5	4,0	- ¹⁾	3,5	9,0	- ¹⁾	- ¹⁾					
	d/d		4,0	5,5	6,5	5,5	6,5	12	5,5	6,5	12	5,5	12	12	- ¹⁾					

¹⁾ No performance assessed

Factor for temperature range 72/120°C: 0,83

Table C7.2: Characteristic resistance under shear load for edge distance c=60mm

Anchor rod		M6	M8	M10			M12			M16			-	-						
Internal threaded anchor FIS E		-	-	-			-			-			M6	M8	M10	M12				
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)																				
compressive strength f_b	use category	Effective anchorage depth h_{ef} [mm]										85								
		50	100	50	100	50	100	200	50	100	200	50	100	200	85					
12N/mm ²	w/w	w/d	1,2	2,5	1,2	3,0	2,0	3,0	1,5	1,5	3,0	3,0	0,6	3,0	4,5	- ¹⁾				
	d/d		1,5	3,5	1,5	4,5	3,0	4,5	2,5	2,0	4,5	4,5	0,9	4,5	6,0	- ¹⁾				
20N/mm ²	w/w	w/d	2,0	4,0	2,0	5,0	3,5	5,0	3,0	2,5	5,0	5,0	1,2	5,0	7,5	- ¹⁾				
	d/d		2,0	4,0	2,0	5,0	3,5	5,0	3,0	2,5	5,0	5,0	1,2	5,0	7,5	- ¹⁾				

¹⁾ No performance assessed

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance

Solid brick Mz, NF, Characteristic resistance under tension and shear load c=60mm

Annex C 7

Solid brick Mz, 2DF, EN 771-1:2015

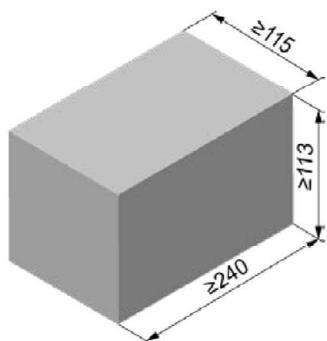

Solid brick Mz, 2DF, EN 771-1:2015		
Producer	e.g. Wienerberger	
Nominal dimensions [mm]	length L	width W
	≥ 240	≥ 115
Density ρ [kg/dm³]	≥ 1,8	
Compressive strength f _b [N/mm²]	10 / 16	
Standard or annex	EN 771-1:2015	

Table C8.1: Installation parameters

Anchor rod	M6	M8	M10	M12	M16	-	-
Internal threaded anchor FIS E	-	-	-	-	-	M6	M8
						11x85	15x85

Anchor rod and internal threaded anchor FIS E without perforated sleeve

Effective anchorage depth h _{ef} [mm]	50	100	50	100	50	100	50	100	85
Max. installation torque T _{inst} [Nm]	4				10			4	10

Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H 16x85 K

Effective anchorage depth h _{ef} [mm]	-1)	85	-1)	85	-1)
Max. installation torque T _{inst} [Nm]		10		4	

General installation parameters

Edge distance C _{min}	[mm]	60
S _{min} II		120
S _{cr} II		240
S _{cr} ⊥ = S _{min} ⊥		115

Drilling method

Hammer drilling with hard metal hammer drill

¹⁾ No performance assessed

Table C8.2: Group factors

Anchor rods	M6	M8	M10	M12	M16	-	-
Internal threaded anchor FIS E	-	-	-	-	-	M6	M8
Group factor	[-]	1,5					
		1,4					
		2					

fischer injection system FIS V Plus for masonry

Performance
Solid brick Mz, 2DF, dimensions, installation parameters

Annex C 8

Solid brick Mz, 2DF, EN 771-1:2015

Table C9.1: Characteristic resistance under tension load

Anchor rod	M6	M8	M10	M12	M16	-	-	M8	M10	-
Internal threaded anchor FIS E	-	-	-	-	-	M6	M8	M10	M12	M6 M8 11x85
						11x85	15x85			
Perforated sleeve FIS H K	-	-	-	-	-	-	-	-	-	16x85
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)										
compressive strength f_b	use category	50	100	50	100	50	100	50	100	Effective anchorage depth h_{ef} [mm]
10N/mm ²	w/w	1,5	2,5	1,5	2,5	1,5	3	2	3,5	2
	d/d	3	4,0	3,0	4,0	3,0	4,5	3	5,5	3
16N/mm ²	w/w	2,5	4	2,5	4	2,5	4,5	3,5	5,5	3,5
	d/d	4,5	7,0	4,5	7,0	4,5	7,5	5,5	8	5,5
Factor for temperature range 72/120°C: 0,83										

Table C9.2: Characteristic resistance under shear load

Anchor rod	M6	M8	M10	M12	M16	-	-	M8	M10	-	
Internal threaded anchor FIS E	-	-	-	-	-	M6	M8	M10	M12	M6 M8 11x85	
						11x85	15x85				
Perforated sleeve FIS H K	-	-	-	-	-	-	-	-	-	16x85	
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)											
compressive strength f_b	use category	Effective anchorage depth h_{ef} [mm]					85				
10N/mm ²	w/w	2,5	3,0	3,0	3,5	3,0	2,5	3,0	3,0	3,0	3,5
	d/d										
16N/mm ²	w/w	4,0	5,0	5,5	5,5	5,0	4,0	5,0	5,0	5,0	6,0
	d/d										
Factor for job site tests and displacements see annex C110											


fischer injection system FIS V Plus for masonry

Performance

Solid brick Mz, 2DF, Characteristic resistance under tension and shear load

Annex C 9

Solid brick Mz, EN 771-1:2015

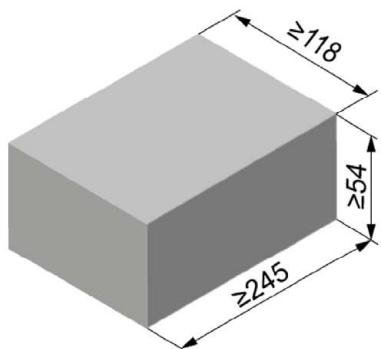

Solid brick Mz, EN 771-1:2015		
Producer	e.g. Nigra	
Nominal dimensions [mm]	length L ≥ 245	width W ≥ 118
Density ρ [kg/dm ³]	≥ 1,8	
Compressive strength f_b [N/mm ²]	10 / 20	
Standard or annex	EN 771-1:2015	

Table C10.1: Installation parameters

Anchor rod	M6	M8	M10	M12	M16	-	-							
Internal threaded anchor FIS E	-	-	-	-	-	M6	M10							
Anchor rod and internal threaded anchor FIS E without perforated sleeve														
Effective anchorage depth h_{ef} [mm]	50	100	50	100	50	100	85							
Max. installation torque T_{inst} [Nm]	4			10		4	10							
General installation parameters														
Edge distance c_{\min}	[mm]	60												
Spacing $s_{\text{cr II}} = s_{\min \parallel}$		245												
$s_{\text{cr } \perp} = s_{\min \perp}$		60												
Drilling method														
Hammer drilling with hard metal hammer drill														

Table C10.2: Group factors

Anchor rods	M6	M8	M10	M12	M16	-	-
Internal threaded anchor FIS E	-	-	-	-	-	M6	M10
						11x85	15x85
Group factor	$\alpha_{g,N \parallel}$ $\alpha_{g,V \parallel}$ $\alpha_{g,N \perp}$ $\alpha_{g,V \perp}$	[-] 2					
fischer injection system FIS V Plus for masonry							
Performance Solid brick Mz, dimensions, installation parameters							Annex C 10

Solid brick Mz, EN 771-1:2015

Table C11.1: Characteristic resistance under tension load

Anchor rod		M6	M8	M10	M12	M16	-	-
Internal threaded anchor FIS E		-	-	-	-	-	M6	M8
		M10 M12 11x85 15x85						
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)								
compressive strength f_b	use category	Effective anchorage depth h_{ef} [mm]						
		≥ 50						
10N/mm ²	w/w	0,6	0,9	0,75	0,75	0,75	0,6	0,75
	d/d	1,2	1,5	1,2	1,2	1,2	1,2	1,2
20N/mm ²	w/w	0,9	1,5	1,2	1,2	1,2	0,9	1,2
	d/d	1,5	2,5	2,0	2,0	2,0	1,5	2,0

Factor for temperature range 72/120°C: 0,83

Table C11.2: Characteristic resistance under shear load

Anchor rod		M6	M8	M10	M12	M16	-	-
Internal threaded anchor FIS E		-	-	-	-	-	M6	M8
		M10 M12 11x85 15x85						
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)								
compressive strength f_b	use category	Effective anchorage depth h_{ef} [mm]						
		≥ 50						
10N/mm ²	w/w	2,0	3,0	4,0	4,5	5,5	2,0	3,0
	d/d						4,0	4,5
20N/mm ²	w/w	2,5	4,0	5,5	6,0	8,0	2,5	4,0
	d/d						5,5	6,0


Factor for job site tests and displacements see annex C110

fischer injection system FIS V Plus for masonry

Performance
Solid brick Mz, Characteristic resistance under tension and shear load

Annex C 11

Solid brick Mz, EN 771-1:2015

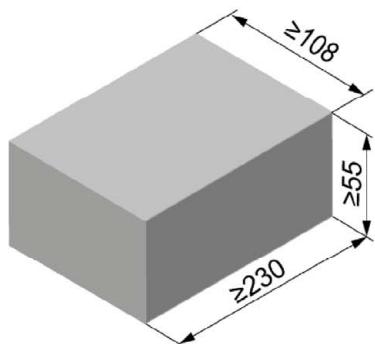

Solid brick Mz, EN 771-1:2015		
Producer	e.g. Wienerberger	
Nominal dimensions [mm]	length L	width W
	≥ 230	≥ 108
Density ρ [kg/dm ³]	≥ 1,8	
Compressive strength f_b [N/mm ²]	10 / 20	
Standard or annex	EN 771-1:2015	

Table C12.1: Installation parameters

Anchor rod	M6	M8	M10	M12	M16	-	-							
Internal threaded anchor FIS E	-	-	-	-	-	M6	M10							
Anchor rod and internal threaded anchor FIS E without perforated sleeve														
Effective anchorage depth h_{ef} [mm]	50	90	50	90	50	90	85							
Max. installation torque T_{inst} [Nm]	4			10		4	10							
General installation parameters														
Edge distance c_{\min}	[mm]	60												
Spacing $s_{\text{cr II}} = s_{\min \parallel}$		230												
$s_{\text{cr } \perp} = s_{\min \perp}$		60												
Drilling method														
Hammer drilling with hard metal hammer drill														

Table C12.2: Group factors

Anchor rods	M6	M8	M10	M12	M16	-	-
Internal threaded anchor FIS E	-	-	-	-	-	M6	M10
						11x85	15x85
Group factor	$\alpha_{g,N \parallel}$ $\alpha_{g,V \parallel}$ $\alpha_{g,N \perp}$ $\alpha_{g,V \perp}$	[-] 2					
fischer injection system FIS V Plus for masonry							
Performance Solid brick Mz, dimensions, installation parameters							Annex C 12

Solid brick Mz, EN 771-1:2015

Table C13.1: Characteristic resistance under tension load

Anchor rod	M6	M8	M10	M12	M16	-	-		
Internal threaded anchor FIS E	-	-	-	-	-	M6	M8	M10	M12
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)									
compressive strength f_b	use category			Effective anchorage depth h_{ef} [mm]					
				≥ 50					85
10N/mm ²	w/w	w/d	0,6	0,9	0,75	0,75	0,75		0,75
	d/d		1,2	1,5	1,2	1,2	1,2		1,2
20N/mm ²	w/w	w/d	0,9	1,5	1,2	1,2	1,2		1,2
	d/d		1,5	2,5	2,0	2,0	2,0		2,0

Factor for temperature range 72/120°C: 0,83

Table C13.2: Characteristic resistance under shear load

Anchor rod	M6	M8	M10	M12	M16	-	-		
Internal threaded anchor FIS E	-	-	-	-	-	M6	M8	M10	M12
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)									
compressive strength f_b	use category			Effective anchorage depth h_{ef} [mm]					
				≥ 50					85
10N/mm ²	w/w	w/d	2,0	3,0	4,0	4,5	5,5	2,0	3,0
	d/d								
20N/mm ²	w/w	w/d	2,5	4,0	5,5	6,0	8,0	2,5	4,0
	d/d								


Factor for job site tests and displacements see annex C110

fischer injection system FIS V Plus for masonry

Performance
Solid brick Mz, Characteristic resistance under tension and shear load

Annex C 13

Solid sand-lime brick KS, NF, EN 771-2:2015

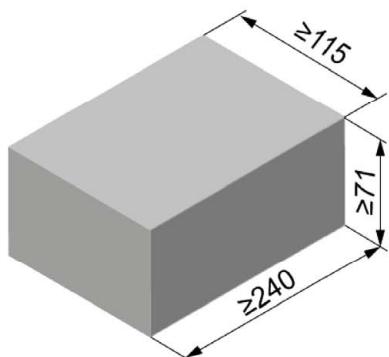

Solid sand-lime brick KS, NF, EN 771-2:2015		
Producer	length L	width W
Nominal dimensions [mm]	≥ 240	≥ 115
Density ρ [kg/dm ³]	≥ 1,8	
Compressive strength f_b [N/mm ²]	12 / 20 / 28	
Standard or annex	EN 771-2:2015	

Table C14.1: Installation parameters

Anchor rod	M6	M8	M10	M12	M16	-	-							
Internal threaded anchor FIS E	-	-	-	-	-	M6	M8							
Anchor rod and internal threaded anchor FIS E without perforated sleeve														
Effective anchorage depth h_{ef} [mm]	50	100	50	100	50	100	85							
					200	200	200							
Max. installation torque T_{inst} [Nm]	3		5		15	15	25							
General installation parameters														
Edge distance C_{min}	[mm]	60												
$S_{\text{min II}}$		80												
$S_{\text{cr II}}$		80												
$S_{\text{min I}}$		3x h_{ef}												
$S_{\text{cr I}}$		3x h_{ef}												
Drilling method														
Hammer drilling with hard metal hammer drill														

Table C14.2: Group factors

Anchor rod	M6	M8	M10	M12	M16	-	-	
Internal threaded anchor FIS E	-	-	-	-	-	M6	M8	
						11x85	15x85	
Group factor	$\alpha_{g,N} \parallel$	[-]	0,7					
	$\alpha_{g,v} \parallel$		1,3					
	$\alpha_{g,N} \perp$		2,0					
	$\alpha_{g,v} \perp$		2,0					

fischer injection system FIS V Plus for masonry

Performance

Solid sand-lime brick KS, NF, dimensions, installation parameters

Annex C 14

Solid sand-lime brick KS, NF, EN 771-2:2015

Table C15.1: Characteristic resistance under tension load

Anchor rod		M6		M8		M10		M12		M16		-		-											
Internal threaded anchor FIS E		-		-		-		-		-		M6 M8		M10 M12											
												11x85		15x85											
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)																									
compressive strength f_b	use category			Effective anchorage depth h_{ef} [mm]																					
		50	100	50	100	50	100	50	100	200	50	100	200	50	100										
12N/mm ²	w/w	2,0	3,0	2,5	4,5	2,5	3,5	7,0	2,5	3,0	6,5	2,5	3,5	8,0	2,5										
	d/d	4,0	5,5	4,0	8,0	4,0	5,5	12	4,0	4,5	12	4,5	5,5	12	4,0										
20N/mm ²	w/w	3,0	4,5	3,5	6,5	3,5	4,5	10	3,5	4,0	9,5	4,0	5,0	11	3,5										
	d/d	5,5	7,5	6,0	11	6,0	8,0	12	6,0	6,5	12	6,5	8,0	12	6,0										
28N/mm ²	w/w	3,5	5,0	4,0	8,0	4,5	5,5	12	4,5	5,0	11	4,5	5,5	12	4,5										
	d/d	6,5	9,0	7,0	12	7,0	9,0	12	7,0	7,5	12	7,5	9,5	12	7,0										

Factor for temperature range 72/120°C: 0,83

Table C15.2: Characteristic resistance under shear load

Anchor rod		M6		M8		M10		M12		M16		-		-											
Internal threaded anchor FIS E		-		-		-		-		-		M6 M8		M10 M12											
												11x85		15x85											
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)																									
compressive strength f_b	use category			Effective anchorage depth h_{ef} [mm]																					
		50	100	50	100	50	100	50	100	≥100	50	100	50	100	85										
12N/mm ²	w/w	1,5	3,0	1,5	3,0	1,2	2,0	1,2	2,0	1,2	2,0	1,2	2,0	1,2	1,2										
	d/d																								
20N/mm ²	w/w	2,5	4,0	2,5	4,0	1,5	3,0	1,5	3,0	1,5	3,0	1,5	3,0	1,5	1,5										
	d/d																								
28N/mm ²	w/w	3,0	4,5	3,0	4,5	1,5	3,5	1,5	3,5	1,5	3,5	1,5	3,5	1,5	1,5										
	d/d																								


Factor for job site tests and displacements see annex C110

fischer injection system FIS V Plus for masonry


Performance
Solid sand-lime brick KS, NF, Characteristic resistance under tension and shear load

Annex C 15

Solid sand-lime brick KS, 8DF, EN 771-2:2015

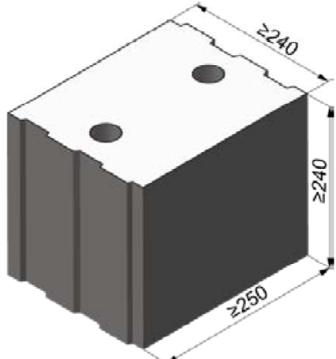

Solid sand-lime brick KS, 8DF, EN 771-2:2015			
Producer	-		
Nominal dimensions [mm]	length L		width W
	≥ 250		≥ 240
Density ρ [kg/dm ³]	≥ 2,0		
Compressive strength f_b [N/mm ²]	10 / 20 / 28		
Standard or annex	EN 771-2:2015		

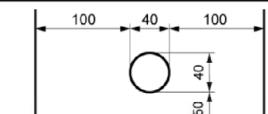

Dimension see also Annex B 15

Table C16.1: Installation parameters

Anchor rod	M6	M8	M10	M12	M16	-	-
Internal threaded anchor FIS E	-	-	-	-	-	M6 M8 M10 M12	11x85 15x85

Anchor rod and internal threaded anchor FIS E without perforated sleeve

Effective anchorage depth h_{ef} [mm]	50	100	50	100	50	100	50	100	85
Max. installation torque T_{inst} [Nm]		4			10			4	10

Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H 16x85 K

Effective anchorage depth h_{ef} [mm]	- ¹⁾	85	- ¹⁾	85	- ¹⁾
Max. installation torque T_{inst} [Nm]		10		4	

General installation parameters

Edge distance C_{\min}	[mm]	60
$S_{\min \parallel}$		80
$S_{\max \parallel}$		3x h_{ef}
$S_{\min \perp}$		80
$S_{\max \perp}$		3x h_{ef}

Drilling method

Hammer drilling with hard metal hammer drill

¹⁾ No performance assessed

Table C16.2: Group factors

Anchor rods	M6	M8	M10	M12	M16	-	-
Internal threaded anchor FIS E	-	-	-	-	-	M6 M8 M10 M12	11x85 15x85
Group factors	$\alpha_{g,N \parallel}$				1,5		
	$\alpha_{g,v \parallel}$				1,2		
	$\alpha_{g,N \perp}$				1,5		
	$\alpha_{g,v \perp}$				1,2		

fischer injection system FIS V Plus for masonry

Performance
Solid sand-lime brick KS, 8DF, dimensions, installation parameters

Annex C 16

Solid sand-lime brick KS, 8DF, EN 771-2:2015

Table C17.1: Characteristic resistance under tension load

Anchor rod	M6	M8	M10	M12	M16	-	-	M8	M10	-
Internal threaded anchor FIS E	-	-	-	-	-	M6	M8	M10 M12	-	M6 M8 11x85
						11x85	15x85			
Perforated sleeve FIS H K	-	-	-	-	-	-	-			16x85
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)										
compressive strength f_b	use category	Effective anchorage depth h_{ef} [mm]					85			
10N/mm ²	w/w	w/d	3,0	4,0	4,5	4,5	3,5	3,0	3,5	4,5
	d/d		5,0	7,0	7,0	7,0	5,5	5,0	5,5	8,0
20N/mm ²	w/w	w/d	4,5	6,0	6,0	6,0	5,0	4,5	5,0	6,5
	d/d		7,5	10,0	10,0	10,0	7,5	7,5	7,5	11,0
28N/mm ²	w/w	w/d	5,0	8,0	8,5	8,5	7,0	5,0	7,0	8,5
	d/d		8,5	12,0	12,0	12,0	11,0	8,5	11,0	12,0

Factor for temperature range 72/120°C: 0,83

Table C17.2: Characteristic resistance under shear load

Anchor rod	M6	M8	M10	M12	M16	-	-	M8	M10	-
Internal threaded anchor FIS E	-	-	-	-	-	M6	M8	M10 M12	-	M6 M8 11x85
						11x85	15x85			
Perforated sleeve FIS H K	-	-	-	-	-	-	-			16x85
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)										
compressive strength f_b	use category	Effective anchorage depth h_{ef} [mm]					85			
10N/mm ²	w/w	w/d	2,5	4,5			2,5	4,5		4,5
	d/d									2,5 4,5
20N/mm ²	w/w	w/d	4,0	6,5			4,0	6,5		6,5
	d/d									4,0 6,5
28N/mm ²	w/w	w/d	5,0	9,0			5,0	9,0		9,0
	d/d									5,0 9,0


Factor for job site tests and displacements see annex C110

fischer injection system FIS V Plus for masonry

Performance
Solid sand-lime brick KS, 8DF, Characteristic resistance under tension and shear load

Annex C 17

Solid sand-lime brick KS, EN 771-2:2015

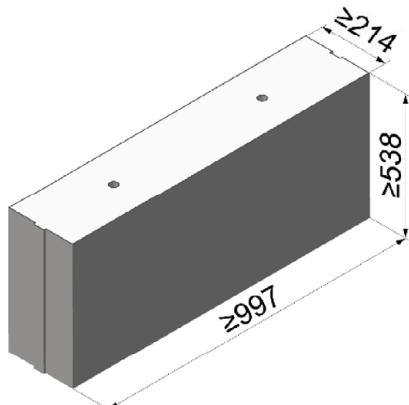

Solid sand-lime brick KS, EN 771-2:2015			
Producer	e.g. Calduran		
Nominal dimensions [mm]	length L	width W	height H
	≥ 997	≥ 214	≥ 538
Density ρ [kg/dm³]	1,8		2,2
Compressive strength f _b [N/mm²]	10 / 20		36
Standard or annex	EN 771-2:2015		

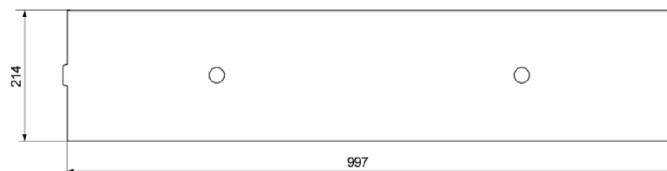


Table C18.1: Installation parameters

Anchor rod	M6	M8	M10	M12	M16	-	-							
Internal threaded anchor FIS E	-	-	-	-	-	M6	M8							
Anchor rod and internal threaded anchor FIS E without perforated sleeve														
Effective anchorage depth h _{ef} [mm]	50	100	50	100	50	100	85							
Max. installation torque T _{inst} [Nm]	4			10		4	10							
General installation parameters														
Edge distance c _{min}	s _{cr} II = s _{min} II [mm] s _{cr} ⊥ = s _{min} ⊥	75												
Spacing		3x h _{ef}												
		3x h _{ef}												
Drilling method														
Hammer drilling with hard metal hammer drill														

Table C18.2: Group factors

Anchor rod	M6	M8	M10	M12	M16	-	-	
Internal threaded anchor FIS E	-	-	-	-	-	M6	M8	
Group factors	$\alpha_{g,N} \parallel$ $\alpha_{g,v} \parallel$ $\alpha_{g,N} \perp$ $\alpha_{g,v} \perp$	[-]	2					
fischer injection system FIS V Plus for masonry								
Performance Solid sand-lime brick KS, dimensions, installation parameters	Annex C 18							

Solid sand-lime brick KS, EN 771-2:2015

Table C19.1: Characteristic resistance under tension load

Anchor rod		M6	M8	M10	M12	M16	-	-	
Internal threaded anchor FIS E		-	-	-	-	-	M6	M8	
		N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)							
compressive strength f _b	use category	50	100	50	100	50	100	50	100
10N/mm ²	w/w	4,0	4,0	7,0	5,0	6,0	5,0	6,0	5,5
	d/d	7,0	7,0	12,0	8,0	9,5	8,0	10,0	9,0
20N/mm ²	w/w	5,5	6,0	10,0	7,0	8,5	7,0	9,0	8,0
	d/d	8,5	10,5	12,0	11,5	12,0	11,0	12,0	12,0
36N/mm ²	w/w	4,5	8,0	12,0	11,5	12,0	12,0	12,0	12,0
	d/d	8,0	12,0	12,0	12,0	12,0	12,0	12,0	12,0

Factor for temperature range 72/120°C: 0,83

Table C19.2: Characteristic resistance under shear load

Anchor rod		M6	M8	M10	M12	M16	-	-	
Internal threaded anchor FIS E		-	-	-	-	-	M6	M8	
		V _{Rk} = V _{Rk,b} = V _{Rk,c} [kN] depending on the compressive strength f _b (temperature range 50/80°C and 72/120°C)							
compressive strength f _b	use category	Effective anchorage depth h _{ef} [mm]						85	
10N/mm ²	w/w	3,0	5,0	5,5	4,0	4,0	3,0	5,0	
	d/d								
20N/mm ²	w/w	4,5	7,0	7,5	6,0	6,0	4,5	7,0	
	d/d								
36N/mm ²	w/w	4,5	9,0	11,0	12,0	12,0	4,5	9,0	
	d/d								

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance

Solid sand-lime brick KS, Characteristic resistance under tension and shear load

Annex C 19

Perforated sand-lime brick KSL, 3DF, EN 771-2:2015

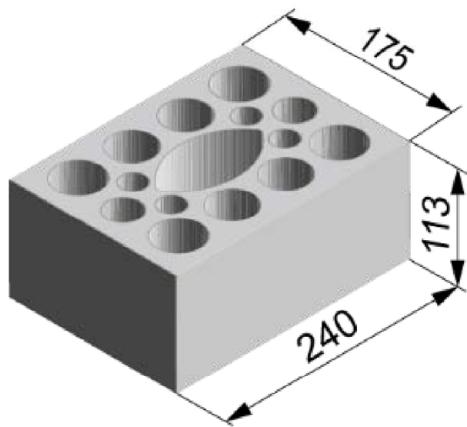

Perforated sand-lime brick KSL, 3DF, EN 771-2:2015		
Producer	e.g. KS Wemding	
Nominal dimensions [mm]	length L	width W
	240	175
Density ρ [kg/dm ³]	$\geq 1,4$	
Compressive strength f_b [N/mm ²]	8 / 10 / 12 / 16 / 20	
Standard or annex	EN 771-2:2015	

Tabelle C20.1: Installation parameters
(Pre-positioned anchorage with perforated sleeve FIS H K)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-			M6	M8				M10	M12			
Perforated sleeve FIS H K	12x50	12x85			11x85		16x85		16x130		20x85		20x130	

Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K

Max. installation torque T_{inst} [Nm]	2
--	---

General installation parameters

Edge distance c_{min}	[mm]	60	80
$s_{min \parallel}$		100	
$s_{cr \parallel}$		240	
$s_{min \perp}$		115	
$s_{cr \perp}$		115	

Drilling method

Hammer drilling with hard metal hammer drill

Table C20.2: Group factors

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-			M6	M8				M10	M12			
Perforated sleeve FIS H K	12x50	12x85			11x85		16x85		16x130		20x85		20x130	
Group factors	$\alpha_{g,N \parallel} = \alpha_{g,V \parallel}$ $\alpha_{g,N \perp} = \alpha_{g,V \perp}$	[\cdot]								1,5				
										2,0				

fischer injection system FIS V Plus for masonry

Performance
Perforated sand-lime brick KSL, 3DF, dimensions, installation parameters

Annex C 20

Perforated sand-lime brick KSL, 3DF, EN 771-2:2015

Table C21.1: Installation parameters
(Push through anchorage with perforated sleeve FIS H K)

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
Anchor rod with perforated sleeve FIS H K			
Max. installation torque	T_{inst} [Nm]		2
General installation parameters			
Edge distance	c_{min}	80	
Spacing	$s_{min \parallel}$	100	
	$s_{cr \parallel}$	240	
	$s_{min \perp}$	115	
	$s_{cr \perp}$	115	
	[mm]		
Drilling method			
Hammer drilling with hard metal hammer drill			

Table C21.2: Group factors

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
Group factors	$\alpha_{g,N \parallel}$	1,5	
	$\alpha_{g,v \parallel}$		
	$\alpha_{g,N \perp}$	2,0	
	$\alpha_{g,v \perp}$		
[-]			

fischer injection system FIS V Plus for masonry

Performance

Perforated sand-lime brick KSL, 3DF, dimensions, installation parameters

Annex C 21

Perforated sand-lime brick KSL, 3DF, EN 771-2:2015

Table C22.1: Characteristic resistance under tension load (Pre-positioned anchorage)

Anchor rod		M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E		-	-			M6	M8				M10	M12		-	-
						11x85					15x85				
Perforated sleeve FIS H K		12x50	12x85			16x85		16x130			20x85		20x130		
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)															
compressive strength f_b	use category														
8 N/mm ²	w/w	w/d		1,5			2,0		2,0		2,0		2,0		2,0
	d/d			1,5			2,0		2,5		2,5		2,5		2,5
10 N/mm ²	w/w	w/d		2,0			2,0		2,5		2,5		2,5		2,5
	d/d			2,0			2,5		3,0		3,0		3,0		3,0
12 N/mm ²	w/w	w/d		2,5			2,5		3,0		3,0		3,0		3,0
	d/d			2,5			3,0		3,5		3,5		3,5		3,5
16 N/mm ²	w/w	w/d		3,0			3,5		4,5		4,5		4,5		4,5
	d/d			3,5			4,0		4,5		4,5		4,5		4,5
20 N/mm ²	w/w	w/d		4,0			4,5		5,5		5,5		5,5		5,5
	d/d			4,5			5,0		6,0		6,0		6,0		6,0

Table C22.2: Characteristic resistance under tension load (Push through anchorage)

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)				
compressive strength f_b	use category			
8 N/mm ²	w/w	w/d		2,0
	d/d			2,5
10 N/mm ²	w/w	w/d		2,5
	d/d			3,0
12 N/mm ²	w/w	w/d		3,0
	d/d			3,5
16 N/mm ²	w/w	w/d		4,5
	d/d			4,5
20 N/mm ²	w/w	w/d		5,5
	d/d			6,0

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

fischer injection system FIS V Plus for masonry

Performance

Perforated sand-lime brick KSL, 3DF, Characteristic resistance under tension load

Annex C 22

Perforated sand-lime brick KSL, 3DF, EN 771-2:2015

Table C23.1: Characteristic resistance under shear load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-			M6	M8				M10	M12			
					11x85		-	-		15x85		-	-	
Perforated sleeve FIS H K	12x50	12x85		16x85		16x130		20x85		20x130				
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)														
compressive strength f_b	w/w	w/d												
8 N/mm ²	w/w	w/d	1,5				3,0				2,5	3,0	2,5	
			d/d											
10 N/mm ²	w/w	w/d	2,0				3,5							
			d/d											
12 N/mm ²	w/w	w/d	2,5				4,5				4,0	4,5	4,0	
			d/d											
16 N/mm ²	w/w	w/d	3,0	3,5	3,0	3,5	3,0	6,0				5,5	6,0	5,5
			d/d											
20 N/mm ²	w/w	w/d	4,0	4,5	4,0	4,5	4,0	7,5				6,5	7,5	6,5
			d/d											

Table C23.2: Characteristic resistance under shear load (Push through anchorage)

Anchor rod	M10	M12	M16			
Perforated sleeve FIS H K	18x130/200	22x130/200				
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)						
compressive strength f_b	w/w	w/d				
8 N/mm ²	w/w	w/d	3,0		2,5	
			d/d			
10 N/mm ²	w/w	w/d	3,5		3,5	
			d/d			
12 N/mm ²	w/w	w/d	4,5		4,0	
			d/d			
16 N/mm ²	w/w	w/d	6,0		5,5	
			d/d			
20 N/mm ²	w/w	w/d	7,5		6,5	
			d/d			


Factor for job site tests and displacements see annex C110

fischer injection system FIS V Plus for masonry


Performance
Perforated sand-lime brick KSL, 3DF, Characteristic resistance under shear load

Annex C 23

Vertical perforated brick HLz, EN 771-1:2015

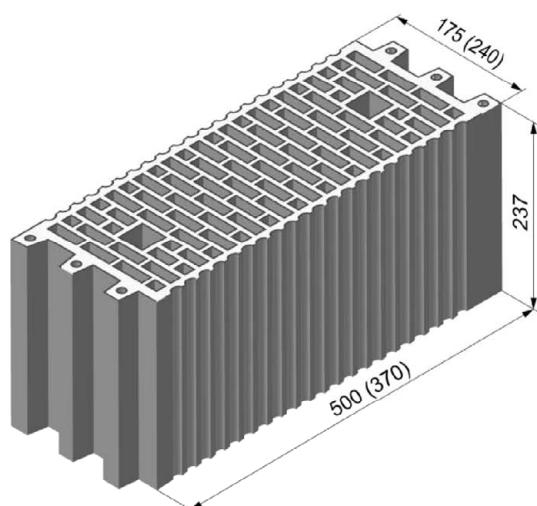

Vertical perforated brick HLz, EN 771-1:2015		
Producer	e.g. Wienerberger, Poroton	
Nominal dimensions [mm]	length L	width W
	500	175
Nominal dimensions [mm]	370	240
	237	237
Density ρ [kg/dm ³]	$\geq 1,0$	
Compressive strength f_b [N/mm ²]	4 / 6 / 8 / 10 / 12	
Standard or annex	EN 771-1:2015	

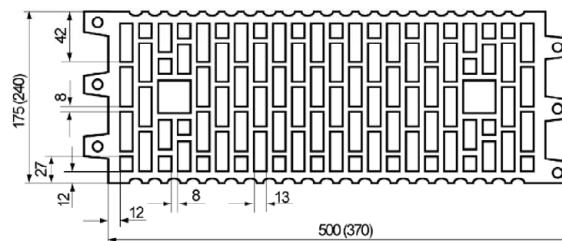

Dimension
see also
Annex B
15

Table C24.1: Installation parameters

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-
Perforated sleeve FIS H K	12x50	12x85	16x85	16x130	20x85	20x130								

Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K

Max. installation torque	T_{inst}	[Nm]	2
--------------------------	------------	------	---

General installation parameters

Edge distance	C_{min}	[mm]	100
	$S_{min \parallel}$		100
Spacing	$S_{cr \parallel}$		500 (370)
	$S_{min \perp}$		100
	$S_{cr \perp}$		240

Drilling method

Hammer drilling with hard metal hammer drill

Table C24.2: Group factors

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-
Perforated sleeve FIS H K	12x50	12x85	16x85	16x130	20x85	20x130								
Group factors	$\alpha_{g,N \parallel} \parallel = \alpha_{g,v \parallel}$ $\alpha_{g,N \perp} = \alpha_{g,v \perp}$	[\cdot]	1											

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, dimensions, installation parameters

Annex C 24

Vertical perforated brick HLz, EN 771-1:2015

Table C25.1: Characteristic resistance under tension load

Anchor rod		M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E		-	-			M6	M8				M10	M12		-	-
						11x85					15x85				
Perforated sleeve FIS H K		12x50	12x85			16x85		16x130			20x85		20x130		
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)															
compressive strength f_b	use category														
4 N/mm ²	w/w	w/d		0,3							0,9				1,2
	d/d			0,4							0,9				1,2
6 N/mm ²	w/w	w/d		0,5							1,5				2,0
	d/d			0,6							1,5				2,0
8 N/mm ²	w/w	w/d		0,75							2,0				2,5
	d/d			0,75							2,0				2,5
10 N/mm ²	w/w	w/d		0,9							2,5				3,0
	d/d			0,9							2,5				3,5
12 N/mm ²	w/w	w/d		0,9							3,0				3,5
	d/d			1,2							3,0				4,0

Factor for temperature range 72/120°C: 0,83

Table C25.2: Characteristic resistance under shear load

Anchor rod		M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E		-	-			M6	M8				M10	M12		-	-
						11x85					15x85				
Perforated sleeve FIS H K		12x50	12x85			16x85		16x130			20x85		20x130		
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)															
compressive strength f_b	use category														
4 N/mm ²	w/w	w/d				0,5					0,6		0,5		0,6
	d/d														
6 N/mm ²	w/w	w/d				0,75					0,9		0,75		0,9
	d/d														
8 N/mm ²	w/w	w/d				0,9					1,2		0,9		1,2
	d/d														
10 N/mm ²	w/w	w/d				1,2					1,5		1,2		1,5
	d/d														
12 N/mm ²	w/w	w/d				1,5					2,0		1,5		2,0
	d/d														

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance


Vertical perforated brick HLz, Characteristic resistance under tension and shear load

Annex C 25

Vertical perforated brick HLz, 2DF, EN 771-1:2015

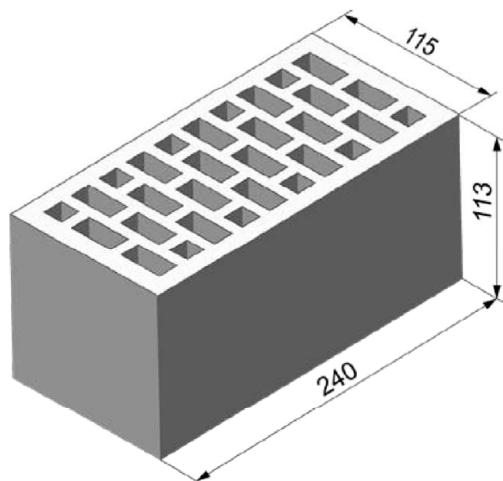

Vertical perforated brick HLz, 2DF, EN 771-1:2015		
Producer	e.g. Wienerberger	
Nominal dimensions [mm]	length L	width W
	240	115
Density ρ [kg/dm ³]	$\geq 1,4$	
Compressive strength f_b [N/mm ²]	6 / 10 / 16 / 20 / 28	
Standard or annex	EN 771-1:2015	

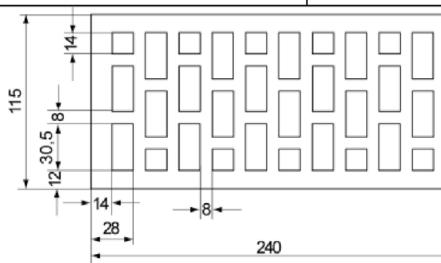

Dimension
see also
Annex B 15

Table C26.1: Installation parameters

Anchor rod	M6	M8	M6	M8	-	M8	M10	-	M12	M16									
Internal threaded anchor FIS E	-	-	-	-	M6 M8	-	M10 M12	-	-	-									
					11x85			15x85											
Perforated sleeve FIS H K	12x50	12x85	16x85	20x85															
Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K																			
Max. installation torque	T_{inst} [Nm]							2											
General installation parameters																			
Edge distance	c_{min}	[mm]	80																
Spacing	$s_{cr \parallel} = s_{min \parallel}$		240																
	$s_{cr \perp} = s_{min \perp}$		115																
Drilling method																			
Hammer drilling with hard metal hammer drill																			

Table C26.2: Group factors

Anchor rod	M6	M8	M6	M8	-	M8	M10	-	M12	M16	
Internal threaded anchor FIS E	-	-	-	-	M6 M8	-	M10 M12	-	-	-	
					11x85			15x85			
Perforated sleeve FIS H K	12x50	12x85	16x85	20x85							
Group factors	$\alpha_{g,N \parallel}$	$\alpha_{g,V \parallel}$	$\alpha_{g,N \perp}$	$\alpha_{g,V \perp}$	[-]	2					

fischer injection system FIS V Plus for masonry

Performance
Vertical perforated brick HLz, 2DF, dimensions, installation parameters

Annex C 26

Vertical perforated brick HLz, 2DF, EN 771-1:2015

Table C27.1: Characteristic resistance under tension load

Anchor rod	M6	M8	M6	M8	-	M8	M10	-	M12	M16		
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	M10	M12		
					11x85	11x85			15x85	-		
	Perforated sleeve FIS H K				12x50	12x85	16x85	16x85	20x85	20x85		
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)												
compressive strength f_b	use category											
6 N/mm ²	w/w	w/d	0,75	0,9	0,75	0,75	0,9	0,9				
	d/d		0,75	1,2	0,75	0,75	0,9	0,9				
10 N/mm ²	w/w	w/d	1,2	1,5	1,2	1,2	1,5	1,5				
	d/d		1,2	2,0	1,2	1,2	1,5	1,5				
16 N/mm ²	w/w	w/d	2,0	2,5	2,0	2,0	2,0	2,0				
	d/d		2,0	3,0	2,0	2,0	2,5	2,5				
20 N/mm ²	w/w	w/d	2,5	3,5	2,5	2,5	3,0	3,0				
	d/d		2,5	4,0	2,5	2,5	3,0	3,0				
28 N/mm ²	w/w	w/d	3,0	5,0	3,5	3,5	4,0	4,0				
	d/d		3,5	5,5	3,5	3,5	4,5	4,5				

Factor for temperature range 72/120°C: 0,83

Table C27.2: Characteristic resistance under shear load

Anchor rod	M6	M8	M6	M8	-	M8	M10	-	M12	M16		
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	M10	M12		
					11x85	11x85			15x85	-		
	Perforated sleeve FIS H K				12x50	12x85	16x85	16x85	20x85	20x85		
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)												
compressive strength f_b	use category											
6 N/mm ²	w/w	w/d	1,2	1,5	1,2	2,0	1,2	1,5	2,5			
	d/d											
10 N/mm ²	w/w	w/d	2,0	2,5	2,0	4,0	2,0	2,5	4,5			
	d/d											
16 N/mm ²	w/w	w/d	3,0	3,5	3,0	6,0	3,0	3,5	7,0			
	d/d											
20 N/mm ²	w/w	w/d	4,0	4,5	4,0	7,5	4,0	4,5	8,5			
	d/d											
28 N/mm ²	w/w	w/d	5,0	6,5	5,0	9,5	5,0	6,5	12,0			
	d/d											


Factor for job site tests and displacements see annex C110

fischer injection system FIS V Plus for masonry


Performance
Vertical perforated brick HLz, 2DF,
Characteristic resistance under tension and shear load

Annex C 27

Vertical perforated brick HLz, T8, EN 771-1:2015

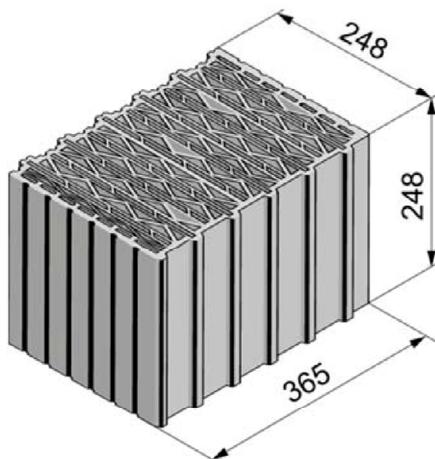

Vertical perforated brick HLz, T8, EN 771-1:2015		
Producer	-	
Nominal dimensions [mm]	length L	width W
	248	365
height H	248	
Density ρ [kg/dm ³]	0,6	
Compressive strength f_b [N/mm ²]	4 / 6 / 8	
Standard or annex	EN 771-1:2015	

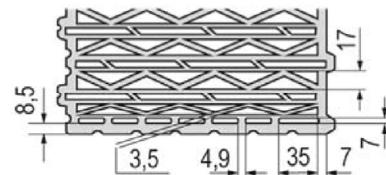

Dimension see also
Annex B 15

Table C28.1: Installation parameters
(Pre-positioned anchorage with perforated sleeve FIS H K)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-	-	-
Perforated sleeve FIS H K	12x50	12x85	16x85	16x130	16x130	20x85	20x130	20x130	20x200							

Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K

Max. installation torque	T_{inst} [Nm]	3	5	3	5	3	5	5	5	5	5	5	5	5	5	5
--------------------------	-----------------	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

General installation parameters

Edge distance	c_{min}	[mm]	60
	$s_{min \parallel}$		80
Spacing	$s_{cr \parallel}$	[mm]	250
	$s_{min \perp}$		80
	$s_{cr \perp}$		250

Drilling method

Rotary drilling with carbide drill

Table C28.2: Group factors

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-	-	-
Perforated sleeve FIS H K	12x50	12x85	16x85	16x130	16x130	20x85	20x130	20x130	20x200							
Group factors	$\alpha_{g,N \parallel}$	$\alpha_{g,V \parallel}$	$\alpha_{g,N \perp}$	$\alpha_{g,V \perp}$	[\cdot]	1,3	1,2	1,3	1,0							

fischer injection system FIS V Plus for masonry

Performance
Vertical perforated brick HLz, T8, dimensions, installation parameters

Annex C 28

Vertical perforated brick HLz, T8, EN 771-1:2015

Table C29.1: Installation parameters
(Push through anchorage with perforated sleeve FIS H K)

Anchor rod	M10	M12	M16	
Perforated sleeve FIS H K	18x130/200		22x130/200	
Anchor rod with perforated sleeve FIS H K				
Max. installation torque	T_{inst} [Nm]		5	
General installation parameters				
Edge distance	c_{min}	[mm]	60	
	$s_{min \parallel}$		80	
Spacing	$s_{cr \parallel}$		250	
	$s_{min \perp}$		80	
	$s_{cr \perp}$		250	
Drilling method				
Rotary drilling with carbide drill				

Table C29.2: Group factors

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
Group factors	$\alpha_{g,N \parallel}$	[-]	1,3
	$\alpha_{g,v \parallel}$		1,2
	$\alpha_{g,N \perp}$		1,3
	$\alpha_{g,v \perp}$		1,0

fischer injection system FIS V Plus for masonry

Performance
Vertical perforated brick HLz, T8, dimensions, installation parameters

Annex C 29

Vertical perforated brick HLz, T8, EN 771-1:2015

Table C30.1: Characteristic resistance under tension load (Pre-positioned anchorage)

Anchor rod		M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E		-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-	-	-
						11x85					15x85						
Perforated sleeve FIS H K		12x50	12x85		16x85		16x130		20x85		20x130		20x200				
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)																	
compressive strength f_b	use category																
4 N/mm ²	w/w	w/d	1,2														1,2
	d/d		1,2														1,5
6 N/mm ²	w/w	w/d	1,5														1,5
	d/d		1,5														1,5
8 N/mm ²	w/w	w/d	1,5														2,0
	d/d		2,0														2,0

Table C30.2: Characteristic resistance under tension load (Push through anchorage)

Anchor rod		M10		M12		M16							
Perforated sleeve FIS H K		18x130/200		22x130/200									
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)													
compressive strength f_b	use category												
4 N/mm ²	w/w	w/d							1,2				
	d/d								1,5				
6 N/mm ²	w/w	w/d							1,5				
	d/d								1,5				
8 N/mm ²	w/w	w/d							2,0				
	d/d								2,0				

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, T8, Characteristic resistance under tension load

Annex C 30

Vertical perforated brick HLz, T8, EN 771-1:2015

Table C31.1: Characteristic resistance under shear load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-		M6 11x85	M8	-	-	-	-	M10 15x85	M12	-	-	-	-	
Perforated sleeve FIS H K	12x50	12x85			16x85		16x130		20x85		20x130		20x200			
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)																
compressive strength f_b	use category															
4 N/mm ²	w/w	w/d														
	d/d															
6 N/mm ²	w/w	w/d														
	d/d															
8 N/mm ²	w/w	w/d														
	d/d															

Table C31.2: Characteristic resistance under shear load (Push through anchorage)

Anchor rod	M10	M12	M16	
Perforated sleeve FIS H K	18x130/200		22x130/200	
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)				
compressive strength f_b	use category			
4 N/mm ²	w/w	w/d		
	d/d			
6 N/mm ²	w/w	w/d		
	d/d			
8 N/mm ²	w/w	w/d		
	d/d			


Factor for job site tests and displacements see annex C108

fischer injection system FIS V Plus for masonry


Performance
Vertical perforated brick HLz, T8, Characteristic resistance under shear load

Annex C 31

Vertical perforated brick HLz, T10, T11, EN 771-1:2015

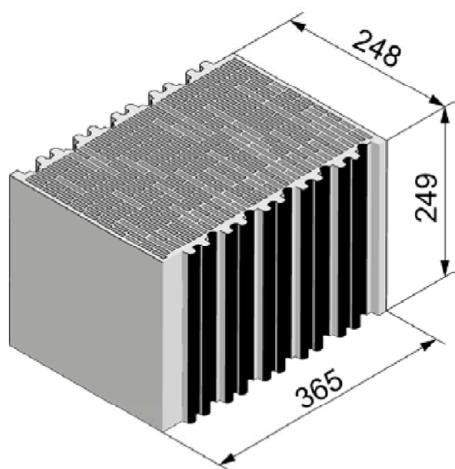

Vertical perforated brick HLz, T10, T11, EN 771-1:2015		
Producer	-	
Nominal dimensions [mm]	length L	width W
	248	365
height H	249	
Density ρ [kg/dm ³]	0,7	
Compressive strength f_b [N/mm ²]	8 / 10 / 12	
Standard or annex	EN 771-1:2015	

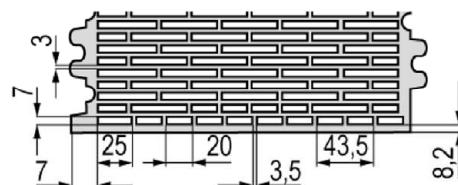

Dimension see also Annex B 16

Table C32.1: Installation parameters
(Pre-positioned anchorage with perforated sleeve FIS H K)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16													
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-	-														
						11x85					15x85																		
Perforated sleeve FIS H K	12x50	12x85	16x85	16x130	16x130	20x85	20x130	20x130	20x200	20x200																			
Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K																													
Max. installation torque	T_{inst} [Nm]	3	5	3	5																								
General installation parameters																													
Edge distance	C_{min}	[mm]	60																										
	$S_{min \parallel}$		80																										
Spacing	$S_{cr \parallel}$		250																										
	$S_{min \perp}$		80																										
	$S_{cr \perp}$		250																										
Drilling method																													
Rotary drilling with carbide drill																													

Table C32.2: Group factors

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-	-	
						11x85					15x85					
Perforated sleeve FIS H K	12x50	12x85	16x85	16x130	16x130	20x85	20x130	20x130	20x200	20x200						
Group factors	$\alpha_{g,N \parallel}$	[-]	1,7													
	$\alpha_{g,v \parallel}$		0,5													
	$\alpha_{g,N \perp}$		1,3													
	$\alpha_{g,v \perp}$		0,5													

fischer injection system FIS V Plus for masonry

Performance
Vertical perforated brick HLz, T10, T11, dimensions, installation parameters

Annex C 32

Vertical perforated brick HLz, T10, T11, EN 771-1:2015

Table C33.1: Installation parameters
(Push through anchorage with perforated sleeve FIS H K)

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
Anchor rod with perforated sleeve FIS H K			
Max. installation torque	T_{inst} [Nm]		5
General installation parameters			
Edge distance	c_{min}	60	
	$s_{min \parallel}$	80	
Spacing	$s_{cr \parallel}$	250	
	$s_{min \perp}$	80	
	$s_{cr \perp}$	250	
Drilling method			
Rotary drilling with carbide drill			

Table C33.2: Group factors

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
Group factors	$\alpha_{g,N \parallel}$	1,7	
	$\alpha_{g,v \parallel}$	0,5	
	$\alpha_{g,N \perp}$	1,3	
	$\alpha_{g,v \perp}$	0,5	

fischer injection system FIS V Plus for masonry

Performance
Vertical perforated brick HLz, T10, T11, dimensions, installation parameters

Annex C 33

Vertical perforated brick HLz, T10, T11, EN 771-1:2015

Table C34.1: Characteristic resistance under tension load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-		M6 11x85	M8	-	-	-	M10 15x85	M12	-	-	-	-	-	
Perforated sleeve FIS H K	12x50	12x85		16x85		16x130		20x85		20x130		20x200				

$N_{RK} = N_{RK,p} = N_{RK,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)

compressive strength f_b	use category										
8 N/mm ²	w/w	w/d	1,5								1,5
	d/d		1,5								2,0
10 N/mm ²	w/w	w/d	1,5								2,0
	d/d		2,0								2,0
12 N/mm ²	w/w	w/d	2,0								2,0
	d/d		2,0								2,5

Table C34.2: Characteristic resistance under tension load (Push through anchorage)

Anchor rod			M10	M12	M16
Perforated sleeve FIS H K	18x130/200				22x130/200
$N_{RK} = N_{RK,p} = N_{RK,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)					
compressive strength f_b	use category				
8 N/mm ²	w/w	w/d	1,5		1,5
	d/d		2,0		2,0
10 N/mm ²	w/w	w/d	2,0		2,0
	d/d		2,0		2,0
12 N/mm ²	w/w	w/d	2,0		2,0
	d/d		2,5		2,5

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, T10, T11, Characteristic resistance under tension load

Annex C 34

Vertical perforated brick HLz, T10, T11, EN 771-1:2015

Table C35.1: Characteristic resistance under shear load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-			M6 M8	-	-			M10 M12	-	-			15x85	-
Perforated sleeve FIS H K	12x50	12x85			16x85		16x130		20x85		20x130		20x200			

$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)

compressive strength f_b	use category														
8 N/mm ²	w/w	w/d													2,0
	d/d														
10 N/mm ²	w/w	w/d													2,0
	d/d														
12 N/mm ²	w/w	w/d													2,0
	d/d														

Table C35.2: Characteristic resistance under shear load (Push through anchorage)

Anchor rod	M10		M12		M16									
Perforated sleeve FIS H K	18x130/200			22x130/200										
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)														
compressive strength f_b	use category													
8 N/mm ²	w/w	w/d	1,5		2,0									
	d/d													
10 N/mm ²	w/w	w/d	1,5		2,0									
	d/d													
12 N/mm ²	w/w	w/d	2,0		2,0									
	d/d													

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, T10, T11, Characteristic resistance under shear load


Annex C 35

Vertical perforated brick HLz, T7 PF, filled with perlite, EN 771-1:2015

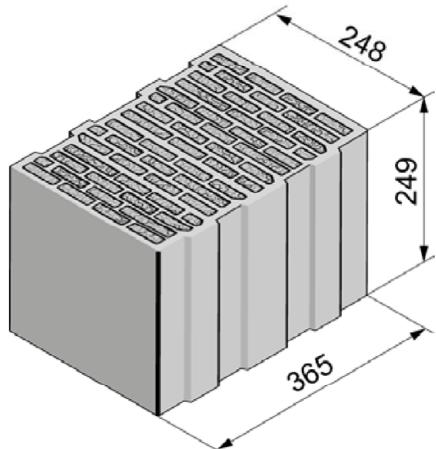

Vertical perforated brick HLz, T7 PF, filled with perlite,
EN 771-1:2015

Producer	-		
Nominal dimensions [mm]	length L	width W	height H
	248	365	249
Density ρ [kg/dm ³]	0,5		
Compressive strength f_b [N/mm ²]	4 / 6		
Standard or annex	EN 771-1:2015		

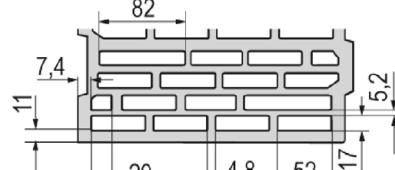

Dimension see also
Annex B 16

Table C36.1: Installation parameters
(Pre-positioned anchorage with perforated sleeve FIS H K)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-	-	-
Perforated sleeve FIS H K	12x50	12x85	16x85	16x130	20x85	20x130	20x200									

Ankerstangen und Innengewindeanker FIS E mit Injektionsanker-Hülse FIS H K

Max. installation torque	T_{inst} [Nm]	2	5	2	5
--------------------------	-----------------	---	---	---	---

General installation parameters

Edge distance	C_{min}	[mm]	60
	$S_{min \parallel}$		80
Spacing	$S_{cr \parallel}$		250
	$S_{min \perp}$		80
	$S_{cr \perp}$		250

Drilling method

Rotary drilling with carbide drill

Table C36.2: Group factors

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-	-	-
Perforated sleeve FIS H K	12x50	12x85	16x85	16x130	20x85	20x130	20x200									
Group factors	$\alpha_{g,N \parallel}$	$\alpha_{g,v \parallel}$	$\alpha_{g,N \perp}$	$\alpha_{g,v \perp}$	[-]	1,1										
						1,2										
						1,1										
						1,2										

fischer injection system FIS V Plus for masonry

Performance
Vertical perforated brick HLz, T7 PF, filled with perlite,
dimensions, installation parameters

Annex C 36

Vertical perforated brick HLz, T7 PF, filled with perlite, EN 771-1:2015

Table C37.1: Installation parameters
(Push through anchorage with perforated sleeve FIS H K)

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
Anchor rod with perforated sleeve FIS H K			
Max. installation torque	T_{inst} [Nm]		5
General installation parameters			
Edge distance	c_{min}	60	
	$s_{min \parallel}$	80	
Spacing	$s_{cr \parallel}$	250	
	$s_{min \perp}$	80	
	$s_{cr \perp}$	250	
Drilling method			
Rotary drilling with carbide drill			

Table C37.2: Group factors

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
Group factors	$\alpha_{g,N \parallel}$	1,1	
	$\alpha_{g,v \parallel}$	1,2	
	$\alpha_{g,N \perp}$	1,1	
	$\alpha_{g,v \perp}$	1,2	

fischer injection system FIS V Plus for masonry

Performance
Vertical perforated brick HLz, T7 PF, filled with perlite,
dimensions, installation parameters

Annex C 37

Vertical perforated brick HLz, T7 PF, filled with perlite, EN 771-1:2015

Table C38.1: Characteristic resistance under tension load (Pre-positioned anchorage)

Anchor rod		M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E		-	-		M6	M8		-	-		M10	M12	-	-	-	-	-
Perforated sleeve FIS H K		12x50	12x85		16x85		16x130		20x85		20x130		20x200				
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)																	
compressive strength f_b	use category																
4 N/mm ²	w/w	w/d	1,2				1,2				1,2				1,2		
	d/d		1,5				1,5				1,5				1,5		
6 N/mm ²	w/w	w/d	1,5				1,5				1,5				1,5		
	d/d		1,5				2,0				1,5				2,0		

Table C38.2: Characteristic resistance under tension load (Push through anchorage)

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)				
compressive strength f_b	use category			
4 N/mm ²	w/w	w/d	1,2	1,2
	d/d		1,5	1,5
6 N/mm ²	w/w	w/d	1,5	1,5
	d/d		2,0	2,0

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, T7 PF, filled with perlite,
Characteristic resistance under tension load

Annex C 38

Vertical perforated brick HLz, T7 PF, filled with perlite, EN 771-1:2015

Table C39.1: Characteristic resistance under shear load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-		M6 11x85	M8	-	-	-	-	M10 15x85	M12	-	-	-	-	
Perforated sleeve FIS H K	12x50	12x85		16x85		16x130		20x85		20x130		20x200				
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)																
compressive strength f_b	use category															
4 N/mm ²	w/w	w/d	0,9	1,5					1,2							
	d/d															
6 N/mm ²	w/w	w/d	1,2	2,0					1,5							
	d/d															

Table C39.2: Characteristic resistance under shear load (Push through anchorage)

Anchor rod	M10	M12	M16												
Perforated sleeve FIS H K	18x130/200	22x130/200													
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)															
compressive strength f_b	use category														
4 N/mm ²	w/w	w/d	1,5						1,2						
	d/d														
6 N/mm ²	w/w	w/d	2,0						1,5						
	d/d														

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, T7 PF, filled with perlite,
Characteristic resistance under shear load

Annex C 39

Vertical perforated brick HLz, S9 MW, filled with mineral wool, EN 771-1:2015

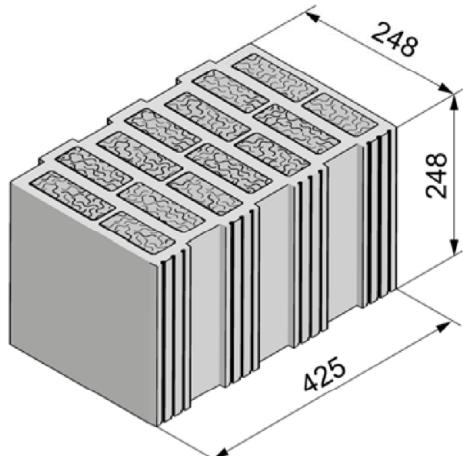

Vertical perforated brick HLz, S9 MW, filled with mineral wool, EN 771-1:2015		
Producer	-	
Nominal dimensions [mm]	length L	width W
	248	425
height H	248	
Density ρ [kg/dm ³]	0,8	
Compressive strength f_b [N/mm ²]	4 / 6 / 8	
Standard or annex	EN 771-1:2015	

Dimension see also Annex B 16

Table C40.1: Installation parameters
(Pre-positioned anchorage with perforated sleeve FIS H K)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-	-	
Perforated sleeve FIS H K	12x50	12x85	16x85	16x130	20x85	20x130	20x200									

Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K

Max. installation torque	T_{inst} [Nm]	3	5	3	5
--------------------------	-----------------	---	---	---	---

General installation parameters

Edge distance	c_{min}	[mm]	60
	$s_{min \parallel}$		80
Spacing	$s_{cr \parallel}$		250
	$s_{min \perp}$		80
	$s_{cr \perp}$		250

Drilling method

Rotary drilling with carbide drill

Table C40.2: Group factors

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-	-	
Perforated sleeve FIS H K	12x50	12x85	16x85	16x130	20x85	20x130	20x200									

Group factors

$\alpha_{g,N \parallel}$	[-]	1,3
$\alpha_{g,V \parallel}$		1,2
$\alpha_{g,N \perp}$		0,6
$\alpha_{g,V \perp}$		1,2

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, S9 MW, filled with mineral wool, dimensions, installation parameters

Annex C 40

Vertical perforated brick HLz, S9 MW, filled with mineral wool, EN 771-1:2015

Table C41.1: Installation parameters
(Push through anchorage with perforated sleeve FIS H K)

Anchor rod	M10	M12	M16	
Perforated sleeve FIS H K	18x130/200		22x130/200	
Anchor rod with perforated sleeve FIS H K				
Max. installation torque	T_{inst} [Nm]		5	
General installation parameters				
Edge distance	c_{min}	[mm]	60	
	$s_{min \parallel}$		80	
Spacing	$s_{cr \parallel}$		250	
	$s_{min \perp}$		80	
	$s_{cr \perp}$		250	
Drilling method				
Rotary drilling with carbide drill				

Table C41.2: Group factors

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
Group factors	$\alpha_{g,N \parallel}$	[-]	1,3
	$\alpha_{g,v \parallel}$		1,2
	$\alpha_{g,N \perp}$		0,6
	$\alpha_{g,v \perp}$		1,2

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, S9 MW, filled with mineral wool,
dimensions, installation parameters

Annex C 41

Vertical perforated brick HLz, S9 MW, filled with mineral wool, EN 771-1:2015

Table C42.1: Characteristic resistance under tension load (Pre-positioned anchorage)

Anchor rod		M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E		-	-			M6	M8				M10	M12					
						11x85					15x85						
Perforated sleeve FIS H K		12x50	12x85			16x85		16x130		20x85		20x130		20x200			
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)																	
compressive strength f_b	use category																
4 N/mm ²	w/w	w/d		1,5			2,0		3,0		2,5		4,0				
	d/d			2,0			2,5		3,0		2,5		4,5				
6 N/mm ²	w/w	w/d		2,0			2,5		3,5		3,0		5,0				
	d/d			2,0			3,0		4,0		3,0		5,5				
8 N/mm ²	w/w	w/d		2,5			3,0		4,0		3,5		6,0				
	d/d			2,5			3,0		4,5		3,5		6,5				

Table C42.2: Characteristic resistance under tension load (Push through anchorage)

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)				
compressive strength f_b	use category			
4 N/mm ²	w/w	w/d	3,0	4,0
	d/d		3,0	4,5
6 N/mm ²	w/w	w/d	3,5	5,0
	d/d		4,0	5,5
8 N/mm ²	w/w	w/d	4,0	6,0
	d/d		4,5	6,5

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, S9 MW, filled with mineral wool;
Characteristic resistance under tension load

Annex C 42

Vertical perforated brick HLz, S9 MW, filled with mineral wool, EN 771-1:2015

Table C43.1: Characteristic resistance under shear load (Pre-positioned anchorage)

Anchor rod		M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E		-	-			M6	M8				M10	M12					
Perforated sleeve FIS H K		12x50	12x85			16x85		16x130		20x85		20x130		20x200			

$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)

compressive strength f_b	use category														
4 N/mm²	w/w	w/d	2,0			2,0			2,5			2,0			1,5
	d/d														
6 N/mm²	w/w	w/d	2,5			2,5			3,0			2,5			2,0
	d/d														
8 N/mm²	w/w	w/d	2,5			3,0			4,0			3,0			2,5
	d/d														

Table C43.2: Characteristic resistance under shear load (Push through anchorage)

Anchor rod		M10	M12	M16		
Perforated sleeve FIS H K		18x130/200		22x130/200		
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)						
compressive strength f_b	use category					
4 N/mm²	w/w	w/d	2,5			
	d/d					
6 N/mm²	w/w	w/d	3,0			
	d/d					
8 N/mm²	w/w	w/d	4,0			
	d/d					

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance


Vertical perforated brick HLz, S9 MW, filled with mineral wool;
Characteristic resistance under shear load

Annex C 43

Vertical perforated brick HLz, T7 MW, filled with mineral wool, EN 771-1:2015

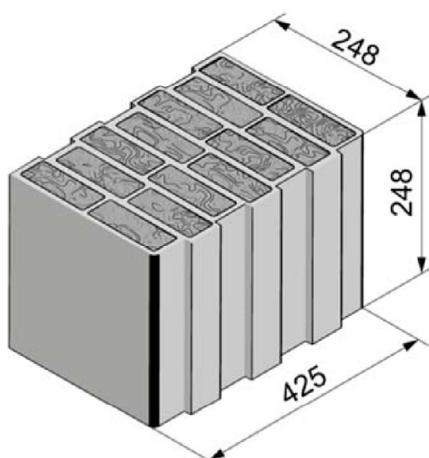

Vertical perforated brick HLz, T7 MW, filled with mineral wool, EN 771-1:2015		
Producer	-	
Nominal dimensions [mm]	length L	width W
	248	425
height H	248	
Density ρ [kg/dm ³]	0,6	
Compressive strength f_b [N/mm ²]	4 / 6 / 8	
Standard or annex	EN 771-1:2015	

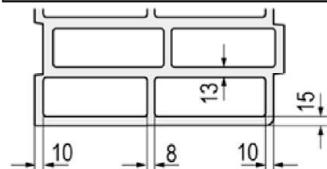

Dimension see also
Annex B 16

Table C44.1: Installation parameters
(Pre-positioned anchorage with perforated sleeve FIS H K)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16														
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-	-															
					11x85					15x85																				
Perforated sleeve FIS H K	12x50	12x85			16x85		16x130			20x85		20x130		20x200																
Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K																														
Max. installation torque T_{inst} [Nm]	2		5	2											5															
General installation parameters																														
Edge distance c_{min}	[mm]	60																												
$s_{min \parallel}$		80																												
$s_{cr \parallel}$		250																												
$s_{min \perp}$		80																												
$s_{cr \perp}$		250																												
Drilling method																														
Rotary drilling with carbide drill																														

Table C44.2: Group factors

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-	-	
					11x85					15x85						
Perforated sleeve FIS H K	12x50	12x85			16x85		16x130			20x85		20x130		20x200		
Group factors	$\alpha_{g,N \parallel}$	1,9														
	$\alpha_{g,V \parallel}$	0,9														
	$\alpha_{g,N \perp}$	1,0														
	$\alpha_{g,V \perp}$	0,7														

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, T7 MW, filled with mineral wool;
dimensions, installation parameters

Annex C 44

Vertical perforated brick HLz, T7 MW, filled with mineral wool, EN 771-1:2015

Table C45.1: Installation parameters
(Push through anchorage with perforated sleeve FIS H K)

Anchor rod	M10	M12	M16	
Perforated sleeve FIS H K	18x130/200		22x130/200	
Anchor rod with perforated sleeve FIS H K				
Max. installation torque	T_{inst} [Nm]		5	
General installation parameters				
Edge distance	c_{min}	[mm]	60	
	$s_{min \parallel}$		80	
Spacing	$s_{cr \parallel}$		250	
	$s_{min \perp}$		80	
	$s_{cr \perp}$		250	
Drilling method				
Rotary drilling with carbide drill				

Table C45.2: Group factors

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
Group factors	$\alpha_{g,N \parallel}$	[-]	1,9
	$\alpha_{g,V \parallel}$		0,9
	$\alpha_{g,N \perp}$		1,0
	$\alpha_{g,V \perp}$		0,7

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, T7 MW, filled with mineral wool;
dimensions, installation parameters

Annex C 45

Vertical perforated brick HLz, T7 MW, filled with mineral wool, EN 771-1:2015

Table C46.1: Characteristic resistance under tension load (Pre-positioned anchorage)

Anchor rod		M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E		-	-			M6	M8				M10	M12					
						11x85					15x85						
Perforated sleeve FIS H K		12x50	12x85			16x85		16x130		20x85		20x130		20x200			
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)																	
compressive strength f_b	use category																
4 N/mm ²	w/w	w/d	0,6	0,75		1,5		2,0		1,2		2,0		2,0			
	d/d		0,6	0,9		1,5		2,0		1,5		2,0		2,5			
6 N/mm ²	w/w	w/d	0,75	0,9		1,5		2,0		1,5		2,5		2,5			
	d/d		0,9	0,9		2,0		2,5		2,0		2,5		3,0			
8 N/mm ²	w/w	w/d	0,9	1,2		2,0		2,5		2,0		2,5		3,0			
	d/d		0,9	1,2		2,0		3,0		2,0		3,0		3,5			

Table C46.2: Characteristic resistance under tension load (Push through anchorage)

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)				
compressive strength f_b	use category			
4 N/mm ²	w/w	w/d	2,0	2,0
	d/d		2,0	2,0
6 N/mm ²	w/w	w/d	2,0	2,5
	d/d		2,5	2,5
8 N/mm ²	w/w	w/d	2,5	2,5
	d/d		3,0	3,0

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, T7 MW, filled with mineral wool;
Characteristic resistance under tension load

Annex C 46

Vertical perforated brick HLz, T7 MW, filled with mineral wool, EN 771-1:2015

Table C47.1: Characteristic resistance under shear load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-			M6 M8					M10 M12						
					11x85					15x85						
Perforated sleeve FIS H K	12x50	12x85			16x85		16x130			20x85		20x130		20x200		
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)																
compressive strength f_b	w/w	w/d														
4 N/mm ²	w/w	w/d		1,2												1,5
	d/d															
6 N/mm ²	w/w	w/d		1,5												2,0
	d/d															
8 N/mm ²	w/w	w/d		1,5												2,5
	d/d															

Table C47.2: Characteristic resistance under shear load (Push through anchorage)

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)			
compressive strength f_b	w/w	w/d	
4 N/mm ²	w/w	w/d	1,5
	d/d		
6 N/mm ²	w/w	w/d	2,0
	d/d		
8 N/mm ²	w/w	w/d	2,5
	d/d		

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, T7 MW, filled with mineral wool;
Characteristic resistance under shear load

Annex C 47

Vertical perforated brick HLz, EN 771-1:2015

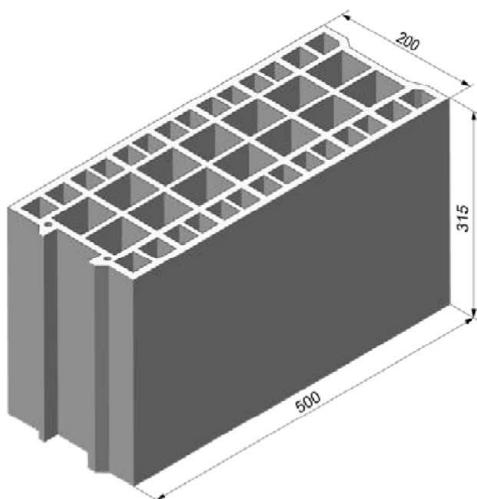

Vertical perforated brick HLz, EN 771-1:2015		
Producer	e.g. Bouyer Leroux	
Nominal dimensions [mm]	length L	width W
	500	200
Density ρ [kg/dm ³]	$\geq 0,6$	
Compressive strength f_b [N/mm ²]	4 / 6 / 8	
Standard or annex	EN 771-1:2015	

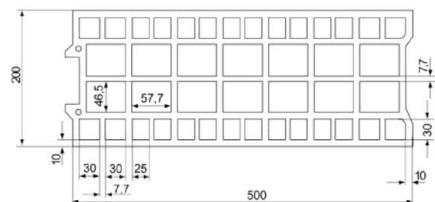


Table C48.1: Installation parameters
(Pre-positioned anchorage with perforated sleeve FIS H K)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-
Perforated sleeve FIS H K	12x50	12x85	16x85	16x130	16x85	16x130	20x85	20x130	20x85	20x130	20x85	20x130	20x85	20x130

Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K

Max. installation torque	T_{inst}	[Nm]	2
--------------------------	------------	------	---

General installation parameters

Edge distance	C_{min}	[mm]	120
	$S_{min \parallel}$		120
Spacing	$S_{cr \parallel}$		500
	$S_{min \perp} = S_{cr \perp}$		315

Drilling method

Hammer drilling with hard metal hammer drill

Table C48.2: Group factors

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-
Perforated sleeve FIS H K	12x50	12x85	16x85	16x130	16x85	16x130	20x85	20x130	20x85	20x130	20x85	20x130	20x85	20x130
Group factors	$\alpha_{g,N \parallel}$	[-]	1,3											
	$\alpha_{g,V \parallel}$		1,7											
	$\alpha_{g,N \perp} = \alpha_{g,V \perp}$		2											

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, dimensions, installation parameters

Annex C 48

Vertical perforated brick HLz, EN 771-1:2015

Table C49.1: Installation parameters
(Push through anchorage with perforated sleeve FIS H K)

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
Anchor rod with perforated sleeve FIS H K			
Max. installation torque	T_{inst} [Nm]		2
General installation parameters			
Edge distance	c_{min}	120	
Spacing	$s_{min \parallel}$	120	
	$s_{cr \parallel}$	500	
	$s_{min \perp} = s_{cr \perp}$	315	
Drilling method			
Hammer drilling with hard metal hammer drill			

Table C49.2: Group factors

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
Group factors	$\alpha_{g,N \parallel}$	1,3	
	$\alpha_{g,v \parallel}$	1,7	
	$\alpha_{g,N \perp} = \alpha_{g,v \perp}$	2	

Vertical perforated brick HLz, EN 771-1:2015

Table C50.1: Characteristic resistance under tension load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-			M6	M8				M10	M12			
					11x85		-	-		15x85		-	-	
Perforated sleeve FIS H K	12x50	12x85			16x85		16x130			20x85		20x130		
$N_{RK} = N_{RK,p} = N_{RK,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)														
compressive strength f_b	use category													
4 N/mm ²	w/w	w/d	0,5		1,5			0,75		1,5		1,5		1,5
	d/d		0,6		1,5			0,9		1,5		2,0		
6 N/mm ²	w/w	w/d	0,75		2,0			1,2		2,0		2,5		
	d/d		0,9		2,5			1,2		2,5		2,5		
8 N/mm ²	w/w	w/d	0,9		3,0			1,5		3,0		3,5		
	d/d		1,2		3,0			2,0		3,0		3,5		

Table C50.2: Characteristic resistance under tension load (Push through anchorage)

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
$N_{RK} = N_{RK,p} = N_{RK,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)			
compressive strength f_b	use category		
4 N/mm ²	w/w	w/d	0,75
	d/d		0,9
6 N/mm ²	w/w	w/d	1,2
	d/d		1,2
8 N/mm ²	w/w	w/d	1,5
	d/d		2,0

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, Characteristic resistance under tension load

Annex C 50

Vertical perforated brick HLz, EN 771-1:2015

Table C51.1: Characteristic resistance under shear load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-			M6	M8	-	-	-	M10	M12	-	-	-
					11x85	15x85				15x85	15x85			
Perforated sleeve FIS H K	12x50	12x85			16x85	16x130			20x85	20x130				

$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)

compressive strength f_b	use category													
4 N/mm ²	w/w	w/d	1,5			0,9			1,5			2,5		
	d/d													
6 N/mm ²	w/w	w/d	2,5			1,5			2,5			3,5		
	d/d													
8 N/mm ²	w/w	w/d	3,5			2,0			3,5			4,5		
	d/d													


Table C51.2: Characteristic resistance under shear load (Push through anchorage)

Anchor rod	M10		M12		M16					
Perforated sleeve FIS H K	18x130/200				22x130/200					
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)										
compressive strength f_b	use category									
4 N/mm ²	w/w	w/d	0,9							
	d/d									
6 N/mm ²	w/w	w/d	1,5							
	d/d									
8 N/mm ²	w/w	w/d	2,0							
	d/d									

Factor for job site tests and displacements see annex C110

fischer injection system FIS V Plus for masonry	Annex C 51
Performance Vertical perforated brick HLz, Characteristic resistance under shear load	

Vertical perforated brick HLz, EN 771-1:2015

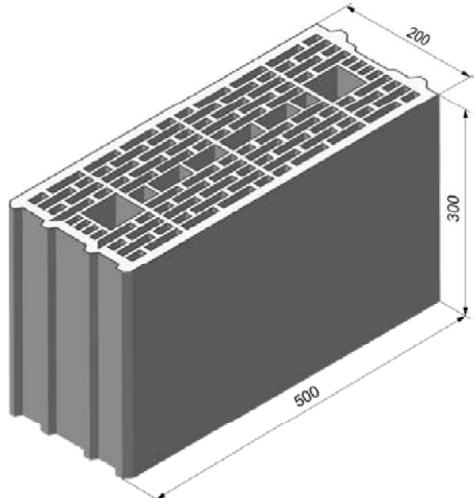

Vertical perforated brick HLz, EN 771-1:2015		
Producer	e.g. Wienerberger	
Nominal dimensions [mm]	length L	width W
	500	200
Density ρ [kg/dm ³]	$\geq 0,7$	
Compressive strength f_b [N/mm ²]	4 / 6 / 8 / 10	
Standard or annex	EN 771-1:2015	

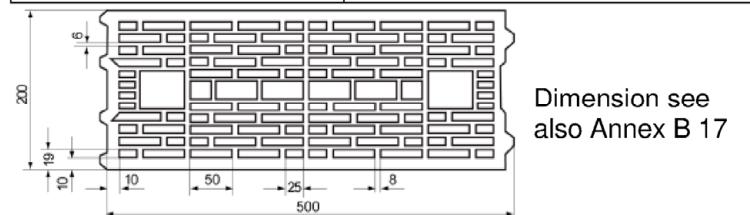


Table C52.1: Installation parameters
(Pre-positioned anchorage with perforated sleeve FIS H K)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-
Perforated sleeve FIS H K	12x50	12x85	16x85	16x130	16x85	16x130	20x85	20x130	20x85	20x130	20x85	20x130	20x85	20x130

Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K

Max. installation torque	T_{inst}	[Nm]	2
--------------------------	------------	------	---

General installation parameters

Edge distance	c_{min}	[mm]	50	80	50	80
	$s_{min \parallel}$		100			
Spacing	$s_{cr \parallel}$		500			
	$s_{min \perp} = s_{cr \perp}$		300			

Drilling method

Hammer drilling with hard metal hammer drill

Table C52.2: Group factors

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-
Perforated sleeve FIS H K	12x50	12x85	16x85	16x130	16x85	16x130	20x85	20x130	20x85	20x130	20x85	20x130	20x85	20x130
Group factors	$\alpha_{g,N \parallel}$	$\alpha_{g,V \parallel}$	$\alpha_{g,N \perp} = \alpha_{g,V \perp}$	[-]	1,4									
					2									

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, dimensions, installation parameters

Annex C 52

Vertical perforated brick HLz, EN 771-1:2015

Table C53.1: Installation parameters
(Push through anchorage with perforated sleeve FIS H K)

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
Anchor rod with perforated sleeve FIS H K			
Max. installation torque	T_{inst} [Nm]		2
General installation parameters			
Edge distance	c_{min}	80	
Spacing	$s_{min \parallel}$ [mm]	100	
	$s_{cr \parallel}$	500	
	$s_{min \perp} = s_{cr \perp}$	300	
Drilling method			
Hammer drilling with hard metal hammer drill			

Table C53.2: Group factors

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
Group factors	$\alpha_{g,N \parallel}$	1,4	
	$\alpha_{g,v \parallel}$	2	
	$\alpha_{g,N \perp} = \alpha_{g,v \perp}$		

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, dimensions, installation parameters

Annex C 53

Vertical perforated brick HLz, EN 771-1:2015

Table C54.1: Characteristic resistance under tension load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-			M6	M8				M10	M12			
					11x85		-	-		15x85		-	-	
Perforated sleeve FIS H K	12x50	12x85			16x85		16x130		20x85		20x130			
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)														
compressive strength f_b	use category													
4 N/mm ²	w/w	w/d	0,5			0,6			1,2	0,75			1,5	
	d/d		0,6			0,75			1,2	0,9			1,5	
6 N/mm ²	w/w	w/d	0,75			0,9			1,5	1,2			2,0	
	d/d		0,9			1,2			2,0	1,2			2,5	
8 N/mm ²	w/w	w/d	0,9			1,2			2,0	1,5			2,5	
	d/d		1,2			1,5			2,5	1,5			3,0	
10 N/mm ²	w/w	w/d	1,2			1,5			2,5	2,0			3,5	
	d/d		1,5			2,0			3,0	2,0			4,0	

Table C54.2: Characteristic resistance under tension load (Push through anchorage)

Anchor rod			M10	M12	M16
Perforated sleeve FIS H K				18x130/200	22x130/200
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)					
compressive strength f_b	use category				
4 N/mm ²	w/w	w/d	1,2		1,5
	d/d		1,2		1,5
6 N/mm ²	w/w	w/d	1,5		2,0
	d/d		2,0		2,5
8 N/mm ²	w/w	w/d	2,0		2,5
	d/d		2,5		3,0
10 N/mm ²	w/w	w/d	2,5		3,5
	d/d		3,0		4,0

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

fischer injection system FIS V Plus for masonry

Performance
Vertical perforated brick HLz, Characteristic resistance under tension load

Annex C 54

Vertical perforated brick HLz, EN 771-1:2015

Table C55.1: Characteristic resistance under shear load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-			M6	M8				M10	M12			
					11x85		-	-		15x85		-		-
Perforated sleeve FIS H K	12x50	12x85			16x85		16x130		20x85		20x130			
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)														
compressive strength f_b	w/w	w/d												
4 N/mm ²	w/w	w/d	0,9	1,2	0,9	1,2	0,6	2,0	0,6	2,0	0,6	2,0	0,6	2,0
6 N/mm ²	w/w	w/d	1,2	1,5	1,2	1,5	0,9	3,0	0,9	3,0	0,9	3,0	0,9	3,0
8 N/mm ²	w/w	w/d	1,5	2,0	1,5	2,0	1,2	4,0	1,2	4,0	1,2	4,0	1,2	4,0
10 N/mm ²	w/w	w/d	2,0	3,0	2,0	3,0	1,5	5,0	1,5	5,0	1,5	5,0	1,5	5,0

Table C55.2: Characteristic resistance under shear load (Push through anchorage)

Anchor rod	M10		M12		M16	
Perforated sleeve FIS H K	18x130/200		22x130/200			
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)						
compressive strength f_b	w/w	w/d				
4 N/mm ²	w/w	w/d	0,6	0,6	0,6	0,6
6 N/mm ²	w/w	w/d	0,9	0,9	0,9	0,9
8 N/mm ²	w/w	w/d	1,2	1,2	1,2	1,2
10 N/mm ²	w/w	w/d	1,5	1,5	1,5	1,5


Factor for job site tests and displacements see annex C110

fischer injection system FIS V Plus for masonry


Performance
Vertical perforated brick HLz, Characteristic resistance under shear load

Annex C 55

Vertical perforated brick HLz, EN 771-1:2015

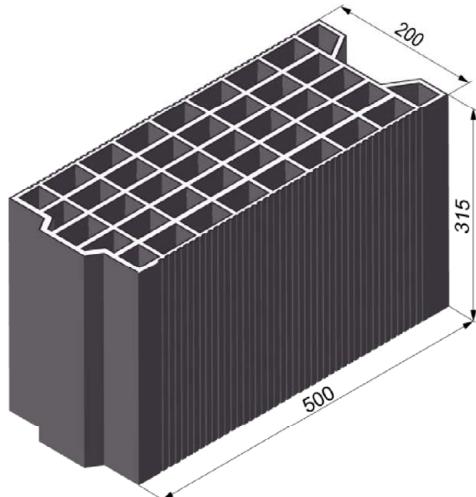

Vertical perforated brick HLz, EN 771-1:2015		
Producer	e.g. Terreal	
Nominal dimensions [mm]	length L	width W
	500	200
Density ρ [kg/dm ³]	$\geq 0,7$	
Compressive strength f_b [N/mm ²]	2 / 4 / 6 / 8	
Standard or annex	EN 771-1:2015	

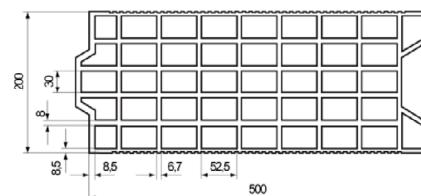

Dimension see also
Annex B 17

Table C56.1: Installation parameters
(Pre-positioned anchorage with perforated sleeve FIS H K)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-
Perforated sleeve FIS H K	12x50	12x85	16x85	16x130			16x85	16x130		20x85		20x85		20x130

Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K

Max. installation torque	T_{inst}	[Nm]	2
--------------------------	------------	------	---

General installation parameters

Edge distance	c_{min}	[mm]	50	80	50	80
	$s_{min \parallel}$		100			
Spacing	$s_{cr \parallel}$		500			
	$s_{min \perp}$		100			
	$s_{cr \perp}$		315			

Drilling method

Hammer drilling with hard metal hammer drill

Table C56.2: Group factors

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-
Perforated sleeve FIS H K	12x50	12x85	16x85	16x130			16x85	16x130		20x85		20x85		20x130
	$\alpha_{g,N \parallel}$	[-]												
Group factors	$\alpha_{g,v \parallel}$													
	$\alpha_{g,N \perp}$													
	$\alpha_{g,v \perp}$													

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, dimensions, installation parameters

Annex C 56

Vertical perforated brick HLz, EN 771-1:2015

Table C57.1: Installation parameters
(Push through anchorage with perforated sleeve FIS H K)

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
Anchor rod with perforated sleeve FIS H K			
Max. installation torque	T_{inst} [Nm]		2
General installation parameters			
Edge distance	C_{min}	80	
Spacing	$S_{min \parallel}$	100	
	$S_{cr \parallel}$ [mm]	500	
	$S_{min \perp}$	100	
	$S_{cr \perp}$	315	
Drilling method			
Hammer drilling with hard metal hammer drill			

Table C57.2: Group factors

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
Group factors	$\alpha_{g,N} \parallel$	1,1	
	$\alpha_{g,v} \parallel$	1,2	
	$\alpha_{g,N} \perp$	1,1	
	$\alpha_{g,v} \perp$	1,2	

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, dimensions, installation parameters

Annex C 57

Vertical perforated brick HLz, EN 771-1:2015

Table C58.1: Characteristic resistance under tension load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16								
Internal threaded anchor FIS E	-	-			M6	M8				M10	M12											
					11x85		-	-		15x85		-	-									
Perforated sleeve FIS H K	12x50	12x85		16x85		16x130		20x85		20x130												
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)																						
compressive strength f_b	use category																					
2 N/mm ²	w/w	w/d	0,5																			
	d/d		0,5				0,6				0,5		0,6									
4 N/mm ²	w/w	w/d	0,9																			
	d/d		0,9	1,2																		
6 N/mm ²	w/w	w/d	1,5																			
	d/d		1,5																			
8 N/mm ²	w/w	w/d	2,0																			
	d/d		2,0																			

Table C58.2: Characteristic resistance under tension load (Push through anchorage)

Anchor rod	M10	M12	M16	
Perforated sleeve FIS H K	18x130/200		22x130/200	
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)				
compressive strength f_b	use category			
2 N/mm ²	w/w	w/d	0,5	
	d/d		0,6	
4 N/mm ²	w/w	w/d	0,9	
	d/d		1,2	
6 N/mm ²	w/w	w/d	1,5	
	d/d		1,5	
8 N/mm ²	w/w	w/d	2,0	
	d/d		2,0	

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

fischer injection system FIS V Plus for masonry

Performance
Vertical perforated brick HLz, Characteristic resistance under tension load

Annex C 58

Vertical perforated brick HLz, EN 771-1:2015

Table C59.1: Characteristic resistance under shear load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16		
Internal threaded anchor FIS E	-	-			M6	M8				M10	M12					
					11x85		-	-		15x85		-		-		
Perforated sleeve FIS H K	12x50	12x85			16x85		16x130			20x85		20x130				
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)																
compressive strength f_b	w/w	w/d														
2 N/mm ²	w/w	w/d	0,3	0,6	0,3	0,6	0,6	0,6	0,9	0,9	0,9	0,9	0,75	0,75		
4 N/mm ²	w/w	w/d	0,75	1,2	0,75	1,2	1,2	1,2	1,2	1,2	1,2	2,0	2,0	1,5	1,5	
6 N/mm ²	w/w	w/d	0,9	2,0	0,9	2,0	1,5	1,5	1,5	1,5	1,5	3,0	3,0	2,0	2,0	
8 N/mm ²	w/w	w/d	1,5	2,5	1,5	2,5	2,5	2,5	2,0	2,0	2,0	2,0	4,0	4,0	3,0	3,0

Table C59.2: Characteristic resistance under shear load (Push through anchorage)

Anchor rod	M10		M12		M16	
Perforated sleeve FIS H K	18x130/200		22x130/200			
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)						
compressive strength f_b	w/w	w/d				
2 N/mm ²	w/w	w/d	0,6	0,6	0,75	0,75
4 N/mm ²	w/w	w/d	1,2	1,2	1,5	1,5
6 N/mm ²	w/w	w/d	1,5	1,5	2,0	2,0
8 N/mm ²	w/w	w/d	2,0	2,0	3,0	3,0


Factor for job site tests and displacements see annex C110

fischer injection system FIS V Plus for masonry

Performance
Vertical perforated brick HLz, Characteristic resistance under shear load

Annex C 59

Vertical perforated brick HLz, EN 771-1:2015

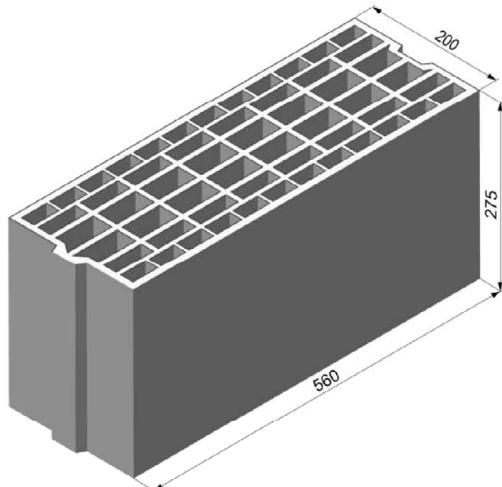

Vertical perforated brick HLz, EN 771-1:2015		
Producer	e.g. Imery	
Nominal dimensions [mm]	length L	width W
	560	200
Density ρ [kg/dm ³]	$\geq 0,7$	
Compressive strength f_b [N/mm ²]	4 / 6 / 8	
Standard or annex	EN 771-1:2015	

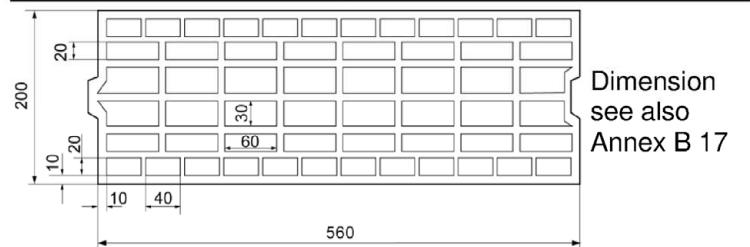


Table C60.1: Installation parameters

Anchor rod	M8	M10	M10	M12	M12	M16	M16
Perforated sleeve FIS H K	16x130	18x130/200	20x130	22x130/200			
Anchor rod with perforated sleeve FIS H K							
Max. installation torque	T_{inst} [Nm]					2	
General installation parameters							
Edge distance	c_{min}				80		
Spacing	$s_{min \parallel} = s_{cr \parallel}$ [mm]				560		
	$s_{min \perp} = s_{cr \perp}$				275		
Drilling method							
Hammer drilling with hard metal hammer drill							

Table C60.2: Group factors

Anchor rod	M8	M10	M10	M12	M12	M16	M16
Perforated sleeve FIS H K	16x130	18x130/200	20x130	22x130/200			
Group factors	$\alpha_{g,N \parallel}$ $\alpha_{g,v \parallel}$ $\alpha_{g,N \perp}$ $\alpha_{g,v \perp}$	[$-$]			2		
fischer injection system FIS V Plus for masonry							

Performance

Vertical perforated brick HLz, dimensions, installation parameters

Annex C 60

Vertical perforated brick HLz, EN 771-1:2015

Table C61.1: Characteristic resistance under tension load

Anchor rod	M8	M10	M10	M12	M12	M16	M16
Perforated sleeve FIS H K	16x130		18x130/200		20x130		22x130/200
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)							
compressive strength f_b	use category						
4 N/mm ²	w/w	w/d	0,9		1,2		
	d/d		1,2		1,5		
6 N/mm ²	w/w	w/d	1,5		2,0		
	d/d		1,5		2,0		
8 N/mm ²	w/w	w/d	2,0		2,5		
	d/d		2,5		3,0		

Factor for temperature range 72/120°C: 0,83

Table C61.2: Characteristic resistance under shear load

Anchor rod	M8	M10	M10	M12	M12	M16	M16
Perforated sleeve FIS H K	16x130		18x130/200		20x130		22x130/200
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)							
compressive strength f_b	use category						
4 N/mm ²	w/w	w/d			0,9		
	d/d						
6 N/mm ²	w/w	w/d			1,5		
	d/d						
8 N/mm ²	w/w	w/d			2,0		
	d/d						

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance


Vertical perforated brick HLz, Characteristic resistance under tension and shear load

Annex C 61

Vertical perforated brick HLz, EN 771-1:2015

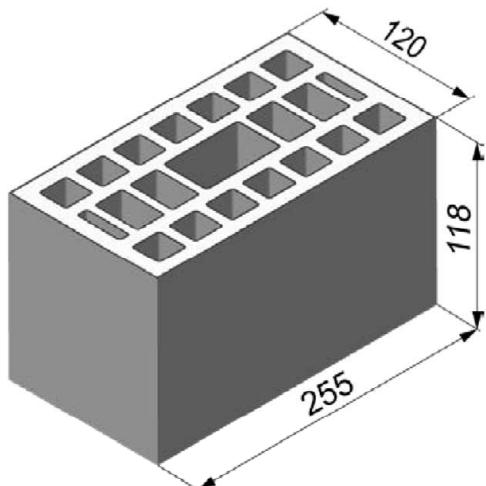

Vertical perforated brick HLz, EN 771-1:2015		
Producer	e.g. Wienerberger	
Nominal dimensions [mm]	length L	width W
	255	120
Density ρ [kg/dm ³]	$\geq 1,0$	
Compressive strength f_b [N/mm ²]	2 / 4 / 6 / 8 / 10 / 12	
Standard or annex	EN 771-1:2015	

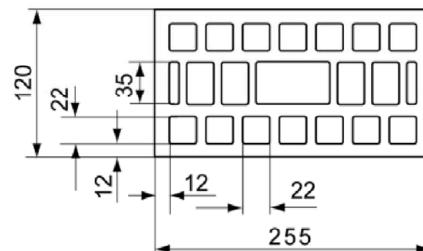

Dimension see also
Annex B 18

Table C62.1: Installation parameters

Anchor rod	M6	M8	M6	M8	-	M8	M10	-	M12	M16										
Internal threaded anchor FIS E	-	-	-	-	M6 M8	-	M10 M12	-	-	-										
Perforated sleeve FIS H K	12x50	12x85	16x85	20x85	11x85	15x85														
Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K																				
Max. installation torque T_{inst} [Nm]							2													
General installation parameters																				
Edge distance C_{min}	[mm]	60																		
Spacing $S_{cr \parallel} = S_{min \parallel}$		255																		
$S_{cr \perp} = S_{min \perp}$		120																		
Drilling method																				
Hammer drilling with hard metal hammer drill																				

Table C62.2: Group factors

Anchor rod	M6	M8	M6	M8	-	M8	M10	-	M12	M16	
Internal threaded anchor FIS E	-	-	-	-	M6 M8	-	M10 M12	-	-	-	
Perforated sleeve FIS H K	12x50	12x85	16x85	20x85	11x85	15x85					
Group factors	$\alpha_{g,N \parallel}$ $\alpha_{g,V \parallel}$ $\alpha_{g,N \perp}$ $\alpha_{g,V \perp}$	[-]	2								
fischer injection system FIS V Plus for masonry											
Performance Vertical perforated brick HLz, dimensions, installation parameters								Annex C 62			

Vertical perforated brick HLz, EN 771-1:2015

Table C63.1: Characteristic resistance under tension load

Anchor rod	M6	M8	M6	M8	-	M8	M10	-	M12	M16			
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	M10	M12			
					11x85	11x85			15x85	-			
	Perforated sleeve FIS H K			12x50	12x85	16x85	16x85	20x85					
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)													
compressive strength f_b	use category												
2 N/mm ²	w/w	w/d	0,4		0,5			-					
	d/d		0,5		0,5			-					
4 N/mm ²	w/w	w/d	0,9		0,9			0,5					
	d/d		0,9		1,2			0,5					
6 N/mm ²	w/w	w/d	1,2		1,5			0,75					
	d/d		1,5		1,5			0,75					
8 N/mm ²	w/w	w/d	1,5		2,0			0,9					
	d/d		2,0		2,0			0,9					
10 N/mm ²	w/w	w/d	2,0		2,5			1,2					
	d/d		2,5		2,5			1,2					
12 N/mm ²	w/w	w/d	2,5		3,0			1,5					
	d/d		3,0		3,5			1,5					

¹⁾ No performance assesses

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

fischer injection system FIS V Plus for masonry

Performance
Vertical perforated brick HLz, Characteristic resistance under tension load

Annex C 63

Vertical perforated brick HLz, EN 771-1:2015

Table C64.1: Characteristic resistance under shear load

Anchor rod	M6	M8	M6	M8	-	M8	M10	-	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	M10	M12
					11x85	11x85			15x85	-
Perforated sleeve FIS H K	12x50	12x85	16x85	16x85	20x85	20x85				
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)										
compressivestrengh f_b	use category									
2 N/mm ²	w/w	w/d	0,6	0,75	0,6	0,75				
	d/d									
4 N/mm ²	w/w	w/d	1,2	1,5	1,2	1,5				
	d/d									
6 N/mm ²	w/w	w/d	2,0	2,0	2,0	2,0				
	d/d									
8 N/mm ²	w/w	w/d	2,5	3,0	2,5	3,0				
	d/d									
10 N/mm ²	w/w	w/d	3,0	3,5	3,0	3,5				
	d/d									
12 N/mm ²	w/w	w/d	4,0	4,5	4,0	4,5				
	d/d									

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance


Vertical perforated brick HLz, Characteristic resistance under shear load

Annex C 64

Vertical perforated brick HLz, EN 771-1:2015

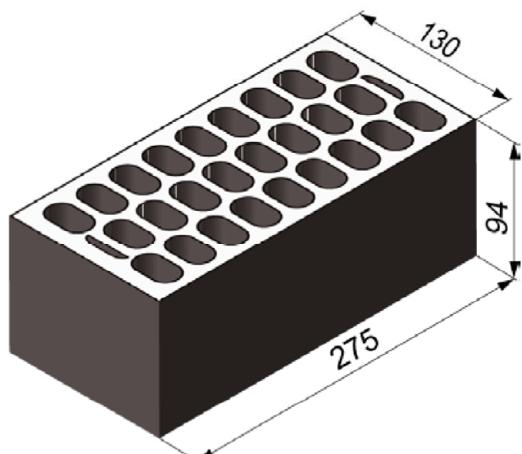

Vertical perforated brick HLz, EN 771-1:2015		
Producer	e.g. Cermanica Farreny S.A.	
Nominal dimensions [mm]	length L	width W
	275	130
Density ρ [kg/dm ³]	$\geq 0,8$	
Compressive strength f_b [N/mm ²]	6 / 8 / 12 / 16 / 20	
Standard or annex	EN 771-1:2015	

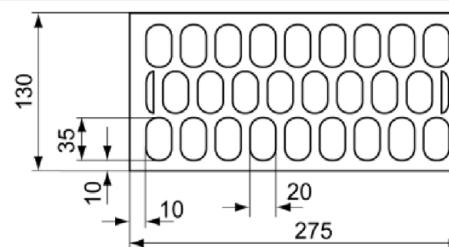

Dimension see also Annex B 18

Table C65.1: Installation parameters

Anchor rod	M6	M8	M6	M8	-	M8	M10	-	M12	M16									
Internal threaded anchor FIS E	-	-	-	-	M6 M8	-	-	M10 M12	-	-									
					11x85			15x85											
Perforated sleeve FIS H K	12x50	12x85	16x85	20x85															
Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K																			
Max. installation torque	T_{inst}	[Nm]						2											
General installation parameters																			
Edge distance	c_{min}	[mm]	100						120										
Spacing	$s_{cr \parallel} = s_{min \parallel}$		275																
	$s_{cr \perp} = s_{min \perp}$		95																
Drilling method																			
Hammer drilling with hard metal hammer drill																			

Table C65.2: Group factors

Anchor rod	M6	M8	M6	M8	-	M8	M10	-	M12	M16	
Internal threaded anchor FIS E	-	-	-	-	M6 M8	-	-	M10 M12	-	-	
					11x85			15x85			
Perforated sleeve FIS H K	12x50	12x85	16x85	20x85							
Group factors	$\alpha_{g,N \parallel}$	$\alpha_{g,V \parallel}$	$\alpha_{g,N \perp}$	$\alpha_{g,V \perp}$	[-]	2					

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, dimensions, installation parameters

Annex C 65

Vertical perforated brick HLz, EN 771-1:2015

Table C66.1: Characteristic resistance under tension load

Anchor rod	M6	M8	M6	M8	-	M8	M10	-	M12	M16	
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	M10	M12	-	
					11x85	11x85			15x85		
	Perforated sleeve FIS H K			12x50	12x85	16x85	16x85	20x85	20x85		
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)											
compressive strength f_b	use category										
6 N/mm ²	w/w	w/d	0,4				0,9				
	d/d		0,4				0,9				
8 N/mm ²	w/w	w/d	0,5				1,2				
	d/d		0,6				1,2				
12 N/mm ²	w/w	w/d	0,75				1,5				
	d/d		0,9				2,0				
16 N/mm ²	w/w	w/d	0,9				2,0				
	d/d		1,2				2,5				
20 N/mm ²	w/w	w/d	1,2				3,0				
	d/d		1,5				3,0				

Factor for temperature range 72/120°C: 0,83

Table C66.2: Characteristic resistance under shear load

Anchor rod	M6	M8	M6	M8	-	M8	M10	-	M12	M16	
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	M10	M12	-	
					11x85	11x85			15x85		
	Perforated sleeve FIS H K			12x50	12x85	16x85	16x85	20x85	20x85		
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)											
compressive strength f_b	use category										
6 N/mm ²	w/w	w/d	1,2				1,2				
	d/d										
8 N/mm ²	w/w	w/d	1,5				1,5				
	d/d										
12 N/mm ²	w/w	w/d	2,0				2,5				
	d/d										
16 N/mm ²	w/w	w/d	3,0				3,0				
	d/d										
20 N/mm ²	w/w	w/d	4,0				4,0				
	d/d										


Factor for job site tests and displacements see annex C110

fischer injection system FIS V Plus for masonry


Performance
Vertical perforated brick HLz, Characteristic resistance under tension and shear load

Annex C 66

Vertical perforated brick HLz, EN 771-1:2015

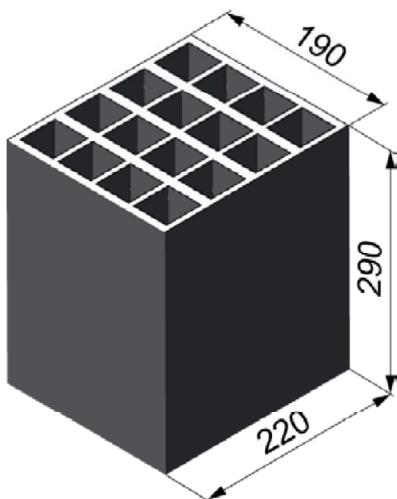

Vertical perforated brick HLz, EN 771-1:2015		
Producer	e.g. Perceram	
Nominal dimensions [mm]	length L	width W
	220	190
Density ρ [kg/dm ³]	$\geq 0,7$	
Compressive strength f_b [N/mm ²]	6 / 8 / 10	
Standard or annex	EN 771-1:2015	

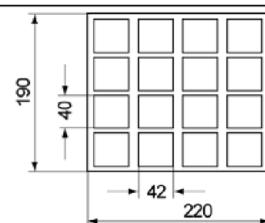

Dimension see also
Annex B 18

Table C67.1: Installation parameters
(Pre-positioned anchorage with perforated sleeve FIS H K)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-
Perforated sleeve FIS H K	12x50	12x85	16x85	16x130	16x85	16x130	20x85	20x130	20x85	20x130	20x85	20x130	20x85	20x130

Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K

Max. installation torque	T_{inst} [Nm]	2
--------------------------	-----------------	---

General installation parameters

Edge distance	c_{min}	[mm]	110
Spacing	$s_{min \parallel} = s_{cr \parallel}$		220
	$s_{min \perp} = s_{cr \perp}$		290

Drilling method

Hammer drilling with hard metal hammer drill

Table C67.2: Group factors

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-
Perforated sleeve FIS H K	12x50	12x85	16x85	16x130	16x85	16x130	20x85	20x130	20x85	20x130	20x85	20x130	20x85	20x130
Group factors	$\alpha_{g,N \parallel}$ $\alpha_{g,v \parallel}$ $\alpha_{g,N \perp}$ $\alpha_{g,v \perp}$	[-]	2											

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, dimensions, installation parameters

Annex C 67

Vertical perforated brick HLz, EN 771-1:2015

Table C68.1: Installation parameters
(Push through anchorage with perforated sleeve FIS H K)

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
Anchor rod with perforated sleeve FIS H K			
Max. installation torque	T_{inst} [Nm]		2
General installation parameters			
Edge distance	c_{min}	110	
Spacing	$s_{min \parallel} = s_{cr \parallel}$ [mm]	220	
	$s_{min \perp} = s_{cr \perp}$	290	
Drilling method			
Hammer drilling with hard metal hammer drill			

Table C68.2: Group factors

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
Group factors	$\alpha_{g,N \parallel}$ $\alpha_{g,v \parallel}$ $\alpha_{g,N \perp}$ $\alpha_{g,v \perp}$	[$-$]	2

Vertical perforated brick HLz, EN 771-1:2015

Table C69.1: Characteristic resistance under tension load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-			M6	M8				M10	M12			
					11x85		-	-		15x85		-		-
Perforated sleeve FIS H K	12x50	12x85			16x85		16x130			20x85		20x130		
$N_{RK} = N_{RK,p} = N_{RK,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)														
compressive strength f_b	use category													
6 N/mm ²	w/w	w/d	0,3	1,2		1,2		1,5		1,2		1,5		
	d/d		0,4	1,5		1,5		1,5		1,5		1,5		
8 N/mm ²	w/w	w/d	0,5	1,5		1,5		2,0		1,5		2,0		
	d/d		0,5	2,0		2,0		2,5		2,0		2,5		
10 N/mm ²	w/w	w/d	0,6	2,0		2,0		2,5		2,0		2,5		
	d/d		0,6	2,5		2,5		3,0		2,5		3,0		

Table C69.2: Characteristic resistance under tension load (Push through anchorage)

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
$N_{RK} = N_{RK,p} = N_{RK,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)			
compressive strength f_b	use category		
6 N/mm ²	w/w	w/d	1,5
	d/d		1,5
8 N/mm ²	w/w	w/d	2,0
	d/d		2,5
10 N/mm ²	w/w	w/d	2,5
	d/d		3,0

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, Characteristic resistance under tension load

Annex C 69

Vertical perforated brick HLz, EN 771-1:2015

Table C70.1: Characteristic resistance under shear load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-			M6	M8				M10	M12			
					11x85		-	-		15x85		-		-
Perforated sleeve FIS H K	12x50	12x85			16x85		16x130			20x85		20x130		

$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)

compressive strength f_b	use category								
6 N/mm ²	w/w	w/d	1,5	1,5	1,5	2,5	1,5	2,0	
	d/d								
8 N/mm ²	w/w	w/d	2,0	2,0	2,0	3,5	2,0	3,0	
	d/d								
10 N/mm ²	w/w	w/d	2,5	3,0	3,0	4,5	3,0	3,5	
	d/d								


Table C70.2: Characteristic resistance under shear load (Push through anchorage)

Anchor rod	M10		M12		M16			
Perforated sleeve FIS H K	18x130/200			22x130/200				
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)								
compressive strength f_b	use category							
6 N/mm ²	w/w	w/d			2,0			
	d/d							
8 N/mm ²	w/w	w/d			3,0			
	d/d							
10 N/mm ²	w/w	w/d			3,5			
	d/d							

Factor for job site tests and displacements see annex C110

fischer injection system FIS V Plus for masonry	Annex C 70
Performance Vertical perforated brick HLz, Characteristic resistance under shear load	

Vertical perforated brick HLz, EN 771-1:2015

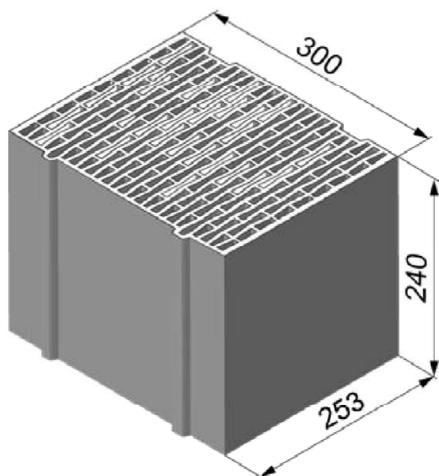

Vertical perforated brick HLz, EN 771-1:2015		
Producer	e.g. Ziegelwerk Brenna	
Nominal dimensions [mm]	length L	width W
	253	300
Density ρ [kg/dm ³]	$\geq 0,8$	
Compressive strength f_b [N/mm ²]	2 / 4 / 6	
Standard or annex	EN 771-1:2015	

Dimension see also Annex B 18

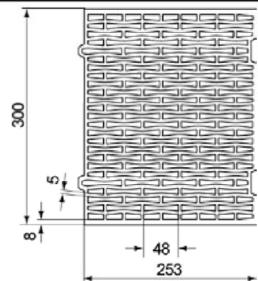


Table C71.1: Installation parameters
(Pre-positioned anchorage with perforated sleeve FIS H K)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E		-		-	M6	M8				M10	M12			
Perforated sleeve FIS H K	12x50	12x85			11x85		-			15x85		-		

Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K

Max. installation torque	T_{inst} [Nm]	2
--------------------------	-----------------	---

General installation parameters

Edge distance	c_{min}	[mm]	60
Spacing	$s_{min \parallel} = s_{cr \parallel}$		255
	$s_{min \perp} = s_{cr \perp}$		240

Drilling method

Hammer drilling with hard metal hammer drill

Table C71.2: Group factors

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E		-		-	M6	M8				M10	M12			
Perforated sleeve FIS H K	12x50	12x85			11x85		-			15x85		-		
Group factors	$\alpha_{g,N \parallel}$	$\alpha_{g,v \parallel}$	$\alpha_{g,N \perp}$	$\alpha_{g,v \perp}$	[-]	2								

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, dimensions, installation parameters

Annex C 71

Vertical perforated brick HLz, EN 771-1:2015

Table C72.1: Installation parameters
(Push through anchorage with perforated sleeve FIS H K)

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
Anchor rod with perforated sleeve FIS H K			
Max. installation torque	T_{inst} [Nm]		2
General installation parameters			
Edge distance	c_{min}	60	
Spacing	$s_{min \parallel} = s_{cr \parallel}$ [mm]	255	
	$s_{min \perp} = s_{cr \perp}$	240	

Drilling method

Hammer drilling with hard metal hammer drill

Table C72.2: Group factors

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
Group factors	$\alpha_{g,N \parallel}$ $\alpha_{g,v \parallel}$ $\alpha_{g,N \perp}$ $\alpha_{g,v \perp}$	[$-$]	2

Vertical perforated brick HLz, EN 771-1:2015

Table C73.1: Characteristic resistance under tension load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-			M6	M8				M10	M12			
					11x85		-	-		15x85		-	-	
Perforated sleeve FIS H K	12x50	12x85		16x85		16x130		20x85		20x130				
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)														
compressive strength f_b	use category													
2 N/mm ²	w/w	w/d	- ¹⁾	0,5		0,5		0,4		0,5		0,4		
	d/d		0,3	0,5		0,5		0,5		0,5		0,5		
4 N/mm ²	w/w	w/d	0,5	0,9		0,9		0,9		0,9		0,9		
	d/d		0,6	0,9		0,9		0,9		0,9		0,9		
6 N/mm ²	w/w	w/d	0,75	1,5		1,5		1,2		1,5		1,2		
	d/d		0,9	1,5		1,5		1,5		1,5		1,5		

¹⁾ No performance assessed

Table C73.2: Characteristic resistance under tension load (Push through anchorage)

Anchor rod	M10	M12	M16											
Perforated sleeve FIS H K	18x130/200		22x130/200											
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)														
compressive strength f_b	use category													
2 N/mm ²	w/w	w/d											0,4	
	d/d												0,5	
4 N/mm ²	w/w	w/d											0,9	
	d/d												0,9	
6 N/mm ²	w/w	w/d											1,2	
	d/d												1,5	

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

fischer injection system FIS V Plus for masonry

Performance
Vertical perforated brick HLz, Characteristic resistance under tension load

Annex C 73

Vertical perforated brick HLz, EN 771-1:2015

Table C74.1: Characteristic resistance under shear load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-			M6	M8				M10	M12		-	-
					11x85		-	-		15x85			-	-
Perforated sleeve FIS H K	12x50	12x85			16x85		16x130			20x85		20x130		

$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)

compressive strength f_b	use category													
2 N/mm ²	w/w	w/d	0,5								0,6			
	d/d													
4 N/mm ²	w/w	w/d	0,9								1,2			
	d/d													
6 N/mm ²	w/w	w/d	1,5								1,5			
	d/d													

Table C74.2: Characteristic resistance under shear load (Push through anchorage)

Anchor rod	M10		M12		M16					
Perforated sleeve FIS H K	18x130/200		22x130/200							
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)										
compressive strength f_b	use category									
2 N/mm ²	w/w	w/d	0,5				0,6			
	d/d									
4 N/mm ²	w/w	w/d	0,9				1,2			
	d/d									
6 N/mm ²	w/w	w/d	1,5				1,5			
	d/d									


Factor for job site tests and displacements see annex C110

fischer injection system FIS V Plus for masonry

Performance
Vertical perforated brick HLz, Characteristic resistance under shear load

Annex C 74

Vertical perforated brick HLz, Porotherm W 44, filled with mineral wool, EN 771-1:2015

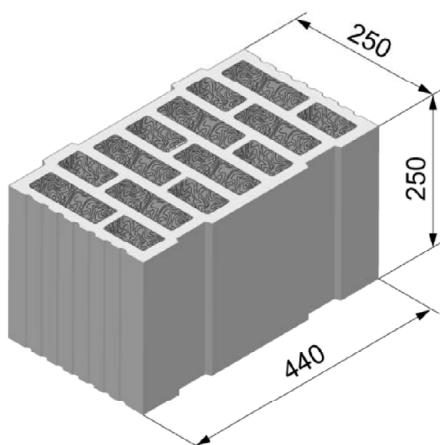

Vertical perforated brick HLz, Porotherm W 44, filled with mineral wool, EN 771-1:2015			
Producer		-	
Nominal dimensions [mm]	length L	width W	height H
	250	440	250
Density ρ [kg/dm ³]		0,7	
Compressive strength f_b [N/mm ²]		6 / 8 / 10	
Standard or annex	EN 771-1:2015		

Dimension see also Annex B 18

Table C75.1: Installation parameters
(Pre-positioned anchorage with perforated sleeve FIS H K)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6 M8	-	-	-	-	M10 M12	-	-	-	-	-	-
Perforated sleeve FIS H K	12x50	12x85			11x85	16x85		16x130		20x85	20x130		20x130		20x200	

Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K

Max. installation torque	T_{inst} [Nm]	2	5	2	5	6
--------------------------	-----------------	---	---	---	---	---

General installation parameters

Edge distance	c_{min}	[mm]	60
	$s_{min \parallel}$		80
Spacing	$s_{cr \parallel}$		250
	$s_{min \perp}$		80
	$s_{cr \perp}$		250

Drilling method

Rotary drilling with carbide drill

Table C75.2: Group factors

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6 M8	-	-	-	-	M10 M12	-	-	-	-	-	-
Perforated sleeve FIS H K	12x50	12x85			11x85	16x85		16x130		20x85	20x130		20x130		20x200	

Group factors $\alpha_{g,N \parallel}$ [-]

$\alpha_{g,v \parallel}$	1,3
$\alpha_{g,N \perp}$	0,8
$\alpha_{g,v \perp}$	1,3

fischer injection system FIS V Plus for masonry

Performance
Vertical perforated brick HLz, Porotherm W 44, filled with mineral wool;
dimensions, installation parameters

Annex C 75

Vertical perforated brick HLz, Porotherm W 44, filled with mineral wool, EN 771-1:2015

Table C76.1: Installation parameters
(Push through anchorage with perforated sleeve FIS H K)

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
Anchor rod with perforated sleeve FIS H K			
Max. installation torque	T_{inst} [Nm]	5	6
General installation parameters			
Edge distance	c_{min}	60	
	$s_{min \parallel}$	80	
Spacing	$s_{cr \parallel}$	250	
	$s_{min \perp}$	80	
	$s_{cr \perp}$	250	
Drilling method			
Rotary drilling with carbide drill			

Table C76.2: Group factors

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
Group factors	$\alpha_{g,N \parallel}$	1,3	
	$\alpha_{g,v \parallel}$	1,3	
	$\alpha_{g,N \perp}$	0,8	
	$\alpha_{g,v \perp}$	1,3	

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, Porotherm W 44, filled with mineral wool;
dimensions, installation parameters

Annex C 76

Vertical perforated brick HLz, Porotherm W 44, filled with mineral wool, EN 771-1:2015

Table C77.1: Characteristic resistance under tension load (Pre-positioned anchorage)

Anchor rod		M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E		-	-		M6	M8		-	-		M10	M12	-	-	-	-	-
					11x85						15x85						
Perforated sleeve FIS H K		12x50		12x85		16x85		16x130		20x85		20x130		20x200			
$N_{RK} = N_{RK,p} = N_{RK,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)																	
compressive strength f_b	use category																
6 N/mm ²	w/w	w/d	0,75		1,5		1,2				1,5						2,5
	d/d		0,9		1,5		1,2				1,5						2,5
8 N/mm ²	w/w	w/d	0,9		1,5		1,2				1,5						2,5
	d/d		0,9		2,0		1,5				2,0						3,0
10 N/mm ²	w/w	w/d	0,9		2,0		1,5				2,0						3,0
	d/d		1,2		2,0		1,5				2,0						3,5

Table C77.2: Characteristic resistance under tension load (Push through anchorage)

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
$N_{RK} = N_{RK,p} = N_{RK,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)				
compressive strength f_b	use category			
6 N/mm ²	w/w	w/d		1,5
	d/d			1,5
8 N/mm ²	w/w	w/d		1,5
	d/d			2,0
10 N/mm ²	w/w	w/d		2,0
	d/d			2,0

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, Porotherm W 44, filled with mineral wool,
Characteristic resistance under tension load

Annex C 77

Vertical perforated brick HLz, Porotherm W 44, filled with mineral wool, EN 771-1:2015

Table C78.1: Characteristic resistance under shear load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-			M6 M8					M10 M12						
Perforated sleeve FIS H K	12x50	12x85			11x85			16x85		16x130		20x85		20x130		20x200

$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)

compressive strength f_b	use category													
6 N/mm ²	w/w	w/d	0,9			1,2			0,9			1,2		
	d/d													
8 N/mm ²	w/w	w/d	0,9			1,5			0,9			1,5		
	d/d													
10 N/mm ²	w/w	w/d	1,2			1,5			1,2			1,5		
	d/d													

Table C78.2: Characteristic resistance under shear load (Push through anchorage)

Anchor rod	M10		M12		M16			
Perforated sleeve FIS H K	18x130/200				22x130/200			
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)								
compressive strength f_b	use category							
6 N/mm ²	w/w	w/d	1,2		1,2			
	d/d							
8 N/mm ²	w/w	w/d	1,5		1,5			
	d/d							
10 N/mm ²	w/w	w/d	1,5		1,5			
	d/d							

Factor for job site tests and displacements see annex C110

fischer injection system FIS V Plus for masonry


Performance

Vertical perforated brick HLz, Porotherm W 44, filled with mineral wool;
Characteristic resistance under shear load


Annex C 78

English translation prepared by DIBt

Vertical perforated brick HLz, EN 771-1:2015

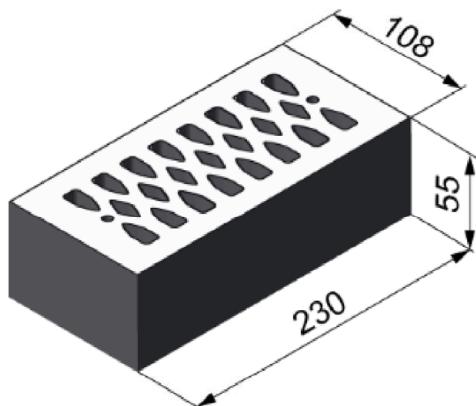

Vertical perforated brick HLz, EN 771-1:2015		
Producer	e.g. Wienerberger.	
Nominal dimensions [mm]	length L	width W
	230	108
Density ρ [kg/dm ³]	$\geq 1,4$	
Compressive strength f_b [N/mm ²]	2 / 4 / 6 / 8	
Standard or annex	EN 771-1:2015	

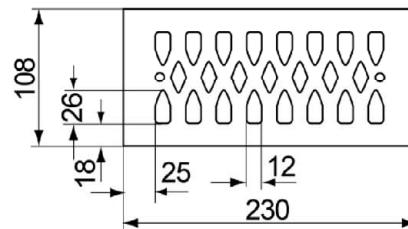

Dimension see also
Annex B 18

Table C79.1: Installation parameters

Anchor rod	M6	M8	M6	M8	-	M8	M10	-	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6 M8	-	-	M10 M12	-	-
					11x85			15x85		-
Perforated sleeve FIS H K										
Perforated sleeve FIS H K	12x50	12x85	16x85					20x85		
Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K										
Max. installation torque T_{inst} [Nm]						2				
General installation parameters										
Edge distance C_{min}						60				
Spacing	$S_{min \parallel}$	[mm]				80				
	$S_{cr \parallel}$					230				
	$S_{min \perp}$					60				
	$S_{cr \perp}$					60				
Drilling method										
Hammer drilling with hard metal hammer drill										

Table C79.2: Group factors

Anchor rod	M6	M8	M6	M8	-	M8	M10	-	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6 M8	-	-	M10 M12	-	-
					11x85			15x85		-
Perforated sleeve FIS H K	12x50	12x85	16x85					20x85		
Group factors	$\alpha_{g,N \parallel}$	[-]						2		
	$\alpha_{g,v \parallel}$									
	$\alpha_{g,N \perp}$									
	$\alpha_{g,v \perp}$									

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, dimensions, installation parameters

Annex C 79

Vertical perforated brick HLz, EN 771-1:2015

Table C80.1: Characteristic resistance under tension load¹⁾

Anchor rod	M6	M8	M6	M8	-	M8	M10	-	M12	M16			
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	M10	M12			
					11x85	11x85			15x85	-			
	Perforated sleeve FIS H K			12x50	12x85	16x85	16x85	20x85					
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)													
compressive strength f_b	use category												
2 N/mm ²	w/w	w/d	0,3	0,9	0,75	0,75	0,75	0,75	0,5	0,5			
	d/d		0,3	0,9	0,9	0,9	0,9	0,9	0,6	0,6			
4 N/mm ²	w/w	w/d	0,6	1,5	1,5	1,5	1,5	1,5	0,9	0,9			
	d/d		0,75	2,0	1,5	1,5	1,5	1,5	1,2	1,2			
6 N/mm ²	w/w	w/d	0,9	2,5	2,5	2,5	2,5	2,5	1,5	1,5			
	d/d		0,9	3,0	2,5	2,5	2,5	2,5	1,5	1,5			
8 N/mm ²	w/w	w/d	1,2	3,5	3,0	3,0	3,0	3,0	2,0	2,0			
	d/d		1,5	4,0	3,5	3,5	3,5	3,5	2,5	2,5			

¹⁾ If the fixing is in a solid area, for w/w, the characteristic value shall be reduced with the factor 0,64.

Factor for temperature range 72/120°C: 0,83


Table C80.2: Characteristic resistance under shear load

Anchor rod	M6	M8	M6	M8	-	M8	M10	-	M12	M16			
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	M10	M12			
					11x85	11x85			15x85	-			
	Perforated sleeve FIS H K			12x50	12x85	16x85	16x85	20x85					
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)													
compressive strength f_b	use category												
2 N/mm ²	w/w	w/d	0,6					0,4					
	d/d		0,6					0,4					
4 N/mm ²	w/w	w/d	1,2					0,9					
	d/d		1,2					0,9					
6 N/mm ²	w/w	w/d	1,5					1,2					
	d/d		1,5					1,2					
8 N/mm ²	w/w	w/d	2,5					1,5					
	d/d		2,5					1,5					


Factor for job site tests and displacements see annex C110

fischer injection system FIS V Plus for masonry	Annex C 80
Performance Vertical perforated brick HLz, Characteristic resistance under tension and shear load	

Horizontal perforated brick LLz, EN 771-1:2015

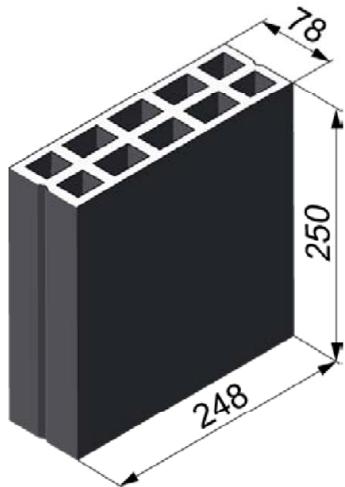

Horizontal perforated brick LLz, EN 771-1:2015			
Producer	-		
Nominal dimensions [mm]	length L	width W	height H
	250	78	248
Density ρ [kg/dm ³]	$\geq 0,7$		
Compressive strength f_b [N/mm ²]	2 / 4 / 6		
Standard or annex	EN 771-1:2015		

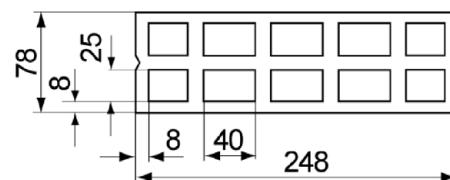

Dimension see also
Annex B 19

Table C81.1: Installation parameters

Anchor rod	M6	M8
Perforated sleeve FIS H K	12x50	
Anchor rod with perforated sleeve FIS H K		
Max. installation torque	T_{inst} [Nm]	2
General installation parameters		
Edge distance	c_{min}	100
Spacing	$s_{min \parallel}$	75
	$s_{cr \parallel}$	250
	$s_{min \perp} = s_{cr \perp}$	250
	[mm]	
Drilling method		
Hammer drilling with hard metal hammer drill		

Table C81.2: Group factors

Anchor rod	M6	M8
Perforated sleeve FIS H K	12x50	
Group factors	$\alpha_{g,N \parallel}$	1,6
	$\alpha_{g,v \parallel}$	1,1
	$\alpha_{g,N \perp}$	
	$\alpha_{g,v \perp}$	2,0
fischer injection system FIS V Plus for masonry		

Performance
Horizontal perforated brick LLz, dimensions, installation parameters

Annex C 81

Horizontal perforated brick LLz, EN 771-1:2015

Table C82.1: Characteristic resistance under tension load

Anchor rod	M6		M8
Perforated sleeve FIS H K	12x50		
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)			
compressive strength f_b	use category		
2 N/mm ²	w/w	w/d	0,5
	d/d		0,6
4 N/mm ²	w/w	w/d	0,9
	d/d		1,2
6 N/mm ²	w/w	w/d	1,5
	d/d		1,5

Factor for temperature range 72/120°C: 0,83

Table C82.2: Characteristic resistance under shear load

Anchor rod	M6		M8
Perforated sleeve FIS H K	12x50		
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)			
compressive strength f_b	use category		
2 N/mm ²	w/w	w/d	0,5
	d/d		
4 N/mm ²	w/w	w/d	0,9
	d/d		
6 N/mm ²	w/w	w/d	1,5
	d/d		

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance


Horizontal perforated brick LLz, Characteristic resistance under tension and shear load

Annex C 82

Horizontal perforated brick LLz, EN 771-1:2015

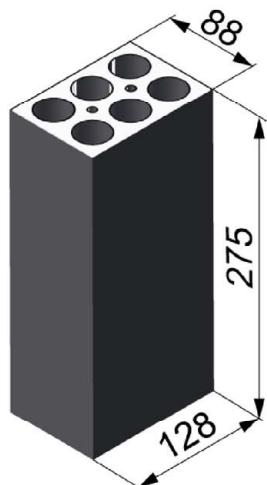

Horizontal perforated brick LLz, EN 771-1:2015		
Producer	e.g. Cermanica Farreny S.A.	
Nominal dimensions [mm]	length L	width W
	275	88
Density ρ [kg/dm ³]	$\geq 0,8$	
Compressive strength f_b [N/mm ²]	2	
Standard or annex	EN 771-1:2015	

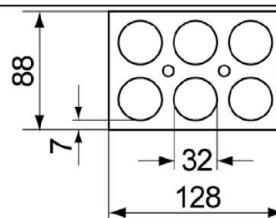

Dimension see also
Annex B 19

Table C83.1: Installation parameters

Anchor rod	M6	M8
Perforated sleeve FIS H K	12x50	
Anchor rod with perforated sleeve FIS H K		
Max. installation torque	T_{inst} [Nm]	2
General installation parameters		
Edge distance	c_{min}	60
Spacing	$s_{min \parallel}$	75
	$s_{cr \parallel}$ [mm]	275
	$s_{min \perp}$	75
	$s_{cr \perp}$	130
Drilling method		
Hammer drilling with hard metal hammer drill		

Table C83.2: Group factors

Anchor rod	M6	M8
Perforated sleeve FIS H K	12x50	
Group factors	$\alpha_{g,N \parallel}$	1,3
	$\alpha_{g,v \parallel}$	1,5
	$\alpha_{g,N \perp}$	1,3
	$\alpha_{g,v \perp}$	1,5

fischer injection system FIS V Plus for masonry

Performance
Horizontal perforated brick LLz, dimensions, installation parameters

Annex C 83

Horizontal perforated brick LLz, EN 771-1:2015

Table C84.1: Characteristic resistance under tension load

Anchor rod	M6	M8
Perforated sleeve FIS H K	12x50	
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)		
compressive strength f_b	use category	
2 N/mm ²	w/w w/d d/d	1,5

Factor for temperature range 72/120°C: 0,83

Table C84.2: Characteristic resistance under shear load

Anchor rod	M6	M8
Perforated sleeve FIS H K	12x50	
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)		
compressive strength f_b	use category	
2 N/mm ²	w/w w/d d/d	1,2

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance


Horizontal perforated brick LLz, Characteristic resistance under tension and shear load

Annex C 84

Light-weight concrete hollow block Hbl, EN 771-3:2015

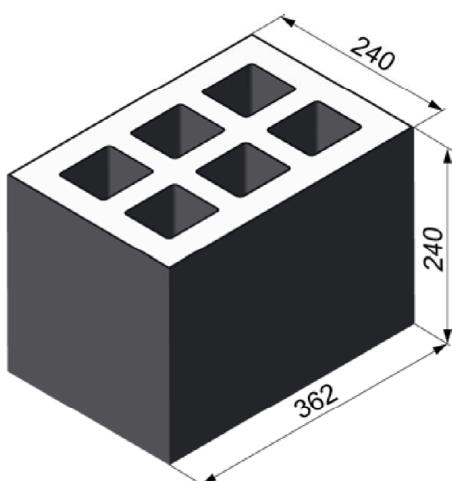

Light-weight concrete hollow block Hbl, EN 771-3:2015		
Producer	-	
Nominal dimensions [mm]	Länge L	Breite B
	362	240
Höhe H		240
Density ρ [kg/dm ³]	$\geq 1,0$	
Compressive strength f_b [N/mm ²]	2 / 4	
Standard or annex	EN 771-3:2015	

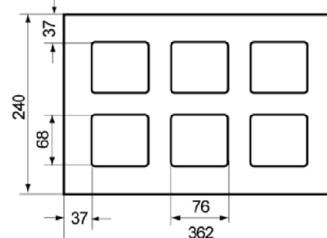

Dimension see also
Annex B 19

Table C85.1: Installation parameters
(Pre-positioned anchorage with perforated sleeve FIS H K)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-	-	
Perforated sleeve FIS H K	12x50	12x85	16x85	16x130	20x85	20x130	20x200									

Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K

Max. installation torque	T_{inst} [Nm]	2
--------------------------	-----------------	---

General installation parameters

Edge distance	C_{min}	[mm]	60
	$S_{min \parallel}$		100
Spacing	$S_{cr \parallel}$		362
	$S_{min \perp} = S_{cr \perp}$		240

Drilling method

Hammer drilling with hard metal hammer drill

Table C85.2: Group factors

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-	-	
Perforated sleeve FIS H K	12x50	12x85	16x85	16x130	20x85	20x130	20x200									
Group factors	$\alpha_{g,N \parallel}$	$\alpha_{g,v \parallel}$	$\alpha_{g,N \perp}$	$\alpha_{g,v \perp}$	[-]	1,2										
						1,1										
						2,0										

fischer injection system FIS V Plus for masonry

Performance

Light-weight concrete hollow block Hbl, dimensions, installation parameters

Annex C 85

Light-weight concrete hollow block Hbl, EN 771-3:2015

Table C86.1: Installation parameters
(Push through anchorage with perforated sleeve FIS H K)

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
Anchor rod with perforated sleeve FIS H K			
Max. installation torque	T_{inst} [Nm]		2
General installation parameters			
Edge distance	c_{min}	60	
Spacing	$s_{min \parallel}$ [mm]	100	
	$s_{cr \parallel}$	362	
	$s_{min \perp} = s_{cr \perp}$	240	
Drilling method			
Hammer drilling with hard metal hammer drill			

Table C86.2: Group factors

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
Group factors	$\alpha_{g,N \parallel}$	1,2	
	$\alpha_{g,v \parallel}$	1,1	
	$\alpha_{g,N \perp}$		
	$\alpha_{g,v \perp}$	2,0	

Light-weight concrete hollow block Hbl, EN 771-3:2015

Table C87.1: Characteristic resistance under tension load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-		M6 11x85	M8	-	-	-	M10 15x85	M12	-	-	-	-	-	
Perforated sleeve FIS H K	12x50	12x85		16x85		16x130		20x85		20x130		20x200				
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)																
compressive strength f_b	use category															
2 N/mm ²	w/w	w/d	1,2							1,5						2,5
	d/d		1,2							1,5						2,5
4 N/mm ²	w/w	w/d	2,0							3,0						5,0
	d/d		2,5							3,0						5,5

Table C87.2: Characteristic resistance under tension load (Push through anchorage)

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)			
compressive strength f_b	use category		
2 N/mm ²	w/w	w/d	1,5
	d/d		1,5
4 N/mm ²	w/w	w/d	3,0
	d/d		3,0

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

fischer injection system FIS V Plus for masonry

Performance

Light-weight concrete hollow block Hbl, Characteristic resistance under tension load

Annex C 87

Light-weight concrete hollow block Hbl, EN 771-3:2015

Table C88.1: Characteristic resistance under shear load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-		M6 11x85	M8	-	-	-	-	M10 15x85	M12	-	-	-	-	
Perforated sleeve FIS H K	12x50	12x85		16x85		16x130		20x85		20x130		20x200				
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)																
compressive strength f_b	use category															
2 N/mm ²	w/w	w/d														
	d/d															
4 N/mm ²	w/w	w/d														
	d/d															

Table C88.2: Characteristic resistance under shear load (Push through anchorage)

Anchor rod	M10	M12	M16	
Perforated sleeve FIS H K	18x130/200		22x130/200	
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)				
compressive strength f_b	use category			
2 N/mm ²	w/w	w/d		
	d/d			
4 N/mm ²	w/w	w/d		
	d/d			

Factor for job site tests and displacements see annex C110

fischer injection system FIS V Plus for masonry


Performance

Light-weight concrete hollow block Hbl, Characteristic resistance under shear load

Annex C 88


English translation prepared by DIBt

Light-weight concrete hollow block Hbl, EN 771-3:2015

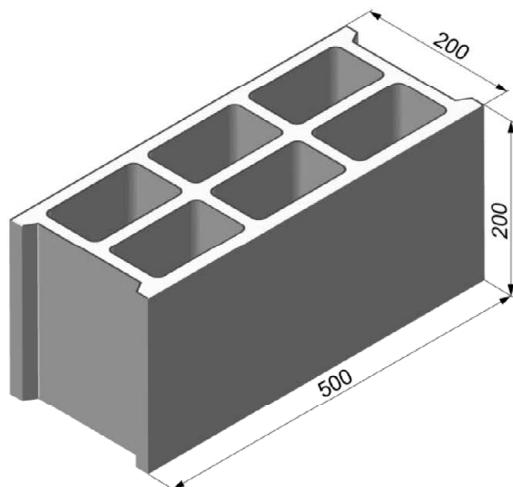

Light-weight concrete hollow block Hbl, EN 771-3:2015

Producer	e.g. Sepa		
Nominal dimensions [mm]	length L	width W	height H
	500	200	200
Density ρ [kg/dm ³]	$\geq 1,0$		
Compressive strength f_b [N/mm ²]	2 / 4 / 6		
Standard or annex	EN 771-1:2015		

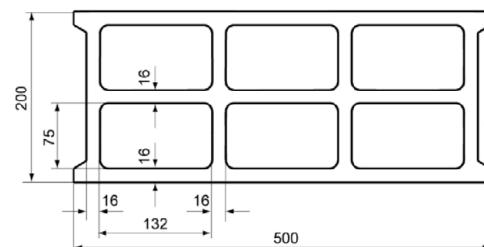

Dimension see also
Annex B 19

Table C89.1: Installation parameters

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	M10	M12	-	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	-	-	M10	M12	-	-
Perforated sleeve FIS H K	12x50	12x85	16x85	16x85	16x130	18x130/200	16x130	18x130/200	16x130	18x130/200	20x85	20x85	20x85	20x85

Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K

Max. installation torque	T_{inst} [Nm]	1	2
--------------------------	-----------------	---	---

General installation parameters

Edge distance	C_{min}	100
Spacing	$S_{min \parallel} = S_{cr \parallel}$ [mm]	500
	$S_{min \perp} = S_{cr \perp}$	200

Drilling method

Hammer drilling with hard metal hammer drill

Table C89.2: Group factors

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	M10	M12	-	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	-	-	M10	M12	-	-
Perforated sleeve FIS H K	12x50	12x85	16x85	16x85	16x130	18x130/200	16x130	18x130/200	16x130	18x130/200	20x85	20x85	20x85	20x85
Group factors	$\alpha_{g,N \parallel}$ $\alpha_{g,v \parallel}$ $\alpha_{g,N \perp}$ $\alpha_{g,v \perp}$	[-]			2									

fischer injection system FIS V Plus for masonry

Performance

Light-weight concrete hollow block Hbl, dimensions, installation parameters

Annex C 89

Light-weight concrete hollow block Hbl, EN 771-3:2015

Table C90.1: Characteristic resistance under tension load

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	M10	M12	-	M12	M16
Internal threaded anchor FIS E	-	-			M6	M8						M10	M12	
					11x85							15x85		
Perforated sleeve FIS H K	12x50	12x85			16x85			16x130	18x130/200			20x85		
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)														
compressive strength f_b	use category													
2 N/mm ²	w/w	w/d										0,4		
	d/d											0,5		
4 N/mm ²	w/w	w/d										0,9		
	d/d											0,9		
6 N/mm ²	w/w	w/d										1,2		
	d/d											1,5		

Factor for temperature range 72/120°C: 0,83

Table C90.2: Characteristic resistance under shear load

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	M10	M12	-	M12	M16
Internal threaded anchor FIS E	-	-			M6	M8						M10	M12	
					11x85							15x85		
Perforated sleeve FIS H K	12x50	12x85			16x85			16x130	18x130/200			20x85		
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)														
compressive strength f_b	use category													
2 N/mm ²	w/w	w/d										0,9		
	d/d													
4 N/mm ²	w/w	w/d										1,5		
	d/d													
6 N/mm ²	w/w	w/d										2,5		
	d/d													


Factor for job site tests and displacements see annex C110

fischer injection system FIS V Plus for masonry


Performance
Light-weight concrete hollow block Hbl,
Characteristic resistance under tension and shear load

Annex C 90

Light-weight concrete hollow block Hbl, EN 771-3:2015

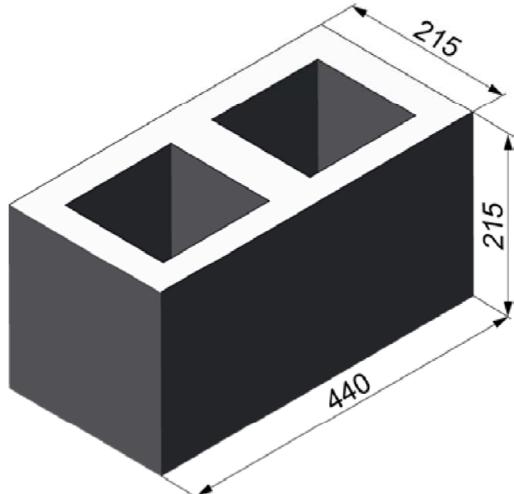

Light-weight concrete hollow block Hbl, EN 771-3:2015		
Producer	e.g. Roadstone wood	
Nominal dimensions [mm]	length L	width W
	440	215
Density ρ [kg/dm ³]	$\geq 1,2$	
Compressive strength f_b [N/mm ²]	4 / 6 / 8 / 10	
Standard or annex	EN 771-3:2015	

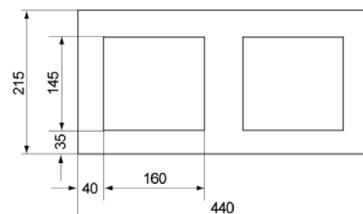

Dimension see also
Annex B 19

Table C91.1: Installation parameters
(Pre-positioned anchorage with perforated sleeve FIS H K)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-
					11x85					15x85				
Perforated sleeve FIS H K	12x50	12x85			16x85		16x130			20x85		20x130		
Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K														
Max. installation torque T_{inst} [Nm]										2				
General installation parameters														
Edge distance c_{min}										110				
Spacing	$s_{min \parallel}$									100				
	$s_{cr \parallel}$	[mm]								440				
	$s_{min \perp}$									100				
	$s_{cr \perp}$									215				
Drilling method														
Hammer drilling with hard metal hammer drill														

Table C91.2: Group factors

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-
					11x85					15x85				
Perforated sleeve FIS H K	12x50	12x85			16x85		16x130			20x85		20x130		
Group factors														
$\alpha_{g,N \parallel}$	$\alpha_{g,V \parallel}$	[-]								1,4				
	$\alpha_{g,V \parallel}$									2,0				
	$\alpha_{g,N \perp}$									1,4				
	$\alpha_{g,V \perp}$									1,2				

fischer injection system FIS V Plus for masonry

Performance
Light-weight concrete hollow block Hbl, dimensions, installation parameters

Annex C 91

Light-weight concrete hollow block Hbl, EN 771-3:2015

Table C92.1: Installation parameters
(Push through anchorage with perforated sleeve FIS H K)

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
Anchor rod with perforated sleeve FIS H K			
Max. installation torque	T_{inst} [Nm]		2
General installation parameters			
Edge distance	c_{min}	110	
	$s_{min \parallel}$	100	
Spacing	$s_{cr \parallel}$	440	
	$s_{min \perp}$	100	
	$s_{cr \perp}$	215	
Drilling method			
Hammer drilling with hard metal hammer drill			

Table C92.2: Group factors

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
Group factors	$\alpha_{g,N} \parallel$	1,4	
	$\alpha_{g,v} \parallel$	2,0	
	$\alpha_{g,N} \perp$	1,4	
	$\alpha_{g,v} \perp$	1,2	

Light-weight concrete hollow block Hbl, EN 771-3:2015

Table C93.1: Characteristic resistance under tension load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-			M6	M8				M10	M12			
					11x85		-	-		15x85		-	-	
Perforated sleeve FIS H K	12x50	12x85		16x85		16x130		20x85		20x130				
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)														
compressive strength f_b	use category													
4 N/mm ²	w/w	w/d	0,9			1,2			2,0					
	d/d		1,2			1,5			2,0					
6 N/mm ²	w/w	w/d	1,5			2,0			3,0					
	d/d		1,5			2,0			3,0					
8 N/mm ²	w/w	w/d	2,0			2,5			3,5					
	d/d		2,0			3,0			4,0					
10 N/mm ²	w/w	w/d	2,5			3,0			4,5					
	d/d		3,0			3,5			5,0					

Table C93.2: Characteristic resistance under tension load (Push through anchorage)

Anchor rod	M10	M12	M16	
Perforated sleeve FIS H K	18x130/200		22x130/200	
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)				
compressive strength f_b	use category			
4 N/mm ²	w/w	w/d	1,2	
	d/d		1,5	
6 N/mm ²	w/w	w/d	2,0	
	d/d		2,0	
8 N/mm ²	w/w	w/d	2,5	
	d/d		3,0	
10 N/mm ²	w/w	w/d	3,0	
	d/d		3,5	

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

fischer injection system FIS V Plus for masonry

Performance

Light-weight concrete hollow block Hbl, Characteristic resistance under tension load

Annex C 93

Light-weight concrete hollow block Hbl, EN 771-3:2015

Table C94.1: Characteristic resistance under shear load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-			M6	M8				M10	M12			
					11x85		-	-		15x85		-		-
Perforated sleeve FIS H K	12x50	12x85		16x85		16x130		20x85		20x130				
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)														
compressive strength f_b	use category													
4 N/mm ²	w/w	w/d	0,75	1,2	0,75	1,2	0,75							1,2
	d/d													
6 N/mm ²	w/w	w/d	1,2	2,0	1,2	2,0	1,2							2,0
	d/d													
8 N/mm ²	w/w	w/d	1,5	2,5	1,5	2,5	1,5							2,5
	d/d													
10 N/mm ²	w/w	w/d	2,0	3,0	2,0	3,0	2,0							3,0
	d/d													

Table C94.2: Characteristic resistance under shear load (Push through anchorage)

Anchor rod	M10	M12	M16	
Perforated sleeve FIS H K	18x130/200		22x130/200	
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)				
compressive strength f_b	use category			
4 N/mm ²	w/w	w/d		
	d/d		1,2	
6 N/mm ²	w/w	w/d		
	d/d		2,0	
8 N/mm ²	w/w	w/d		
	d/d		2,5	
10 N/mm ²	w/w	w/d		
	d/d		3,0	

Factor for job site tests and displacements see annex C110

fischer injection system FIS V Plus for masonry


Performance

Light-weight concrete hollow block Hbl, Characteristic resistance under shear load

Annex C 94

English translation prepared by DIBt

Light-weight concrete solid block Vbl, EN 771-3:2015

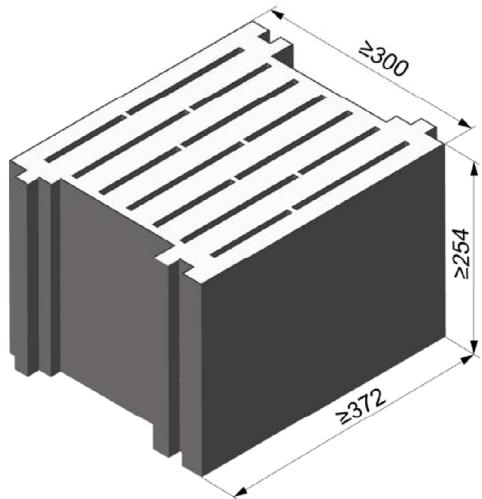

Light-weight concrete solid block Vbl, EN 771-3:2015

Producer	e.g. Sepa		
Nominal dimensions [mm]	length L	width W	height H
≥ 372	≥ 300	≥ 254	
Density ρ [kg/dm ³]	≥ 0,6		
Compressive strength f_b [N/mm ²]	2		
Standard or annex	EN 771-3:2015		

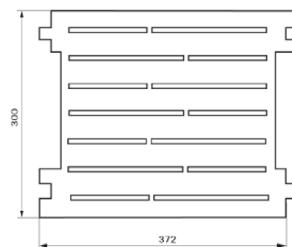


Table C95.1: Installation parameters

Anchor rod	M8	M10	M10	M12	M12	M16	M16	M12	M16
Perforated sleeve FIS H K	16x130		18x130/200		20x130		22x130/200		20x200
Anchor rod with perforated sleeve FIS H K									
Max. installation torque T_{inst} [Nm]							4		
Spacing $s_{min \parallel} = s_{cr \parallel}$ [mm]							130		
							370		
							250		
Drilling method									
Hammer drilling with hard metal hammer drill									

Table C95.2: Group factors

Anchor rod	M8	M10	M10	M12	M12	M16	M16	M12	M16
Perforated sleeve FIS H K	16x130		18x130/200		20x130		22x130/200		20x200
Group factors	$\alpha_{g,N \parallel}$ $\alpha_{g,v \parallel}$ $\alpha_{g,N \perp}$ $\alpha_{g,v \perp}$	[$-$]					2		
fischer injection system FIS V Plus for masonry									

Performance

Light-weight concrete solid block Vbl, dimensions, installation parameters

Annex C 95

Light-weight concrete solid block Vbl, EN 771-3:2015

Table C96.1: Characteristic resistance under tension load

Anchor rod	M8	M10	M10	M12	M12	M16	M16	M12	M16
Perforated sleeve FIS H K	16x130		18x130/200		20x130		22x130/200		20x200
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)									
compressive strength f_b	use category								
2 N/mm ²	w/w	w/d	2,0			2,5		3,0	
	d/d		2,0			3,0		4,0	

Factor for temperature range 72/120°C: 0,83

Table C96.2: Characteristic resistance under shear load

Anchor rod	M8	M10	M10	M12	M12	M16	M16	M12	M16
Perforated sleeve FIS H K	16x130		18x130/200		20x130		22x130/200		20x200
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)									
compressive strength f_b	use category								
2 N/mm ²	w/w	w/d			4,5			6,5	
	d/d								

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance

Light-weight concrete solid block Vbl,
Characteristic resistance under tension and shear load


Annex C 96

Light-weight concrete solid block Vbl, EN 771-3:2015

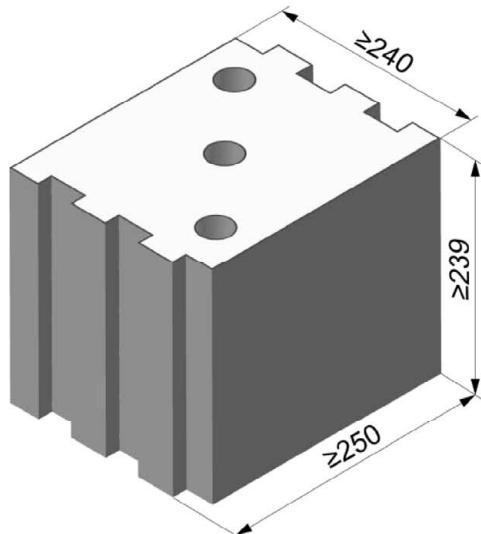

Light-weight concrete solid block Vbl, EN 771-3:2015

Producer	KLB		
Nominal dimensions [mm]	length L	width W	height H
Density ρ [kg/dm ³]	$\geq 1,6$		
Compressive strength f_b [N/mm ²]	4 / 6 / 8		
Standard or annex	EN 771-3:2015		

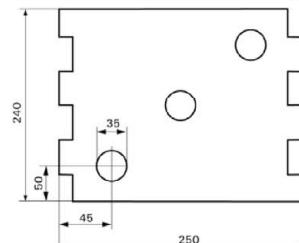

Dimension see also
Annex B 19

Table C97.1: Installation parameters
(Pre-positioned anchorage with perforated sleeve FIS H K)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-	-	-
Perforated sleeve FIS H K	12x50	12x85	16x85	16x130	20x85	20x130	20x200									

Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K

Max. installation torque T_{inst} [Nm]	4
--	---

General installation parameters

Edge distance c_{min}	[mm]	130
Spacing $s_{min \parallel} = s_{cr \parallel}$		250
Spacing $s_{min \perp} = s_{cr \perp}$		250

Drilling method

Hammer drilling with hard metal hammer drill

Table C97.2: Group factors

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-	-	-
Perforated sleeve FIS H K	12x50	12x85	16x85	16x130	20x85	20x130	20x200									
Group factors	$\alpha_{g,N \parallel}$ $\alpha_{g,v \parallel}$ $\alpha_{g,N \perp}$ $\alpha_{g,v \perp}$	[-]	2,0													

fischer injection system FIS V Plus for masonry

Performance

Light-weight concrete solid block Vbl, dimensions, installation parameters

Annex C 97

Light-weight concrete solid block Vbl, EN 771-3:2015

Table C98.1: Installation parameters
(Push through anchorage with perforated sleeve FIS H K)

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
Anchor rod with perforated sleeve FIS H K			
Max. installation torque	T_{inst} [Nm]		2
General installation parameters			
Edge distance	c_{min}	130	
Spacing	$s_{min \parallel} = s_{cr \parallel}$ [mm]	250	
	$s_{min \perp} = s_{cr \perp}$	250	
Drilling method			
Hammer drilling with hard metal hammer drill			

Table C98.2: Group factors

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
Group factors	$\alpha_{g,N \parallel}$ $\alpha_{g,V \parallel}$ $\alpha_{g,N \perp}$ $\alpha_{g,V \perp}$	[$-$]	2,0

fischer injection system FIS V Plus for masonry

Performance
Light-weight concrete solid block Vbl, dimensions, installation parameters

Annex C 98

Light-weight concrete solid block Vbl, EN 771-3:2015

Table C99.1: Characteristic resistance under tension load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-		M6 11x85	M8	-	-	-	M10 15x85	M12	-	-	-	-	-	
Perforated sleeve FIS H K	12x50	12x85		16x85		16x130		20x85		20x130		20x200				

$N_{RK} = N_{RK,p} = N_{RK,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)

compressive strength f_b	use category							
4 N/mm ²	w/w	w/d	1,2	2,0	2,5			3,0
	d/d		2,0	3,5	4,0			5,0
6 N/mm ²	w/w	w/d	1,5	3,0	4,0			5,0
	d/d		3,0	5,0	6,5			7,5
8 N/mm ²	w/w	w/d	2,0	4,0	5,0			6,5
	d/d		4,0	7,0	8,5			9,0

Table C99.2: Characteristic resistance under tension load (Push through anchorage)

Anchor rod	M10		M12		M16			
Perforated sleeve FIS H K	18x130/200				22x130/200			
$N_{RK} = N_{RK,p} = N_{RK,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)								
compressive strength f_b	use category							
4 N/mm ²	w/w	w/d	2,5			3,0		
	d/d		4,0			5,0		
6 N/mm ²	w/w	w/d	4,0			5,0		
	d/d		6,5			7,5		
8 N/mm ²	w/w	w/d	5,0			6,5		
	d/d		8,5			9,0		

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

Light-weight concrete solid block Vbl, EN 771-3:2015

Table C100.1: Characteristic resistance under shear load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-		M6 11x85	M8	-	-	-	-	M10 15x85	M12	-	-	-	-	
Perforated sleeve FIS H K	12x50	12x85		16x85		16x130		20x85		20x130		20x200				
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)																
compressive strength f_b	use category															
4 N/mm ²	w/w	w/d	2,0	3,0	2,0	3,0	2,0	3,5			4,5					
	d/d															
6 N/mm ²	w/w	w/d	3,0	4,5	3,0	4,5	3,0	5,5			6,5					
	d/d															
8 N/mm ²	w/w	w/d	4,0	6,0	4,0	6,0	4,0	7,0			8,5					
	d/d															


Table C100.2: Characteristic resistance under shear load (Push through anchorage)

Anchor rod	M10	M12	M16	
Perforated sleeve FIS H K	18x130/200	22x130/200		
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)				
compressive strength f_b	use category			
4 N/mm ²	w/w	w/d	3,5	4,5
	d/d			
6 N/mm ²	w/w	w/d	5,5	6,5
	d/d			
8 N/mm ²	w/w	w/d	7,0	8,5
	d/d			

Factor for job site tests and displacements see annex C110

fischer injection system FIS V Plus for masonry	Annex C 100
Performance Light-weight concrete solid block Vbl, Characteristic resistance under shear load	

Light-weight concrete solid block Vbl, EN 771-3:2015

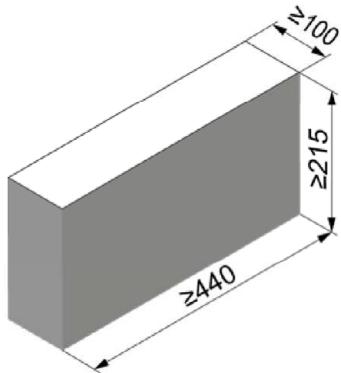

Light-weight concrete solid block Vbl, EN 771-3:2015		
Producer	Roadstone wood	
Nominal dimensions [mm]	length L	width W
	≥ 440	≥ 100
Density ρ [kg/dm ³]	≥ 2,0	
Compressive strength f_b [N/mm ²]	4 / 6 / 8 / 10	
Standard or annex	EN 771-3:2015	

Table C101.1: Installation parameters

Anchor rod	M6	M8	M10	M12	M16
Anchor rod without perforated sleeve					
Effective anchorage depth h_{ref} [mm]	50	70	50	70	50
Max. installation torque T_{inst} [Nm]	4			10	
General installation parameters					
Edge distance C_{\min}			100		
Spacing	$s_{\min \parallel}$ [mm]		75		
	$s_{\text{cr} \parallel}$		3x h_{ref}		
	$s_{\min \perp}$		75		
	$s_{\text{cr} \perp}$		3x h_{ref}		
Drilling method					
Hammer drilling with hard metal hammer drill					

Table C101.2: Group factors

Anchor rod	M6	M8	M10	M12	M16
Group factors	$\alpha_{g,N \parallel}$		1,6		
	$\alpha_{g,v \parallel}$		1,3		
	$\alpha_{g,N \perp}$		1,4		
	$\alpha_{g,v \perp}$		1,3		
fischer injection system FIS V Plus for masonry					
Performance Light-weight concrete solid block Vbl, dimensions, installation parameters					Annex C 101

Light-weight concrete solid block Vbl, EN 771-3:2015

Table C102.1: Characteristic resistance under tension load

Anchor rod		M6	M8	M10	M12	M16
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)						
compressive strength f_b	use category	Effective anchorage depth h_{ef} [mm] ≥ 50				
4 N/mm ²	w/w	1,2			1,2	
	d/d	2,0			2,0	
6 N/mm ²	w/w	1,5			2,0	
	d/d	3,0			3,5	
8 N/mm ²	w/w	2,0			2,5	
	d/d	4,0			4,5	
10N/mm ²	w/w	3,0			3,5	
	d/d	5,0			5,5	

Factor for temperature range 72/120°C: 0,83

Table C102.2: Characteristic resistance under shear load

Anchor rod		M6	M8	M10	M12	M16
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)						
compressive strength f_b	use category	Effective anchorage depth h_{ef} [mm] ≥ 50				
4 N/mm ²	w/w	1,2	1,5	1,5	1,5	1,5
	d/d					
6 N/mm ²	w/w	2,0	2,0	2,5	2,5	2,5
	d/d					
8 N/mm ²	w/w	2,5	2,5	3,0	3,0	3,5
	d/d					
10N/mm ²	w/w	3,0	3,5	4,0	4,0	4,5
	d/d					

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance

Light-weight concrete solid block Vbl,
Characteristic resistance under tension and shear load

Annex C 102

Light-weight concrete solid block Vbl, EN 771-3:2015

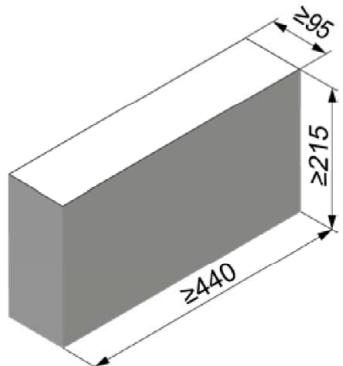

Light-weight concrete solid block Vbl, EN 771-3:2015		
Producer	Tramac	
Nominal dimensions [mm]	length L	width W
	≥ 440	≥ 95
Density ρ [kg/dm ³]	≥ 2,0	
Compressive strength f_b [N/mm ²]	6 / 8 / 10 / 12	
Standard or annex	EN 771-3:2015	

Table C103.1: Installation parameters

Anchor rod	M6	M8	M10	M12	M16
Anchor rod without perforated sleeve					
Effective anchorage depth h_{ef} [mm]	50	70	50	70	50
Max. installation torque T_{inst} [Nm]	4			10	
General installation parameters					
Edge distance C_{\min}			60		
	$S_{\min \parallel}$		75		
Spacing	$S_{\text{cr} \parallel}$ [mm]		3x h_{ef}		
	$S_{\min \perp}$		75		
	$S_{\text{cr} \perp}$		3x h_{ef}		
Drilling method					
Hammer drilling with hard metal hammer drill					

Table C103.2: Group factors

Anchor rod	M6	M8	M10	M12	M16
Group factors	$\alpha_{g,N \parallel}$		1,9		
	$\alpha_{g,v \parallel}$		1,4		
	$\alpha_{g,N \perp}$		1,9		
	$\alpha_{g,v \perp}$		1,4		
fischer injection system FIS V Plus for masonry					
Performance Light-weight concrete solid block Vbl, dimensions, installation parameters					Annex C 103

Light-weight concrete solid block Vbl, EN 771-3:2015

Table C104.1: Characteristic resistance under tension load

Anchor rod		M6		M8		M10		M12		M16									
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)																			
compressive strength f_b	use category	Effective anchorage depth h_{ef} [mm]																	
6 N/mm ²	w/w	w/d	50	70	50	70	50	70	50	70	50								
	d/d		2,5	3,5	2,5	3,5	2,5	3,5	2,5	3,5	2,5								
8 N/mm ²	w/w	w/d	2,0	2,5	2,0	2,5	2,0	3,0	2,0	3,0	2,0								
	d/d		3,5	4,5	3,5	4,5	3,5	5,0	3,5	5,0	3,5								
10 N/mm ²	w/w	w/d	2,5	3,5	2,5	3,5	2,5	3,5	2,5	3,5	2,5								
	d/d		4,5	6,0	4,5	6,0	4,5	6,0	4,5	6,0	4,5								
12 N/mm ²	w/w	w/d	3,0	4,0	3,0	4,0	3,0	4,5	3,0	4,5	3,0								
	d/d		5,0	7,0	5,0	7,0	5,0	7,5	5,0	7,5	5,0								

Factor for temperature range 72/120°C: 0,83

Table C104.2: Characteristic resistance under shear load

Anchor rod		M6		M8		M10		M12		M16									
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)																			
compressive strength f_b	use category	Effective anchorage depth h_{ef} [mm] ≥ 50																	
6 N/mm ²	w/w	w/d	2,0		2,0		2,0		1,5										
	d/d																		
8 N/mm ²	w/w	w/d	2,5		2,5		3,0		2,5										
	d/d																		
10 N/mm ²	w/w	w/d	3,5		3,5		4,0		3,0										
	d/d																		
12 N/mm ²	w/w	w/d	4,0		4,0		4,5		3,5										
	d/d																		

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance

Light-weight concrete solid block Vbl,
Characteristic resistance under tension and shear load

Annex C 104

Autoclaved aerated concrete (cylindrical drill hole), EN 771-4:2015

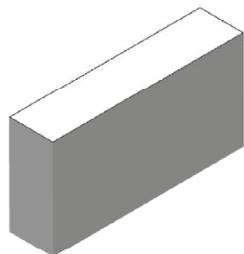

Autoclaved aerated concrete, EN 771-4:2015				
Producer				e.g. Ytong
Density ρ	[kg/dm ³]	0,35	0,5	0,65
Compressive strength f_b	[N/mm ²]	2	4	6
Standard or annex				EN 771-4:2015

Table C105.1: Installation parameters

Anchor rod	M6	M8	M10	M12	M16	-	-							
Internal threaded anchor FIS E	-	-	-	-	-	M6	M8							
Anchor rod and internal threaded anchor FIS E without perforated sleeve														
Effective anchorage depth h_{ef} [mm]	100	200	100	200	100	200	100							
Max. installation torque T_{inst} [Nm]	1	4	1	8	2	12	2							
General installation parameters														
Edge distance C_{min}	[mm]	100												
$S_{cr \parallel} = S_{min \parallel}$		250												
$h_{ef}=200\text{mm}$		80												
$S_{min \parallel}$		3x h_{ef}												
$h_{ef}=200\text{mm}$		250												
$S_{cr \perp} = S_{min \perp}$		80												
$h_{ef}=200\text{mm}$		3x h_{ef}												
Drilling method														
Hammer drilling with hard metal hammer drill														
fischer injection system FIS V Plus for masonry														
Performance Autoclaved aerated concrete (cylindrical drill hole), dimensions, installation parameters														
Annex C 105														

English translation prepared by DIBt

Table C106.1: Group factors for autoclaved aerated concrete
(Compressive strength $f_b = 2 \text{ N/mm}^2$)

Anchor rod	M6	M8	M10	M12	M16	-	-
Internal threaded anchor FIS E	-	-	-	-	-	M6	M8
						M10 M12	
						11x85	
Group factors	$h_{ef}=200 \alpha_{g,N} \parallel$	1,6					$\perp^1)$
	$h_{ef}=200 \alpha_{g,v} \parallel$	1,1					$\perp^1)$
	$\alpha_{g,N} \parallel, \alpha_{g,v} \parallel$	2					
	$h_{ef}=200 \alpha_{g,N} \perp$	1,6					$\perp^1)$
	$h_{ef}=200 \alpha_{g,v} \perp$	0,8					$\perp^1)$
	$\alpha_{g,N} \perp, \alpha_{g,v} \perp$	2					

$\perp^1)$ No performance assessed

Table C106.2: Group factors for autoclaved aerated concrete
(Compressive strength $f_b = 4 \text{ N/mm}^2$)

Anchor rod	M6	M8	M10	M12	M16	-	-
Internal threaded anchor FIS E	-	-	-	-	-	M6	M8
						M10 M12	
						11x85	
Group factors	$h_{ef}=200 \alpha_{g,N} \parallel$	0,7					$\perp^1)$
	$h_{ef}=200 \alpha_{g,v} \parallel$	2,0					$\perp^1)$
	$\alpha_{g,N} \parallel, \alpha_{g,v} \parallel$	2					
	$h_{ef}=200 \alpha_{g,N} \perp$	0,7					$\perp^1)$
	$h_{ef}=200 \alpha_{g,v} \perp$	1,2					$\perp^1)$
	$\alpha_{g,N} \perp, \alpha_{g,v} \perp$	2					

$\perp^1)$ No performance assessed

Table C106.3: Group factors for autoclaved aerated concrete
(Compressive strength $f_b = 6 \text{ N/mm}^2$)

Anchor rod	M6	M8	M10	M12	M16	-	-
Internal threaded anchor FIS E	-	-	-	-	-	M6	M8
						M10 M12	
						11x85	
Group factors	$h_{ef}=200 \alpha_{g,N} \parallel$	0,7					$\perp^1)$
	$h_{ef}=200 \alpha_{g,v} \parallel$	2,0					$\perp^1)$
	$\alpha_{g,N} \parallel, \alpha_{g,v} \parallel$	2					
	$h_{ef}=200 \alpha_{g,N} \perp$	0,7					$\perp^1)$
	$h_{ef}=200 \alpha_{g,v} \perp$	1,2					$\perp^1)$
	$\alpha_{g,N} \perp, \alpha_{g,v} \perp$	2					

$\perp^1)$ No performance assessed

fischer injection system FIS V Plus for masonry

Performance
Autoclaved aerated concrete (cylindrical drill hole), Group factors

Annex C 106

Autoclaved aerated concrete (cylindrical drill hole), EN 771-4:2015

Table C107.1: Characteristic resistance under tension load

Anchor rod		M6	M8	M10	M12	M16	-	-	
Internal threaded anchor FIS E		-	-	-	-	-	M6	M8	
		N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)							
compressive strength f _b	use category	100	200	100	200	100	200	100	200
2 N/mm ²	w/w	1,2	1,2	1,5	2,0	1,5	3,0	1,5	3,0
	d/d	1,5	3,0	1,5	3,0	1,5	3,5	2,0	4,0
4 N/mm ²	w/w	1,2	- ¹⁾	2,0	1,5	2,5	3,5	2,5	3,5
	d/d	1,5	- ¹⁾	2,0	3,0	3,0	5,0	2,5	5,0
6 N/mm ²	w/w	1,5	- ¹⁾	3,0	2,5	4,5	5,0	4,5	7,0
	d/d	1,5	- ¹⁾	3,5	4,0	5,0	7,0	5,0	9,0

¹⁾ No performance assessed

Factor for temperature range 72/120°C: 0,83

Table C107.2: Characteristic resistance under shear load

Anchor rod		M6	M8	M10	M12	M16	-	-	
Internal threaded anchor FIS E		-	-	-	-	-	M6	M8	
		V _{Rk} = V _{Rk,b} = V _{Rk,c} [kN] depending on the compressive strength f _b (temperature range 50/80°C and 72/120°C)							
compressive strength f _b	use category	100	200	100	200	100	200	100	200
2 N/mm ²	w/w	1,2	1,2	1,2	1,2	1,2	1,5	1,2	1,2
	d/d								
4 N/mm ²	w/w	2,0	- ¹⁾	2,5	2,0	2,0	2,5	2,0	2,0
	d/d								
6 N/mm ²	w/w	2,5	- ¹⁾	3,0	2,5	3,0	3,5	4,0	4,5
	d/d								

¹⁾ No performance assessed

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance

Autoclaved aerated concrete (cylindrical drill hole),
Characteristic resistance under tension and shear load

Annex C 107

**Autoclaved aerated concrete (conical drill hole with special drill bit PBB),
EN 771-4:2015**

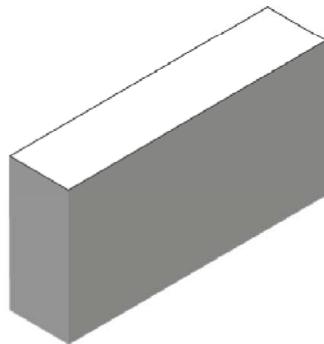

Autoclaved aerated concrete, EN 771-4:2015				
Producer		e.g. Ytong		
Density ρ	[kg/dm ³]	0,35	0,5	0,65
Compressive strength f_b	[N/mm ²]	2	4	6
Standard or annex				EN 771-4:2015

Table C108.1: Installation parameters

Anchor rod	M8	M10	M12	-
Internal threaded anchor FIS E	-	-	-	M6 M8 11x85
Anchor rod and internal threaded anchor FIS E without perforated sleeve				
Effective anchorage depth h_{ef} [mm]	75	95	75	95
Max. installation torque T_{inst} [Nm]			2	
General installation parameters				
Edge distance C_{min}	120	150	120	150
Spacing $s_{cr\parallel} = s_{min\parallel}$ [mm]	240	300	240	300
$s_{cr\perp} = s_{min\perp}$	240	250	240	250
Drilling method				
Hammer drilling with hard metal hammer drill				

Table C108.2: Group factors

Anchor rod	M8	M10	M12	-
Internal threaded anchor FIS E	-	-	-	M6 M8 11x85
Group factors	$\alpha_{g,N\parallel}$ $\alpha_{g,v\parallel}$ $\alpha_{g,N\perp}$ $\alpha_{g,v\perp}$	[\cdot]	2	

fischer injection system FIS V Plus for masonry

Performance
Autoclaved aerated concrete (conical drill hole with special drill bit PBB),
dimensions, installation parameters

Annex C 108

Autoclaved aerated concrete (conical drill hole with special drill bit PBB),

EN 771-4:2015

Table C109.1: Characteristic resistance under tension load

Anchor rod		M8		M10		M12		-
Internal threaded anchor FIS E		-	-	-	-	-	-	M6 M8 11x85
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)								
compressive strength f_b	use category	75	95	75	95	75	95	85
2 N/mm ²	w/w w/d	2,0	2,5	2,0	2,5	2,0	2,5	2,0
	d/d	2,0	2,5	2,0	2,5	2,0	2,5	2,0
4 N/mm ²	w/w w/d	3,0	3,5	3,0	3,5	3,0	3,5	3,0
	d/d	3,0	3,5	3,0	3,5	3,0	3,5	3,0
6 N/mm ²	w/w w/d	3,5	4,0	3,5	4,0	3,5	4,0	3,5
	d/d	4,0	4,5	4,0	4,5	4,0	4,5	4,0

Factor for temperature range 72/120°C: 0,83

Table C109.2: Characteristic resistance under shear load

Anchor rod		M8		M10		M12		-
Internal threaded anchor FIS E		-	-	-	-	-	-	M6 M8 11x85
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)								
compressive strength f_b	use category	75	95	75	95	75	95	85
2 N/mm ²	w/w w/d	2,5						
	d/d	4,5						
4 N/mm ²	w/w w/d	6,0						
	d/d	6,0						

Factor for job site tests and displacements see annex C110

fischer injection system FIS V Plus for masonry

Performance

Autoclaved aerated concrete (conical drill hole with special drill bit PBB),
Characteristic resistance under tension and shear load

Annex C 109

β-factors for job site tests; displacements

Table C110.1: β-factors for job site tests

use category		w/w and w/d		d/d	
temperature range		50/80	72/120	50/80	72/120
Material	Size				
solid units	M6	0,55	0,46	0,96	0,80
	M8	0,57	0,51		
	M10	0,59	0,52		
	M12 FIS E 11x85	0,6	0,54		
	M16 FIS E 15x85	0,62	0,52		
	FIS H 16x85 K	0,55	0,46		
hollow units	all sizes	0,86	0,72	0,96	0,8
Autoclaved aerated concrete cylindrical drill hole	all sizes	0,73	0,73	0,81	0,81
Autoclaved aerated concrete conical drill hole	all sizes	0,66	0,59	0,73	0,66

Table C110.2: Displacements

Material	N [kN]	δN_0 [mm]	δN_∞ [mm]	V [kN]	δV_0 [mm]	δV_∞ [mm]
solid units and autoclaved aerated concrete $h_{ef}=100\text{mm}$	$\frac{N_{Rk}}{1,4 * \gamma_{Mm}}$	0,03	0,06	$\frac{V_{Rk}}{1,4 * \gamma_{Mm}}$	0,82	0,88
hollow units	$\frac{N_{Rk}}{1,4 * \gamma_{Mm}}$	0,48	0,06	$\frac{V_{Rk}}{1,4 * \gamma_{Mm}}$	1,71	2,56
solid brick Mz NF annex C 4 - C 7	$\frac{N_{Rk}}{1,4 * \gamma_{Mm}}$	0,74	1,48	$\frac{V_{Rk}}{1,4 * \gamma_{Mm}}$	1,23	1,85
solid brick KS NF annex C 14 / C 15	$\frac{N_{Rk}}{1,4 * \gamma_{Mm}}$	0,2	0,4	$\frac{V_{Rk}}{1,4 * \gamma_{Mm}}$	0,91	1,37
AAC $h_{ef}=200\text{ mm}$ annex C 105 - C 107	$\frac{N_{Rk}}{1,4 * \gamma_{Mm}}$	1,03	2,06	$\frac{V_{Rk}}{1,4 * \gamma_{Mm}}$	1,25	1,88
brick Annex C 89 / C 90	$\frac{N_{Rk}}{1,4 * \gamma_{Mm}}$	0,03	0,06	$\frac{V_{Rk}}{1,4 * \gamma_{Mm}}$	6,44	9,66

For anchorage in autoclaved aerated concrete, the partial factor γ_{MAAC} shall be used instead of γ_{Mm} .

fischer injection system FIS V Plus for masonry	Annex C 110
Performance β-factors for job site tests; displacements	