

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments



European Technical Assessment

ETA-20/0229
of 3 April 2020

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Würth Fixanchor W-FAZ PRO/S /
W-FAZ PRO/A4 / W-FAZ PRO/HCR

Product family
to which the construction product belongs

Mechanical fasteners for use in concrete

Manufacturer

Adolf Würth GmbH & Co. KG
Reinhold-Würth-Straße 12-17
74653 Künzelsau
DEUTSCHLAND

Manufacturing plant

Werk W1

This European Technical Assessment
contains

21 pages including 3 annexes which form an integral part
of this assessment

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

EAD 330232-01-0601

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The Würth Fixanchor W-FAZ PRO/S / W-FAZ PRO/A4 / W-FAZ PRO/HCR is a fastener made of zinc plated steel, stainless steel or high corrosion resistant steel which is placed into a drilled hole and anchored by torque-controlled expansion.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the fastener is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the fastener of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading)	see Annex B3, C1 and C2
Characteristic resistance to shear load (static and quasi-static loading)	see Annex C3
Characteristic resistance for seismic performance categories C1 and C2	see Annex C4
Displacements	see Annex C6 and C7
Durability	See Annex B1

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	see Annex C5

English translation prepared by DIBt

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with the European Assessment Document EAD 330232-01-0601 the applicable European legal act is: 1996/582/EC.

The system to be applied is: 1

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.

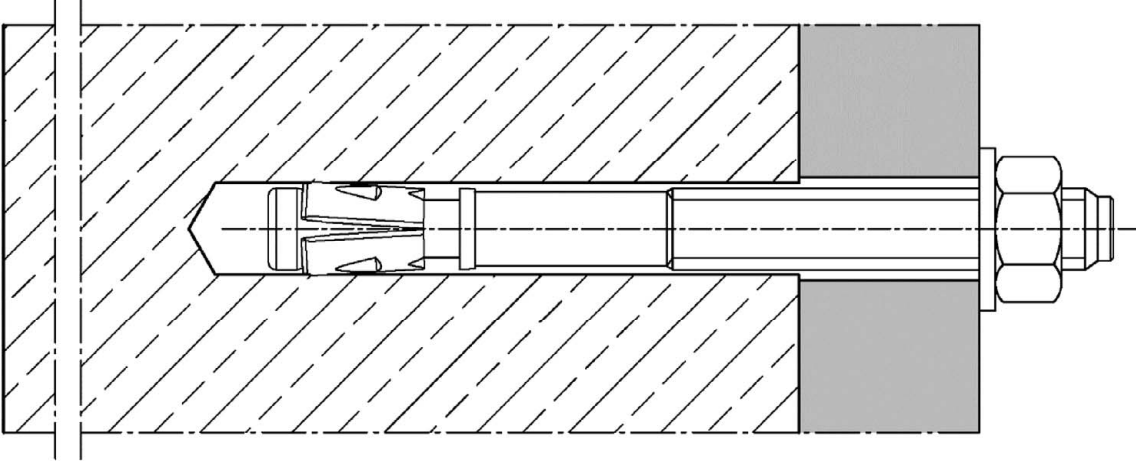
Issued in Berlin 3 April 2020 by Deutsches Institut für Bautechnik

BD Dipl.-Ing. Andreas Kummerow
Head of Department


beglaubigt:
Baderschneider

Wedge Anchor Würth Fixanchor W-FAZ PRO/S, W-FAZ PRO/A4 and W-FAZ PRO/HCR


Installation condition



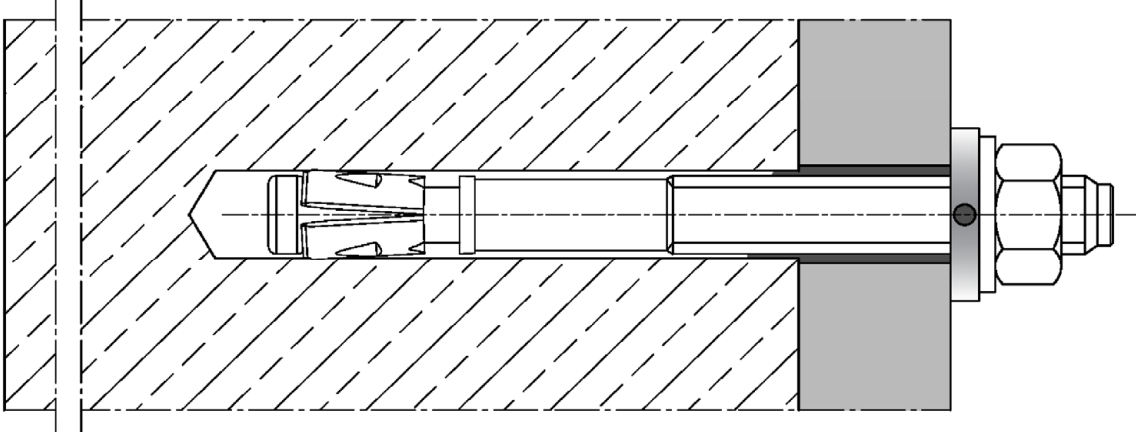Installation condition with filling washer WIT-SHB (optional with cap nut HM)



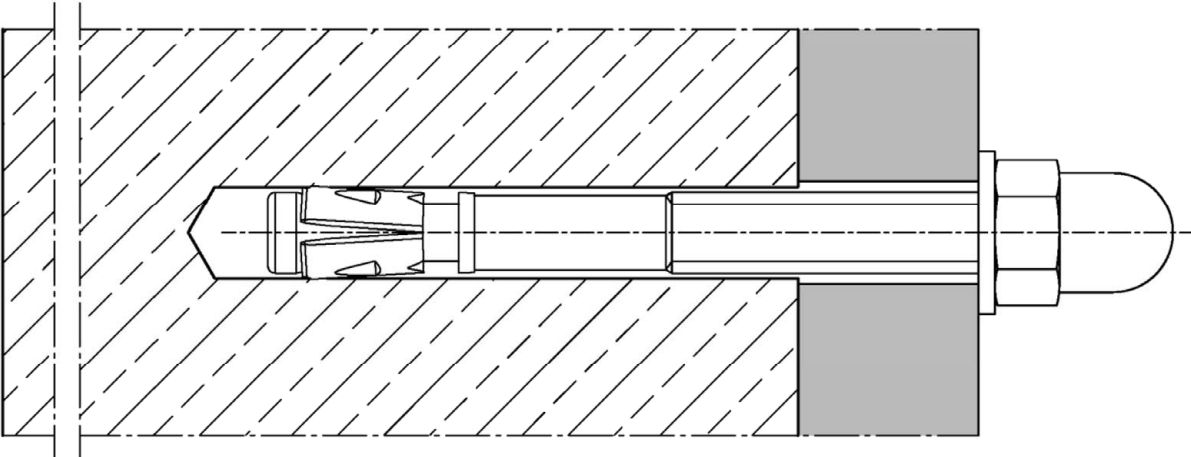Installation condition with cap nut HM (optional with filling washer WIT-SHB)




Würth Fixanchor W-FAZ PRO/S / W-FAZ PRO/A4 / W-FAZ PRO/HCR

Product description
Product types and installation conditions

Annex A1

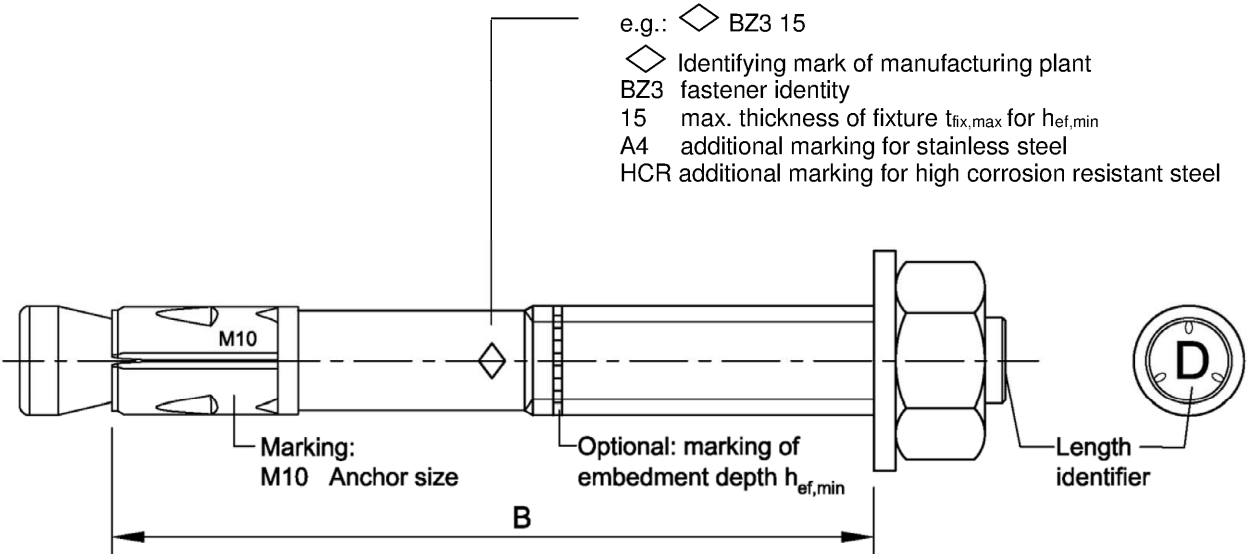Marking



Usable length: $B = h_{ef} + t_{fix}$

h_{ef} : (existing) effective anchorage depth

t_{fix} : fixture thickness (including e.g. levelling layers or other non-load-bearing layers or additional filling washer)

Table A1: Length identification

Length identifier	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
Usable length B \geq	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105

Length identifier	P	Q	R	S	T	U	V	W	X	Y	Z	AA	BB	CC	DD
Usable length B \geq	110	115	120	125	130	135	140	145	150	160	170	180	190	200	210

Length identifier	EE	FF	GG	HH	II	JJ	KK	LL
Usable length B \geq	220	230	240	250	260	270	280	290

Dimensions in mm

Würth Fixanchor W-FAZ PRO/S / W-FAZ PRO/A4 / W-FAZ PRO/HCR

Product description
Marking


Annex A2

Table A2: Material


Part	W-FAZ PRO/S	W-FAZ PRO/A4	W-FAZ PRO/HCR
	Steel, zinc plated	Stainless steel	High corrosion resistant steel
Conical bolt	Steel, galvanized ≥ 5 µm, fracture elongation A ₅ ≥ 8%	Stainless steel, fracture elongation A ₅ ≥ 8%	High corrosion resistant steel, fracture elongation A ₅ ≥ 8%
Expansion sleeve	Stainless steel	Stainless steel	Stainless steel
Washer	Steel, galvanized ≥ 5 µm	Stainless steel	High corrosion resistant steel
Filling washer			
Hexagon nut			
Cap nut			

Table A3: Fastener dimensions


Fastener size			W-FAZ PRO/S / W-FAZ PRO/A4 / W-FAZ PRO/HCR			
			M8	M10	M12	M16
Width across hexagon nut / cap nut	SW	[mm]	13	17	19	24
Length of fastener	L	[mm]	$h_{ef} + t_{fix} + 18,0$	$h_{ef} + t_{fix} + 21,5$	$h_{ef} + t_{fix} + 26,0$	$h_{ef} + t_{fix} + 33,0$
Thickness of filling washer	t	[mm]	5			

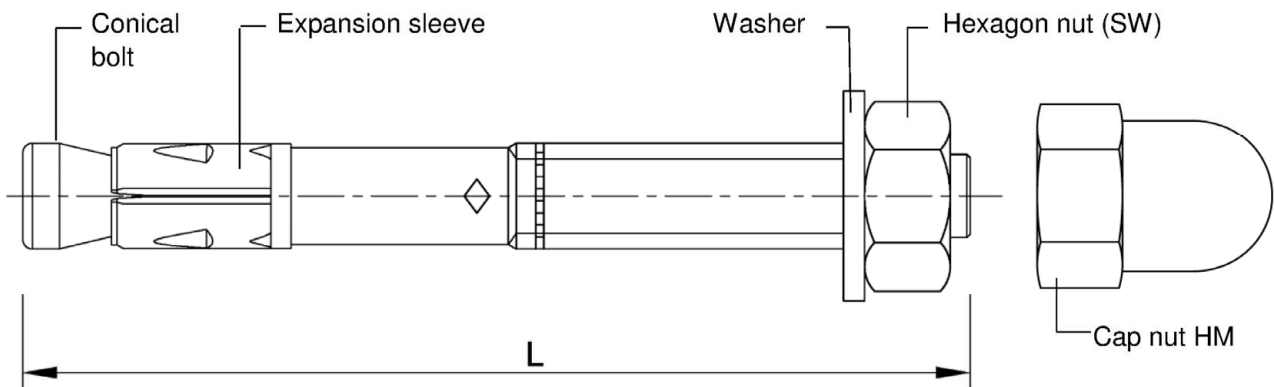

Filling washer WIT-SHB



Reducing adapter



Würth Fixanchor W-FAZ PRO/S / W-FAZ PRO/A4 / W-FAZ PRO/HCR

Product description
Material and dimensions

Annex A3

Specifications of intended use

Würth Fixanchor	W-FAZ PRO/S / W-FAZ PRO/A4 / W-FAZ PRO/HCR			
	M8	M10	M12	M16
Static or quasi-static action	✓			
Seismic performance categories C1 and C2	✓			
Fire exposure	R30 / R60 / R90 / R120			
Variable, effective anchorage depth	35 mm to 90 mm	40 mm to 100 mm	50 mm to 125 mm	65 mm to 160 mm

Base materials:

- Cracked or uncracked concrete
- Reinforced or unreinforced normal weight concrete according to EN 206: 2013 + A1:2016
- Strength classes C20/25 to C50/60 according to EN 206: 2013 + A1:2016

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions: **W-FAZ PRO/S, W-FAZ PRO/A4, W-FAZ PRO/HCR**
- For all other conditions according to EN 1993-1-4:2015-10 corresponding to corrosion resistance classes:
 - according to Annex A, Table A.3: CRC I - III **W-FAZ PRO/A4, W-FAZ PRO/HCR**
 - according to Annex A, Table A.3: CRC IV, V **W-FAZ PRO/HCR**

Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the fastener is indicated on the design drawings (e.g. position of the fastener relative to reinforcement or to supports, etc.)
- Design method EN 1992-4:2018 and Technical Report TR 055

Installation:

- Hole drilling by hammer drill bit or vacuum drill bit
- Use of the fastener only as supplied by the manufacturer without exchanging the components of the fastener (exception: when using the cap nut HM)
- Optionally, the annular gap between fixture and stud of the W-FAZ PRO can be filled to reduce the hole clearance. For this purpose, the filling washer WIT-SHB (annex A3) must be used in addition to the supplied washer. For filling use high-strength mortar with compressive strength $\geq 40\text{N/mm}^2$. (e.g. WIT-VIZ, WIT-UH 300, WIT-VM 250, WIT-Nordic, WIT-PE 500, WIT-PE 1000)

Würth Fixanchor W-FAZ PRO/S / W-FAZ PRO/A4 / W-FAZ PRO/HCR


Intended use
Specifications

Annex B1



Table B1: Installation parameters

Anchor size				W-FAZ PRO/S / W-FAZ PRO/A4 / W-FAZ PRO/HCR			
				M8	M10	M12	M16
Nominal drill hole diameter	d_0	[mm]	8	10	12	16	
Cutting diameter of drill bit	$d_{cut} \leq$	[mm]	8,45	10,45	12,5	16,5	
Minimum effective anchorage depth	$h_{ef,min}$	[mm]	35	40	50	65	
Maximum effective anchorage depth	$h_{ef,max}$	[mm]	90	100	125	160	
Depth of drill hole	$h_0 \geq$	[mm]	$h_{ef} + 8$	$h_{ef} + 9$	$h_{ef} + 10$	$h_{ef} + 14$	
	$h_1 \geq$	[mm]	$h_{ef} + 10$	$h_{ef} + 11$	$h_{ef} + 13$	$h_{ef} + 17$	
Diameter of clearance hole in the fixture ¹⁾	$d_f \leq$	[mm]	9	12	14	18	
Projection after anchor has been inserted for installing with cap nut HM (according to Annex B5)	C	[mm]	10,5	12,5	16,0	19,5	
Installation torque	W-FAZ PRO/S	T_{inst}	[Nm]	15	40	60	110
	W-FAZ PRO/A4 W-FAZ PRO/HCR	T_{inst}	[Nm]	15	40	55	100

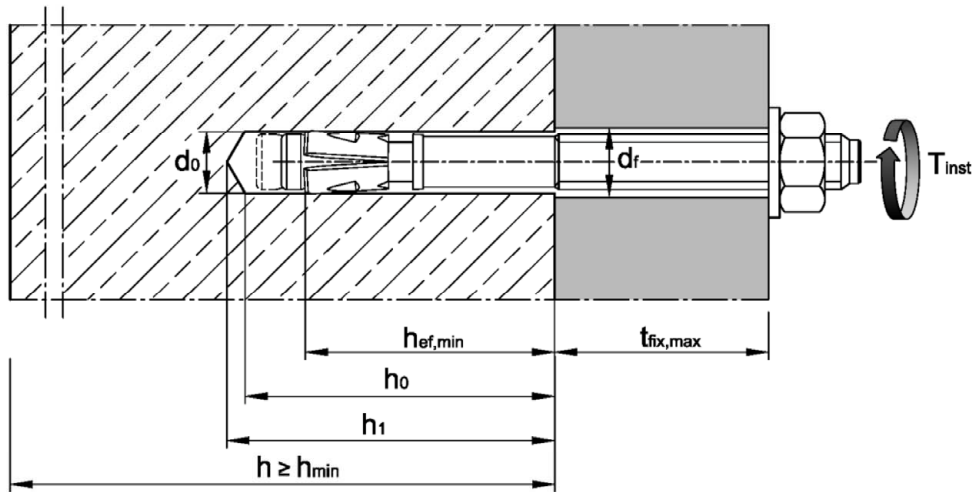¹⁾ For larger diameters of clearance hole in the fixture, see EN 1992-4, chapter 6.2.2.2



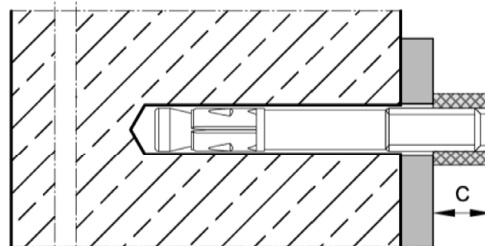Setting gauge for installation with cap nut HM



C [mm] :
Projection after anchor has been inserted for installing with cap nut HM or height of setting gauge (see Table B1 and Annex B6).

Würth Fixanchor W-FAZ PRO/S / W-FAZ PRO/A4 / W-FAZ PRO/HCR

Intended use
Installation parameters

Annex B2

Table B2: Minimum thickness of concrete member, minimum spacings, edge distances and required area

Anchor size				W-FAZ PRO/S / W-FAZ PRO/A4 / W-FAZ PRO/HCR					
				M8	M10	M12	M16		
Minimum member thickness depending on h_{ef}	$h_{min} \geq$	[mm]	max (1,5· h_{ef} ; 80)		max (1,5· h_{ef} ;100)		max (1,5· h_{ef} ;120)		
Minimum edge distances and spacings									
Minimum edge distance	c_{min}	[mm]	40	45	55	65			
Minimum spacings	s_{min}	[mm]	35	40	50	65			
Projected required area $A_{pr,req}$									
Projected required area	W-FAZ PRO/S	cracked concrete	$A_{pr,req}$	[mm ²]	13 900	23 700	31 500	42 300	
		uncracked concrete	$A_{pr,req}$	[mm ²]	22 500	34 700	41 300	50 200	
	W-FAZ PRO /A4 and /HCR	cracked concrete	$A_{pr,req}$	[mm ²]	16 900	25 900	29 800	44 300	
		uncracked concrete	$A_{pr,req}$	[mm ²]	19 700	35 700	35 300	54 800	
The edge distances and spacings shall be selected in steps of 5 mm. In combination with variable anchorage depths and member thicknesses, the following equation must be fulfilled:									
$A_{pr,req} \leq A_{pr,ef}$				$A_{pr,req}$	Projected required area			$A_{pr,ef}$	Projected effective area (acc. to Table B4)

Table B3: Applicable concrete thickness h_{sp} and area A_{sp} to determine characteristic edge distance $c_{cr,sp}$

Anchor size				M8	M10	M12	M16
Applicable concrete thickness	W-FAZ PRO/S W-FAZ PRO/A4 W-FAZ PRO/HCR	h_{sp}	[kN]	$\min(h ; h_{ef} + 1,5 \cdot c \cdot \sqrt{2})$			
Area to determine $c_{cr,sp}$ ¹⁾	W-FAZ PRO/S	A_{sp}	[mm ²]	$\frac{N_{Rk,sp}^0 - 2,573}{0,000436}$	$\frac{N_{Rk,sp}^0 + 2,040}{0,000693}$	$\frac{N_{Rk,sp}^0 + 3,685}{0,000692}$	$\frac{N_{Rk,sp}^0 + 3,738}{0,000875}$
	W-FAZ PRO/A4, W-FAZ PRO/HCR	A_{sp}	[mm ²]	$\frac{N_{Rk,sp}^0 + 4,177}{0,000862}$	$\frac{N_{Rk,sp}^0 + 7,235}{0,000967}$	$\frac{N_{Rk,sp}^0 + 7,847}{0,000951}$	$\frac{N_{Rk,sp}^0 + 11,415}{0,000742}$

¹⁾ with $N_{Rk,sp}^0$ in kN

Würth Fixanchor W-FAZ PRO/S / W-FAZ PRO/A4 / W-FAZ PRO/HCR

Intended use
Minimum spacings and edge distances
Required area and applicable concrete thickness

Annex B3

Table B4: Projected effective area $A_{pr,ef}$ to determine spacings and edge distances

Member thickness: $h > h_{ef} + 1,5 \cdot c$	
Effective anchorage depth $h_{ef} < 1,5 \cdot c$	Effective anchorage depth $h_{ef} \geq 1,5 \cdot c$
anchor group with $s \geq 3 \cdot c$ or single anchor	
$A_{pr,ef} = 2 \cdot (3 \cdot c) \cdot (1,5 \cdot c + h_{ef})$ [mm ²]	$A_{pr,ef} = 2 \cdot (3 \cdot c) \cdot (3 \cdot c)$ [mm ²]
Anchor group ($s < 3 \cdot c$)	
$A_{pr,ef} = (3 \cdot c + s) \cdot (1,5 \cdot c + h_{ef})$ [mm ²]	$A_{pr,ef} = (3 \cdot c + s) \cdot (3 \cdot c)$ [mm ²]
Member thickness: $h \leq h_{ef} + 1,5 \cdot c$	
Effective anchorage depth $h_{ef} \leq 1,5 \cdot c$	Effective anchorage depth $h_{ef} > 1,5 \cdot c$
anchor group with $s \geq 3 \cdot c$ or single anchor	
$A_{pr,ef} = 2 \cdot (3 \cdot c) \cdot h$ [mm ²]	$A_{pr,ef} = 2 \cdot (3 \cdot c) \cdot (h - h_{ef} + 1,5 \cdot c)$ [mm ²]
Anchor group ($s < 3 \cdot c$)	
$A_{pr,ef} = (3 \cdot c + s) \cdot h$ [mm ²]	$A_{pr,ef} = (3 \cdot c + s) \cdot (h - h_{ef} + 1,5 \cdot c)$ [mm ²]
<p>If the area $A_{pr,ef}$ is trimmed by lateral edges ($c_2 < 1,5 \cdot c$), calculate the area actually present. The spacings and edge distances shall be rounded to 5 mm.</p>	

Würth Fixanchor W-FAZ PRO/S / W-FAZ PRO/A4 / W-FAZ PRO/HCR

Intended use
Projected effective area to determine spacings and edge distances

Annex B4












Installation instructions

1		<p>Drill hole perpendicular to concrete surface. If using a vacuum drill bit, proceed with step 3.</p>
2		<p>Blow out dust. Alternatively vacuum clean down to the bottom of the hole.</p>
3		<p>Check position of nut and washer.</p>
4		<p>Drive in fastener.</p>
5		<p>Apply installation torque T_{inst}.</p>

Würth Fixanchor W-FAZ PRO/S / W-FAZ PRO/A4 / W-FAZ PRO/HCR

Intended use
Installation instructions

Annex B5

Installation with cap nut HM				
1		Drill hole perpendicular to concrete surface. If using a vacuum drill bit, proceed with step 3.		
2		Blow out dust. Alternatively vacuum clean down to the bottom of the hole.		
	Installation <u>with</u> setting gauge		Installation <u>without</u> setting gauge	
3		Remove nut and washer. Attach setting gauge.		Check position of nut.
4		Drive in fastener until end of the anchor is level with setting gauge.		Drive in fastener
5		Check excess length of the anchor, remove setting gauge.		Remove nut.
6		Screw on washer and cap nut.		Screw on cap nut
7		Apply installation torque T_{inst} .		
Würth Fixanchor W-FAZ PRO/S / W-FAZ PRO/A4 / W-FAZ PRO/HCR				
Intended use Installation instructions with cap nut			Annex B6	

Installation instructions with filling of annular gap

1		<p>Drill hole perpendicular to concrete surface. If using a vacuum drill bit, proceed with step 3.</p>
2		<p>Blow out dust. Alternatively vacuum clean down to the bottom of the hole.</p>
3		<p>Fit the filling washer additionally to the fastener. Check position of nut and washer.</p>
4		<p>Drive in fastener.</p>
5		<p>Apply installation torque T_{inst}.</p>
6		<p>Fill the annular gap between anchor and fixture with mortar (compressive strength $\geq 40 \text{ N/mm}^2$). Use enclosed reducing adapter. Observe the processing information of the mortar! The annular gap is completely filled, when excess mortar seeps out.</p>

Würth Fixanchor W-FAZ PRO/S / W-FAZ PRO/A4 / W-FAZ PRO/HCR

Intended use
Installation instructions with filling of annular gap

Annex B7

Table C1: Characteristic values for tension loads under static and quasi-static action, W-FAZ PRO/S zinc plated

Fastener size			W-FAZ PRO/S (zp)			
			M8	M10	M12	M16
Installation factor	γ_{inst}	[-]	1,0			
Steel failure						
Characteristic resistance	$N_{Rk,s}$	[kN]	19,8	30,4	44,9	79,3
Modulus of elasticity	E_s	[N/mm ²]	210.000			
Partial factor	γ_{Ms}	[-]	1,5			
Pull-out						
Characteristic resistance in cracked concrete C20/25	$N_{Rk,p,cr}$	[kN]	9,5	15	22	30
Increasing factor for $N_{Rk,p,cr}$	ψ_C	[-]	$\left(\frac{f_{ck}}{20}\right)^{0,439}$	$\left(\frac{f_{ck}}{20}\right)^{0,265}$	$\left(\frac{f_{ck}}{20}\right)^{0,5}$	$\left(\frac{f_{ck}}{20}\right)^{0,339}$
Characteristic resistance in uncracked concrete C20/25	$N_{Rk,p,ucr}$	[kN]	14	24	30	50
Increasing factor for $N_{Rk,p,ucr}$	ψ_C	[-]	$\left(\frac{f_{ck}}{20}\right)^{0,489}$	$\left(\frac{f_{ck}}{20}\right)^{0,448}$	$\left(\frac{f_{ck}}{20}\right)^{0,5}$	$\left(\frac{f_{ck}}{20}\right)^{0,203}$
Splitting						
Characteristic resistance	$N^0_{Rk,sp}$	[kN]	$\min (N_{Rk,p} ; N^0_{Rk,c})^3$			
Characteristic edge distance ²⁾	$c_{cr,sp}$	[mm]	$\frac{A_{sp} + 0,8 \cdot (h_{sp} - h_{ef})^2}{(3,41 \cdot h_{sp} - 0,59 \cdot h_{ef})}$			
Characteristic spacing	$s_{cr,sp}$	[mm]	$2 \cdot c_{cr,sp}$			
Concrete cone failure						
Minimum, effective anchorage depth	$h_{ef,min}$	[mm]	35 ¹⁾	40	50	65
Maximum, effective anchorage depth	$h_{ef,max}$	[mm]	90	100	125	160
Characteristic edge distance	$c_{cr,N}$	[mm]	$1,5 \cdot h_{ef}$			
Characteristic spacing	$s_{cr,N}$	[mm]	$2 \cdot c_{cr,N}$			
Factor k_1	cracked concrete	$k_{cr,N}$	7,7			
	uncracked concrete	$k_{ucr,N}$	11,0			

¹⁾ Fastenings with anchorage depth $h_{ef} < 40$ mm are restricted to the use of structural components which are statically indeterminate and subject to internal exposure conditions only.

²⁾ Applicable concrete thickness h_{sp} and area A_{sp} to determine characteristic edge distance $c_{cr,sp}$ according to Table B3

³⁾ $N^0_{Rk,c}$ according to EN 1992-4:2018

Würth Fixanchor W-FAZ PRO/S / W-FAZ PRO/A4 / W-FAZ PRO/HCR

Performance
Characteristic values for **tension loads**

Annex C1

Table C2: Characteristic values for **tension loads** under static or quasi-static action,
W-FAZ PRO/A4 and W-FAZ PRO/HCR

Fastener size			W-FAZ PRO/A4 and W-FAZ PRO/HCR			
			M8	M10	M12	M16
Installation factor	γ_{inst}	[-]	1,0			
Steel failure						
Characteristic resistance	$N_{Rk,s}$	[kN]	19,8	30,4	44,9	74,6
Modulus of elasticity - W-FAZ PRO/A4	E_s	[N/mm ²]	200.000			
Modulus of elasticity - W-FAZ PRO/HCR	E_s	[N/mm ²]	195.000			
Partial factor	γ_{Ms}	[-]	1,5			
Pull-out						
Characteristic resistance in cracked concrete C20/25	$N_{Rk,p,cr}$	[kN]	9,5	17	22	35
Increasing factor for $N_{Rk,p,cr}$	ψ_C	[-]	$\left(\frac{f_{ck}}{20}\right)^{0,488}$	$\left(\frac{f_{ck}}{20}\right)^{0,5}$	$\left(\frac{f_{ck}}{20}\right)^{0,435}$	$\left(\frac{f_{ck}}{20}\right)^{0,350}$
Characteristic resistance in uncracked concrete C20/25	$N_{Rk,p,ucr}$	[kN]	20	25	42	50
Increasing factor for $N_{Rk,p,ucr}$	ψ_C	[-]	$\left(\frac{f_{ck}}{20}\right)^{0,240}$	$\left(\frac{f_{ck}}{20}\right)^{0,364}$	$\left(\frac{f_{ck}}{20}\right)^{0,213}$	$\left(\frac{f_{ck}}{20}\right)^{0,196}$
Splitting						
Characteristic resistance	$N^0_{Rk,sp}$	[kN]	$\min (N_{Rk,p} ; N^0_{Rk,c}{}^3)$			
Characteristic edge distance ²⁾	$c_{cr,sp}$	[mm]	$\frac{A_{sp} + 0,8 \cdot (h_{sp} - h_{ef})^2}{(3,41 \cdot h_{sp} - 0,59 \cdot h_{ef})}$			
Characteristic spacing	$s_{cr,sp}$	[mm]	$2 \cdot c_{cr,sp}$			
Concrete cone failure						
Minimum, effective anchorage depth	$h_{ef,min}$	[mm]	35 ¹⁾	40	50	65
Maximum, effective anchorage depth	$h_{ef,max}$	[mm]	90	100	125	160
Characteristic edge distance	$c_{cr,N}$	[mm]	$1,5 \cdot h_{ef}$			
Characteristic spacing	$s_{cr,N}$	[mm]	$2 \cdot c_{cr,N}$			
Factor k_1	cracked concrete	$k_{cr,N}$	7,7			
	uncracked concrete	$k_{ucr,N}$	11,0			

¹⁾ Fastenings with anchorage depth $h_{ef} < 40$ mm are restricted to the use of structural components which are statically indeterminate and subject to internal exposure conditions only

²⁾ Applicable concrete thickness h_{sp} and area A_{sp} according to Table B3 to determine characteristic edge distance $c_{cr,sp}$

³⁾ $N^0_{Rk,c}$ according to EN 1992-4:2018

Würth Fixanchor W-FAZ PRO/S / W-FAZ PRO/A4 / W-FAZ PRO/HCR

Performance
Characteristic values for **tension loads**

Annex C2

Table C3: Characteristic values for **shear loads** under static and quasi-static action

Fastener size			W-FAZ PRO/S / W-FAZ PRO/A4 / W-FAZ PRO/HCR			
			M8	M10	M12	M16
Installation factor	γ_{inst}	[-]	1,0			
Steel failure <u>without</u> lever arm						
Characteristic resistance	W-FAZ PRO/S	$V^{0}_{Rk,s}$ [kN]	15,7	26,8	38,3	60,0
	W-FAZ PRO /A4 and /HCR	$V^{0}_{Rk,s}$ [kN]	16,8	27,8	39,8	69,5
Partial factor	γ_{Ms}	[-]	1,25			
Ductility factor	k_7	[-]	1,0			
Steel failure <u>with</u> lever arm						
Characteristic bending resistance	W-FAZ PRO/S	$M^{0}_{Rk,s}$ [Nm]	30	60	105	240
	W-FAZ PRO/S /A4 and /HCR	$M^{0}_{Rk,s}$ [Nm]	27	55	99	223
Partial factor	γ_{Ms}	[-]	1,25			
Concrete pry-out failure						
Pry-out factor	W-FAZ PRO/S	k_8 [-]	2,8	3,1	3,0	3,6
	W-FAZ PRO/S /A4 and /HCR	k_8 [-]	2,7	2,8	3,3	3,4
Concrete edge failure						
Effective length of fastener in shear loading	l_f	[mm]	$h_{ef}^{1)}$			
Outside diameter of fastener	d_{nom}	[mm]	8	10	12	16

¹⁾ Fastenings with anchorage depth $h_{ef} < 40$ mm are restricted to the use of structural components which are statically indeterminate and subject to internal exposure conditions only.

Würth Fixanchor W-FAZ PRO/S / W-FAZ PRO/A4 / W-FAZ PRO/HCR

Performance
Characteristic values for **shear loads**

Annex C3

Table C4: Characteristic values for seismic loading, performance category C1											
Fastener size				W-FAZ PRO/S / W-FAZ PRO/A4 / W-FAZ PRO/HCR							
				M8		M10		M12		M16	
Effective anchorage depth	$h_{ef} \geq$	[mm]		40	45	40	60	50	70	65	85
Tension load											
Installation factor	γ_{inst}	[-]		1,0							
Steel failure											
Characteristic resistance	W-FAZ PRO/S	$N_{Rk,s,C1}$	[kN]	19,8	30,4	44,9	79,3				
	W-FAZ PRO/A4 W-FAZ PRO/HCR	$N_{Rk,s,C1}$	[kN]	19,8	30,4	44,9	74,6				
Pull-out											
Characteristic resistance	W-FAZ PRO/S	$N_{Rk,s,C1}$	[kN]	9,1	15,0	22,0	30,0				
	W-FAZ PRO/A4 W-FAZ PRO/HCR	$N_{Rk,s,C1}$	[kN]	9,0	17,0	22,0	35,0				
Shear load											
Steel failure without lever arm											
Characteristic resistance	W-FAZ PRO/S	$V_{Rk,s,C1}$	[kN]	11,7	13,4	22,5	24,4	30,0	33,8	48,8	52,3
	W-FAZ PRO/A4 W-FAZ PRO/HCR	$V_{Rk,s,C1}$	[kN]	11,0	12,7	20,6	22,2	33,2	33,2	61,1	64,3
Factor for anchorages	with annular gap	α_{gap}	[-]	0,5							
	without annular gap	α_{gap}	[-]	1,0							

Table C5: Characteristic values for seismic loading, performance category C2											
Fastener size				W-FAZ PRO/S / W-FAZ PRO/A4 / W-FAZ PRO/HCR							
				M8		M10		M12		M16	
Effective anchorage depth	$h_{ef} \geq$	[mm]		40	45	40	60	50	70	65	85
Tension load											
Installation factor	γ_{inst}	[-]		1,0							
Steel failure											
Characteristic resistance	W-FAZ PRO/S	$N_{Rk,s,C2}$	[kN]	19,8	30,4	44,9	79,3				
	W-FAZ PRO/A4 W-FAZ PRO/HCR	$N_{Rk,s,C2}$	[kN]	19,8	30,4	44,9	74,6				
Pull-out											
Characteristic resistance	W-FAZ PRO/S	$N_{Rk,s,C2}$	[kN]	2,8	3,6	7,3	12,5	10,7	19,0	19,8	35,2
	W-FAZ PRO/A4 W-FAZ PRO/HCR	$N_{Rk,s,C2}$	[kN]	2,3	3,2	5,0	7,7	8,0	13,8	19,0	29,4
Shear load											
Steel failure without lever arm											
Characteristic resistance	W-FAZ PRO/S	$V_{Rk,s,C2}$	[kN]	7,3	11,3	15,4	19,0	18,3	28,0	39,4	43,3
	W-FAZ PRO/A4 W-FAZ PRO/HCR	$V_{Rk,s,C2}$	[kN]	7,5	8,6	12,5	15,9	22,4	25,6	42,7	46,1
Factor for anchorages	with annular gap	α_{gap}	[-]	0,5							
	without annular gap	α_{gap}	[-]	1,0							

Würth Fixanchor W-FAZ PRO/S / W-FAZ PRO/A4 / W-FAZ PRO/HCR									
Performance Characteristic resistance for seismic loading									
Annex C4									

Table C6: Characteristic values for tension and shear load under fire exposure

Fastener size		W-FAZ PRO/S / W-FAZ PRO/A4 / W-FAZ PRO/HCR					
		M8	M10	M12	M16		
Tension load							
Steel failure							
Characteristic resistance	R30	$N_{Rk,s,fi}$	[kN]	1,2	2,6	4,6	7,7
	R60			1,0	1,9	3,3	5,6
	R90			0,7	1,3	2,1	3,5
	R120			0,6	1,0	1,5	2,5
Shear load							
Steel failure <u>without</u> lever arm							
Characteristic resistance	R30	$V_{Rk,s,fi}$	[kN]	4,0	7,5	12,3	20,7
	R60			2,7	5,1	8,5	14,2
	R90			1,4	2,7	4,6	7,7
	R120			0,8	1,6	2,7	4,5
Steel failure <u>with</u> lever arm							
Characteristic resistance	R30	$M^0_{Rk,s,fi}$	[Nm]	4,1	9,6	19,1	43,8
	R60			2,8	6,6	13,1	30,1
	R90			1,5	3,5	7,2	16,4
	R120			0,8	2,0	4,2	9,6

$N_{Rk,p,fi}$ according to EN 1992-4:2018

Würth Fixanchor W-FAZ PRO/S / W-FAZ PRO/A4 / W-FAZ PRO/HCR

Performance
Characteristic values under **fire exposure**

Annex C5

Table C7: Displacements under **tension load**, W-FAZ PRO/S zinc plated

Fastener size	W-FAZ PRO/S (zp)								
	M8	M10	M12	M16					
Displacements under static or quasi-static action $\delta_{N0} = \delta_{N0\text{-factor}} \cdot N$ N: acting tension load $\delta_{N\infty} = \delta_{N\infty\text{-factor}} \cdot N$									
Effective anchorage depth	$h_{ef} \geq$ [mm]	35	40	50	65				
Cracked concrete									
Factor for displacement	$\delta_{N0\text{-factor}}$ [mm/kN]	0,13	0,05	0,04	0,03				
	$\delta_{N\infty\text{-factor}}$ [mm/kN]	0,29	0,20	0,15	0,11				
Uncracked concrete									
Factor for displacement	$\delta_{N0\text{-factor}}$ [mm/kN]	0,03	0,01	0,004	0,005				
	$\delta_{N\infty\text{-factor}}$ [mm/kN]	0,03	0,03	0,03	0,03				
Displacement under seismic action C2									
Effective anchorage depth	$h_{ef} \geq$ [mm]	40	45	40	60	50	70	65	85
Displacements for DLS	$\delta_{N, C2(DLS)}$ [mm]	3,9	4,9	2,8	4,7	2,4	4,2	2,5	4,5
Displacements for ULS	$\delta_{N, C2(ULS)}$ [mm]	11,3	14,3	9,4	16,1	7,3	12,9	7,2	12,8

Table C8: Displacements under **tension load**, W-FAZ PRO/A4 and W-FAZ PRO/HCR

Fastener size	W-FAZ PRO/A4 / W-FAZ PRO/HCR								
	M8	M10	M12	M16					
Displacements under static or quasi-static action $\delta_{N0} = \delta_{N0\text{-factor}} \cdot N$ N: acting tension load $\delta_{N\infty} = \delta_{N\infty\text{-factor}} \cdot N$									
Effective anchorage depth	$h_{ef} \geq$ [mm]	35	40	50	65				
Cracked concrete									
Factor for displacement	$\delta_{N0\text{-factor}}$ [mm/kN]	0,11	0,06	0,05	0,02				
	$\delta_{N\infty\text{-factor}}$ [mm/kN]	0,27	0,17	0,16	0,08				
Uncracked concrete									
Factor for displacement	$\delta_{N0\text{-factor}}$ [mm/kN]	0,02	0,00	0,001	0,00				
	$\delta_{N\infty\text{-factor}}$ [mm/kN]	0,05	0,05	0,05	0,05				
Displacement under seismic action C2									
Effective anchorage depth	$h_{ef} \geq$ [mm]	40	45	40	60	50	70	65	85
Displacements for DLS	$\delta_{N, C2(DLS)}$ [mm]	2,0	2,9	2,6	4,1	3,3	5,7	3,3	5,1
Displacements for ULS	$\delta_{N, C2(ULS)}$ [mm]	7,7	11,1	10,8	16,8	10,4	18,0	9,0	13,9

Würth Fixanchor W-FAZ PRO/S / W-FAZ PRO/A4 / W-FAZ PRO/HCR

Performance
Displacements under tension load

Annex C6

Table C9: Displacements under **shear load**, W-FAZ PRO/S zinc plated

Fastener size			W-FAZ PRO/S (zp)							
			M8	M10	M12	M16				
Displacements under static or quasi-static action										
$\delta_{V0} = \delta_{V0\text{-factor}} \cdot V$			V: acting shear load							
$\delta_{V\infty} = \delta_{V\infty\text{-factor}} \cdot V$										
Effective anchorage depth	$h_{ef} \geq$	[mm]	35	40	50	65				
Factor for displacement	$\delta_{V0\text{-factor}}$	[mm/kN]	0,15	0,09	0,09	0,07				
	$\delta_{V\infty\text{-factor}}$	[mm/kN]	0,22	0,13	0,14	0,11				
Displacement under seismic action C2 ¹⁾										
Effective anchorage depth	$h_{ef} \geq$	[mm]	40	45	40	60	50	70	65	85
Displacements for DLS	$\delta_{V,C2(DLS)}$	[mm]	2,8	2,7	3,0	3,1	3,4	3,7	3,4	3,8
Displacements for ULS	$\delta_{V,C2(ULS)}$	[mm]	5,1	5,0	5,0	5,5	6,3	9,9	6,0	9,6

¹⁾ For anchorages with clearance in the fixture the annular gap must also be taken into account

Table C10: Displacements under **shear load**, W-FAZ PRO/A4 and W-FAZ PRO/HCR

Fastener size			W-FAZ PRO/A4 / W-FAZ PRO/HCR							
			M8	M10	M12	M16				
Displacements under static or quasi-static action										
$\delta_{V0} = \delta_{V0\text{-factor}} \cdot V$			V: acting shear load							
$\delta_{V\infty} = \delta_{V\infty\text{-factor}} \cdot V$										
Effective anchorage depth	$h_{ef} \geq$	[mm]	35	40	50	65				
Factor for displacement	$\delta_{V0\text{-factor}}$	[mm/kN]	0,26	0,14	0,12	0,09				
	$\delta_{V\infty\text{-factor}}$	[mm/kN]	0,39	0,20	0,17	0,14				
Displacement under seismic action C2 ¹⁾										
Effective anchorage depth	$h_{ef} \geq$	[mm]	40	45	40	60	50	70	65	85
Displacements for DLS	$\delta_{V,C2(DLS)}$	[mm]	2,8	3,0	3,4	3,5	3,5	4,2	3,8	4,4
Displacements for ULS	$\delta_{V,C2(ULS)}$	[mm]	5,2	5,1	7,0	8,4	7,5	11,8	7,8	11,1

¹⁾ For anchorages with clearance in the fixture the annular gap must also be taken into account

Würth Fixanchor W-FAZ PRO/S / W-FAZ PRO/A4 / W-FAZ PRO/HCR

Performance
Displacements under shear load

Annex C7