

Approval body for construction products  
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and  
Laender Governments



## European Technical Assessment

**ETA-08/0250**  
**of 27 May 2021**

English translation prepared by DIBt - Original version in German language

### General Part

Technical Assessment Body issuing the  
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Kaubiflex FA-System

Product family  
to which the construction product belongs

Liquid applied watertight covering kits for wet room floors  
and/or walls

Manufacturer

Kaubit AG  
Industriestraße 1  
49413 Dinklage  
DEUTSCHLAND

Manufacturing plant

Kaubit AG  
Industriestraße 1  
49413 Dinklage  
DEUTSCHLAND

This European Technical Assessment  
contains

10 pages including 5 annexes which form an integral part  
of this assessment

This European Technical Assessment is  
issued in accordance with Regulation (EU)  
No 305/2011, on the basis of

EAD 030352-00-0503

This version replaces

ETA-08/0250 issued on 9 February 2017

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

## Specific Part

### 1 Technical description of the product

"Kaubiflex FA-System" is a watertight covering kit. It consists of the following components:

- Primer "Kaubit primer UKD 200" on the basis of styrol-butadien or "Kaubit Primer DS 2" on the basis of a polymer dispersion
- one-component liquid waterproofing membrane "Kaubiflex FA Sealing Compound" on the basis of styrol-butadien
- sealing tape Type "NG", "NV", "NVV", "PEVV" or "PEVV perforated"
- sealing ingoing and outgoing corners Type "NG", "NV", "NVV", "PEVV" or "PEVV perforated"
- sealing sleeves for walls "NG", "NV", "NVV", "NVV perforated"
- sealing sleeves for floor gullies "NG", "NV", "NVV", "NVV perforated" or "Butyl"
- adhesive "Kaubit FM Flex" according to EN 12004<sup>1</sup>

The kit is intended to be used under a wearing surface, e.g. tiles. The wearing surface and the jointing material are not part of the kit, but are considered during the assessment of the intended use of the product. Pipes and floor gullies themselves are not part of the kit.

Annex A1 shows the system build-up and annex A2 to A4 shows the components for sealing details.

### 2 Specification of the intended use in accordance with the applicable European Assessment Document

The intended use of the watertight covering kit are indoor applications on floors and walls in wet rooms under a wearing surface, where the liquid applied kit is only exposed to temperature (i.e. temperature of structure) between 5 °C and 40°C in following uses:

- floor and/or wall surfaces with only occasional direct exposure to water, e. g. at a good distance from shower or bathtub
- floor and/or wall in shower areas or around bathtubs used for a few showers daily, e. g. in ordinary dwellings, multifamily houses and hotels
- floor and/or wall surfaces with exposure to water more frequent or of longer duration than normally anticipated in dwellings, e. g. public wet rooms, schools and sport facilities

The watertight membrane is intended to be used on flexible substrate e. g. plywood, chipboard, gypsum, anhydrite or similar material vulnerable to water and on rigid substrates e. g. masonry or concrete.

<sup>1</sup> EN 12004:2014-02 Adhesives for tiles - Requirements, evaluation of conformity, classification and designation

The product should be used in connection with the following types of gullies:

Stainless steel or plastics – type PP or PE – with flange for attaching of collar/membrane or with clamping ring and collar. It is up to the responsibility of the user to use suitable products of the given types.

The performances given in Section 3 are only valid if the watertight covering kit is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead the assumption of working life of the watertight covering kit of 25 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	See Annex A1

#### 3.2 Hygiene, health and the environment (BWR 3)

Essential characteristic	Performance
Content and/or Release of dangerous substances:	
Component: Tile adhesive (CE-marked)	According to EN 12004
Other components: Carcinogenic substances, classified as EU-Kat. Carc. 1A/1B (H350, H350i) and mutagenic substances, classified as EU-Kat. Muta. 1A/1B (H340), according to the regulation (EG) Nr. 1272/2008.	no performance assessed
Vapour permeability	See Annex A1
Watertightness	See Annex A1
Crack bridging ability	See Annex A1, category
Bond strength	See Annex A1, category
Scratching resistance	See Annex A1
Joint bridging ability	See Annex A1, category
Watertightness around penetration	See Annex A1, category
Resistance to temperature	See Annex A1, category
Resistance to water	See Annex A1, category
Resistance to alkalinity	See Annex A1, category
Resistance to mechanical wear	See Annex A1

**3.3 Safety and accessibility (BWR 4)**

Essential characteristic	Performance
Slipperiness	See Annex A1
Reparability	See Annex A1
Thickness	See Annex A1

**4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base**

In accordance with EAD No. 030352 00 0503, the applicable European legal act is: 2003/665/EC.

The system to be applied is: 2+

In addition, with regard to e.g. reaction to fire for products covered by this EAD the applicable the system to be applied is: 3


**5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable EAD**

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.

Issued in Berlin on 27 May 2021 by Deutsches Institut für Bautechnik

Bettina Hemme  
Head of Section

*beglaubigt:*  
Gnamou

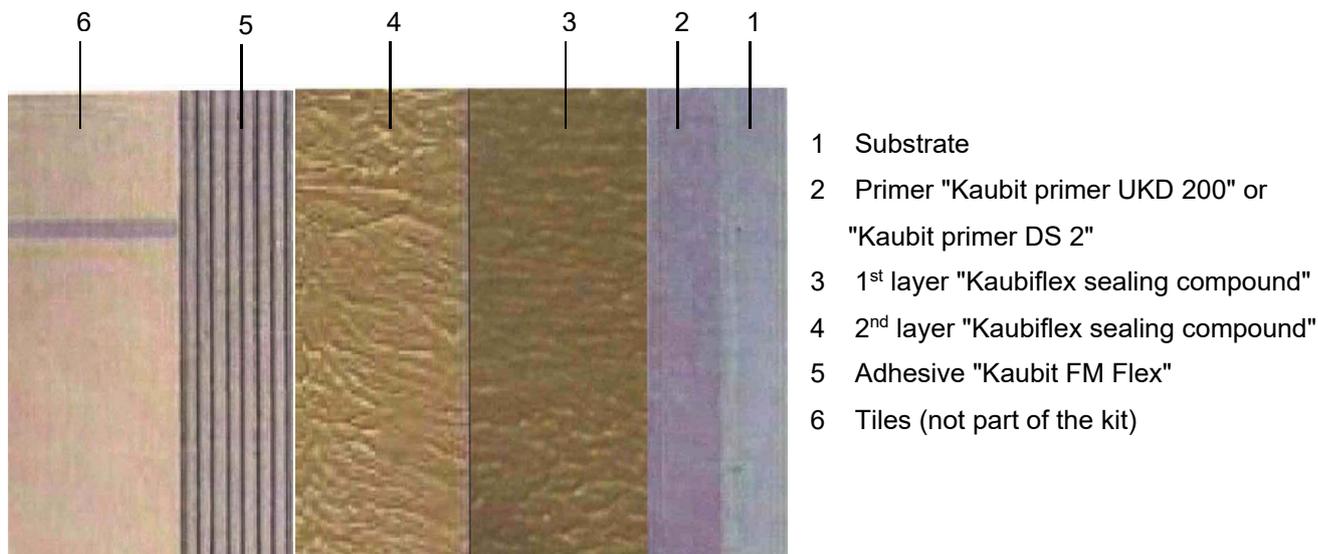

Description of the product	
Minimum layer thickness of the waterproofing sheet	0.5 mm
Working life	25 years
Reaction to fire acc. to EN 13501-1	class E
Slipperiness	no performance assessed
Reparability	reparable
Performance of the product:	Description / Class / Level
Use category related to BWR 3	IA2
Statement on dangerous substance	see section 3.2
Water vapour diffusion resistance factor Kaubit primer UKD 200 with Kaubiflex FA sealing compound (1000 g/m <sup>2</sup> ) 23 °C – 50/93 % r.h.	23 °C – 50/93 % r.h.      s <sub>d</sub> = 2,3 m
Kaubit Primer DS 2 (460 g/m <sup>2</sup> ) with Kaubiflex FA sealing compound (1000 g/m <sup>2</sup> ) 23 °C – 75/100 % r.h.	23 °C – 75/100 % r.h.      s <sub>d</sub> = 79 m
Water tightness acc. to EN 13967	watertight
Crack bridging ability	category 1: 0.4 mm
Bond strength	category 2: ≥ 0.5 MPa
Scratch resistance	not relevant
Joint bridging ability	category 2: watertight
Water tightness around penetrations	category 2: watertight
Resistance to temperature	category 2: ≥ 0,5 MPa
Resistance to water	category 2: ≥ 0.5 MPa
Resistance to alkalinity	category 2: ≥ 0.5 MPa
Resistance to mechanical wear	not relevant

**Kaubiflex FA-System**  
Kaubit AG

**System built-up, levels of use categories and performances of the product**

Annex A1

**Sealing tape:**



Type "NG" width 120 mm  
Type "NV" width 120 mm




Type "NVV" width 120 mm




Type "PEVV" width 120 mm  
with and without perforation

<b>Kaubiflex FA-System</b> Kaubit AG	Annex A2
<b>Details and components</b>	

**Ingoing/outgoing corners:**

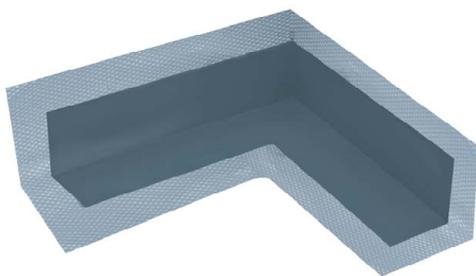

Type "NG"  
Type "NV"  
leg length 100 or 140 mm

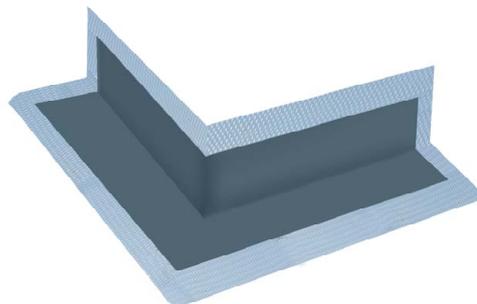

Type "NG"  
Type "NV"  
leg length 75 or 140 mm



Type "NVV"  
leg length 100 or 140 mm



Type "NVV"  
leg length 75 or 140 mm



Type "PEVV" leg length 120 mm  
with and without perforation



Type "PEVV" leg length 105 mm  
with and without perforation



Electronic copy of the ETA by DIBt: ETA-08/0250

**Kaubiflex FA-System**  
Kaubit AG

**Details and Components**

Annex A3



**Sealing sleeves for walls:**

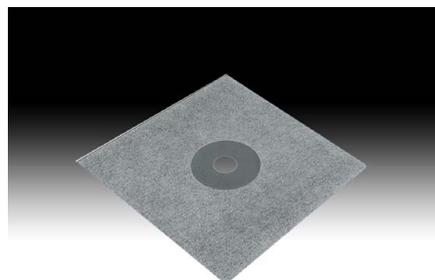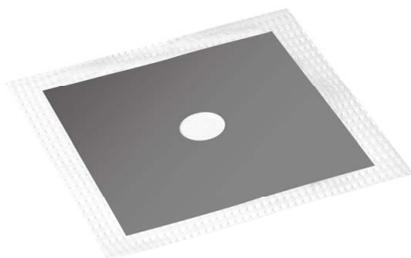

Type NG" 100 x 100 mm, 150 x 150 mm, 200 x 200 mm  
Type NV" 100 x 100 mm, 150 x 150 mm, 200 x 200 mm

Type NVV" 100 x 100 mm, 150 x 150 mm, 200 x 200 mm with and without perforation

**Sealing sleeves for floors:**

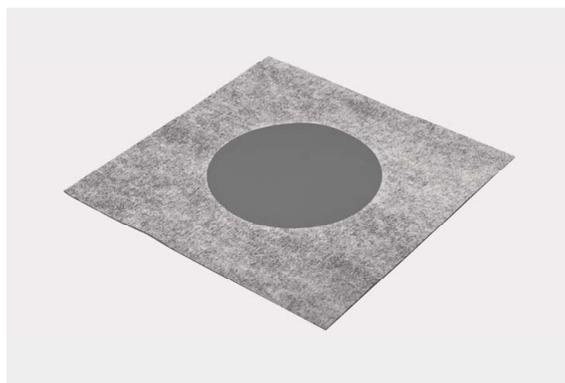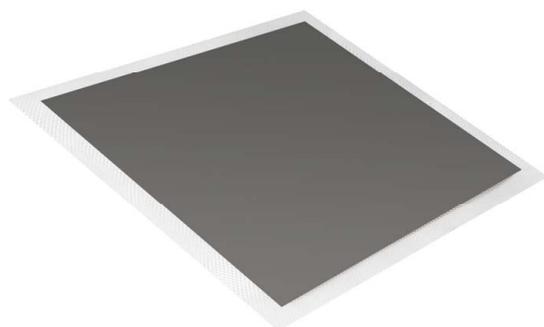

Type "NG" 350 x 350 mm, 400 x 400 mm  
Type "NV" 350 x 350 mm, 400 x 400 mm

Type "NVV" 350 x 350 mm  
with and without perforation



Type "Butyl" 370 x 370 mm

Electronic copy of the ETA by DIBt: ETA-08/0250

**Kaubiflex FA-System**  
Kaubit AG

**Details and components**

Annex A4

### Installation

The levels of use categories and the performance of the waterproofing kit can be assumed only, if the installation is carried out according to the installation instructions stated in the technical file of the manufacturer, in particular taking account of the following points:

- installation by appropriately trained personnel
- installation of only those components which are specified components of the kit
- installation with the required tools and adjuvant
- precautions during installation
- inspecting the substrate surface for cleanliness and correct treatment
- inspecting during installation and of the finished watertight membrane and documentation of the results

<b>Kaubiflex FA-System</b> Kaubit AG	Annex B
<b>Intended use</b> Specifications	