

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments



European Technical Assessment

ETA-09/0339
of 7 December 2021

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Halfen anchor channel HTA

Product family
to which the construction product belongs

Anchor channels

Manufacturer

Leviat GmbH
Liebigstraße 14
40764 Langenfeld
DEUTSCHLAND

Manufacturing plant

Leviat Werke

This European Technical Assessment
contains

30 pages including 3 annexes which form an integral part
of this assessment

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

EAD 330008-03-0601, Edition 05/2021

This version replaces

ETA-09/0339 issued on 28 June 2018

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The Halfen anchor channel HTA is a system consisting of a C-shaped channel profile of steel and stainless steel and at least two metal anchors non-detachably fixed on the channel back and channel bolts.

The anchor channel is embedded surface-flush in the concrete. HALFEN channel bolts with appropriate hexagon nuts and washers are fixed to the channel.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor channel is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor channel of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance under tension load (static and quasi-static loading)	
- Resistance to steel failure of anchors, connection and channel lips	See Annex C1
- Resistance to steel failure of channel bolt	See Annex C2
- Resistance to steel failure by exceeding the bending strength of the channel	See Annex A6 and C1
- Maximum installation torque	See Annex B4
- Resistance to pull-out failure of the anchor and to concrete cone failure	See Annex B3 and C3
- Minimum edge distance, spacing and member thickness	See Annex A6 and B3
- Characteristic edge distance and spacing to avoid splitting of concrete under load	See Annex C3
- Resistance to blow-out failure – bearing area of anchor head	See Annex A5

<p>Characteristic resistance under shear load (static and quasi-static loading)</p> <ul style="list-style-type: none"> - Resistance to steel failure of channel bolt - Resistance to steel failure of channel lips, connection and anchor (shear load perpendicular to longitudinal axis of channel) - Resistance to steel failure of channel lips, anchor and connection (shear load in direction of longitudinal axis of channel) - Resistance to concrete failure 	<p>See Annex C5 See Annex C4 No performance assessed See Annex C4</p>
<p>Characteristic resistance under combined tension and shear load (static and quasi-static load)</p>	<p>See Annex C6</p>
<p>Characteristic resistances under cyclic fatigue tension load</p>	<p>See Annex C9 to C11</p>
<p>Displacements (static and quasi-static load)</p>	<p>See Annex C3 and C4</p>
<p>Durability</p>	<p>See Annex B1</p>

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	See Annex C7 and C8

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with EAD No. 330008-03-0601, the applicable European legal act is: [2000/273/EC].


The system to be applied is: 1

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.

Dipl.-Ing. Beatrix Wittstock
Head of Section

beglaubigt:
Müller

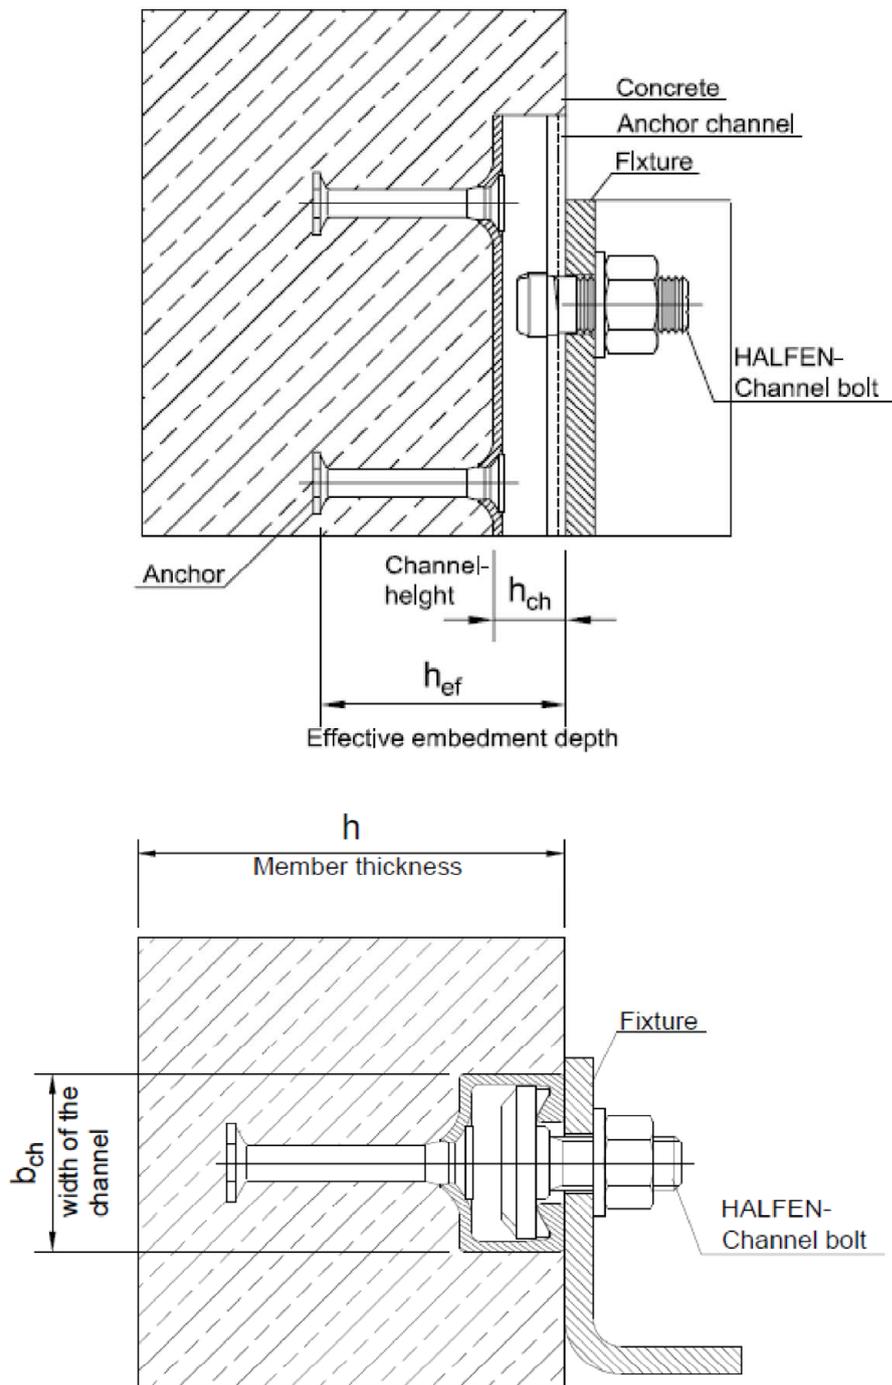

HALFEN Anchor Channels HTA

Product description
Installed condition

Annex A1

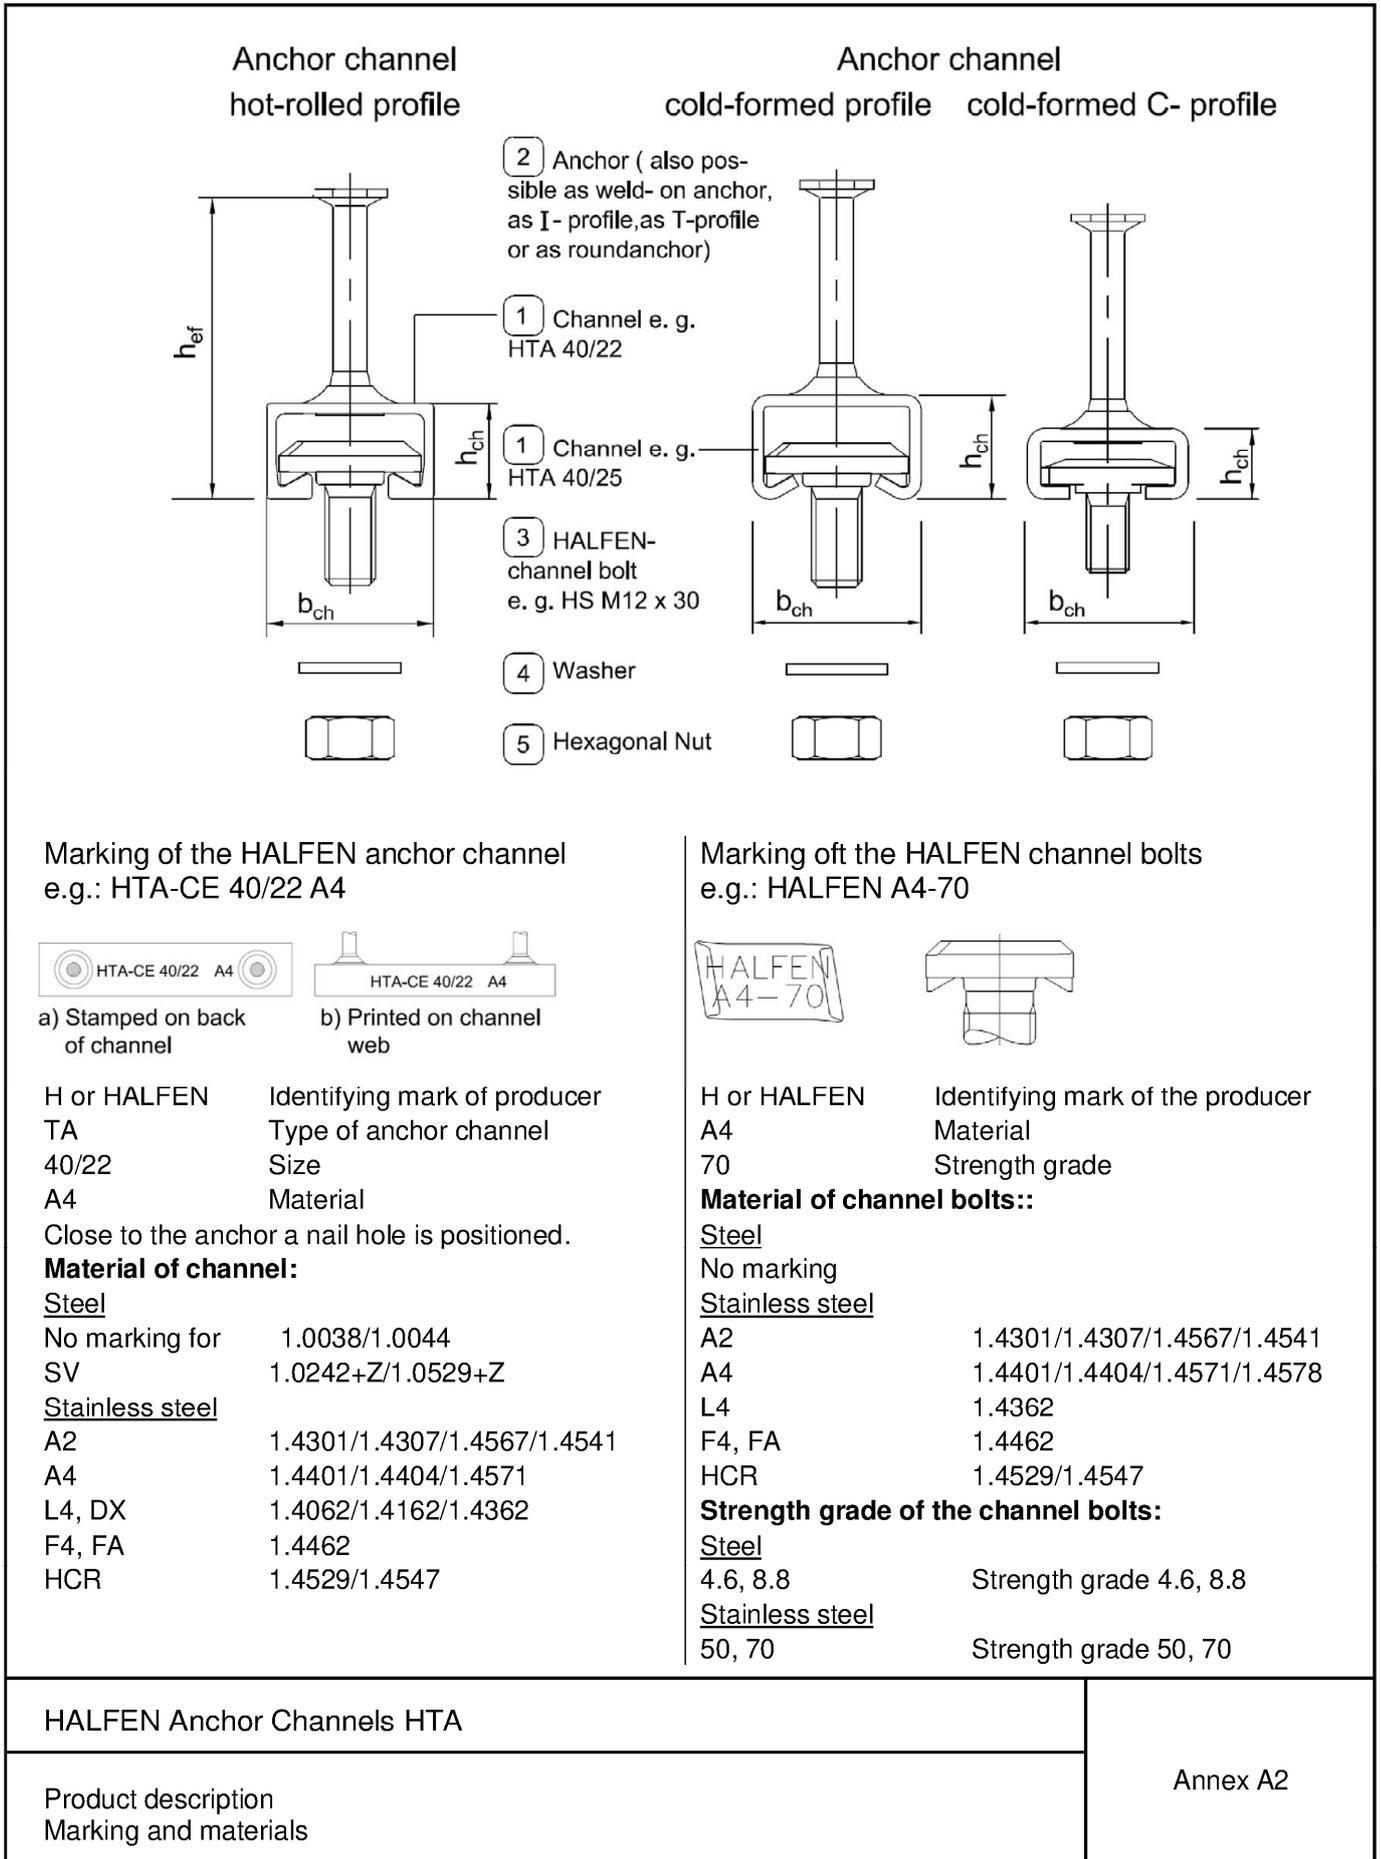


Table A1: Materials and intended use

Item no.	Specification	Intended use			
		1	2	3	4
		Dry internal conditions	Internal conditions with usual humidity	Medium corrosion exposure	High corrosion exposure
		Anchor channels may only be used in structures subject to dry internal conditions	Anchor channels may also be used in structures subject to internal conditions with usual humidity.	Anchor channels may also be used in structures subject to external atmospheric exposure (incl. industrial and marine environment) or exposure in permanently damp internal conditions, if no particular aggressive conditions exist.	Anchor channels may also be used in structures subject to exposure in particular aggressive conditions.
For examples see use conditions in Annex B1					
Materials					
①	Channel profile	Steel 1.0038 (A), 1.0044 (A), 1.0976 (D) hot-dip galv. ≥ 55 µm acc. to (N) 1.0242+Z (U), 1.0529+Z (U) hot-dip coated ≥ 15 µm	Steel 1.0038 (A), 1.0044 (A), 1.0976 (D) hot-dip galv. ≥ 55 µm acc. to (N) Stainless Steel ⁵⁾ 1.4301 (G), 1.4307 (G), 1.4567 (G), 1.4541 (G), 1.0213 (B), 1.1122 (E)	Stainless Steel 1.4401 (G), 1.4404 (G), 1.4571 (G), 1.4362 (G), 1.4062 (F), 1.4162 (F)	Stainless Steel 1.4462 ²⁾ (G), 1.4529 (G), 1.4547 (G)
②	Anchor	Steel 1.0038 (A), 1.0214 (B), 1.0401 (C), 1.1132 (E), 1.5525 (I), 1.5535 (I), 1.5523 (H) hot-dip galv. ≥ 55 µm acc. to (N)	Steel 1.0038 (A), 1.0214 (B), 1.0401 (C), 1.1132 (E), 1.5525 (I), 1.5535 (I), 1.5523 (H) hot-dip galv. ≥ 55 µm acc. to (N) Stainless Steel ⁵⁾ 1.4301 (G), 1.4307 (G), 1.4567 (G), 1.4541 (G)	Stainless Steel 1.4401 (G), 1.4404 (G), 1.4571 (G), 1.4362 (G), 1.4578 (G) Steel 1.0038 (A) ⁴⁾	Stainless Steel 1.4462 ²⁾ (G), 1.4529 (G), 1.4547 (G)
③	HALFEN channel bolts	Steel strength grade 4.6 / 8.8 (J) electroplated ≥ 5 µm acc. to (O)	Steel strength grade 4.6 / 8.8 (J) hot-dip galv. ≥ 50 µm acc. to (P) ¹⁾ Stainless Steel ⁵⁾ strength grade 50,70 (K) 1.4301 (G), 1.4307 (G), 1.4567 (G), 1.4541 (G)	Stainless Steel strength grade 50,70 (K) 1.4401 (G), 1.4404 (G), 1.4571 (G), 1.4362 (G), 1.4578 (G)	Stainless Steel strength grade 50,70 (K) 1.4462 ²⁾ (G), 1.4529 (G), 1.4547 (G)
④	Washer ³⁾ (R) and (S) production class A, 200 HV	Steel EN 10025:2005 electroplated ≥ 5 µm acc. to (O)	Steel EN 10025:2005 hot-dip galv. ≥ 50 µm acc. to (P) ¹⁾ Stainless Steel ⁵⁾ steel grade A2, A3 (K)	Stainless Steel steel grade A4, A5 (K)	Stainless Steel 1.4462 ²⁾ (G), 1.4529 (G), 1.4547 (G)
⑤	Hexagonal nuts (T)	Steel strength grade 5/8 (L) electroplated ≥ 5 µm acc. to (O)	Steel strength grade 5/8 (L) hot-dip galv. ≥ 50 µm acc. to (P) ¹⁾ Stainless steel ⁵⁾ strength grade 70, 80 (M) steel grade A2, A3 (M)	Stainless Steel strength grade 70, 80 (M) steel grade A4, A5 (M)	Stainless Steel strength grade 70, 80 (M) 1.4462 ²⁾ (G), 1.4529 (G), 1.4547 (G)

A - EN 10025-2:2004 E - EN 10263-3:2017
B - EN 10263-2:2017 F - EN 10088-2:2014
C - EN 10277-2:2008 G - EN 10088-3:2014
D - EN 10149-2:2013 H - EN 10269:2013

I - EN 10263-4:2017
J - EN ISO 898-1:2013
K - EN ISO 3506-1:2009
L - EN ISO 898-2:2012

M - EN ISO 3506-2:2009
N - EN ISO 1461:2009
O - EN ISO 4042:1999
P - EN ISO 10684:2004

R - EN ISO 7089:2000
S - EN ISO 7093-1:2000
T - EN ISO 4032:2012
U - EN 10346:2015

¹⁾ or electroplated with special coating ≥ 12 µm

²⁾ 1.4462 not applicable for indoor swimming pools

³⁾ not included in scope of delivery

⁴⁾ only for weld-on anchors with sufficient concrete cover acc. to EN 1992-1-1 + AC:2010

⁵⁾ stainless steel anchors only in combination with stainless steel channel profiles, channel bolts, washers and nuts

HALFEN Anchor Channels HTA

Product description
Materials and intended use

Annex A3

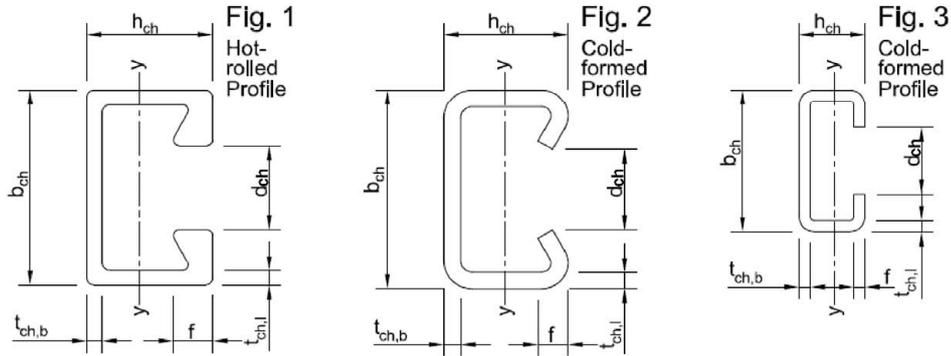


Table A2: Profile dimensions (steel and stainless steel)

Anchor-channel	Figure	Dimensions						Material	I _y [mm ⁴]
		b _{ch}	h _{ch}	t _{ch,b}	t _{ch,l}	d _{ch}	f		
[mm]									
28/15	3	28,00	15,25	2,25	2,25	12,00	2,25	Steel	4060
38/17	3	38,00	17,50	3,00	3,00	18,00	3,00		8547
40/25	2	40,00	25,00	2,75	2,75	18,00	5,60		20570
49/30	2	50,00	30,00	3,00	3,00	22,00	7,39		41827
54/33	2	54,00	33,00	4,50	4,50	22,00	7,90		72079
72/49	2	72,00	49,00	6,00	6,00	33,00	9,90		293579
40/22 40/22P	1	39,50	23,00	2,60	2,40	18,00	6,00		20029
50/30 50/30P	1	49,00	30,00	3,20	2,75	22,50	7,85		52896
52/34	1	52,50	33,50	4,10	4,00	22,50	10,50		93262
55/42	1	54,50	42,00	5,00	5,00	26,00	12,90		187464
72/48	1	72,00	48,50	4,50	5,00	33,00	15,50	349721	
28/15	3	28,00	15,25	2,25	2,25	12,00	2,25	Stainless steel	4060
38/17	3	38,00	17,50	3,00	3,00	18,00	3,00		8547
40/25	2	39,50	25,00	2,50	2,50	18,00	5,40		19097
49/30	2	50,00	30,00	3,00	3,00	22,00	7,39		41827
54/33	2	54,00	33,00	4,50	4,50	22,00	7,90		72079
72/49	2	72,00	49,00	6,00	6,00	33,00	9,90		293579
40/22 40/22P	1	39,50	23,00	2,60	2,40	18,00	6,00		20029
50/30 50/30P	1	49,00	30,00	3,20	2,75	22,50	7,85		52896
52/34	1	52,50	33,50	4,10	4,00	22,50	10,50		93262
55/42	1	54,50	42,00	5,00	5,00	26,00	12,90		187464
72/48	1	72,00	48,50	4,50	5,00	33,00	15,50	349721	

HALFEN Anchor Channels HTA

Product description
Profile dimensions

Annex A4

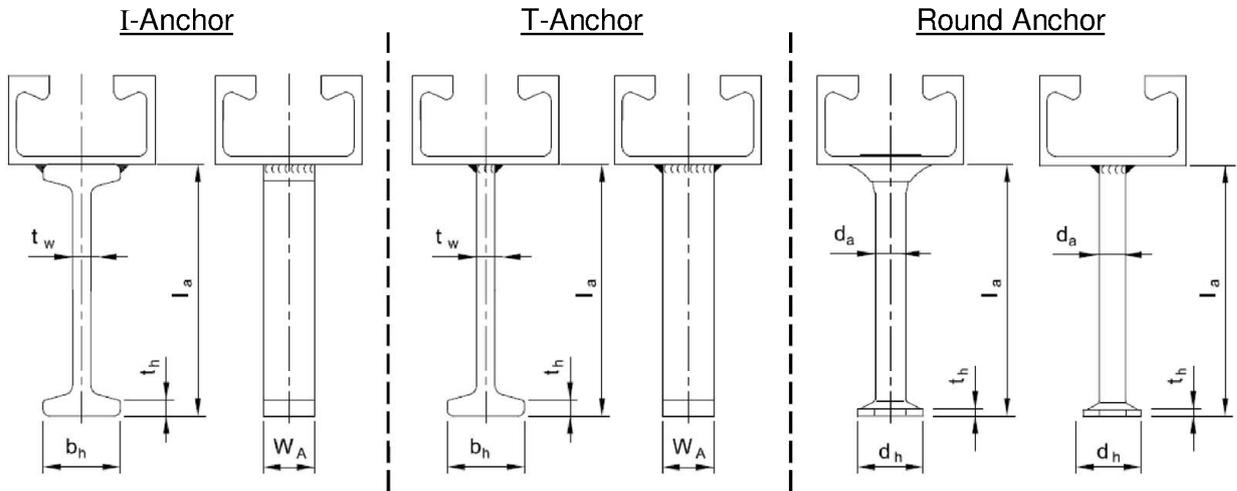


Table A3: Dimensions of anchors (I-Anchor, T-Anchor or Round Anchor)

Anchor channel	I-Anchor und T-Anchor						Round Anchor				
	min l_a	t_w	b_h	t_h	w_A	A_h	min l_a	d_a	d_h	t_h	A_h
	[mm]						[mm ²]	[mm]			
28/15	62	5	18	3,3	10 - 20	130	32	6	12	1,3	85
38/17	62	5	18	3,3	10 - 20	130	60,4	8	16	1,9	151
40/25	62	5	18	3,3	12 - 24	156	60,9	8	16	1,9	151
40/22	62	5	18	3,3	12 - 24	156	60,9	8	16	1,9	151
40/22P	128	6	17	5	18 - 30	198	70,2	10	20	2,2	236
49/30	69	5	18	3,5	18 - 30	234	69,2	10	20	2,2	236
50/30	69	5	18	3,5	18 - 30	234	69,2	10	20	2,2	236
50/30P	128	6	17	5	25 - 35	275	78,7	12	25	2,7	378
54/33	128	6	17	5	30 - 40	330	126	12	25	2,7	378
52/34	128	6	17	5	30 - 40	330	125,5	12	25	2,7	378
55/42 ¹⁾	140	7,1	20	6	35 - 45	452	136,2	14	28	3,2	462
72/49	140	7,1	20	6	40 - 50	516	- ²⁾				
72/48	140	7,1	20	6	40 - 50	516	- ²⁾				

¹⁾ HTA 55/42 in stainless steel only with weld-on anchors.

²⁾ Product not available.

HALFEN Anchor Channels HTA

Product description
Dimensions of anchors

Annex A5

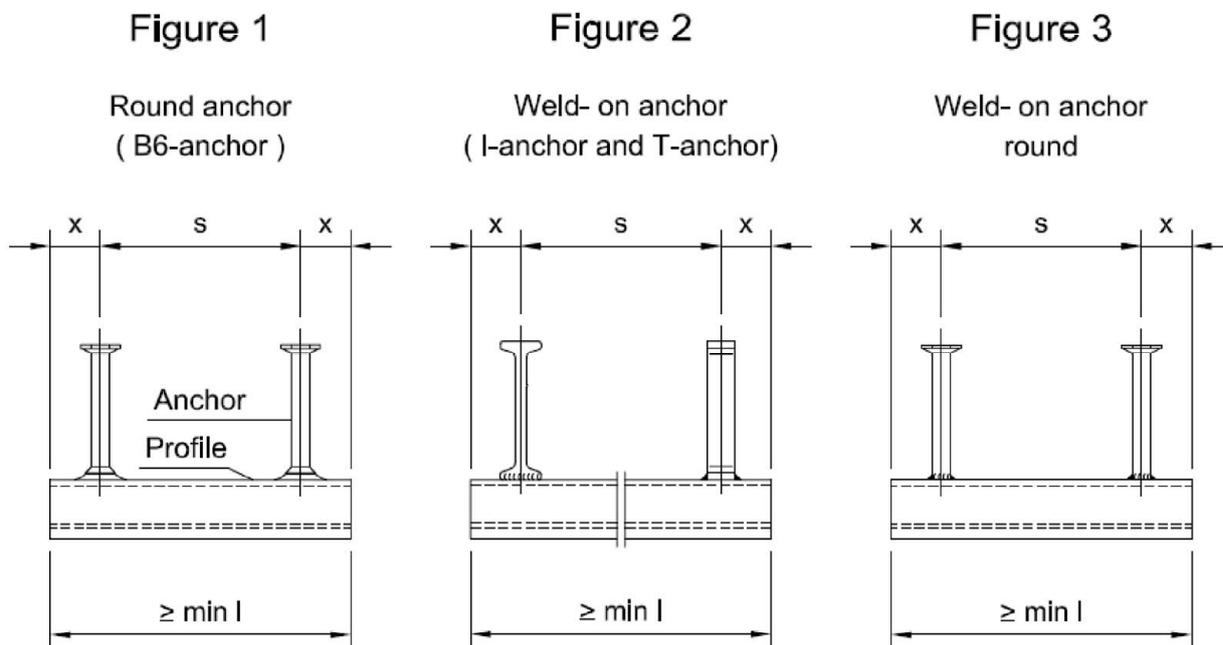


Table A4: Anchor positioning

Anchor channel	Anchor spacing s		End spacing x ¹⁾		Min. Channel length l _{min}	
	S _{min}	S _{max}	Round anchor Fig. 1	Welded anchor Fig. 2 and 3	Round anchor Fig. 1	Welded anchor Fig. 2 and 3
	[mm]					
28/15 38/17	50	200	25	25	100	100
40/25 40/22 40/22P 49/30 50/30 50/30P	100 (50)	250	25 ²⁾	25 ²⁾	100	150
52/34 54/33	100 (80)	250	35	25 ²⁾	150	150
55/42	100 (80)	300	35	25 (35)	150	150
72/48 72/49	100 (80)	400	- ³⁾	25 (35)	- ³⁾	150

() valid for round anchor acc. Fig. 1.

¹⁾ For channels with l = 6070 mm the end spacing x is always 35 mm.

²⁾ End spacing may be increased up to 35 mm.


³⁾ Product not available.

HALFEN Anchor Channels HTA


Product description
Anchor positioning, channel length

Annex A6


HALFEN channel bolt,
Hook-head geometry

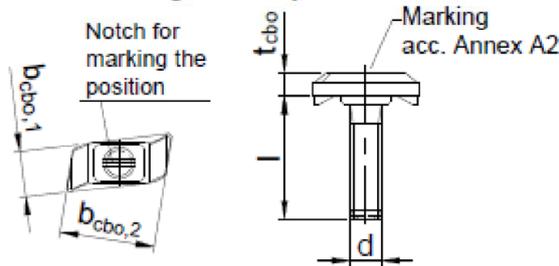

HALFEN channel bolt,
Hammer-head geometry

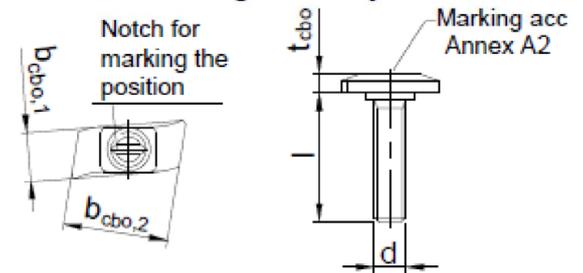

alternative Hook-head geometry

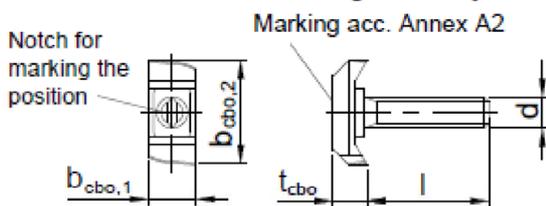

alternative Hammer-head geometry

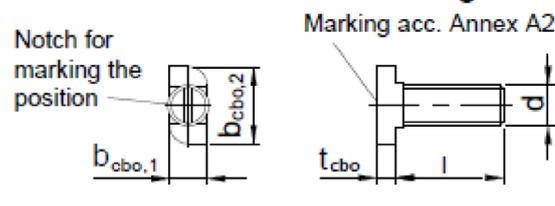


Table A5: Dimensions of HALFEN channel bolts

Head	HS	Thread d	Channel bolts - wing shape			Channel bolts - alternative shape			Anchor channel
			Width b _{cbo,1} [mm]	Length b _{cbo,2} [mm]	Thickness t _{cbo} [mm]	Width b _{cbo,1} [mm]	Length b _{cbo,2} [mm]	Thickness t _{cbo} [mm]	
Hook-head	40/22	M10	15	30.8	7.2	- ¹⁾	- ¹⁾	- ¹⁾	40/22
		M12	15	30.8	7.2	- ¹⁾	- ¹⁾	- ¹⁾	40/22P
		M16	17.4	30.8	8.2 (9.8)	- ¹⁾	- ¹⁾	- ¹⁾	40/25
	50/30	M10	16.3	40.2	10	15	41.5	10	49/30
		M12	16.3	40.2	10	15	41.5	10	50/30P
		M16	19.4	40.2	11	20	41.5	11	52/34
		M20	21	39.5	12.5	21	41.5	12	54/33
	72/48	M24	- ¹⁾	- ¹⁾	- ¹⁾	24.5	41	18	55/42
		M20	- ¹⁾	- ¹⁾	- ¹⁾	23	58	14	
		M24	- ¹⁾	- ¹⁾	- ¹⁾	25	58	16	72/48
Hammer-head	28/15	M27	- ¹⁾	- ¹⁾	- ¹⁾	28	58	18	72/49
		M30	- ¹⁾	- ¹⁾	- ¹⁾	31	58	20	
		M6	10.6	21.1	4	10.1	22.7 (22.2)	4	28/15
		M8	10.6	21.1 (20.7)	4.5	10.1	22.7 (22.2)	4	
	M10	10.9	20.2	5	10.1	22.7 (22.2)	5 (4)		
	38/17	M12	10.8	20.1	6.5	10.1	22.7 (22.2)	5.5	
		M10	13.6-14.1	29	6	13 (12)	30.5	6	38/17
M12		13.6-14.1	29	6	13 (12)	30.5	7 (6)		
		M16	16	29	8.5	16	7		

() Value applies for strength grade 8.8

¹⁾ Product not available

HALFEN Anchor Channels HTA

Product description
HALFEN channel bolts, dimensions

Annex A7

Table A6: Strength grade

	Steel ¹⁾		Stainless steel ¹⁾	
Strength grade	4.6	8.8	50	70
f_{uk} [N/mm ²]	400	800	500	700
f_{yk} [N/mm ²]	240	640	210	450
Finish	electroplated, hot-dip galv.		-	

¹⁾ Materials according Annex A2 and Annex A3, Tab. A1

HALFEN Anchor Channels HTA

Product description
HALFEN channel bolts, strength grade

Annex A8

Specifications for intended use

Anchor channels and channel bolts subject to:

- Static and quasi-static loads in tension and shear perpendicular to the longitudinal axis of the channel.
- Fatigue cyclic tension loads.
- Fire exposure for concrete class C20/25 to C50/60.

Base materials:

- Reinforced or unreinforced normal weight concrete according to EN 206-1:2000.
- Strength classes C12/15 to C90/105 according to EN 206-1:2000.
- Cracked or uncracked concrete.

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (e.g. accommodations, bureaus, schools, hospitals, shops, exceptional internal conditions with usual humidity)
(anchor channels and channel bolts according to Annex A3, Table A1, column 1 - 4)
- Structures subject to internal conditions with usual humidity (e.g. kitchen, bath and laundry in residential buildings, exceptional permanent damp conditions and application under water)
(anchor channels and channel bolts according to Annex A3, Table A1, column 2 - 4)
- Structures subject to external atmospheric exposure (incl. industrial and marine environment) or exposure to permanently damp internal conditions, if no particular aggressive conditions (e.g. permanent, alternating immersion in seawater etc.) exist.
(anchor channels and channel bolts according to Annex A3, Table A1, column 3 - 4)
- Structures subject to exposure in particular aggressive conditions (e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used))
(anchor channels and channel bolts according to Annex A3, Table A1, column 4)

Design:

- Anchor channels are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor channel and channel bolts are indicated on the design drawings (e.g. position of the anchor channel relative to the reinforcement or to supports).
- For static and quasi-static loading as well as fire exposure the anchor channels are designed in accordance with EOTA TR 047 “Design of Anchor Channels”, March 2018 or EN 1992-4:2018.
- For fatigue loading the anchor channels are designed in accordance with EOTA TR 050 “Calculation Method for the Performance of Anchor Channels under Fatigue Loading”, October 2018.
- The characteristic resistances are calculated with the minimum effective embedment depth.

HALFEN Anchor Channels HTA

Intended use
Specifications

Annex B1

Installation:

- The installation of anchor channels is carried out by appropriately qualified personnel under the supervision of the person responsible for the technical matters on site.
- Use of the anchor channels only as supplied by the manufacturer – without any manipulations, repositioning or exchanging of channel components.
- Cutting of anchor channels is allowed only if pieces according to Annex A5, Table A5 are generated including end spacing and minimum channel length and only to be used in dry internal conditions (Annex A3, Table A1, column 1). For anchor channels made of stainless steel there are no restrictions regarding corrosion resistance when using cut channel pieces, if cutting is done professionally and contamination of cutting edges with corroding material is avoided.
- Installation in accordance with the installation instruction given in Annexes B6 and B7.
- The anchor channels are fixed on the formwork, reinforcement or auxiliary construction such that no movement of the anchor channels will occur during the time of laying the reinforcement and of placing and compacting the concrete.
- The concrete under the head of the anchors is properly compacted. The anchor channels are protected from penetration of concrete into the internal space of the channel profiles.
- Washer may be chosen according to Annex A3 and provided separately by the user.
- Orientating the channel bolt (groove mark according to Annex B7) rectangular to the channel axis.
- The required installation torque given in Annex B4 must be applied and must not be exceeded.

HALFEN Anchor Channels HTA

Intended use
Specifications

Annex B2

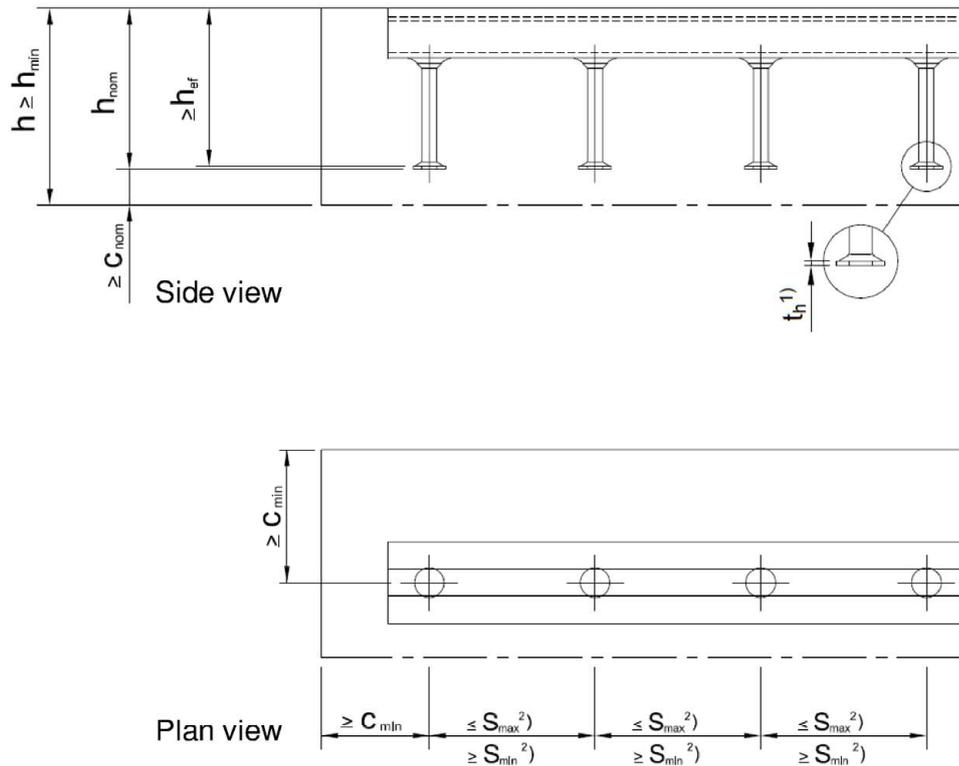


Table B1-1: Minimum effective anchorage depth, edge distance and member thickness

Anchor channel		28/15	38/17	40/25	49/30	54/33	72/49	
Min. effective anchorage depth – round anchor	[mm]	$h_{ef,min}$	45	76	79	94	155	- ⁴⁾
		$h_{ef,min}$	74	76	84	96	156	183
		C_{min}	40	50	50	75	100	150
		h_{min}	actual $h_{ef} + t_h + C_{nom}$ ³⁾					
Min. member thickness		55	90	90	105	170	195	

Table B1-2: Minimum effective anchorage depth, edge distance and member thickness

Anchor channel		40/22	40/22P	50/30	50/30P	52/34	55/42	72/48	
Min. effective anchorage depth – round anchor	[mm]	$h_{ef,min}$	79	91	94	106	155	175	- ⁴⁾
		$h_{ef,min}$	82	146	95	153	156	176	182
		C_{min}	50	50	75	75	100	100	150
		h_{min}	actual $h_{ef} + t_h + C_{nom}$ ³⁾						
Min. member thickness		90	105	105	120	170	190	195	

¹⁾ t_h = Anchor head thickness

²⁾ s_{min} , s_{max} acc. Annex A6, Table A4

³⁾ C_{nom} acc. EN 1992-1-1:2004 + AC:2010

⁴⁾ Product not available

HALFEN Anchor Channels HTA

Intended use
Installation parameters of anchor channels

Annex B3

Table B2: Minimum spacing and installation torque of HALFEN channel bolts

Anchor channel	HALFEN Channel bolts Ø	Min. spacing $s_{min,cbo}$ of the channel bolts	Installation torque T_{inst} ⁴⁾				
			General ²⁾	Steel – steel contact ³⁾			
			$T_{inst,g}$	$T_{inst,s}$			
			Steel 4.6; 8.8 Stainless steel 50; 70 ¹⁾	Steel 4.6	Stainless steel 50 ¹⁾	Steel 8.8	Stainless Steel 70 ¹⁾
	[mm]	[mm]		[Nm]			
28/15	6	30	3	3	3	- ⁵⁾	- ⁵⁾
	8	40	8	8	8	20	15
	10	50	13	15	15	40	30
	12	60	15	25	25	70	50
38/17	10	50	15	15	15	40	30
	12	60	25	25	25	70	50
	16	80	40	65	60	180	130
40/25	10	50	15	15	15	40	30
40/22	12	60	25	25	25	70	50
40/22P	16	80	45	65	60	180	130
49/30 50/30 50/30P	10	50	15	15	15	40	30
	12	60	25	25	25	70	50
	16	80	60	65	60	180	130
	20	100	75	130	120	360	250
52/34 54/33	10	50	15	15	15	40	30
	12	60	25	25	25	70	50
	16	80	60	65	60	180	130
	20	100	120	130	120	360	250
55/42	10	50	15	15	15	40	30
	12	60	25	25	25	70	50
	16	80	60	65	60	180	130
	20	100	120	130	120	360	250
	24	120	200	230	200	620	440
72/48 72/49	20	100	120	130	120	360	250
	24	120	200	230	200	620	440
	27	135	300	340	300	900	650
	30	150	380	460	400	1200	850

¹⁾ Materials according to Annex A2 and Annex A3, Tab. A1

²⁾ Acc. to Annex B5, Fig.1

³⁾ Acc. to Annex B5, Fig. 2

⁴⁾ T_{inst} must not be exceeded

⁵⁾ Product not available

HALFEN Anchor Channels HTA

Intended use
Installation parameters

Annex B4

General

The fixture is in contact with the channel profile and the concrete surface.

The installation torque according to Annex B4, Table B2 shall be applied and must not be exceeded.

Steel to steel contact

The fixture is fastened to the anchor channel by suitable steel parts (e.g. washer). The installation torque according to Annex B4, Table B2 shall be applied and must not be exceeded.

Fig. 1


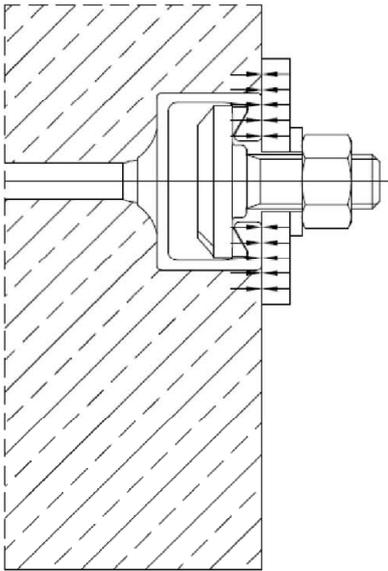


Fig. 2

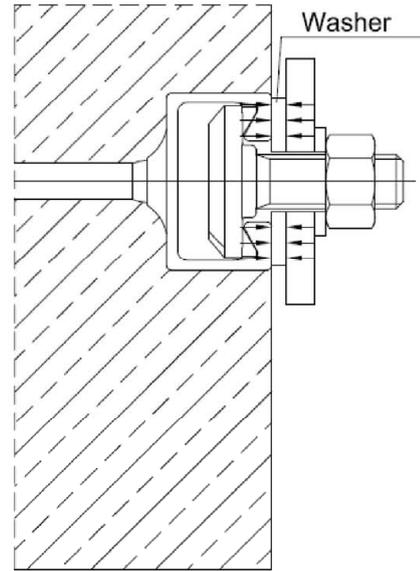


HALFEN Anchor Channels HTA

Intended use
Position of the fixture

Annex B5

Installation of HALFEN anchor channel

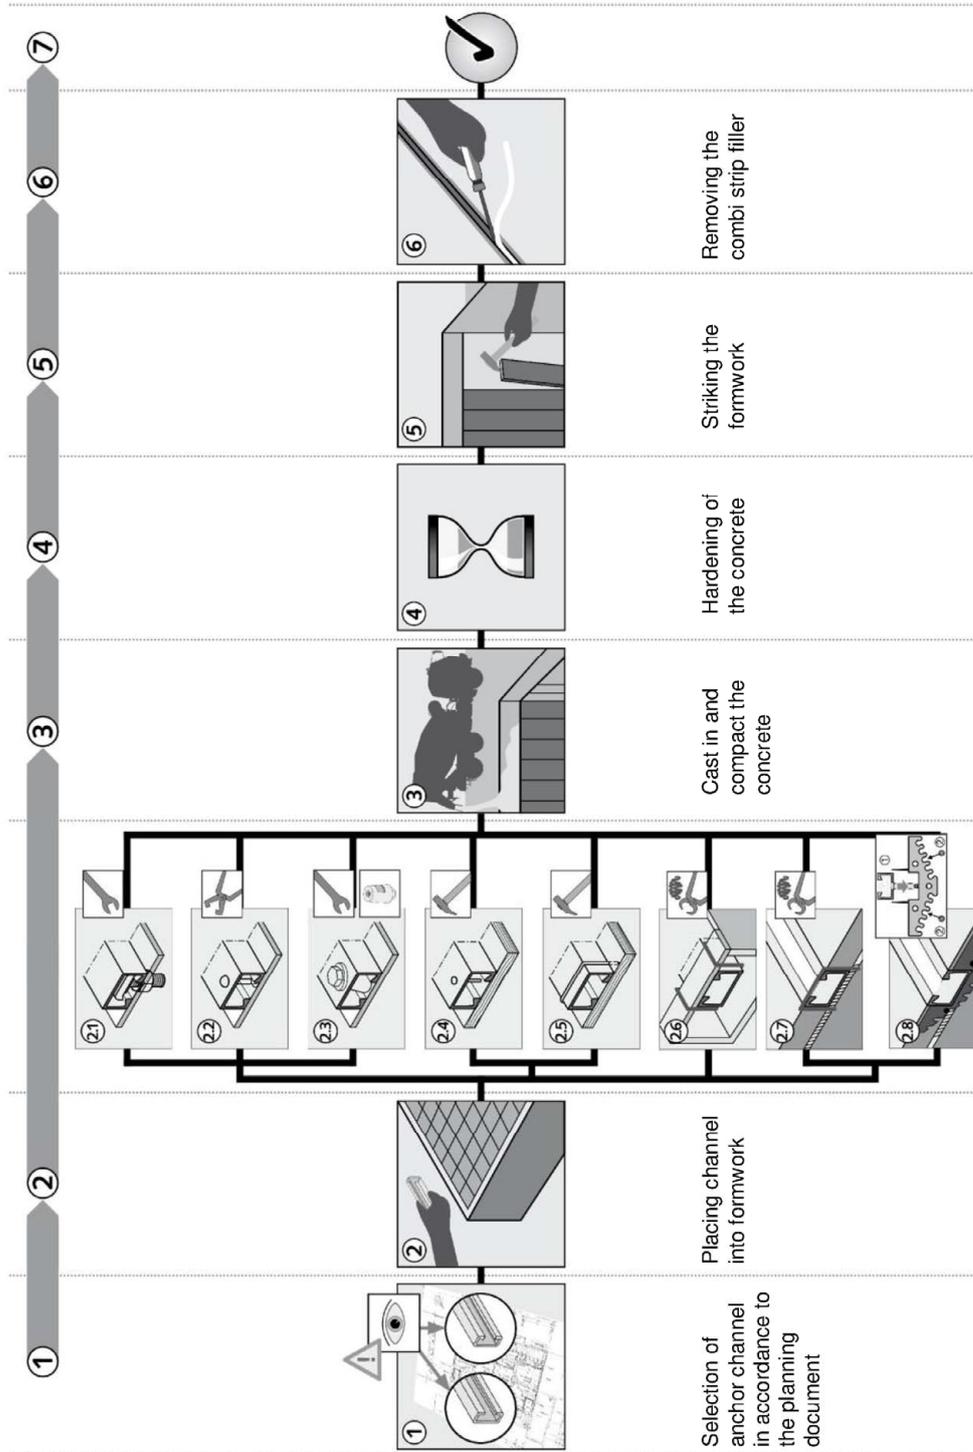


- 2.1 Steel formwork: Fixing with HALFEN channel bolts through formwork penetration
- 2.2 Steel formwork: Fixing with rivets
- 2.3 Steel formwork: Fixing with HALFEN Fixing cone
- 2.4 Timber formwork: Fixing with nails
- 2.5 Timber formwork: Fixing with staples
- 2.6 Fixing in the top surface of concrete: Fixing by using auxiliary construction
- 2.7 Fixing in the top surface of concrete: Fixing from above directly to the reinforcement
- 2.8 Fixing in the top surface of concrete: Fixing from above to the reinforcement, using the HALFEN ChanClip

HALFEN Anchor Channels HTA

Intended use
Installation instruction – HALFEN Anchor channel

Annex B6

Installation of HALFEN channel bolts

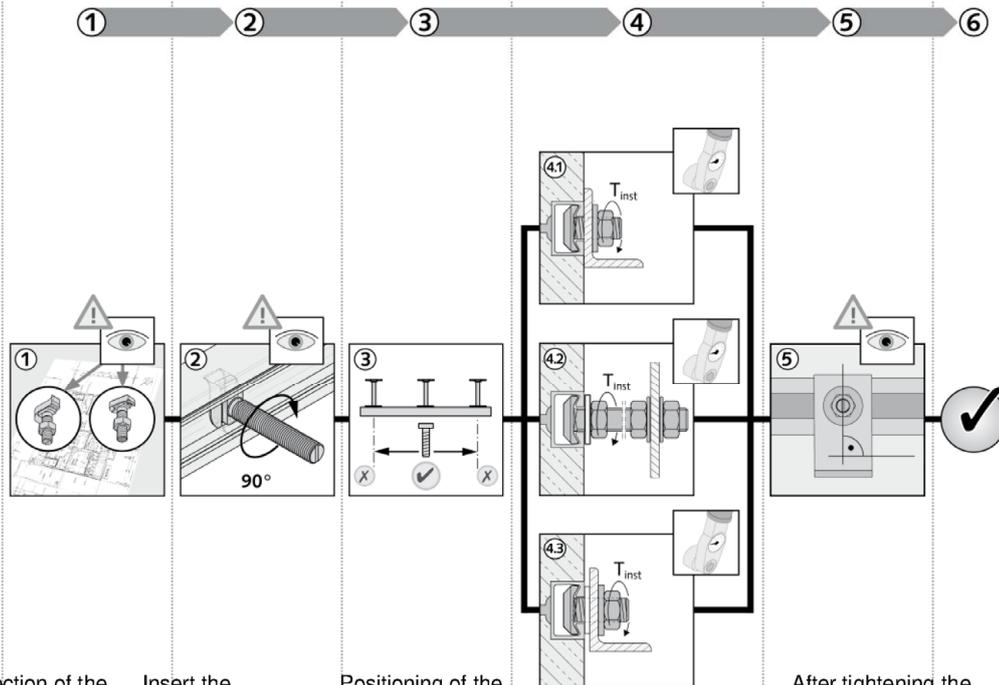

Selection of the HALFEN channel bolts in accordance with the planning document.

Insert the HALFEN channel bolts into the channel slot. After a 90° turn clockwise the HALFEN screw locks into position (check whether the groove mark is perpendicular to the channel longitudinal axis).

Positioning of the HALFEN channel bolts: At the channel ends a minimum clearance must be maintained, which corresponds with the overhang beyond the last anchor acc. to Annex A6.

Tighten the hexagonal nut to the installation torque (T_{inst}) acc. table stated below. T_{inst} must not be exceeded.
4.1: general application,
4.2 and 4.3: steel to steel contact.

After tightening the nut check if the groove mark on the HALFEN channel bolt is perpendicular to the channel longitudinal axis. If it is not perpendicular the screw must be completely loosened, re-inserted and tightened again.

Table B3: Installation torque

Pos. of fixture acc. Annex B5	Material strength grade	Anchor channel	T_{inst} [Nm] ¹⁾								
			M6	M8	M10	M12	M16	M20	M24	M27	M30
General	Steel 4.6 / 8.8 and Stainless steel 50 / 70	28/15	3	8	13	15	- ²⁾				
		38/17	- ²⁾	- ²⁾	15	25	40	- ²⁾	- ²⁾	- ²⁾	- ²⁾
		40/22, 40/22P, 40/25	- ²⁾	- ²⁾	15	25	45	- ²⁾	- ²⁾	- ²⁾	- ²⁾
		49/30, 50/30, 50/30P	- ²⁾	- ²⁾	15	25	60	75	- ²⁾	- ²⁾	- ²⁾
		54/33, 53/34	- ²⁾	- ²⁾	15	25	60	120	- ²⁾	- ²⁾	- ²⁾
		55/42	- ²⁾	- ²⁾	15	25	60	120	200	- ²⁾	- ²⁾
		72/49, 72/48	- ²⁾	- ²⁾	- ²⁾	- ²⁾	- ²⁾	120	200	300	380
Steel to steel contact	Steel	4.6	3	8	15	25	65	130	230	340	460
		8.8	- ²⁾	20	40	70	180	360	620	900	1200
	Stainl. Steel	50	3	8	15	25	60	120	200	300	400
		70	- ²⁾	15	30	50	130	250	440	650	850

¹⁾ T_{inst} must not be exceeded

²⁾ Product not available

HALFEN Anchor Channels HTA

Intended use
Installation instruction – HALFEN channel bolts

Annex B7

Table C1: Characteristic Resistances under tension load – steel failure anchor channel

Anchor channel			28/15	38/17	40/25 40/22	40/22P	49/30 50/30	50/30P	54/33 52/34	55/42	72/49 72/48
Steel failure, anchor											
Characteristic resistance	$N_{Rk,s,a}$	[kN]	9	18	20	31	31	54	56	80	102
Partial factor	$\gamma_{Ms}^{1)}$		1,8								
Steel failure, connection channel/anchor											
Characteristic resistance	$N_{Rk,s,c}$	[kN]	9	18	20	29	31	39	55	80	100
Partial factor	$\gamma_{Ms,ca}^{1)}$		1,8								
Steel failure, local flexure of the channel lips											
Spacing of channel bolts for $N_{Rk,s,l}$	$s_{l,N}$	[mm]	56	76	80 79	79	100 98	98	107 105	109	144
Characteristic resistance	$N^0_{Rk,s,l}$	[kN]	9	18	20 38	38	31 43	43	55 72	110	100 120
Partial factor	$\gamma_{Ms,l}^{1)}$		1,8								

¹⁾ In absence of other national regulations

Table C2: Characteristic flexural resistance of channel

Anchor channel			28/15	38/17	40/25	40/22	40/22P	49/30	50/30	50/30P	54/33	52/34	55/42	72/49	72/48
Char. flexure resistance of channel	$M_{Rk,s,flex}$	[Nm]	317	580	1071	1389	1389	1673	2803	2803	2984	3373	6447	8617	8593
Partial factor	$\gamma_{Ms,flex}^{1)}$		1,15												

¹⁾ In absence of other national regulations

HALFEN Anchor Channels HTA

Performances
Characteristic resistances under tension load – steel failure anchor channel

Annex C1

Table C3: Characteristic resistances under tension load – steel failure of HALFEN channel bolts

HALFEN Channel bolts Ø		M6	M8	M10	M12	M16	M20	M24	M27	M30	
Steel failure											
Characteristic resistance	$N_{Rk,s}$ [kN]	4.6	8,0	14,6	23,2	33,7	62,8	98,0	141,2	183,6	224,4
		8.8	16,1	29,3	46,4	67,4	125,6	196,0	282,4	367,2	448,8
		50 ¹⁾	10,1	18,3	29,0	42,2	78,5	122,5	176,5	229,5	280,5
		70 ¹⁾	14,1	25,6	40,6	59,0	109,9	171,5	247,1	321,3	392,7
		4.6	2,00								
		8.8	1,50								
Partial factor		50 ¹⁾	2,86								
		70 ¹⁾	1,87								

¹⁾ Materials according Annex A2 and A3

²⁾ In absence of other national regulations

HALFEN Anchor Channels HTA

Performances
Characteristic resistances under tension load – steel failure channel bolts

Annex C2

Table C4: Characteristic resistances under tension load – concrete failure

Anchor channel			28/15	38/17	40/25 40/22	40/22P	49/30 50/30	50/30P	54/33 52/34	55/42	72/49 72/48	
Pull-out failure												
Characteristic resistance in cracked concrete C12/15	Round anchors	$N_{Rk,p}$	[kN]	7,6	13,6	13,6	21,2	21,2	34,0	34,0	41,6	- ²⁾
	I-anchors			11,7	11,7	14,0	17,8	21,0	24,7	29,7	40,6	46,4
Characteristic resistance in uncracked concrete C12/15	Round anchors	$N_{Rk,p}$	[kN]	10,6	19,0	19,0	29,7	29,7	47,6	47,6	58,2	- ²⁾
	I-anchors			16,4	16,4	19,6	24,9	29,4	34,6	41,6	56,8	65,0
Increasing factor for $N_{Rk,p} = N_{Rk,p,(C12/15)} \cdot \Psi_c$	C20/25	Ψ_c	[-]	1,67								
	C25/30			2,08								
	C30/37			2,50								
	C35/45			2,92								
	C40/50			3,33								
	C45/55			3,75								
	C50/60			4,17								
	C55/67 ≥C60/75			5,00								
Partial factor		$\gamma_{Mp} = \gamma_{Mc}$ ¹⁾		1,5								
Concrete cone failure												
Product factor k_1	$k_{cr,N}$		7,2	7,8	7,9	8,0	8,1	8,2	8,7	8,9	8,9	
	$k_{ucr,N}$		10,3	11,2	11,2	11,5	11,5	11,7	12,4	12,6	12,7	
Charact.edge spacing	$c_{cr,N}$	[mm]	111	171	176	195	199	216	260	269	270	
Charact.spacing	$s_{cr,N}$		2,0 $c_{cr,N}$									
Partial factor		γ_{Mc} ¹⁾		1,5								
Splitting failure												
Charact.edge spacing	$c_{cr,sp}$	[mm]	135	228	237	273	282	318	465	525	537	
Charact.spacing	$s_{cr,sp}$		2,0 $c_{cr,sp}$									
Partial factor		γ_{Msp} ¹⁾		1,5								

¹⁾ In absence of other national regulations

²⁾ No performance assessed

Table C5: Displacements under tension load

Anchor channel			28/15	38/17	40/25 40/22	40/22P	49/30 50/30	50/30P	54/33 52/34	55/42	72/49 72/48
Tension load	N_{Ek}	[kN]	3,6	7,1	7,9	11,5	12,3	15,5	21,8	31,7	39,7
Short-term displacement	δ_{N0}	[mm]	0,3	0,3	0,4	0,4	0,4	0,5	0,5	0,5	0,5
Long-term displacement	$\delta_{N\infty}$	[mm]	0,6	0,6	0,8	0,8	0,8	1,0	1,0	1,0	1,0

HALFEN Anchor Channels HTA

Performances
Characteristic resistances under tension load – concrete failure and displacements

Annex C3

Table C6: Characteristic resistances under shear load

Anchor channel			28/15	38/17	40/25 40/22	40/22P	49/30 50/30	50/30P	54/33 52/34	55/42	72/49 72/48
Steel failure, anchor											
Characteristic resistance	$V_{Rk,s,a,y}$	[kN]	9	18	20 35	35	31 52	59	55 78	110	100 146
Partial factor	$\gamma_{Ms}^{1)}$		1,8								
Steel failure, connection channel / anchor											
Characteristic resistance	$V_{Rk,s,c,y}$	[kN]	9	18	20 35	35	31 52	59	55 78	110	100 146
Partial factor	$\gamma_{Ms,ca}^{1)}$		1,8								
Steel failure, local flexure of channel lips											
Spacing of channel bolts for $V_{Rk,s,l}$	$s_{l,v}$	[mm]	56	76	80 79	79	100 98	98	107 105	109	144
Characteristic resistance	$V^0_{Rk,s,l,y}$	[kN]	9	18	20 35	35	31 52	59	55 78	110	100 146
Partial factor	$\gamma_{Ms,l}^{1)}$		1,8								
Pry-out failure											
Product factor	$k_8^{2)}$		1,0	2,0	2,0	2,0	2,0	2,0	2,0	2,0	2,0
Partial factor	$\gamma_{Mc}^{1)}$		1,5								
Concrete edge failure											
Product-factor k_{12}	cracked concrete	$k_{cr,v}$	4,5	7,5	7,5	7,5	7,5	7,5	7,5	7,5	7,5
	uncracked concrete	$k_{ucr,v}$	6,3	10,5	10,5	10,5	10,5	10,5	10,5	10,5	10,5
Partial factor	$\gamma_{Mc}^{1)}$		1,5								

¹⁾ In absence of other national regulations

²⁾ Without supplementary reinforcement. In case of supplementary reinforcement the factor k_8 should be multiplied with 0,75.

Table C7: Displacements under shear load

Anchor channel			28/15	38/17	40/25 40/22	40/22P	49/30 50/30	50/30P	54/33 52/34	55/42	72/49 72/48
Shear load	V_{Ek}	[kN]	3,6	7,1	7,9 13,9	13,9	12,3 20,6	23,4	21,8 31,0	43,7	39,7 57,9
Short-term displacements	δ_{v0}	[mm]	0,6	0,6	0,6	0,6	0,6	0,6	1,2	1,2	1,2
Long-term displacements	$\delta_{v\infty}$	[mm]	0,9	0,9	0,9	0,9	0,9	0,9	1,8	1,8	1,8

HALFEN Anchor Channels HTA

Performances
Character. resistances under shear load – steel failure anchor channel, concrete failure, displacements

Annex C4

Table C8: Charact. resistances under shear load – steel failure of HALFEN channel bolts

HALFEN Channel bolts Ø		M6	M8	M10	M12	M16	M20	M24	M27	M30	
Steel failure											
Characteristic resistance	$V_{Rk,s}$ [kN]	4.6	4,8	8,8	13,9	20,2	37,7	58,8	84,7	110,2	134,6
		8.8	8,0	14,6	23,2	33,7	62,8	98,0	141,2	183,6	224,4
Characteristic flexure resistance	$M^0_{Rk,s}$ [Nm]	50 ¹⁾	6,0	11,0	17,4	25,3	47,1	73,5	105,9	137,7	168,3
		70 ¹⁾	8,4	15,4	24,4	35,4	65,9	102,9	148,3	192,8	235,6
Partial factor	γ_{Ms} ²⁾	4.6	6,3	15,0	29,9	52,4	133,2	259,6	449,0	665,8	899,6
		8.8	12,2	30,0	59,8	104,8 ³⁾	266,4 ⁴⁾	519,3 ⁵⁾	898,0	1331,5	1799,2
Partial factor	γ_{Ms} ²⁾	50 ¹⁾	7,6	18,7	37,4	65,5	166,5	324,5	561,3	832,2	1124,5
		70 ¹⁾	10,7	26,2	52,3	91,7 ³⁾	233,1 ⁴⁾	454,4	785,8	1165,1	1574,3
		4.6							1,67		
		8.8							1,25		
		50 ¹⁾							2,38		
		70 ¹⁾							1,56		

³⁾ For HTA 28/15 $M^0_{Rk,s}$ is limited to 84 Nm.

⁴⁾ For HTA 38/17 $M^0_{Rk,s}$ is limited to 231 Nm.

⁵⁾ For HTA 49/30 $M^0_{Rk,s}$ is limited to 509 Nm.

¹⁾ Materials according Annex A2 and A3

²⁾ In absence of other national regulations

HALFEN Anchor Channels HTA

Performances
Characteristic resistances under shear load – steel failure channel bolts

Annex C5

Table C9: Characteristic resistances under combined tension and shear load

Anchor channel	28/15	38/17	40/25 40/22	40/22P	49/30 50/30	50/30P	54/33 52/34	55/42	72/49 72/48
Steel failure: Local failure by flexure of channel lips and failure by flexure of channel									
Product factor	k_{13}	Values according to EN 1992-4:2018, section 7.4.3.1							
Steel failure: Failure of anchor and connection between anchor and channel									
Product factor	k_{14}	Values according to EN 1992-4:2018, section 7.4.3.1							

HALFEN Anchor Channels HTA

Performances
Characteristic resistances under combined tension and shear load

Annex C6

Table C10: Characteristic resistances under tension and shear load under fire exposure

– steel failure

Anchor channel				28/15	38/17	40/25 40/22	40/22P	49/30 50/30	50/30P	54/33 52/34	55/42	72/49 72/48		
Steel failure: Anchor, Connection channel / anchor, Local flexure of channel lips, channel bolts														
Characteristic resistances	R30	M8	$N_{Rk,s,fi}$ = $V_{Rk,s,fi}$	[kN]	1,0	- 2)	- 2)	- 2)	- 2)	- 2)	- 2)	- 2)		
		M10			1,0	1,7	1,9	1,9	1,9	1,9	1,9	- 2)	- 2)	
		M12			1,9	1,7	1,9 2,5	2,5	2,5	2,5	2,5	- 2)	- 2)	
		M16			- 2)	3,2	3,6 6,0	6,0	4,0 6,0	6,0	6,0	6,3	6,3	
		M20			- 2)	- 2)	- 2)	- 2)	4,0 9,5	9,5	8,9 10,1	10,3	10,3	
		M24			- 2)	- 2)	- 2)	- 2)	- 2)	- 2)	- 2)	14,8	14,8	
	R60	M8			0,8	- 2)	- 2)	- 2)	- 2)	- 2)	- 2)	- 2)	- 2)	- 2)
		M10			0,8	1,5	1,5	1,5	1,5	1,5	1,5	- 2)	- 2)	
		M12			1,3	1,5	1,5 2,5	2,5	2,5	2,5	2,5	- 2)	- 2)	
		M16			- 2)	2,4	3,6 4,5	4,5	3,5 4,5	4,5	4,5	4,8	4,8	
		M20			- 2)	- 2)	- 2)	- 2)	3,5 7,1	7,1	6,5 7,5	7,6	7,6	
		M24			- 2)	- 2)	- 2)	- 2)	- 2)	- 2)	- 2)	11,1	11,1	
	R90	M8			0,6	- 2)	- 2)	- 2)	- 2)	- 2)	- 2)	- 2)	- 2)	- 2)
		M10			0,6	1,0	1,1	1,1	1,1	1,1	1,1	- 2)	- 2)	
		M12			0,7	1,0	1,1 1,6	1,6	1,6	1,6	1,6	- 2)	- 2)	
		M16			- 2)	1,4	2,0 2,9	2,9	2,5 3,0	3,0	3,0	3,3	3,3	
		M20			- 2)	- 2)	- 2)	- 2)	2,5 4,8	4,8	4,2 4,8	4,9	4,9	
		M24			- 2)	- 2)	- 2)	- 2)	- 2)	- 2)	- 2)	7,3	7,3	
	R120	M8			0,5	- 2)	- 2)	- 2)	- 2)	- 2)	- 2)	- 2)	- 2)	- 2)
		M10			0,5	0,8	0,8	0,8	0,8	0,8	0,8	- 2)	- 2)	
		M12			0,5	0,8	0,8 1,1	1,1	1,2	1,2	1,2	- 2)	- 2)	
		M16			- 2)	1,0	1,2 1,6	1,6	2,1 2,3	2,3	2,3	2,6	2,6	
		M20			- 2)	- 2)	- 2)	- 2)	2,1 3,6	3,6	3,0 3,5	3,6	3,6	
		M24			- 2)	- 2)	- 2)	- 2)	- 2)	- 2)	- 2)	5,4	5,4	
Partial factor		$\gamma_{Ms,fi}$ ¹⁾	[-]	1,0										

¹⁾ In absence of other national regulations

²⁾ No performance assessed

HALFEN Anchor Channels HTA



Performances
Characteristic resistances under tension and shear load under fire exposure

Annex C7

Table C11: Characteristic resistances under tension and shear load under fire exposure
– concrete cone failure and min. axis distance of reinforcement

Anchor channel			28/15	38/17	40/25 40/22	40/22P	49/30 50/30	50/30P	54/33 52/34	55/42	72/49 72/48	
Min. axis distance of reinforcement ¹⁾												
Min. axis distance	R30	a	[mm]	35	35	35	35	35	35	50	50	50
	R60	a		35	35	35	35	35	35	50	50	50
	R90	a		45	45	45	45	45	45	50	50	50
	R120	a		60	60	60	60	60	60	65	70	70

¹⁾ The reinforced concrete has to be designed acc. to EN 1992. The fire resistance class of the concrete member is not part of this ETA.

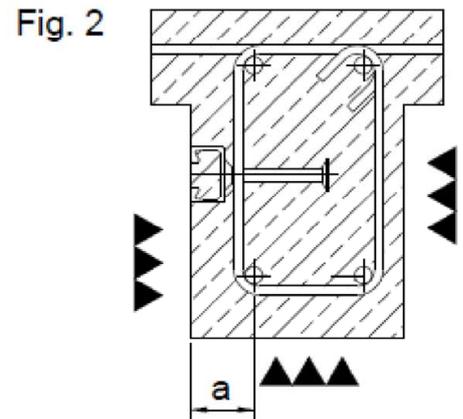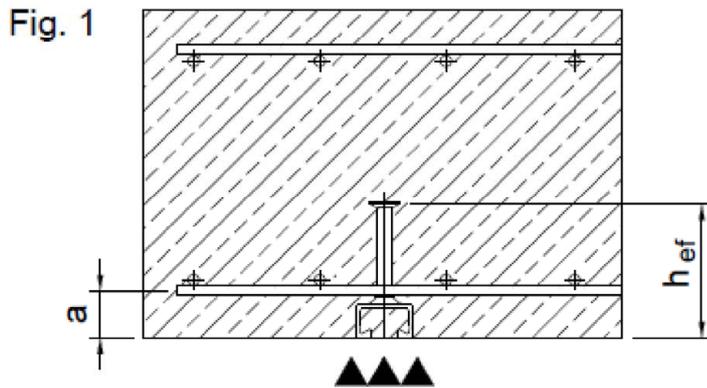

HALFEN Anchor Channels HTA

Performances
Characteristic resistances under tension and shear load under fire exposure

Annex C8

Table C12: Combinations of anchor channels and channel bolts under fatigue tension load

Anchor channel				Channel bolts			
Profile	Anchor	d ₁ [mm]	Material	Channel bolt	Thread Ø [mm]	Grade	Material
40/22	B6	8	Steel hot-dip galv.	HS 40/22	M12	8.8	Steel electroplated, hot-dip galv.
					M16	4.6	
HS 40/22	M12	8.8					
		M16		4.6			
HS 50/30	M16			4.6			
		M20		8.8			
HS 50/30	M16			4.6			
		M20		8.8			
HS 50/30	M16			4.6			
		M20		8.8			
HS 50/30	M16			4.6			
		M20		8.8			

Design Method I acc. EOTA TR 050, October 2018

Table C13: Characteristic resistances under fatigue tension load after n load cycles without static preload (N_{Ed} = 0) – Steel failure

Anchor channel	Load cycles n	40/22	40/22P	50/30	52/34
		ΔN _{Rk,s;0;n} [kN]			
Characteristic resistances under fatigue tension load without static preload	≤ 10 ⁴	11,7	12,8	16,5	22,2
	≤ 10 ⁵	6,7	7,7	9,8	13,2
	≤ 10 ⁶	3,8	4,7	5,8	7,9
	≤ 2·10 ⁶	3,2	4,0	4,9	6,7
	≤ 5·10 ⁶	2,6	3,3	4,0	5,5
	≤ 10 ⁸	1,2			
	> 10 ⁸	-			

HALFEN Anchor Channels HTA

Performances
Characteristic resistances under fatigue tension load – Design method I

Annex C9

Table C14: Characteristic resistances under fatigue tension load after n load cycles without static preload ($N_{Ed} = 0$) – Concrete failure

Pull-out failure and Concrete cone failure:

Reduction factor for pull-out and concrete cone failure without static preload ($N_{Ed} = 0$)

Reduction factor for $\Delta N_{Rk,c;0;n} = \eta_{c,fat} \cdot N_{Rk,c}^{1)}$ $\Delta N_{Rk,p;0;n} = \eta_{c,fat} \cdot N_{Rk,p}^{2)}$	Load cycles n	$\eta_{c,fat}$ [-]
	$\leq 10^4$	0,736
	$\leq 10^5$	0,665
	$\leq 10^6$	0,600
	$\leq 2 \cdot 10^6$	0,582
	$\leq 5 \cdot 10^6$	0,559
	$\leq 6 \cdot 10^7$	0,500
	$> 6 \cdot 10^7$	

¹⁾ $N_{Rk,c}$ static resistance according to Annex C3 and EOTA TR 047, March 2018 or EN 1992-4:2018

²⁾ $N_{Rk,p}$ static resistance according to Annex C3

HALFEN Anchor Channels HTA

Performances
Characteristic resistances under fatigue tension load – Design method I

Annex C10

Design method II acc. EOTA TR 050, October 2018

Table C15: Characteristic limit resistances under fatigue tension load ($n \rightarrow \infty$)
Steel failure

Anchor channel	40/22P	50/30	52/34
		50/30P	
Characteristic resistances under fatigue tension load	$\Delta N_{Rk,s;0;\infty}$		
	[kN]		
	3,3	4,0	5,5

Table C16: Characteristic limit resistances under fatigue tension load ($n \rightarrow \infty$)
Concrete cone and pull-out failure

Anchor Channel	40/22P	50/30	52/34
		50/30P	
Characteristic resistances under fatigue tension load	$\eta_{c,fat}$		
	[-]		
$\Delta N_{Rk,c;0;\infty} = \eta_{c,fat} \cdot N_{Rk,c}$ ¹⁾	0,5		
$\Delta N_{Rk,p;0;\infty} = \eta_{c,fat} \cdot N_{Rk,p}$ ²⁾			

¹⁾ $N_{Rk,c}$ static resistance according Annex C3 and EOTA TR 047, March 2018 or EN 1992-4:2018

²⁾ $N_{Rk,p}$ static resistance according Annex C3

In absence of other national regulations the following partial factors $\gamma_{M,fat}$ are recommended for design method I and II (Tables C12 to C15) according to EOTA TR 050, October 2018.

$\gamma_{Ms,fat} = 1,35$ (steel)

$\gamma_{Mc,fat} = \gamma_{Mp,fat} = 1,5$ (concrete)

HALFEN Anchor Channels HTA

Performances
Characteristic resistances under fatigue tension load – Design method II

Annex C11