

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments



European Technical Assessment

ETA-10/0199
of 10 March 2021

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Fastening screws of PMJ-tec AG

Product family
to which the construction product belongs

Fastening screws for metal members and sheeting

Manufacturer

PMJ-tec AG
Industriestrasse 34
1791 COURTAMAN
SCHWEIZ

Manufacturing plant

Plant 1
Plant 2
Plant 3
Plant 4

This European Technical Assessment
contains

74 pages including 68 annexes which form an integral
part of this assessment

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

EAD 330046-01-0602

This version replaces

ETA-10/0199 issued on 25 March 2019

European Technical Assessment

ETA-10/0199

English translation prepared by DIBt

Page 2 of 74 | 10 March 2021

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific part

1 Technical description of the product

The fastening screws are self-drilling or self-tapping screws made of austenitic stainless steel or carbon steel with anticorrosion coating (listed in Table 1). The fastening screws are normally completed with sealing washers consisting of metal washer and EPDM-seal.

Table 1 - Fastening screws for metal members and sheeting

Annex	Fastening screw	Description
4	Fastening of perforated sheets	
5	Fastening of perforated sheets	
6	Fastening of perforated sheets	
7	Fastening of perforated sheets	
8	PMJ-tec 7510	bimetal with hexagon head and sealing washer $\geq \varnothing 16$ mm
9	PMJ-tec 7510	bimetal with hexagon head and sealing washer $\geq \varnothing 16$ mm
10	PMJ-tec 7520	bimetal with hexagon head and sealing washer $\geq \varnothing 16$ mm
11	PMJ-tec 7530	bimetal with hexagon head and sealing washer $\geq \varnothing 16$ mm
12	PMJ-tec 7550 - 4,8	bimetal with hexagon head and sealing washer $\geq \varnothing 16$ mm
13	PMJ-tec 7550 - 5,5	bimetal with hexagon head and sealing washer $\geq \varnothing 16$ mm
14	PMJ-tec 7550 - 6,3	bimetal with hexagon head and sealing washer $\geq \varnothing 16$ mm
15	PMJ-tec 7565	bimetal with hexagon head and sealing washer $\geq \varnothing 16$ mm
16	PMJ-tec 7310	with hexagon head and sealing washer $\geq \varnothing 16$ mm
17	PMJ-tec 7320	with hexagon head and sealing washer $\geq \varnothing 16$ mm
18	PMJ-tec 7325	with hexagon head and sealing washer $\geq \varnothing 16$ mm
19	PMJ-tec 7330	with hexagon head and sealing washer $\geq \varnothing 16$ mm
20	PMJ-tec 7340	with hexagon head and sealing washer $\geq \varnothing 16$ mm
21	PMJ-tec 7340 - 4,8xL	with hexagon head
22	PMJ-tec 7342	with hexagon head and flange $\varnothing 15$ mm
23	PMJ-tec 7344	with hexagon head and flange $\varnothing 15$ mm
24	PMJ-tec 7346	with hexagon head and flange $\varnothing 15$ mm
25	PMJ-tec 7810	with polyamide bihexagon head and sealing washer $\geq \varnothing 16$ mm
26	PMJ-tec 7820	with polyamide bihexagon head and sealing washer $\geq \varnothing 16$ mm

Table 1 - continued

Annex	Fastening screw	Description
27	PMJ-tec 7825	with polyamide bihexagon head and sealing washer $\geq \varnothing 16$ mm
28	PMJ-tec 7870	bimetal with polyamide bihexagon head and sealing washer $\geq \varnothing 16$ mm
29	PMJ-tec 7880	bimetal with polyamide bihexagon head and sealing washer $\geq \varnothing 16$ mm
30	PMJ-tec 7110	bimetal with rounded undercut head and sealing ring $\geq \varnothing 10$ mm
31	PMJ-tec 7120	bimetal with rounded undercut head and sealing ring $\geq \varnothing 10$ mm
32	PMJ-tec 7140	bimetal with rounded undercut head and sealing ring $\geq \varnothing 10$ mm
33	PMJ-tec 7160	bimetal with rounded undercut head and sealing ring $\geq \varnothing 10$ mm
34	PMJ-tec 7515 - 5,5 x L	bimetal with rounded flat head and sealing washer $\geq \varnothing 11$ mm
35	PMJ-tec 7010	with rounded undercut head and sealing ring $\geq \varnothing 10$ mm
36	PMJ-tec 7040	with rounded undercut head and sealing ring $\geq \varnothing 10$ mm
37	PMJ-tec 7653	with hexagon head and sealing washer $\geq \varnothing 16$ mm
38	PMJ-tec 7673	with hexagon head and sealing washer $\geq \varnothing 16$ mm
39	PMJ-tec 7335	with hexagon head and sealing washer $\geq \varnothing 16$ mm
40	PMJ-tec 7339	with hexagon head
41	PMJ-tec 7641	with hexagon head and sealing washer $\geq \varnothing 16$ mm
42	PMJ-tec 7641	with hexagon head and sealing washer $\geq \varnothing 19$ mm
43	PMJ-tec 7642	with hexagon head and sealing washer $\geq \varnothing 16$ mm
44	PMJ-tec 7642	with hexagon head and sealing washer $\geq \varnothing 19$ mm
45	PMJ-tec 7653	with hexagon head and sealing washer $\geq \varnothing 19$ mm
46	PMJ-tec 7550 - 4,8	bimetal with hexagon head and sealing washer $\geq \varnothing 14$ mm
47	PMJ-tec 7550 - 5,5	bimetal with hexagon head and sealing washer $\geq \varnothing 14$ mm
48	PMJ-tec 7550 - 6,3	bimetal with hexagon head and sealing washer $\geq \varnothing 14$ mm
49	PMJ-tec 7553 - 4,8	bimetal with hexagon head and sealing washer $\geq \varnothing 14$ mm
50	PMJ-tec 7553 - 6,3	bimetal with hexagon head and sealing washer $\geq \varnothing 14$ mm
51	PMJ-tec 7553 - 6,3	bimetal with hexagon head and sealing washer $\geq \varnothing 16$ mm
52	PMJ-tec 7510 - 5,5	bimetal with hexagon head and flange $\varnothing 13,5$ mm
53	PMJ-tec 7563 - 5,5	bimetal with hexagon head and sealing washer $\geq \varnothing 16$ mm
54	PMJ-tec 7561 - 4,8	bimetal with sealing washer $\geq \varnothing 14$ mm
55	PMJ-tec 7525 - 6,3	bimetal with sealing washer $\geq \varnothing 16$ mm
56	PMJ-tec 7553 - 5,5	bimetal with sealing washer $\geq \varnothing 16$ mm

Table 1 - continued

Annex	Fastening screw	Description
57	PMJ-tec 7110-5,5	bimetal with rounded flat head and sealing washer $\geq \varnothing$ 16 mm
58	PMJ-tec 7120-5,5	bimetal with rounded flat head and sealing washer $\geq \varnothing$ 16 mm
59	PMJ-tec 7130-5,5	bimetal with rounded flat head and sealing washer $\geq \varnothing$ 16 mm
60	PMJ-tec 7140-5,5	bimetal with rounded flat head and sealing washer $\geq \varnothing$ 16 mm
61	PMJ-tec 7140-6,3	bimetal with rounded flat head and sealing washer $\geq \varnothing$ 16 mm
62	PMJ-tec 7160-4,8	bimetal with rounded flat head and sealing washer $\geq \varnothing$ 16 mm
63	PMJ-tec 7110-5,5	bimetal with rounded flat head and sealing washer $\geq \varnothing$ 14 mm
64	PMJ-tec 7120-5,5	bimetal with rounded flat head and sealing washer $\geq \varnothing$ 14 mm
65	PMJ-tec 7130-5,5	bimetal with rounded flat head and sealing washer $\geq \varnothing$ 14 mm
66	PMJ-tec 7140-4,8	bimetal with rounded flat head and sealing washer $\geq \varnothing$ 12 mm
67	PMJ-tec 7140-6,3	bimetal with rounded flat head and sealing washer $\geq \varnothing$ 14 mm
68	PMJ-tec 7160-4,8	bimetal with rounded flat head and sealing washer $\geq \varnothing$ 12 mm

The components and the system setup of the product are given in Annex (1-68).

2 Specification of the intended use in accordance with the applicable European Assessment Document 330046-01-0602

The fastening screws are intended to be used for fastening metal sheeting to metal or timber substructures. The sheeting can either be used as wall or roof cladding or as load bearing wall and roof element. The fastening screws can also be used for the fastening of any other thin gauge metal members. The intended use comprises fastening screws and connections for indoor and outdoor applications. Fastening screws which are intended to be used in external environments with $\geq$ C2 corrosion according to the standard EN ISO 12944-2 are made of stainless steel. Furthermore the intended use comprises connections with predominantly static loads (e.g. wind loads, dead loads). The fastening screws are not intended for re-use.

The performances given in Section 3 are only valid if the fastening screws are used in compliance with the specifications and conditions given in Annex (1-68).

The verification and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the fastening screws of at least 25 years. The indications given on the working life cannot be interpreted as a guarantee given by the manufacturer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Shear Resistance of the Connection	see Annexes to this ETA
Tension Resistance of the Connection	see Annexes to this ETA
Design Resistance in combination of tension and shear forces (interaction)	see Annexes to this ETA
Check of Deformation Capacity in case of constraining forces due to temperature	see Annexes to this ETA
Durability	see Annexes to this ETA

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with EAD 330046-01-0602, the applicable European legal act is: Commission Decision 1998/214/EC, amended by 2001/596/EC.

The system to be applied is: 2+

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable EAD


Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.

Issued in Berlin on 10 March 2021 by Deutsches Institut für Bautechnik

Dr.-Ing. Ronald Schwuchow
Head of Section

beglaubigt:
Hahn

Examples of execution of a connection

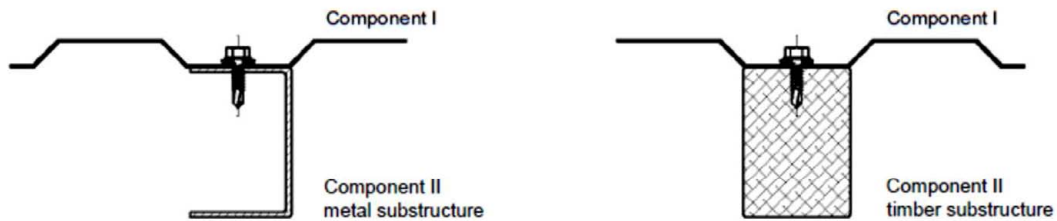

Terms for materials

Fastener	Fastening screw
Washer	Sealing washer
Component I	Metal member or sheeting
Component II	Substructure

Terms for dimensions

t_I	Thickness of metal member or sheeting
t_{II}	Thickness of metal substructure
l_{ef}	Effective screw-in length in timber substructure (without drill point)
d_{dp}	Pre-drill diameter of metal member or sheeting and substructure
$d_{dp,I}$	Pre-drill diameter of metal member or sheeting

Terms for performances

$V_{R,k}$	Characteristic value of shear resistance of the connection
$N_{R,k}$	Characteristic value of tension resistance of the connection
$V_{R,I,k}$	Characteristic value of shear resistance of metal member or sheeting
$N_{R,I,k}$	Characteristic value of tension resistance (pull-through) of metal member or sheeting
$N_{R,II,k}$	Characteristic value of tension resistance (pull-out) of the substructure

Additionally for timber substructure the following terms are used:


$M_{y,Rk}$	Characteristic value of yield moment
$f_{ax,k}$	Characteristic value of withdrawal strength
$f_{h,k}$	Characteristic value of embedding strength

Used terms in the Annexes

Fastening screws for metal members and sheeting

Annex 1

Types of connection and occurred loadings

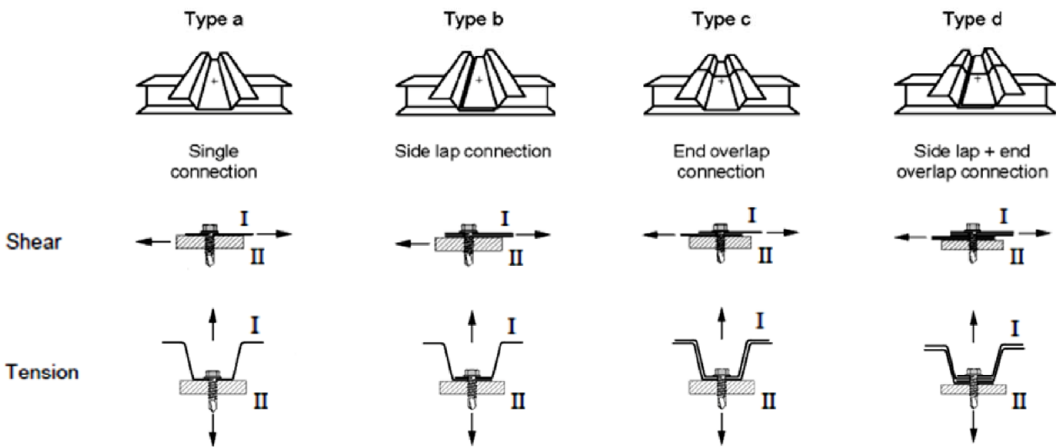

Determination of Design Values

The design value of tension and shear resistance has to be determined as follows:

$$N_{R,d} = \frac{N_{R,k}}{\gamma_M} \quad V_{R,d} = \frac{V_{R,k}}{\gamma_M}$$

The characteristic values $N_{R,k}$ and $V_{R,k}$ are given in the Annexes. For intermediate dimension of metal member or sheeting or substructure the characteristic value of the thinner dimension is used.

The recommended partial safety factor $\gamma_M = 1,33$ is used, provided no partial safety factor is given in national regulations or national Annexes to Eurocode 3.

For the types of connection (a, b, c, d) listed in the Annexes it is not necessary to take into account the effect of constrains due to temperature. Otherwise this has to be considered unless constrains due to temperature do not occur or are not significant (e.g. sufficient flexibility of the substructure).

For asymmetric metal substructures with thickness $t_{II} < 5$ mm (for instance Z- or C-shaped profiles), the characteristic value $N_{R,k}$ given in the Annexes has to be reduced to 70%.

In case of combined tension and shear forces the following interaction equation is taken into account:

$$\frac{N_{S,d}}{N_{R,d}} + \frac{V_{S,d}}{V_{R,d}} \leq 1,0$$

$N_{S,d}$ and $V_{S,d}$ indicates the design values of applied tension and shear forces.

Installation conditions

The installation is carried out according to the manufacturer's instructions.

The fastening screws are screwed-in with electric screw driver. The use of impact wrenches is not allowed.

The fastening screws are fixed rectangular to the surface of the metal member or sheeting.

The metal member or sheeting and substructure are in contact to each other. The use of compression resistant thermal insulation strips up to a thickness of 3 mm is allowed.

The thickness (or minimum thickness) of metal substructure needs to be covered by the clamping length of the fastening screw. Otherwise only the screwed-in clamping length of the fastening screw may be considered.

Basics for the design

Fastening screws for metal members and sheeting

Annex 2

Timber substructures

Characteristic values of tension and shear resistance of the connection for other k_{mod} or p_k as indicated in the Annexes can be determined as follows:

$$N_{R,k} = \min \left\{ \begin{array}{l} N_{R,I,k} \\ F_{ax,Rk} * k_{mod} \end{array} \right. \quad V_{R,k} = \min \left\{ \begin{array}{l} V_{R,I,k} \\ F_{v,Rk} * k_{mod} \end{array} \right.$$

The characteristic values $N_{R,I,k}$ and $V_{R,I,k}$ are given in the corresponding Annex of the fastening screw.

$F_{ax,Rk}$ indicates the characteristic value of tension resistance of timber substructure. The value has to be determined according to EN 1995-1-1:2004 + A1:2008, equation (8.40a) with $f_{ax,k}$ given in the corresponding Annex of the fastening screw.

$F_{v,Rk}$ indicates the characteristic shear resistance of timber substructure. The value has to be determined according to EN 1995-1-1:2004 + A1:2008, equation (8.9) with $M_{y,Rk}$ and $f_{h,k}$ given in the corresponding Annex of the fastening screw.

Aluminium members and sheeting

Characteristic values of tension resistance of the connection can be determined as follows:

$$N_{R,k} = \min \left\{ \begin{array}{l} N_{R,I,k} \\ N_{R,II,k} \end{array} \right.$$

The characteristic value $N_{R,I,k}$ has to be determined according to EN 1999-1-4:2007 + AC:2009, equation (8.13).

The characteristic value $N_{R,II,k}$ is given in the corresponding Annex of the fastening screw.

Perforated steel members and sheeting

Characteristic values of tension and shear resistance of the connection can be determined as follows:

$$N_{R,k} = \min \left\{ \begin{array}{l} N_{R,I,k} \\ N_{R,II,k} \end{array} \right. \quad V_{R,k} = \min \left\{ \begin{array}{l} V_{R,I,k} \\ V_{R,k} \end{array} \right.$$


The characteristic values $N_{R,I,k}$ and $V_{R,I,k}$ are given in Annex 4 and 5.

The characteristic values $N_{R,II,k}$ and $V_{R,k}$ are given in the corresponding Annex of the fastening screw.

Specific notes to the Annexes

Fastening screws for metal members and sheeting

Annex 3

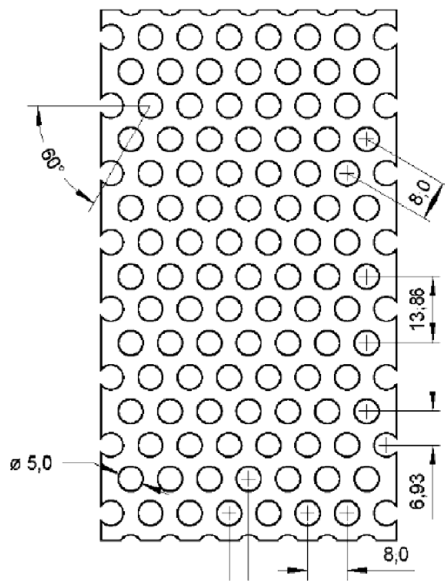

Fastener

Self tapping screw from Ø 6,3 mm to Ø 6,5 mm

Self drilling screw from Ø 5,5 mm to Ø 6,3 mm

Materials

Component I: S280GD to S350GD - EN 10346

Component II: According to the Annex of the corresponding fastener

sheet		perforated sheet made of S280 GD - 10346				perforated sheet made of S320 GD - 10346				perforated sheet made of S350 GD - 10346				
washer Ø [mm]		16	19	22	25	16	19	22	25	16	19	22	25	
Component I t I [mm]	V _{R,I,k} [kN]	0,75	2,16	2,22	2,24	2,38	2,34	2,40	2,44	2,58	2,54	2,60	2,62	2,78
		0,88	2,56	2,64	2,64	2,78	2,78	2,86	2,86	3,02	3,00	3,10	3,10	3,26
		1,00	2,92	3,04	3,02	3,16	3,16	3,30	3,26	3,42	3,42	3,56	3,52	3,68
		1,13	3,32	3,48	3,42	3,56	3,60	3,76	3,70	3,86	3,88	4,10	4,00	4,16
		1,25	3,70	3,88	3,80	3,94	4,00	4,20	4,10	4,26	4,32	4,54	4,42	4,60
		1,50	4,46	4,74	4,56	4,72	4,84	5,12	4,96	5,10	5,22	5,54	5,34	5,50
	N _{R,I,k} [kN]	0,75	1,40	1,94	2,14	2,22	1,52	2,08	3,32	2,42	1,64	2,26	2,50	2,60
		0,88	1,82	2,34	2,62	2,70	1,96	2,54	2,82	2,92	2,12	2,74	3,04	3,14
		1,00	2,24	2,74	3,06	3,14	2,44	2,96	3,32	3,42	2,62	3,20	3,58	3,68
		1,13	2,74	3,18	3,58	3,64	2,98	3,44	3,88	3,96	3,20	3,70	4,18	4,26
		1,25	3,24	3,58	4,08	4,12	3,52	3,88	4,40	4,46	3,78	4,18	4,76	4,80
		1,50	4,36	4,46	5,12	5,12	4,74	4,84	5,56	5,56	5,10	5,22	5,98	5,98


The load bearing capacity of component II is according to the Annex of the corresponding fastener.

The thickness of the perforated sheets which are exposed to wind loads shall be at least 1,00 mm.

Fastening of perforated sheets

Load bearing capacity of component I

Annex 4

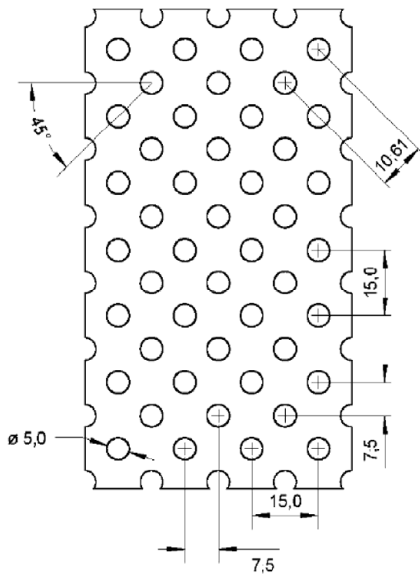

Fastener

Self tapping screw from Ø 6,3 mm to Ø 6,5 mm

Self drilling screw from Ø 5,5 mm to Ø 6,3 mm

Materials

Component I: S280GD - EN 10346

Component II: According to the Annex of the corresponding fastener

sheet		perforated sheet made of S280 GD - 10346								
Fastener		self drilling screws Ø 5,5 mm to Ø 6,0 mm				self tapping screws Ø 6,3 mm to Ø 6,5 mm				
washer Ø [mm]		16	19	22	25	16	19	22	25	
Component I t l [mm]	V _{R,l,k} [kN]	0,75	2,48	2,52	2,84	2,76	2,38	2,64	3,16	3,24
		0,88	3,04	3,12	3,42	3,32	3,02	3,28	3,78	3,88
		1,00	3,56	3,70	3,84	3,84	3,64	3,96	4,36	4,50
		1,13	4,14	4,26	4,40	4,40	4,36	4,70	5,00	5,18
		1,25	4,68	5,84	4,92	4,94	5,06	5,40	5,60	5,84
		1,50	5,76	6,04	5,90	6,10	6,62	6,94	6,88	7,16
	N _{R,l,k} [kN]	0,75	2,88	3,16	3,24	3,14	2,86	3,46	3,72	3,92
		0,88	3,42	3,72	3,76	3,70	3,40	4,02	4,30	4,46
		1,00	3,92	4,28	4,28	4,20	3,90	4,56	4,82	4,96
		1,13	4,46	4,86	4,88	4,72	4,44	5,12	5,38	5,48
		1,25	4,96	5,42	5,42	5,26	4,94	5,66	5,88	5,94
		1,50	6,04	6,60	6,60	6,38	6,00	6,74	6,92	6,90


The load bearing capacity of component II is according to the Annex of the corresponding fastener.

The thickness of the perforated sheets which are exposed to wind loads shall be at least 1,00 mm.

Fastening of perforated sheets

Load bearing capacity of component I

Annex 5

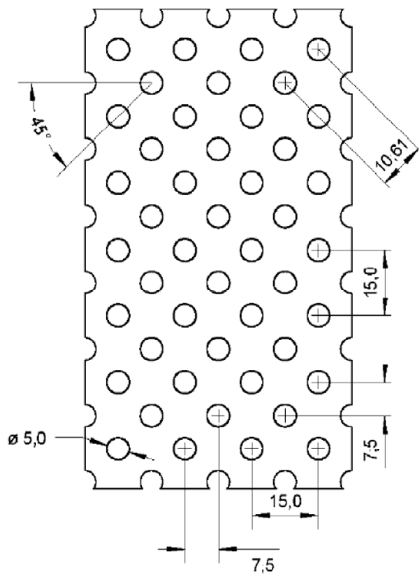

Fastener

Self tapping screw from Ø 6,3 mm to Ø 6,5 mm

Self drilling screw from Ø 5,5 mm to Ø 6,3 mm

Materials

Component I: S320GD - EN 10346

Component II: According to the Annex of the corresponding fastener

sheet		perforated sheet made of S320 GD - 10346							
Fastener		self drilling screws Ø 5,5 mm to Ø 6,0 mm				self tapping screws Ø 6,3 mm to Ø 6,5 mm			
washer Ø [mm]		16	19	22	25	16	19	22	25
Component I t I [mm]	V _{R,I,k} [kN]								
	0,75	2,68	2,74	3,08	3,00	2,68	2,88	3,42	3,50
	0,88	3,30	3,38	3,70	3,60	3,36	3,60	4,10	4,22
	1,00	3,86	4,00	4,16	4,16	4,02	4,30	4,72	4,88
	1,13	4,48	4,62	4,76	4,76	4,76	5,08	5,42	5,60
	1,25	5,06	5,24	5,32	5,36	5,50	5,84	6,08	6,30
	1,50	6,24	6,54	6,40	6,60	7,10	7,52	7,46	7,76
	N _{R,I,k} [kN]								
	0,75	3,12	3,42	3,50	3,40	3,12	3,68	4,06	4,26
	0,88	3,70	4,04	4,08	4,00	3,70	4,32	4,68	4,86
	1,00	4,24	4,64	4,64	4,54	4,24	4,92	5,24	5,40
	1,13	4,84	5,26	5,28	5,12	4,84	5,54	5,86	5,96
	1,25	5,38	5,88	5,88	5,70	5,38	6,14	6,40	6,48
	1,50	6,54	7,16	7,16	6,92	6,54	7,38	7,54	7,52


The load bearing capacity of component II is according to the Annex of the corresponding fastener.

The thickness of the perforated sheets which are exposed to wind loads shall be at least 1,00 mm.

Fastening of perforated sheets

Load bearing capacity of component I

Annex 6

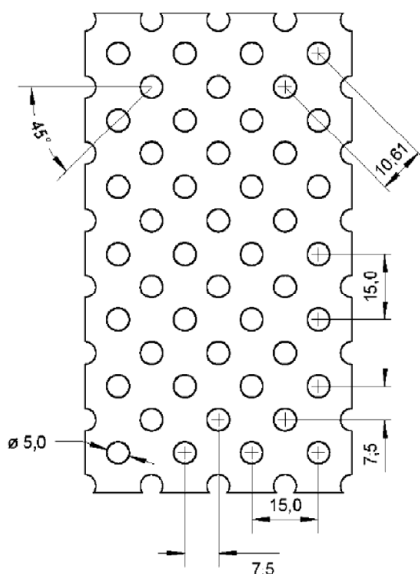

Fastener

Self tapping screw from Ø 6,3 mm to Ø 6,5 mm

Self drilling screw from Ø 5,5 mm to Ø 6,3 mm

Materials

Component I: S350GD - EN 10346

Component II: According to the Annex of the corresponding fastener

sheet		perforated sheet made of S350 GD - 10346							
Fastener		self drilling screws Ø 5,5 mm to Ø 6,0 mm				self tapping screws Ø 6,3 mm to Ø 6,5 mm			
washer Ø [mm]		16	19	22	25	16	19	22	25
Component I t I [mm]	V _{R,I,k} [kN]								
	0,75	2,88	2,92	3,30	3,20	2,98	3,20	3,72	3,92
	0,88	3,54	3,62	3,96	3,86	3,62	3,88	4,42	4,54
	1,00	4,14	4,28	4,46	4,46	4,24	4,52	5,08	5,12
	1,13	4,80	4,94	5,10	5,10	4,92	5,24	5,78	5,74
	1,25	5,44	5,62	5,70	5,72	5,56	5,92	6,46	6,32
	1,50	6,24	6,54	6,40	7,02	6,94	7,36	7,86	7,48
	N _{R,I,k} [kN]								
	0,75	3,34	3,66	3,76	3,64	3,52	4,16	4,52	4,64
	0,88	3,96	4,36	4,38	4,28	3,98	4,76	5,04	5,24
	1,00	4,54	4,98	4,96	4,86	4,40	5,24	5,50	5,76
	1,13	5,16	5,64	5,64	5,48	4,86	5,76	5,96	6,32
	1,25	5,80	6,28	6,28	6,14	5,38	6,24	6,40	6,80
	1,50	6,54	7,16	7,16	7,46	6,54	7,38	7,54	7,80


The load bearing capacity of component II is according to the Annex of the corresponding fastener.


The thickness of the perforated sheets which are exposed to wind loads shall be at least 1,00 mm.

Fastening of perforated sheets

Load bearing capacity of component I

Annex 7

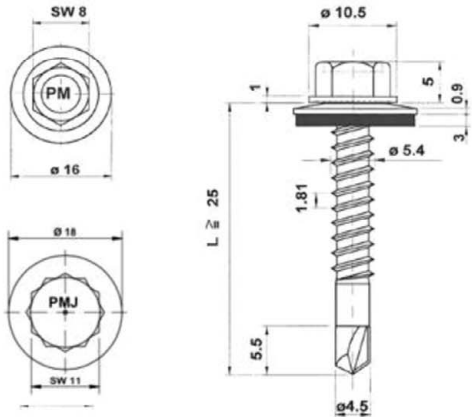	Materials Fastener: Stainless steel A2, A4, A5 – EN ISO 3506 Washer: Stainless steel A2, A4, A5 – EN ISO 3506 Component I: S280GD to S320GD - EN 10346 Component II: S235 - EN 10025-1 S280GD to S320GD - EN 10346 <u>Drilling-capacity</u> Σ(t _i) ≤ 3.50 mm <u>Timber substructures</u> no performance determined																																																																																																																																																																											
<table><tr><th colspan="2" rowspan="2"></th><th colspan="4">Component II</th></tr><tr><th colspan="4">t II [mm]</th></tr><tr><th colspan="2"></th><th>2 x 0,75</th><th>2 x 0,88</th><th colspan="2">2 x 1,00</th></tr><tr><td rowspan="22">Component I</td><td>M_{t,nom}</td><td colspan="4">5 Nm</td></tr><tr><td>0,63</td><td>2,30</td><td>-</td><td>2,40</td><td>ac</td><td>2,50</td><td>ac</td></tr><tr><td>0,75</td><td>2,40</td><td>-</td><td>2,90</td><td>-</td><td>2,90</td><td>-</td></tr><tr><td>0,88</td><td>2,40</td><td>-</td><td>2,90</td><td>-</td><td>2,90</td><td>-</td></tr><tr><td>1,00</td><td>2,40</td><td>-</td><td>2,90</td><td>-</td><td>2,90</td><td>-</td></tr><tr><td>1,13</td><td>2,40</td><td>-</td><td>2,90</td><td>-</td><td>2,90</td><td>-</td></tr><tr><td>1,25</td><td>2,40</td><td>-</td><td>2,90</td><td>-</td><td>2,90</td><td>-</td></tr><tr><td>1,50</td><td>2,40</td><td>-</td><td>2,90</td><td>-</td><td>2,90</td><td>-</td></tr><tr><td>1,75</td><td>2,40</td><td>-</td><td>2,90</td><td>-</td><td>-</td><td>-</td></tr><tr><td>2,00</td><td>2,40</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr><tr><td rowspan="16">V_{R,k} [kN]</td><td>0,50</td><td>0,92</td><td></td><td>1,03</td><td>ac</td><td>1,08</td><td>ac</td></tr><tr><td>0,55</td><td>1,16</td><td></td><td>1,30</td><td>ac</td><td>1,36</td><td>ac</td></tr><tr><td>0,63</td><td>1,70</td><td>-</td><td>1,90</td><td>ac</td><td>2,00</td><td>ac</td></tr><tr><td>0,75</td><td>1,70</td><td>-</td><td>1,90</td><td>-</td><td>2,00</td><td>-</td></tr><tr><td>0,88</td><td>1,70</td><td>-</td><td>1,90</td><td>-</td><td>2,00</td><td>-</td></tr><tr><td>1,00</td><td>1,70</td><td>-</td><td>1,90</td><td>-</td><td>2,00</td><td>-</td></tr><tr><td>1,13</td><td>1,70</td><td>-</td><td>1,90</td><td>-</td><td>2,00</td><td>-</td></tr><tr><td>1,25</td><td>1,70</td><td>-</td><td>1,90</td><td>-</td><td>2,00</td><td>-</td></tr><tr><td>1,50</td><td>1,70</td><td>-</td><td>1,90</td><td>-</td><td>2,00</td><td>-</td></tr><tr><td>1,75</td><td>1,70</td><td>-</td><td>1,90</td><td>-</td><td>-</td><td>-</td></tr><tr><td>2,00</td><td>1,70</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr><tr><td>N_{R,k,II}</td><td>1,70</td><td>-</td><td>1,90</td><td>-</td><td>2,00</td><td>-</td></tr></table>					Component II				t II [mm]						2 x 0,75	2 x 0,88	2 x 1,00		Component I	M _{t,nom}	5 Nm				0,63	2,30	-	2,40	ac	2,50	ac	0,75	2,40	-	2,90	-	2,90	-	0,88	2,40	-	2,90	-	2,90	-	1,00	2,40	-	2,90	-	2,90	-	1,13	2,40	-	2,90	-	2,90	-	1,25	2,40	-	2,90	-	2,90	-	1,50	2,40	-	2,90	-	2,90	-	1,75	2,40	-	2,90	-	-	-	2,00	2,40	-	-	-	-	-	V _{R,k} [kN]	0,50	0,92		1,03	ac	1,08	ac	0,55	1,16		1,30	ac	1,36	ac	0,63	1,70	-	1,90	ac	2,00	ac	0,75	1,70	-	1,90	-	2,00	-	0,88	1,70	-	1,90	-	2,00	-	1,00	1,70	-	1,90	-	2,00	-	1,13	1,70	-	1,90	-	2,00	-	1,25	1,70	-	1,90	-	2,00	-	1,50	1,70	-	1,90	-	2,00	-	1,75	1,70	-	1,90	-	-	-	2,00	1,70	-	-	-	-	-	N _{R,k,II}	1,70	-	1,90	-	2,00	-
		Component II																																																																																																																																																																										
		t II [mm]																																																																																																																																																																										
		2 x 0,75	2 x 0,88	2 x 1,00																																																																																																																																																																								
Component I	M _{t,nom}	5 Nm																																																																																																																																																																										
	0,63	2,30	-	2,40	ac	2,50	ac																																																																																																																																																																					
	0,75	2,40	-	2,90	-	2,90	-																																																																																																																																																																					
	0,88	2,40	-	2,90	-	2,90	-																																																																																																																																																																					
	1,00	2,40	-	2,90	-	2,90	-																																																																																																																																																																					
	1,13	2,40	-	2,90	-	2,90	-																																																																																																																																																																					
	1,25	2,40	-	2,90	-	2,90	-																																																																																																																																																																					
	1,50	2,40	-	2,90	-	2,90	-																																																																																																																																																																					
	1,75	2,40	-	2,90	-	-	-																																																																																																																																																																					
	2,00	2,40	-	-	-	-	-																																																																																																																																																																					
	V _{R,k} [kN]	0,50	0,92		1,03	ac	1,08	ac																																																																																																																																																																				
		0,55	1,16		1,30	ac	1,36	ac																																																																																																																																																																				
		0,63	1,70	-	1,90	ac	2,00	ac																																																																																																																																																																				
		0,75	1,70	-	1,90	-	2,00	-																																																																																																																																																																				
		0,88	1,70	-	1,90	-	2,00	-																																																																																																																																																																				
		1,00	1,70	-	1,90	-	2,00	-																																																																																																																																																																				
		1,13	1,70	-	1,90	-	2,00	-																																																																																																																																																																				
		1,25	1,70	-	1,90	-	2,00	-																																																																																																																																																																				
		1,50	1,70	-	1,90	-	2,00	-																																																																																																																																																																				
		1,75	1,70	-	1,90	-	-	-																																																																																																																																																																				
		2,00	1,70	-	-	-	-	-																																																																																																																																																																				
		N _{R,k,II}	1,70	-	1,90	-	2,00	-																																																																																																																																																																				
Self-drilling screw		Annex 8																																																																																																																																																																										
PMJ-tec 7510 bimetal with hexagon head and sealing washer ≥ Ø 16,0 mm																																																																																																																																																																												

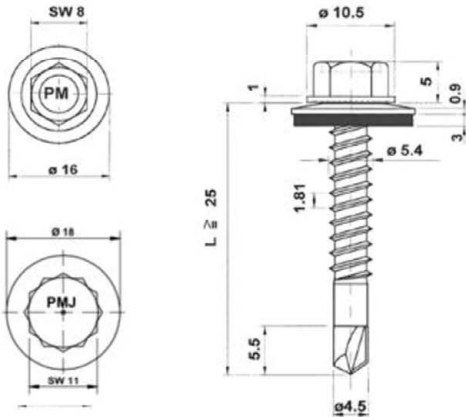

Materials

Fastener: Stainless steel A2, A4, A5 – EN ISO 3506

Washer: Stainless steel A2, A4, A5 – EN ISO 3506

Component I: S280GD to S320GD - EN 10346

Component II: S235 - EN 10025-1
S280GD to S320GD - EN 10346

Drilling-capacity $\Sigma(t_i) \leq 3.50$ mm

Timber substructures


no performance determined

		Component II t II [mm]				
		1,00	1,25	1,50	2,00	3,00
M _{t,nom}		-				
Component I t I [mm]	V _{R,k} [kN]	0,63	1,90 ac	2,10 ac	2,40 ac	2,60 ac
		0,75	2,10 -	2,40 ac	2,60 ac	3,00 ac
		0,88	2,30 -	2,60	2,90 ac	3,40 ac
		1,00	2,50 -	2,80	3,20 -	3,70 -
		1,13	2,70 -	3,00	3,40 -	4,10 -
		1,25	2,80 -	3,20	3,60 -	4,30 -
	N _{R,k} [kN]	0,50	0,49 -	0,70 ac	0,92 ac	1,35 ac
		0,55	0,61 -	0,89 ac	1,16 ac	1,71 ac
		0,63	0,90 -	1,30 ac	1,70 ac	2,50 ac
		0,75	0,90 -	1,30 ac	1,70 ac	2,50 ac
		0,88	0,90 -	1,30 -	1,70 ac	2,50 ac
		1,00	0,90 -	1,30 -	1,70 -	2,50 -
		1,13	0,90 -	1,30 -	1,70 -	2,50 -
		1,25	0,90 -	1,30 -	1,70 -	2,50 -
		N _{R,k,II}	0,90 -	1,30 -	1,70 -	2,50 -

Self-drilling screw

PMJ-tec 7510
bimetal with hexagon head and sealing washer $\geq \varnothing 16,0$ mm

Annex 9

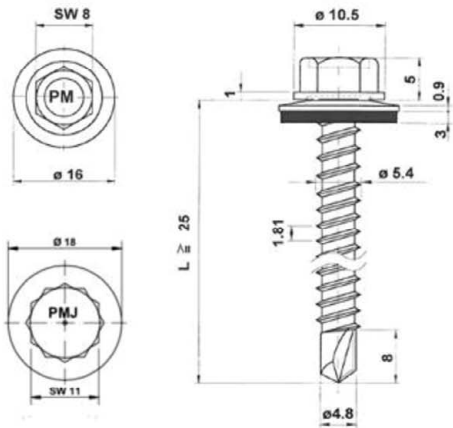	<u>Materials</u> Fastener: Stainless steel A2, A4, A5 – EN ISO 3506 Washer: Stainless steel A2, A4, A5 – EN ISO 3506 Component I: S280GD to S320GD - EN 10346 Component II: S235 - EN 10025-1 S280GD to S320GD - EN 10346 <u>Drilling-capacity</u> $\Sigma(t_i) \leq 6.00$ mm <u>Timber substructures</u> no performance determined
---	--

		Component II						
		t II [mm]						
		3,00		4,00		5,00		
M _{t,nom}		7 Nm						
Component I	V _{R,k} [kN]	0,63	2,60	abcd	3,00	abcd	3,00	abcd
		0,75	3,00	ac	3,40	ac	3,40	ac
		0,88	3,40	ac	3,80	ac	3,80	ac
		1,00	3,70	ac	4,30	ac	4,30	ac
		1,13	4,00	ac	4,70	ac	-	-
		1,25	4,40	a	5,10	a	-	-
		1,50	5,00	-	5,30	-	-	-
		1,75	5,00	-	5,30	-	-	-
		2,00	5,00	-	5,30	-	-	-
	N _{R,k} [kN]	0,50	1,57	abcd	1,57	abcd	1,57	abcd
		0,55	1,98	abcd	1,98	abcd	1,98	abcd
		0,63	2,90	abcd	2,90	abcd	2,90	abcd
		0,75	3,40	ac	3,40	ac	3,40	ac
		0,88	4,00	ac	4,00	ac	4,00	ac
		1,00	4,30	ac	4,50	ac	4,50	ac
		1,13	4,30	ac	5,00	ac	-	-
		1,25	4,30	a	5,10	a	-	-
		1,50	4,30	-	5,10	-	-	-
		1,75	4,30	-	5,10	-	-	-
		2,00	4,30	-	5,10	-	-	-
N _{R,k,II}		4,30	-	5,10	-	5,10	-	

Self-drilling screw

PMJ-tec 7520
bimetal with hexagon head and sealing washer $\geq \text{Ø } 16,0$ mm

Annex 10


	Materials Fastener: Stainless steel A2, A4, A5 – EN ISO 3506 organic coated Washer: Stainless steel A2, A4, A5 – EN ISO 3506 Component I: S280GD to S320GD - EN 10346 Component II: S235 - EN 10025-1 S280GD to S320GD - EN 10346 Drilling-capacity $\Sigma(t_i) \leq 12.50$ mm Timber substructures no performance determined
--	---

		Component II						
		t II [mm]						
		6,00		8,00		10,0		
M _{t,nom}		5 Nm						
Component I t I [mm]	V _{R,k} [kN]	0,63	2,60	abcd	2,60	abcd	2,60	abcd
		0,75	3,10	abcd	3,10	abcd	3,10	abcd
		0,88	3,60	ac	3,60	ac	3,60	ac
		1,00	4,10	ac	4,10	ac	4,10	ac
		1,13	4,60	ac	4,60	ac	4,60	ac
		1,25	5,10	ac	5,10	ac	5,10	ac
		1,50	6,00	-	6,00	-	6,00	-
		1,75	6,00	-	6,00	-	6,00	-
		2,00	6,00	-	6,00	-	6,00	-
		0,50	1,35	abcd	1,35	abcd	1,35	abcd
		0,55	1,71	abcd	1,71	abcd	1,71	abcd
		0,63	2,50	abcd	2,50	abcd	2,50	abcd
		0,75	2,90	abcd	2,90	abcd	2,90	abcd
		0,88	3,70	ac	3,70	ac	3,70	ac
		1,00	4,50	ac	4,50	ac	4,50	ac
		1,13	5,00	ac	5,00	ac	5,00	ac
		1,25	5,50	ac	5,50	ac	5,50	ac
		1,50	5,70	-	5,70	-	5,70	-
		1,75	5,70	-	5,70	-	5,70	-
		2,00	5,70	-	5,70	-	5,70	-
		N _{R,k,II}	5,70	-	5,70	-	5,70	-

Self-drilling screw

PMJ-tec 7530
bimetal with hexagon head and sealing washer $\geq \text{Ø } 16,0$ mm

Annex 11

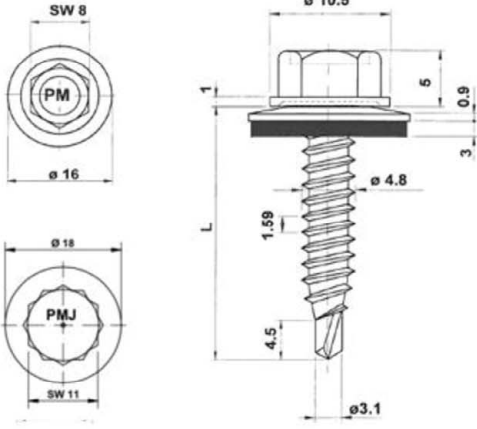
	<u>Materials</u> Fastener: Stainless steel A2, A4, A5 – EN ISO 3506 organic coated Washer: Stainless steel A2, A4, A5 – EN ISO 3506 Component I: S280GD to S320GD - EN 10346 Component II: S235 - EN 10025-1 S280GD to S320GD - EN 10346 <u>Drilling-capacity</u> $\Sigma(t_i) \leq 2.50$ mm <u>Timber substructures</u> no performance determined
---	--

		Component II t II [mm]					
		0,63	0,75	0,88	1,00	1,13	1,25
M _{t,nom}		5 Nm					
Component I t I [mm]	V _{R,k} [kN]	0,63	0,90 -	0,90 -	1,50 -	2,10 ac	2,10 ac
		0,75	0,90 -	0,90 -	1,50 -	2,10 ac	2,10 ac
		0,88	0,90 -	0,90 -	1,70 -	2,40 -	2,40 -
		1,00	0,90 -	0,90 -	1,90 -	2,80 -	2,80 -
		1,13	0,90 -	0,90 -	1,90 -	2,80 -	2,80 -
		1,25	0,90 -	0,90 -	1,90 -	2,80 -	2,80 -
	N _{R,k} [kN]	0,50	0,38 -	0,38 -	0,54	0,70 ac	0,86 ac
		0,55	0,48 -	0,48 -	0,68	0,89 ac	1,09 ac
		0,63	0,70 -	0,70 -	1,00	1,30 ac	1,60 ac
		0,75	0,70 -	0,70 -	1,00	1,30 ac	1,60 a
		0,88	0,70 -	0,70 -	1,00	1,30	1,60 -
		1,00	0,70 -	0,70 -	1,00	1,30	1,60 -
		1,13	0,70 -	0,70 -	1,00	1,30	1,60 -
		1,25	0,70 -	0,70 -	1,00	1,30	1,60 -
		N _{R,k,II}	0,70 -	0,70 -	1,00	1,30	1,60 -

Self-drilling screw

PMJtec 7550 4,8
bimetal with hexagon head and sealing washer $\geq \varnothing 16,0$ mm

Annex 12

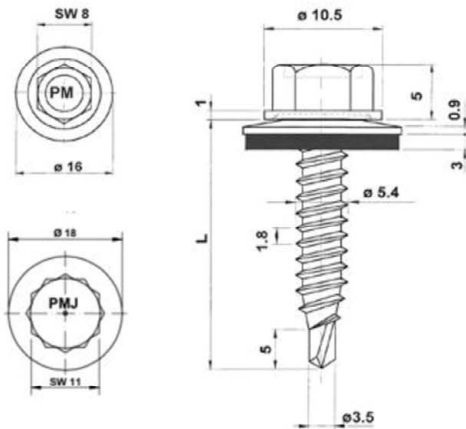

Materials

Fastener: Stainless steel A2, A4, A5 – EN ISO 3506
organic coated

Washer: Stainless steel A2, A4, A5 – EN ISO 3506

Component I: S280GD to S320GD - EN 10346

Component II: S235 - EN 10025-1
S280GD to S320GD - EN 10346

Drilling-capacity $\Sigma(t_i) \leq 2.50$ mm

Timber substructures


no performance determined

		Component II							
		t II [mm]							
		0,63	0,75	0,88	1,00	1,13	1,25	2x0,75	
M _{t,nom}		4 Nm			5 Nm			5 Nm	
Component I	V _{R,k} [kN]	0,63	1,30 -	1,50 -	1,50 -	1,50 ac	1,50 ac	1,50 ac	1,80 ac
		0,75	1,30 -	1,50 -	1,50 -	1,50 -	1,50 -	1,50 -	1,80 -
		0,88	1,30 -	1,50 -	1,90 -	2,30 -	2,30 -	2,40 -	2,40 -
		1,00	1,30 -	1,50 -	2,30 -	3,00 -	3,10 -	3,20 -	3,00 -
	t I [mm]	0,50	0,38 -	0,54 -	0,70 -	0,86 ac	1,03 ac	1,13 ac	1,13 ac
		0,55	0,48 -	0,68 -	0,89 -	1,09 ac	1,30 ac	1,43 ac	1,43 ac
		0,63	0,70 -	1,00 -	1,30 -	1,60 ac	1,90 ac	2,10 ac	2,10 ac
		0,75	0,70 -	1,00 -	1,30 -	1,60 -	1,90 -	2,20 -	2,30 -
	N _{R,k} [kN]	0,88	0,70 -	1,00 -	1,30 -	1,60 -	1,90 -	2,20 -	2,30 -
		1,00	0,70 -	1,00 -	1,30 -	1,60 -	1,90 -	2,20 -	2,30 -
		N _{R,k,II}	0,70 -	1,00 -	1,30 -	1,60 -	1,90 -	2,20 -	2,30 -

Self-drilling screw

PMJ-tec 7550 5,5
bimetal with hexagon head and sealing washer $\geq \varnothing 16,0$ mm

Annex 13

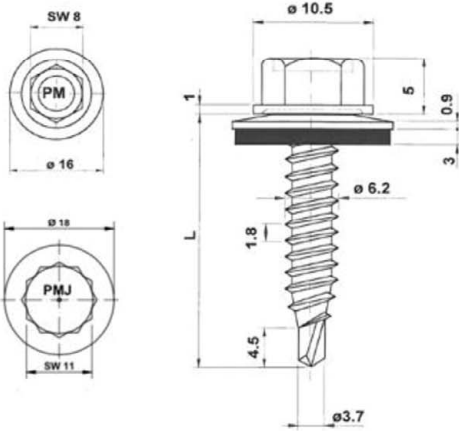

Materials

Fastener: Stainless steel A2, A4, A5 – EN ISO 3506

Washer: Stainless steel A2, A4, A5 – EN ISO 3506

Component I: S280GD to S320GD - EN 10346

Component II: S235 - EN 10025-1
S280GD to S320GD - EN 10346

Drilling-capacity $\Sigma(t_i) \leq 2.50$ mm

Timber substructures


no performance determined

		Component II							
		t II [mm]							
		0,63	0,75	0,88	1,00	1,13	1,25	2x0,75	
M _{t,nom}		4 Nm			5 Nm			5 Nm	
Component I t I [mm]	V _{R,k} [kN]	0,63	1,60 -	1,60 -	1,60 -	1,60 ac	1,60 ac	1,60 ac	1,80 ac
		0,75	1,60 -	1,60 -	1,60 -	1,60 -	1,60 -	1,60 -	1,80 -
		0,88	1,60 -	1,60 -	1,90	2,30 -	2,30 -	2,40 -	2,40 -
		1,00	1,60 -	1,60 -	2,30	3,00 -	3,10 -	3,20 -	3,00 -
	N _{R,k} [kN]	0,50	0,43 -	0,54 -	0,70 -	0,86 -	1,03 ac	1,19 ac	1,30 ac
		0,55	0,55 -	0,68 -	0,89 -	1,09 -	1,30 ac	1,50 ac	1,64 ac
		0,63	0,80 -	1,00 -	1,30 -	1,60 -	1,90 ac	2,20 ac	2,40 ac
		0,75	0,80 -	1,00 -	1,30 -	1,60 -	1,90 -	2,20 -	2,60 -
		0,88	0,80 -	1,00 -	1,30 -	1,60 -	1,90 -	2,20 -	2,60 -
		1,00	0,80 -	1,00 -	1,30 -	1,60 -	1,90 -	2,20 -	2,60 -
		N _{R,k,II}	0,80 -	1,00 -	1,30 -	1,60 -	1,90 -	2,20 -	2,60 -

Self-drilling screw

PMJ-tec 7550 6,3
bimetal with hexagon head and sealing washer $\geq \varnothing 16,0$ mm

Annex 14

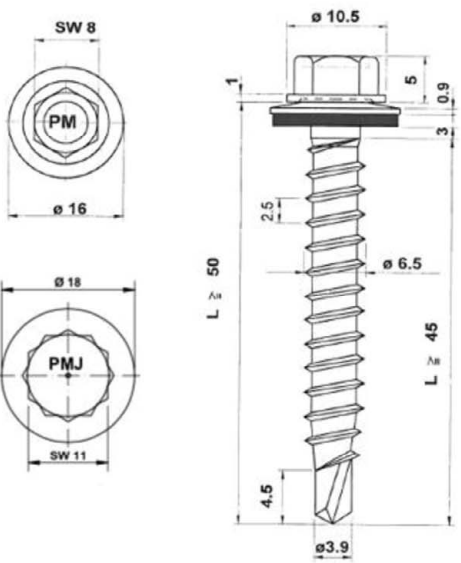	Materials Fastener: Stainless steel A2, A4, A5 – EN ISO 3506 Washer: Stainless steel A2, A4, A5 – EN ISO 3506 Component I: S280GD to S320GD - EN 10346 Component II: S235 - EN 10025-1 S280GD to S320GD - EN 10346 Drilling-capacity $\Sigma(t_i) \leq 2.50$ mm Timber substructures $M_{y,Rk} = 9,742$ Nm $f_{ax,k} = 8,575$ N/mm² for $l_{ef} \geq 45,0$ mm
---	--


		Component II						
		steel t II [mm]				Timber ≥ C24 L _g ≥ 29 mm		
								1,50
M _{t,nom}		5 Nm				-		
Component I t I [mm]	V _{R,k} [kN]	0,63	1,40	ac	-	-	1,40	Failure of component I
		0,75	1,60	ac	-	-	1,60	
		0,88	2,00	ac	-	-	2,00	
		1,00	2,50	ac	-	-	2,50	
	N _{R,k} [kN]	0,50	1,24	ac	-	-	1,24	Failure of component I
		0,55	1,57	ac	-	-	1,57	
		0,63	2,30	ac	-	-	2,30	
		0,75	2,80	ac	-	-	2,80	
		0,88	3,20	ac	-	-	3,20	
		1,00	3,20	ac	-	-	3,20	
N _{R,k,II}		3,20	ac	-	-	-	-	

The values listed above in dependence on the screw in length l_{ef} are valid for $k_{mod} = 0,90$ and $\rho_k = 350$ kg/m³. For other combinations of k_{mod} and timber densities see Annex 3.

Self-drilling screw

PMJ-tec 7565
bimetal with hexagon head and sealing washer $\geq \varnothing 16,0$ mm

Annex 15

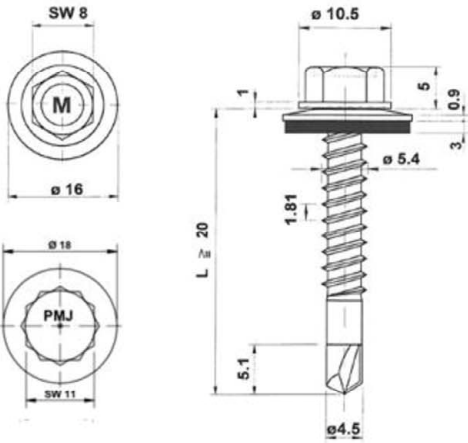

Materials

Fastener: Carbon steel (1.1147) – EN 10263
case hardened, galvanized and coated with "Dural 250"

Washer: Carbon steel, galvanized

Component I: S280GD to S320GD - EN 10346

Component II: S235 - EN 10025-1
S280GD to S320GD - EN 10346

Drilling-capacity $\Sigma(t_i) \leq 3.50$ mm

Timber substructures


No performance determined

		Component II t II [mm]				
		1,00	1,25	1,50	2,00	3,00
M _{t,nom}		-				
Component I t I [mm]	V _{R,k} [kN]	0,63	1,90 ac	2,10 ac	2,40 ac	2,60 ac
		0,75	2,10 -	2,40 ac	2,60 ac	3,00 ac
		0,88	2,30 -	2,60	2,90 ac	3,40 ac
		1,00	2,50 -	2,80	3,20 -	3,70 -
		1,13	2,70 -	3,00	3,40 -	4,10 -
		1,25	2,80 -	3,20	3,60 -	4,30 -
	N _{R,k} [kN]	0,50	0,54 ac	0,76 ac	1,03 ac	1,57 ac
		0,55	0,68 ac	0,95 ac	1,30 ac	1,98 ac
		0,63	1,00 ac	1,40 ac	1,90 ac	2,90 ac
		0,75	1,00 -	1,40 ac	1,90 ac	2,90 ac
		0,88	1,00 -	1,40 -	1,90 ac	2,90 ac
		1,00	1,00 -	1,40 -	1,90 -	2,90 -
		1,13	1,00 -	1,40 -	1,90 -	2,90 -
		1,25	1,00 -	1,40 -	1,90 -	2,90 -
	N _{R,k,II}	1,00	-	1,40	-	2,90

Self-drilling screw

PMJ-tec 7310
with hexagon head and sealing washer $\geq \varnothing 16,0$ mm

Annex 16

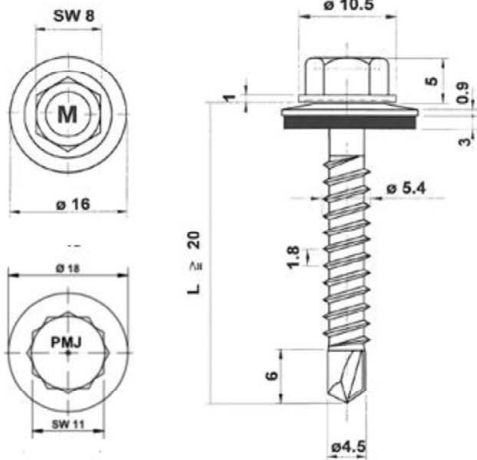

Materials

Fastener: Carbon steel (1.1147) – EN 10263
case hardened, galvanized and coated with "Dural 250"

Washer: Carbon steel, galvanized

Component I: S280GD to S320GD - EN 10346

Component II: S235 - EN 10025-1
S280GD to S320GD - EN 10346

Drilling-capacity $\Sigma(t_i) \leq 3.50$ mm

Timber substructures


No performance determined

		Component II t II [mm]				
		1,00	1,25	1,50	2,00	3,00
M _{t,nom}		-				
Component I t I [mm]	V _{R,k} [kN]	0,63	1,90 ac	2,10 ac	2,40 ac	2,60 ac
		0,75	2,10 -	2,40 ac	2,60 ac	3,00 ac
		0,88	2,30 -	2,60	2,90 ac	3,40 ac
		1,00	2,50 -	2,80	3,20 -	3,70 -
		1,13	2,70 -	3,00	3,40 -	4,10 -
		1,25	2,80 -	3,20	3,60 -	4,30 -
		0,50	0,54 ac	0,76 ac	1,03 ac	1,57 ac
		0,55	0,68 ac	0,95 ac	1,30 ac	1,98 ac
		0,63	1,00 ac	1,40 ac	1,90 ac	2,90 ac
	N _{R,k} [kN]	0,75	1,00 -	1,40 ac	1,90 ac	2,90 ac
		0,88	1,00 -	1,40 -	1,90 ac	2,90 ac
		1,00	1,00 -	1,40 -	1,90 -	2,90 -
		1,13	1,00 -	1,40 -	1,90 -	2,90 -
		1,25	1,00 -	1,40 -	1,90 -	2,90 -
	N _{R,k,II}	1,00	-	1,40	-	2,90

Self-drilling screw

PMJ-tec 7320
with hexagon head and sealing washer $\geq \varnothing 16,0$ mm

Annex 17

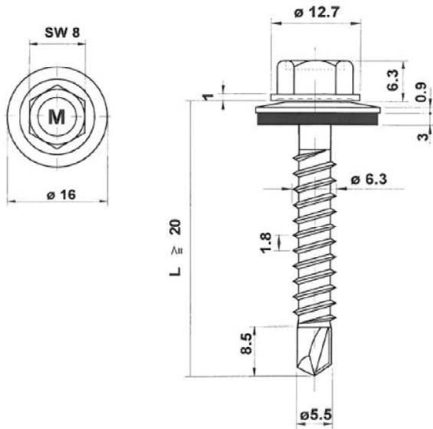

Materials

Fastener: Carbon steel (1.1147) – EN 10263
case hardened, galvanized and coated with "Dural 250"

Washer: Carbon steel, galvanized

Component I: S280GD to S320GD - EN 10346

Component II: S235 - EN 10025-1
S280GD to S320GD - EN 10346

Drilling-capacity $\Sigma(t_i) \leq 6.00$ mm

Timber substructures

No performance determined

		Component II t II [mm]				
		2,50	3,00	4,00	5,00	
M _{t,nom}		-				
Component I t I [mm]	V _{R,k} [kN]	0,63	2,30 ac	2,60 abc	2,60 abc	2,60 abc
		0,75	2,80 ac	3,10 ac	3,10 ac	3,10 abc
		0,88	3,40 ac	3,60 ac	3,60 ac	3,60 ac
		1,00	4,00 ac	4,10 ac	4,10 ac	4,10 ac
		1,13	4,00 ac	4,50 ac	4,80 ac	5,10 ac
		1,25	4,00 ac	5,70 ac	6,00 ac	- -
		1,50	4,00 ac	5,70 ac	6,00 -	- -
		1,75	4,00 ac	5,70 ac	6,00 -	- -
		2,00	4,00 ac	5,70 ac	6,00 -	- -
	N _{R,k} [kN]	0,50	1,51 ac	1,51 abc	1,51 abc	1,51 abc
		0,55	1,91 ac	1,91 abc	1,91 abc	1,91 abc
		0,63	2,80 ac	2,80 abc	2,80 abc	2,80 abc
		0,75	3,50 ac	3,50 abc	3,50 abc	3,50 abc
		0,88	4,40 ac	4,40 ac	4,40 ac	4,40 ac
		1,00	5,20 ac	5,20 ac	5,20 ac	5,20 ac
		1,13	5,70 ac	6,10 ac	6,10 ac	6,10 ac
		1,25	5,70 ac	6,40 ac	7,00 ac	- -
		1,50	5,70 ac	6,40 ac	7,00 -	- -
		1,75	5,70 ac	6,40 ac	7,00 -	- -
		2,00	5,70 ac	6,40 ac	7,00 -	- -
		N _{R,k,II}	5,70 -	6,40 -	7,00 -	7,00 -

Self-drilling screw

PMJ-tec 7325
with hexagon head and sealing washer $\geq \varnothing 16,0$ mm

Annex 18


	Materials Fastener: Carbon steel (1.1147) – EN 10263 case hardened, galvanized and coated with “Dural 250” Washer: Carbon steel, galvanized Component I: S280GD to S320GD - EN 10346 Component II: S235 - EN 10025-1 Drilling-capacity $\Sigma(t_i) \leq 12.50$ mm Timber substructures No performance determined
--	---

		Component II t II [mm]			
		6,00	8,00	10,0	
M _{t,nom}		8 Nm			
Component I t I [mm]	V _{R,k} [kN]	0,63	2,60 abcd	2,60 abcd	2,60 abcd
		0,75	3,10 abcd	3,10 abcd	3,10 abcd
		0,88	3,60 ac	3,60 ac	3,60 ac
		1,00	4,10 ac	4,10 ac	4,10 ac
		1,13	4,60 ac	4,60 ac	4,60 ac
		1,25	5,10 ac	5,10 ac	5,10 ac
		1,50	6,00 -	6,00 -	6,00 -
		1,75	6,00 -	6,00 -	6,00 -
		2,00	6,00 -	6,00 -	6,00 -
	N _{R,k} [kN]	0,50	1,57 abcd	1,57 abcd	1,57 abcd
		0,55	1,98 abcd	1,98 abcd	1,98 abcd
		0,63	2,90 abcd	2,90 abcd	2,90 abcd
		0,75	3,40 abcd	3,40 abcd	3,40 abcd
		0,88	4,00 ac	4,00 ac	4,00 ac
		1,00	4,50 ac	4,50 ac	4,50 ac
		1,13	5,00 ac	5,00 ac	5,00 ac
		1,25	5,50 ac	5,50 ac	5,50 ac
		1,50	6,60 -	6,60 -	6,60 -
		1,75	6,60 -	6,60 -	6,60 -
		2,00	6,60 -	6,60 -	6,60 -
		N _{R,k,II}	6,60 -	6,60 -	6,60 -

Self-drilling screw

PMJ-tec 7330
with hexagon head and sealing washer $\geq \varnothing 16,0$ mm

Annex 19

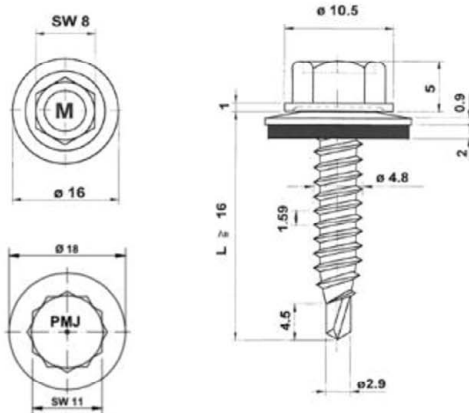

Materials

Fastener: Carbon steel (1.1147) – EN 10263
case hardened, galvanized and coated with "Dural 250"

Washer: Carbon steel, galvanized

Component I: S280GD to S320GD - EN 10346

Component II: S235 - EN 10025-1
S280GD to S320GD - EN 10346

Drilling-capacity $\Sigma(t_i) \leq 2.50$ mm

Timber substructures

No performance determined

		Component II t II [mm]						
		0,63	0,75	0,88	1,00	1,13	1,25	
M _{t,nom}		Σt = 1,50 mm: 4 Nm			Σt = 1,50 mm: 6 Nm			
Component I t I [mm]	V _{R,k} [kN]	0,63	1,40 -	1,40 -	1,80 -	2,10 ac	2,10 ac	2,10 ac
		0,75	1,40 -	1,40 -	1,80 -	2,10 ac	2,10 ac	2,10 ac
		0,88	1,40 -	1,40 -	2,00 -	2,40 ac	2,40 ac	2,40 ac
		1,00	1,40 -	1,40 -	2,20 -	2,80 -	2,80 -	2,80 -
		1,13	1,40 -	1,40 -	2,20 -	2,80 -	2,80 -	2,80 -
		1,25	1,40 -	1,40 -	2,20 -	2,80 -	2,80 -	2,80 -
	N _{R,k} [kN]	0,50	0,38 -	0,38 -	0,54	0,70 ac	0,86 ac	1,03 ac
		0,55	0,48 -	0,48 -	0,68	0,89 ac	1,09 ac	1,30 ac
		0,63	0,70 -	0,70 -	1,00	1,30 ac	1,60 ac	1,90 ac
		0,75	0,70 -	0,70 -	1,00	1,30 ac	1,60 a	1,90 a
		0,88	0,70 -	0,70 -	1,00	1,30	1,60 -	1,90 -
		1,00	0,70 -	0,70 -	1,00	1,30	1,60 -	1,90 -
		1,13	0,70 -	0,70 -	1,00	1,30	1,60 -	1,90 -
		1,25	0,70 -	0,70 -	1,00	1,30	1,60 -	1,90 -
		N _{R,k,II}	0,70 -	0,70 -	1,00	1,30	1,60 -	1,90 -

Self-drilling screw

PMJ-tec 7340
with hexagon head and sealing washer $\geq \varnothing 16,0$ mm

Annex 20

	Materials
	Fastener: Carbon steel (1.1147) – EN 10263 case hardened, galvanized and coated with "Dural 250"
	Washer: none
	Component I: S280GD to S320GD - EN 10346 Component II: S235 - EN 10025-1 S280GD to S320GD - EN 10346
	Drilling-capacity $\Sigma(t) \leq 2.50$ mm
	Timber substructures
	No performance determined


		Component II							
		t II [mm]							
		0,50	0,55	0,63	0,75	0,88	1,00	1,13	1,25
Component I	$M_{t, nom}$	$\Sigma t = 1,50$ mm: 4 Nm				$\Sigma t = 1,50$ mm: 6 Nm			
	0,50	1,51	-	1,51	-	1,51	-	1,51	-
	0,55	1,51	-	1,71	-	1,71	-	1,71	-
	0,63	1,51	-	1,71	-	1,91	-	1,91	-
	0,75	1,51	-	1,71	-	1,91	-	2,18	-
	0,88	1,51	-	1,71	-	1,91	-	2,18	-
	1,00	1,51	-	1,71	-	1,91	-	2,18	-
	1,13	1,51	-	1,71	-	1,91	-	2,18	-
	1,25	1,51	-	1,71	-	1,91	-	2,18	-
	1,50	1,51	-	1,71	-	1,91	-	2,18	-
	1,75	1,51	-	1,71	-	1,91	-	2,18	-
	2,00	1,51	-	-	-	-	-	-	-
	$V_{R,k}$ [kN]	0,50	-	-	-	0,38	-	0,38	-
		0,55	-	-	-	0,48	-	0,48	-
		0,63	-	-	-	0,70	-	0,70	-
		0,75	-	-	-	0,70	-	0,70	-
		0,88	-	-	-	0,70	-	0,70	-
		1,00	-	-	-	0,70	-	0,70	-
		1,13	-	-	-	0,70	-	0,70	-
		1,25	-	-	-	0,70	-	0,70	-
		1,50	-	-	-	0,70	-	0,70	-
		1,75	-	-	-	0,70	-	0,70	-
		2,00	-	-	-	0,70	-	0,70	-
	$N_{R,k,II}$	-	-	-	-	0,70	-	0,70	-

If both components I and II are made of S320GD or S350GD the values $V_{R,k}$ [kN] may be increased by 8,3%.
Only Index a: If component I is made of S320GD or S350GD the values $N_{R,k}$ [kN] may be increased by 8,3%.

Self-drilling screw

PMJ-tec 7340 – 4,8xL
with hexagon head

Annex 21

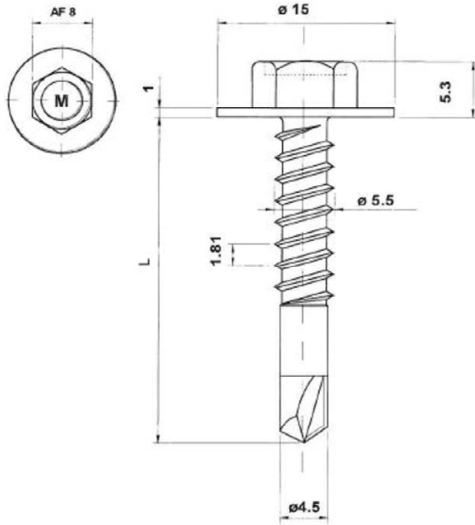

Materials

Fastener: Carbon steel (1.1147) – EN 10263
case hardened, galvanized and coated with "Dural 250"

Washer: none

Component I: S280GD to S320GD - EN 10346

Component II: S235 - EN 10025-1
S280GD to S320GD - EN 10346

Drilling-capacity $\Sigma(t_i) \leq 3.50$ mm

Timber substructures


No performance determined

		Component II						
		t II [mm]						
		1,00	1,13	1,25	1,50	2,00	2,50	3,00
M _{t,nom}		5 Nm						
Component I t I [mm]	V _{R,k} [kN]	0,63	1,90 ac	1,90 ac	2,10 ac	2,40 ac	2,60 ac	2,60 ac
		0,75	2,10 -	2,10 -	2,40 ac	2,60 ac	3,00 ac	3,00 ac
		0,88	2,30 -	2,30 -	2,60	2,90 ac	3,40 -	3,40 -
		1,00	2,50 -	2,50 -	2,80	3,20 -	3,70 -	3,70 -
		1,13	2,70 -	2,70 -	3,00	3,40 -	4,10 -	- - -
		1,25	2,80 -	2,80 -	3,20	3,60 -	4,30 -	- - -
		1,50	2,80 -	2,80 -	3,20	3,60 -	- - -	- - -
		1,75	2,80 -	2,80 -	3,20	3,60 -	- - -	- - -
		2,00	2,80 -	2,80 -	3,20	3,60 -	- - -	- - -
	N _{R,k} [kN]	0,63	1,00 ac	1,00 ac	1,40 ac	1,90 ac	2,90 ac	2,90 ac
		0,75	1,00 -	1,00 -	1,40 ac	1,90 ac	2,90 ac	2,90 ac
		0,88	1,00 -	1,00 -	1,40 -	1,90 ac	2,90 -	2,90 -
		1,00	1,00 -	1,00 -	1,40 -	1,90 -	2,90 -	2,90 -
		1,13	1,00 -	1,00 -	1,40 -	1,90 -	2,90 -	- - -
		1,25	1,00 -	1,00 -	1,40 -	1,90 -	2,90 -	- - -
		1,50	1,00 -	1,00 -	1,40 -	1,90 -	- - -	- - -
		1,75	1,00 -	1,00 -	1,40 -	1,90 -	- - -	- - -
		2,00	1,00 -	1,00 -	1,40 -	1,90 -	- - -	- - -
	N _{R,k,II}	1,00	-	1,00 -	1,40 -	1,90 -	2,90 -	2,90 -

Self-drilling screw

PMJ-tec 7342
with hexagon head and flange Ø15 mm

Annex 22

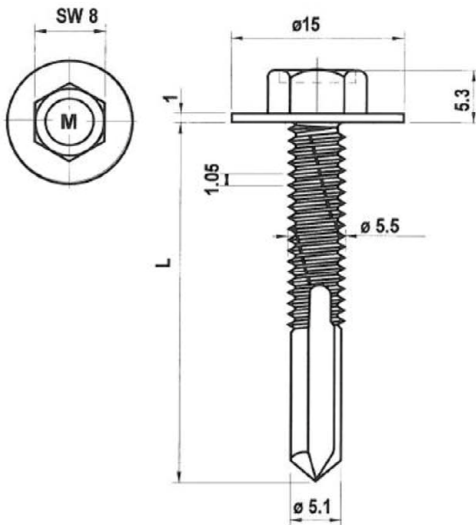

Materials

Fastener: Carbon steel (1.1147) – EN 10263
case hardened, galvanized and coated with "Dural 250"

Washer: none

Component I: S280GD to S320GD - EN 10346

Component II: S235 - EN 10025-1

Drilling-capacity $\Sigma(t_i) \leq 12.50$ mm

Timber substructures


No performance determined

		Component II t II [mm]		
		6,00	8,00	10,0
M _{t,nom}		5 Nm		
Component I t I [mm]	V _{R,k} [kN]	0,63	2,60 abcd	2,60 abcd
		0,75	3,10 abcd	3,10 abcd
		0,88	3,60 ac	3,60 ac
		1,00	4,10 ac	4,10 ac
		1,13	4,60 ac	4,60 ac
		1,25	5,10 ac	5,10 ac
		1,50	6,00 -	6,00 -
		1,75	6,00 -	6,00 -
		2,00	6,00 -	6,00 -
	N _{R,k} [kN]	0,63	2,50 abcd	2,50 abcd
		0,75	2,90 abcd	2,90 abcd
		0,88	3,70 ac	3,70 ac
		1,00	4,50 ac	4,50 ac
		1,13	5,00 ac	5,00 ac
		1,25	5,50 ac	5,50 ac
		1,50	6,60 -	6,60 -
		1,75	6,60 -	6,60 -
		2,00	6,60 -	6,60 -
		N _{R,k,II}	6,60 -	6,60 -

Self-drilling screw

PMJ-tec 7344
with hexagon head and flange Ø15 mm

Annex 23

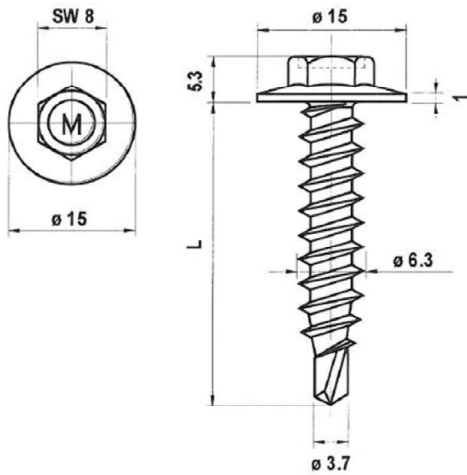

Materials

Fastener: Carbon steel (1.1147) – EN 10263
case hardened, galvanized and coated with "Dural 250"

Washer: none

Component I: S280GD to S320GD - EN 10346

Component II: S235 - EN 10025-1
S280GD to S320GD - EN 10346

Drilling-capacity $\Sigma(t_i) \leq 2.50$ mm

Timber substructures


No performance determined

		Component II t II [mm]					
		0,63	0,75	0,88	1,00	1,13	1,25
M _{t,nom}		5 Nm					
Component I t I [mm]	V _{R,k} [kN]	0,63	1,40 -	1,40 -	1,80 -	2,10 -	2,10 -
		0,75	1,40 -	1,40 -	1,80 -	2,10 -	2,10 -
		0,88	1,40 -	1,40 -	2,00 -	2,40 -	2,40 -
		1,00	1,40 -	1,40 -	2,20 -	2,80 -	2,80 -
		1,13	1,40 -	1,40 -	2,20 -	2,80 -	2,80 -
		1,25	1,40 -	1,40 -	2,20 -	2,80 -	2,80 -
	N _{R,k} [kN]	0,63	0,70 -	0,70 -	1,00 -	1,30 ac	1,60 ac
		0,75	0,70 -	0,70 -	1,00 -	1,30 ac	1,60 -
		0,88	0,70 -	0,70 -	1,00 -	1,30 -	1,60 -
		1,00	0,70 -	0,70 -	1,00 -	1,30 -	1,60 -
		1,13	0,70 -	0,70 -	1,00 -	1,30 -	1,60 -
		1,25	0,70 -	0,70 -	1,00 -	1,30 -	1,60 -
	N _{R,k,II}	0,70 -	0,70 -	1,00 -	1,30 -	1,60 -	1,90 -

Self-drilling screw

PMJ-tec 7346
with hexagon head and flange Ø15 mm

Annex 24

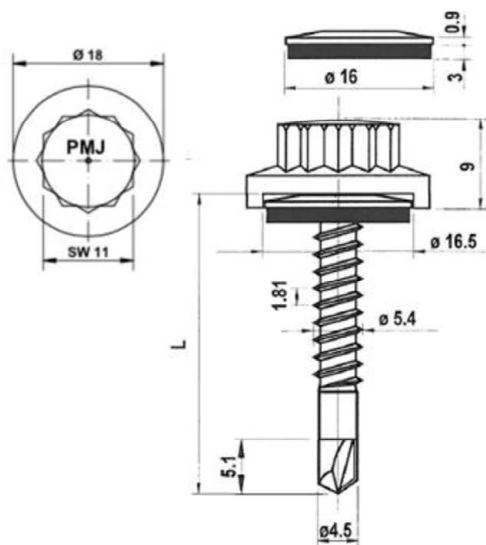

Materials

Fastener: Carbon steel (1.1147) – EN 10263
case hardened, galvanized and coated with "Dural 250"

Washer: stainless steel (1.4301) – EN 10088

Component I: S280GD to S320GD - EN 10346

Component II: S235 - EN 10025-1
S280GD to S320GD - EN 10346

Drilling-capacity $\Sigma(t_i) \leq 3.50$ mm

Timber substructures


No performance determined

		Component II t II [mm]						
		1,00	1,13	1,25	1,50	2,00	2,50	3,00
Component I t I [mm]	M _{t,nom}	5 Nm						
	0,63	1,90 ac	1,90 ac	2,10 ac	2,40 ac	2,60 ac	2,60 ac	2,60 ac
	0,75	2,10 -	2,10 -	2,40 ac	2,60 ac	3,00 ac	3,00 ac	- -
	0,88	2,30 -	2,30 -	2,60	2,90 ac	3,40 -	3,40 -	- -
	1,00	2,50 -	2,50 -	2,80	3,20 -	3,70 -	3,70 -	- -
	1,13	2,70 -	2,70 -	3,00	3,40 -	4,10 -	- -	- -
	1,25	2,80 -	2,80 -	3,20	3,60 -	4,30 -	- -	- -
	1,50	2,80 -	2,80 -	3,20	3,60 -	- -	- -	- -
	1,75	2,80 -	2,80 -	3,20	3,60 -	- -	- -	- -
	2,00	2,80 -	2,80 -	3,20	3,60 -	- -	- -	- -
	V _{R,k} [kN]							
	0,50	0,54 ac	0,54 ac	0,76 ac	1,03 ac	1,57 ac	1,57 ac	1,57 ac
	0,55	0,68 ac	0,68 ac	0,95 ac	1,30 ac	1,98 ac	1,98 ac	1,98 ac
	0,63	1,00 ac	1,00 ac	1,40 ac	1,90 ac	2,90 ac	2,90 ac	2,90 ac
	0,75	1,00 -	1,00 -	1,40 ac	1,90 ac	2,90 ac	2,90 ac	- -
	0,88	1,00 -	1,00 -	1,40 -	1,90 ac	2,90 -	2,90 -	- -
	1,00	1,00 -	1,00 -	1,40 -	1,90 -	2,90 -	2,90 -	- -
	1,13	1,00 -	1,00 -	1,40 -	1,90 -	2,90 -	- -	- -
	1,25	1,00 -	1,00 -	1,40 -	1,90 -	2,90 -	- -	- -
	1,50	1,00 -	1,00 -	1,40 -	1,90 -	- -	- -	- -
	1,75	1,00 -	1,00 -	1,40 -	1,90 -	- -	- -	- -
	2,00	1,00 -	1,00 -	1,40 -	1,90 -	- -	- -	- -
	N _{R,k,II}	1,00 -	1,00 -	1,40 -	1,90 -	2,90 -	2,90 -	2,90 -

Self-drilling screw

PMJ-tec 7810
with polyamide bihexagon head and sealing washer $\geq \varnothing 16$ mm

Annex 25

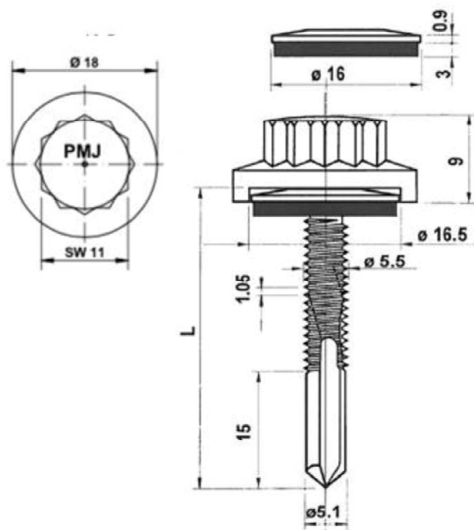

Materials

Fastener: Carbon steel (1.1147) – EN 10263
case hardened, galvanized and coated with "Dural 250"

Washer: stainless steel (1.4301) – EN 10088

Component I: S280GD to S320GD - EN 10346

Component II: S235 - EN 10025-1

Drilling-capacity $\Sigma(t_i) \leq 12.50$ mm

Timber substructures


No performance determined

		Component II t II [mm]			
		6,00	8,00	10,0	
M _{t,nom}		5 Nm			
Component I t I [mm]	V _{R,k} [kN]	0,63	2,60 abcd	2,60 abcd	2,60 abcd
		0,75	3,10 abcd	3,10 abcd	3,10 abcd
		0,88	3,60 ac	3,60 ac	3,60 ac
		1,00	4,10 ac	4,10 ac	4,10 ac
		1,13	4,60 ac	4,60 ac	4,60 ac
		1,25	5,10 ac	5,10 ac	5,10 ac
		1,50	6,00 -	6,00 -	6,00 -
		1,75	6,00 -	6,00 -	6,00 -
		2,00	6,00 -	6,00 -	6,00 -
	N _{R,k} [kN]	0,50	1,35 abcd	1,35 abcd	1,35 abcd
		0,55	1,71 abcd	1,71 abcd	1,71 abcd
		0,63	2,50 abcd	2,50 abcd	2,50 abcd
		0,75	2,90 abcd	2,90 abcd	2,90 abcd
		0,88	3,70 ac	3,70 ac	3,70 ac
		1,00	4,50 ac	4,50 ac	4,50 ac
		1,13	5,00 ac	5,00 ac	5,00 ac
		1,25	5,50 ac	5,50 ac	5,50 ac
		1,50	6,60 -	6,60 -	6,60 -
		1,75	6,60 -	6,60 -	6,60 -
		2,00	6,60 -	6,60 -	6,60 -
N _{R,k,II}		6,60 -	6,60 -	6,60 -	

Self-drilling screw

PMJ-tec 7820
with polyamide bihexagon head and sealing washer $\geq \varnothing 16$ mm

Annex 26

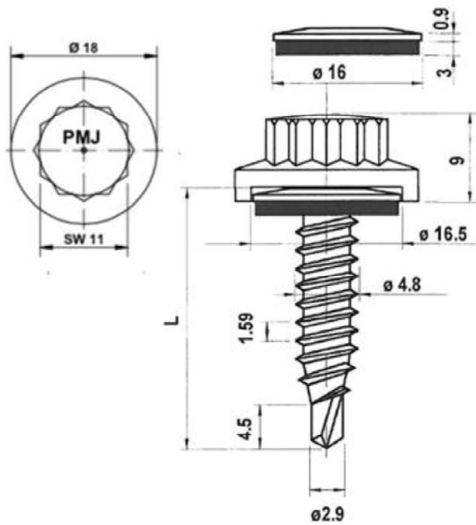

Materials

Fastener: Carbon steel (1.1147) – EN 10263
case hardened, galvanized and coated with "Dural 250"

Washer: stainless steel (1.4301) – EN 10088

Component I: S280GD to S320GD - EN 10346

Component II: S235 - EN 10025-1
S280GD to S320GD - EN 10346

Drilling-capacity $\Sigma(t_i) \leq 2.50$ mm

Timber substructures


No performance determined

		Component II t II [mm]					
		0,63	0,75	0,88	1,00	1,13	1,25
M _{t,nom}		5 Nm					
Component I t I [mm]	V _{R,k} [kN]	0,63	1,40 -	1,40 -	1,80 -	2,10 ac	2,10 ac
		0,75	1,40 -	1,40 -	1,80 -	2,10 ac	2,10 ac
		0,88	1,40 -	1,40 -	2,00 -	2,40 -	2,40 -
		1,00	1,40 -	1,40 -	2,20 -	2,80 -	2,80 -
		1,13	1,40 -	1,40 -	2,20 -	2,80 -	2,80 -
		1,25	1,40 -	1,40 -	2,20 -	2,80 -	2,80 -
	N _{R,k} [kN]	0,50	0,38 -	0,38	0,54	0,70	0,86 ac
		0,55	0,48 -	0,48	0,68	0,89	1,09 ac
		0,63	0,70 -	0,70 -	1,00 -	1,30 ac	1,60 ac
		0,75	0,70 -	0,70 -	1,00 -	1,30 ac	1,60 ac
		0,88	0,70 -	0,70 -	1,00 -	1,30 -	1,60 -
		1,00	0,70 -	0,70 -	1,00 -	1,30 -	1,60 -
		1,13	0,70 -	0,70 -	1,00 -	1,30 -	1,60 -
		1,25	0,70 -	0,70 -	1,00 -	1,30 -	1,60 -
		N _{R,k,II}	0,70 -	0,70 -	1,00 -	1,30 -	1,60 -

Self-drilling screw

PMJ-tec 7825
with polyamide bihexagon head and sealing washer $\geq \varnothing 16$ mm

Annex 27

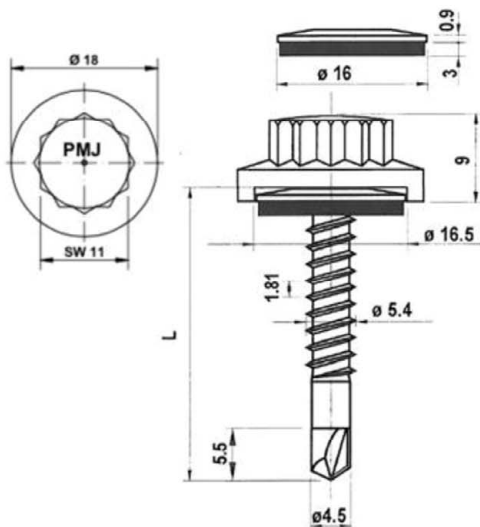

Materials

Fastener: stainless steel (1.4301) – EN 10088
organic coated

Washer: stainless steel (1.4301) – EN 10088

Component I: S280GD to S320GD - EN 10346

Component II: S235 - EN 10025-1
S280GD to S320GD - EN 10346

Drilling-capacity $\Sigma(t_i) \leq 3.50$ mm

Timber substructures


No performance determined

		Component II t II [mm]						
		1,00	1,13	1,25	1,50	2,00	2,50	3,00
M _{t,nom}		5 Nm						
Component I t I [mm]	V _{R,k} [kN]	0,63	1,90 ac	1,90 ac	2,10 ac	2,40 ac	2,60 ac	2,60 ac
		0,75	2,10 -	2,10 -	2,40 ac	2,60 ac	3,00 ac	3,00 ac
		0,88	2,30 -	2,30 -	2,60	2,90 ac	3,40 -	3,40 -
		1,00	2,50 -	2,50 -	2,80	3,20 -	3,70 -	3,70 -
		1,13	2,70 -	2,70 -	3,00	3,40 -	4,10 -	- -
		1,25	2,80 -	2,80 -	3,20	3,60 -	4,30 -	- -
		1,50	2,80 -	2,80 -	3,20	3,60 -	- -	- -
		1,75	2,80 -	2,80 -	3,20	3,60 -	- -	- -
		2,00	2,80 -	2,80 -	3,20	3,60 -	- -	- -
	N _{R,k} [kN]	0,50	0,49 ac	0,49 ac	0,70 ac	0,92 ac	1,35 ac	1,35 ac
		0,55	0,61 ac	0,61 ac	0,89 ac	1,16 ac	1,71 ac	1,71 ac
		0,63	0,90 ac	0,90 ac	1,30 ac	1,70 ac	2,50 ac	2,50 ac
		0,75	0,90 -	0,90 -	1,30 ac	1,70 ac	2,50 ac	2,50 ac
		0,88	0,90 -	0,90 -	1,30 -	1,70 ac	2,50 -	2,50 -
		1,00	0,90 -	0,90 -	1,30 -	1,70 -	2,50 -	2,50 -
		1,13	0,90 -	0,90 -	1,30 -	1,70 -	2,50 -	- -
		1,25	0,90 -	0,90 -	1,30 -	1,70 -	2,50 -	- -
		1,50	- -	- -	- -	- -	- -	- -
		1,75	- -	- -	- -	- -	- -	- -
		2,00	- -	- -	- -	- -	- -	- -
	N _{R,k,II}	0,90	-	0,90 -	1,30 -	1,70 -	2,50 -	2,50 -

Self-drilling screw

PMJ-tec 7870
bimetal with polyamide bihexagon head and sealing washer $\geq \varnothing 16$ mm

Annex 28

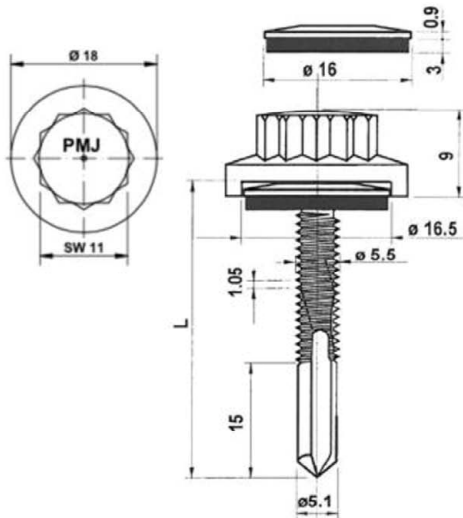

Materials

Fastener: stainless steel (1.4301) – EN 10088
organic coated

Washer: stainless steel (1.4301) – EN 10088

Component I: S280GD to S320GD - EN 10346

Component II: S235 - EN 10025-1

Drilling-capacity $\Sigma(t_i) \leq 12.50$ mm

Timber substructures


No performance determined

		Component II						
		t II [mm]						
		6,00		8,00		10,0		
M _{t,nom}		-						
Component I t I [mm]	V _{R,k} [kN]	0,63	2,60	abcd	2,60	abcd	2,60	abcd
		0,75	3,10	abcd	3,10	abcd	3,10	abcd
		0,88	3,60	ac	3,60	ac	3,60	ac
		1,00	4,10	ac	4,10	ac	4,10	ac
		1,13	4,60	ac	4,60	ac	4,60	ac
		1,25	5,10	ac	5,10	ac	5,10	ac
		1,50	6,00	-	6,00	-	6,00	-
		1,75	6,00	-	6,00	-	6,00	-
		2,00	6,00	-	6,00	-	6,00	-
	N _{R,k} [kN]	0,50	1,57	abcd	1,57	abcd	1,57	abcd
		0,55	1,98	abcd	1,98	abcd	1,98	abcd
		0,63	2,90	abcd	2,90	abcd	2,90	abcd
		0,75	3,40	abcd	3,40	abcd	3,40	abcd
		0,88	4,00	ac	4,00	ac	4,00	ac
		1,00	4,50	ac	4,50	ac	4,50	ac
		1,13	5,00	ac	5,00	ac	5,00	ac
		1,25	5,50	ac	5,50	ac	5,50	ac
		1,50	6,60	-	6,60	-	6,60	-
		1,75	6,60	-	6,60	-	6,60	-
		2,00	6,60	-	6,60	-	6,60	-
N _{R,k,II}		6,60	-	6,60	-	6,60	-	

Self-drilling screw

PMJ-tec 7880
bimetal with polyamide bihexagon head and sealing washer $\geq \varnothing 16$ mm

Annex 29

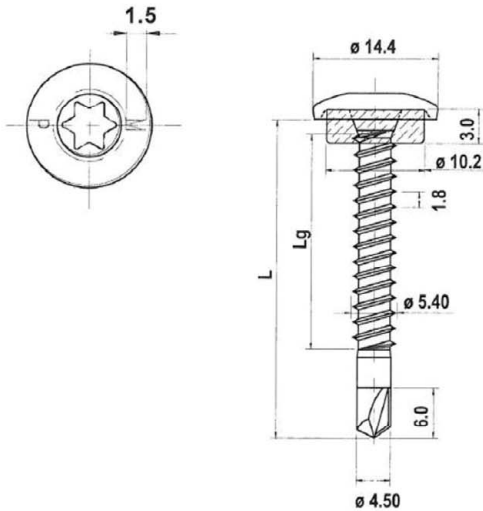

Materials

Fastener: stainless steel (1.4301) – EN 10088

Washer: EPDM sealing

Component I: S280GD to S320GD - EN 10346

Component II: S235 - EN 10025-1
S280GD to S320GD - EN 10346

Drilling-capacity $\Sigma(t_i) \leq 3.50$ mm

Timber substructures


No performance determined

		Component II						
		t II [mm]						
		1,00	1,13	1,25	1,50	2,00		
M _{t,nom}		5 Nm						
Component I	V _{R,k} [kN]	0,50	1,00 ac	1,10 ac	1,20 ac	1,40 ac	1,70 ac	
		0,55	1,10 ac	1,30 ac	1,40 ac	1,70 ac	2,10 ac	
		0,63	1,30 -	1,40 -	1,60 ac	1,90 ac	2,40 ac	
		0,75	1,50 -	1,70 -	2,00 -	2,40 -	3,10 ac	
	N _{R,k} [kN]	0,50	0,90 ac	1,10 ac	1,30 ac	1,70 ac	1,90 ac	
		0,55	0,90 ac	1,10 ac	1,30 ac	1,70 ac	2,30 ac	
		0,63	0,90 -	1,10 -	1,30 ac	1,70 ac	2,50 ac	
		0,75	0,90 -	1,10 -	1,30 -	1,70 -	2,50 ac	
		N _{R,k,II}		0,90 -	1,10 -	1,30 -	1,70 -	2,50 -

Self-drilling screw

PMJ-tec 7110
bimetal with rounded undercut head and sealing ring $\geq \varnothing 10$ mm

Annex 30

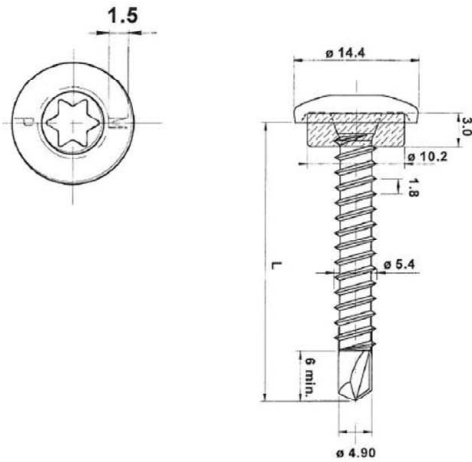

Materials

Fastener: stainless steel (1.4301) – EN 10088

Washer: EPDM sealing

Component I: S280GD to S320GD - EN 10346

Component II: S235 - EN 10025-1
S280GD to S320GD - EN 10346

Drilling-capacity $\Sigma(t_i) \leq 6.00$ mm

Timber substructures


No performance determined

		Component II t II [mm]					
		2,50	3,00	4,00	5,00		
M _{It,nom}		5 Nm					
Component I t I [mm]	V _{R,k} [kN]	0,50	1,40 ac	1,80 ac	1,80 ac	1,80 ac	
		0,55	1,80 ac	2,10 ac	2,10 ac	2,10 ac	
		0,63	2,20 -	2,40 ac	2,40 ac	2,40 ac	
		0,75	2,90 -	2,90 -	2,90 ac	2,90 ac	
	N _{R,k} [kN]	0,50	1,90 ac	1,90 ac	1,90 ac	1,90 ac	
		0,55	2,30 ac	2,30 ac	2,30 ac	2,30 ac	
		0,63	2,80 -	2,80 ac	2,80 ac	2,80 ac	
		0,75	3,00 -	3,80 -	3,80 ac	3,80 ac	
		N _{R,k,II}		3,00 -	3,80 -	3,80 -	3,80 -

Self-drilling screw

PMJ-tec 7120
bimetal with rounded undercut head and sealing ring $\geq \varnothing 10$ mm

Annex 31

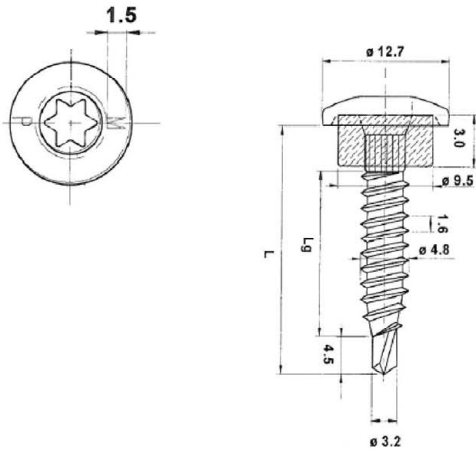

Materials

Fastener: stainless steel (1.4301) – EN 10088

Washer: EPDM sealing

Component I: S280GD to S320GD - EN 10346

Component II: S235 - EN 10025-1
S280GD to S320GD - EN 10346

Drilling-capacity $\Sigma(t_i) \leq 2.50$ mm

Timber substructures


No performance determined

		Component II t II [mm]				
		0,50	0,55	0,63	0,75	
M _{l,nom}		5 Nm				
Component I t I [mm]	V _{R,k} [kN]	0,50	0,80 -	0,90 -	1,00 -	1,10 -
		0,55	0,80 -	0,90 -	1,00 -	1,30 -
		0,63	0,80 -	0,90 -	1,00 -	1,60 -
		0,75	0,80 -	0,90 -	1,00 -	2,00 -
	N _{R,k} [kN]	0,50	0,50 -	0,60 -	0,70 -	0,70 -
		0,55	0,50 -	0,60 -	0,70 -	0,70 -
		0,63	0,50 -	0,60 -	0,70 -	0,70 -
		0,75	0,50 -	0,60 -	0,70 -	0,70 -
N _{R,k,II}		0,50 -	0,60 -	0,70 -	0,70 -	

Self-drilling screw

PMJ-tec 7140
bimetal with rounded undercut head and sealing ring $\geq \varnothing 10$ mm

Annex 32

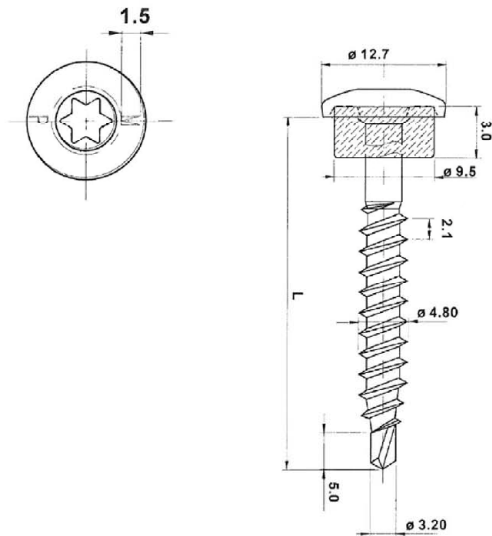

Materials

Fastener: stainless steel (1.4301) – EN 10088

Washer: EPDM sealing

Component I: S280GD to S320GD - EN 10346

Component II: structural timber – EN 14081

Drilling-capacity $\Sigma(t_i) \leq 2.00$ mm

Timber substructures

$M_{y,Rk} = 4,429$ Nm

$f_{ax,k} = 8,575$ N/mm² for $l_{ef} \geq 30,0$ mm


		Component II t II [mm]	
		-	
		$M_{t,nom}$ 5 Nm	
Component I t I [mm]	$V_{R,I,k}$ [kN]	0,50	1,10 ac
		0,55	1,30 ac
		0,63	1,60 ac
		0,75	2,00 ac
	$N_{R,I,k}$ [kN]	0,50	1,80 ac
		0,55	2,10 ac
		0,63	2,50 ac
		0,75	3,20 ac

The values listed above in dependence on the screw in length l_{ef} are valid for $k_{mod} = 0,90$ and $\rho_k = 350$ kg/m³. For other combinations of k_{mod} and timber densities see Annex 3.

Self-drilling screw

PMJ-tec 7160
bimetal with rounded undercut head and sealing ring $\geq \varnothing 10$ mm

Annex 33

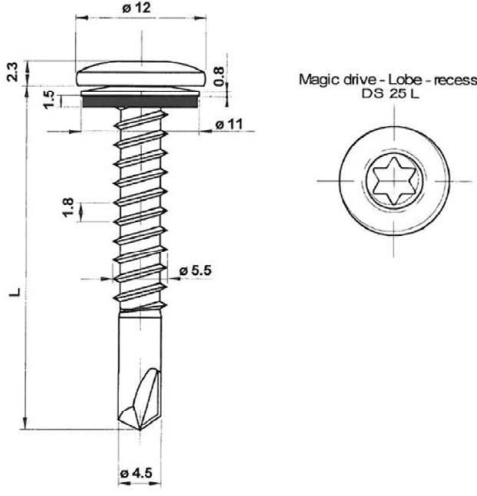
	Materials Fastener: stainless steel (1.4301) – EN 10088 Washer: stainless steel (1.4301) – EN 10088 Component I: S280GD to S320GD - EN 10346 Component II: S235 – EN 10025-1 S280GD to S320GD - EN 10346 Drilling-capacity $\Sigma(t_i) \leq 3.50$ mm Timber substructures -
---	--

		Component II t II [mm]						
		1,00	1,13	1,25	1,50	2,00	2,50	3,00
M _{t,nom}		5 Nm						
Component I t I [mm]	V _{R,k} [kN]	0,50	0,90 ac	1,10 ac	1,30 ac	1,70 ac	1,90 ac	1,90 ac
		0,55	0,90 ac	1,10 ac	1,30 ac	1,70 ac	2,30 ac	2,30 ac
		0,63	0,90 -	1,10 ac	1,30 ac	1,70 ac	2,50 ac	2,50 ac
		0,75	0,90 -	1,10 -	1,30 -	1,70 -	2,50 ac	2,50 ac
		0,88	0,90 -	1,10 -	1,30 -	1,70 -	2,50 -	2,50 -
		1,00	0,90 -	1,10 -	1,30 -	1,70 -	2,50 -	2,50 -
		1,13	0,90 -	1,10 -	1,30 -	1,70 -	2,50 -	- -
		1,25	0,90 -	1,10 -	1,30 -	1,70 -	2,50 -	- -
		1,50	0,90 -	1,10 -	1,30 -	1,70 -	2,50 -	- -
		1,75	0,90 -	1,10 -	1,30 -	1,70 -	- -	- -
		2,00	0,90 -	1,10 -	1,30 -	1,70 -	- -	- -
	N _{R,k} [kN]	0,50	1,04 ac	1,13 ac	1,22 ac	1,40 ac	1,75 ac	1,75 ac
		0,55	1,15 ac	1,27 ac	1,39 ac	1,70 ac	2,05 ac	2,05 ac
		0,63	1,46 -	1,41 ac	1,56 ac	1,99 ac	2,34 ac	2,34 ac
		0,75	1,46 -	1,68 -	1,90 -	2,57 -	2,93 ac	2,93 ac
		0,88	1,46 -	1,68 -	1,90 -	2,57 -	2,93 -	2,93 -
		1,00	1,46 -	1,68 -	1,90 -	2,57 -	2,93 -	2,93 -
		1,13	1,46 -	1,68 -	1,90 -	2,57 -	2,93 -	- -
		1,25	1,46 -	1,68 -	1,90 -	2,57 -	2,93 -	- -
		1,50	1,46 -	1,68 -	1,90 -	2,57 -	2,93 -	- -
		1,75	1,46 -	1,68 -	1,90 -	2,57 -	- -	- -
		2,00	1,46 -	1,68 -	1,90 -	2,57 -	- -	- -
	N _{R,k,II}	1,46	-	1,68 -	1,90 -	2,57 -	2,93 -	2,93 -

Self-drilling screw

PMJ-tec 7515 – 5,5 x L
bimetal with rounded flat head and sealing washer ≥ Ø11 mm

Annex 34

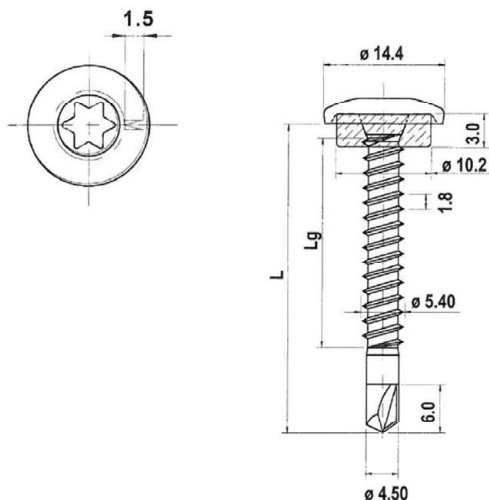

Materials

Fastener: Carbon steel (1.1147) – EN 10263
case hardened, galvanized and coated with "Dural 250"

Washer: EPDM sealing

Component I: S280GD to S320GD - EN 10346

Component II: S235 – EN 10025-1
S280GD to S320GD - EN 10346

Drilling-capacity $\Sigma(t_i) \leq 3.50$ mm

Timber substructures


-

		Component II t II [mm]					
		1,00	1,13	1,25	1,50	2,00	
M _{t,nom}		5 Nm					
Component I t I [mm]	V _{R,k} [kN]	0,50	1,00 ac	1,10 ac	1,20 ac	1,40 ac	1,70 ac
		0,55	1,10 ac	1,30 ac	1,40 ac	1,70 ac	2,10 ac
		0,63	1,30 -	1,40 -	1,60 ac	1,90 ac	2,40 ac
		0,75	1,50 -	1,70 -	2,00 -	2,40 -	3,10 ac
	N _{R,k} [kN]	0,50	0,90 ac	1,10 ac	1,30 ac	1,70 ac	1,90 ac
		0,55	0,90 ac	1,10 ac	1,30 ac	1,70 ac	2,30 ac
		0,63	0,90 -	1,10 -	1,30 ac	1,70 ac	2,80 ac
		0,75	0,90 -	1,10 -	1,30 -	1,70 -	2,90 ac
		N _{R,k,II}	0,90 -	1,10 -	1,30 -	1,70 -	2,90 -

Self-drilling screw

PMJ-tec 7010
with rounded undercut head and sealing ring $\geq \varnothing 10$ mm

Annex 35

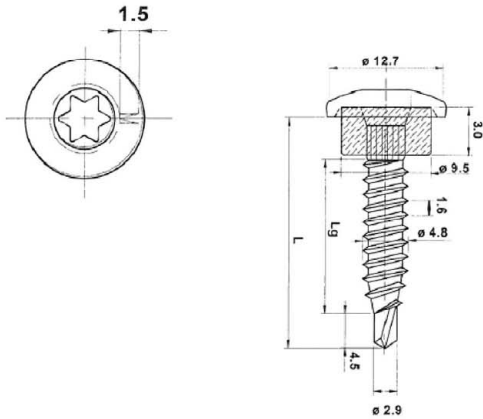

Materials

Fastener: Carbon steel (1.1147) – EN 10263
case hardened, galvanized and coated with "Dural 250"

Washer: EPDM sealing

Component I: S280GD to S320GD - EN 10346

Component II: S235 – EN 10025-1
S280GD to S320GD - EN 10346

Drilling-capacity $\Sigma(t_i) \leq 2.50$ mm

Timber substructures


-

		Component II t II [mm]				
		0,50	0,55	0,63	0,75	
M _{t,nom}		5 Nm				
Component I t I [mm]	V _{R,k} [kN]	0,50	0,80 -	0,90 -	1,00 -	1,10 -
		0,55	0,80 -	0,90 -	1,00 -	1,30 -
		0,63	0,80 -	0,90 -	1,00 -	1,60 -
		0,75	0,80 -	0,90 -	1,00 -	2,00 -
	N _{R,k} [kN]	0,50	0,50 -	0,60 -	0,70 -	0,70 -
		0,55	0,50 -	0,60 -	0,70 -	0,70 -
		0,63	0,50 -	0,60 -	0,70 -	0,70 -
		0,75	0,50 -	0,60 -	0,70 -	0,70 -
	N _{R,k,II}		0,50 -	0,60 -	0,70 -	0,70 -

Self-drilling screw

PMJ-tec 7040
with rounded undercut head and sealing ring $\geq \varnothing 10$ mm


Annex 36

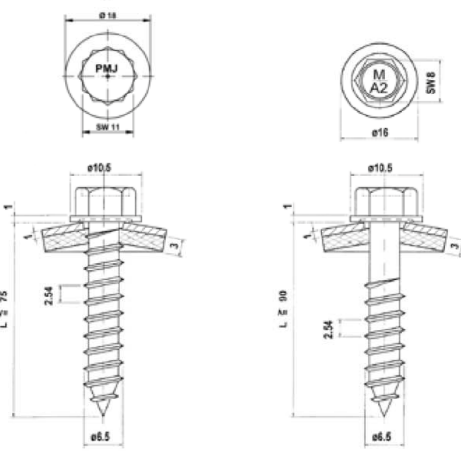	Materials Fastener: Stainless steel A2, A4, A5 – EN ISO 3506 Washer: Stainless steel A2, A4, A5 – EN ISO 3506 Component I: S280GD to S320GD - EN 10346 Component II: S235 – EN 10025-1 S280GD to S320GD - EN 10346
	Drilling-capacity see table below
	Timber substructures $M_{y,Rk} = 9,742 \text{ Nm}$ $f_{ax,k} = 8,575 \text{ N/mm}^2$ for $l_{ef} \geq 26,0 \text{ mm}$

		Component II											Timber ≥ C24 L _g ≥ 24 mm	
		t II [mm]												
		0,63	0,75	0,88	1,00	1,13	1,25	1,50	2,00	3,00				
		Ø 4,0		Ø 4,5				Ø 5,0		Ø 5,7				
		3 Nm					5 Nm							
Component I t I [mm]	V _{R,k} [kN]	0,63	1,30 -	1,50 -	1,80 -	2,00 ac	2,30 ac	2,50 ac	2,90 ac	2,90 ac	2,90 ac	2,90	Failure of component I	
		0,75	1,40 -	1,60 -	1,90 -	2,20 ac	2,50 ac	2,60 ac	3,10 ac	3,10 ac	3,10 ac	3,20		
		0,88	1,50 -	1,70 -	2,00 -	2,30 -	2,60 -	2,80 ac	3,20 ac	3,20 ac	3,20 ac	3,40		
		1,00	1,50 -	1,80 -	2,10 -	2,50 -	2,80 -	3,10 -	3,60 -	3,60 -	3,60 ac	3,50		
		1,13	1,60 -	1,80 -	2,20 -	2,60 -	2,90 -	3,20 -	3,80 -	3,80 -	3,80 ac	3,80		
		1,25	1,60 -	1,90 -	2,30 -	2,70 -	3,00 -	3,30 -	4,00 -	4,00 -	4,00 ac	4,00		
		1,50	1,60 -	1,90 -	2,40 -	2,80 -	3,20 -	3,50 -	4,00 -	4,30 -	4,30 ac	4,30		
		1,75	1,60 -	1,90 -	2,40 -	2,80 -	3,20 -	3,50 -	4,00 -	4,30 -	4,30 -	4,30		
		2,00	1,60 -	1,90 -	2,40 -	2,80 -	3,20 -	3,50 -	4,00 -	4,30 -	4,30 -	4,30		
	N _{R,k} [kN]	0,50	0,49 -	0,59 -	0,70 -	0,76 ac	0,86 ac	0,97 ac	1,13 ac	1,19 ac	1,19 ac	1,19	Failure of component I	
		0,55	0,61 -	0,75 -	0,89 -	0,95 ac	1,09 ac	1,23 ac	1,43 ac	1,50 ac	1,50 ac	1,50		
		0,63	0,90 -	1,10 -	1,30 -	1,40 ac	1,60 ac	1,80 ac	2,10 ac	2,20 ac	2,20 ac	2,20		
		0,75	0,90 -	1,10 -	1,30 -	1,40 ac	1,60 ac	1,80 ac	2,10 ac	2,80 ac	2,80 ac	2,80		
		0,88	0,90 -	1,10 -	1,30 -	1,40 -	1,60 -	1,80 ac	2,10 ac	3,50 ac	3,50 ac	3,50		
		1,00	0,90 -	1,10 -	1,30 -	1,40 -	1,60 -	1,80 -	2,20 -	3,60 -	3,60 ac	3,60		
		1,13	1,00 -	1,20 -	1,40 -	1,50 -	1,70 -	1,90 -	2,30 -	3,60 -	3,60 ac	3,60		
		1,25	1,00 -	1,20 -	1,40 -	1,50 -	1,70 -	1,90 -	2,30 -	3,60 -	3,60 ac	3,60		
		1,50	1,00 -	1,20 -	1,40 -	1,50 -	1,70 -	1,90 -	2,30 -	3,60 -	3,60 ac	3,60		
		1,75	1,00 -	1,20 -	1,40 -	1,50 -	1,70 -	1,90 -	2,30 -	3,60 -	3,60 -	3,60		
		2,00	1,00 -	1,20 -	1,40 -	1,50 -	1,70 -	1,90 -	2,30 -	3,60 -	3,60 -	3,60		
		N _{R,k,II}	1,00 -	1,20 -	1,40 -	1,50 -	1,70 -	1,90 -	2,30 -	3,60 -	3,60 -	3,60		
											Failure of component II see Annex 3			

The values listed above in dependence on the screw in length l_{ef} are valid for $k_{mod} = 0,90$ and $\rho_k = 350 \text{ kg/m}^3$. For other combinations of k_{mod} and timber densities see Annex 3.

Self-tapping screw	Annex 37
PMJ-tec 7653 with hexagon head and sealing washer $\geq \text{Ø}16 \text{ mm}$	

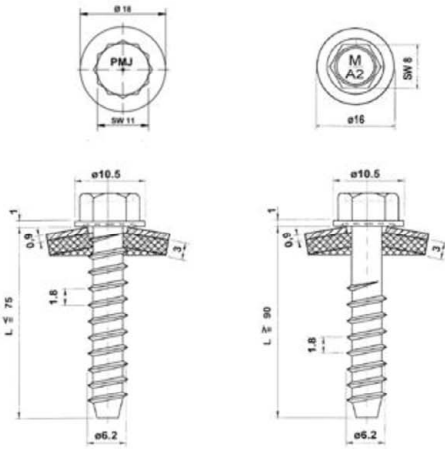

Materials

Fastener: Stainless steel A2, A4, A5 – EN ISO 3506
Washer: Stainless steel A2, A4, A5 – EN ISO 3506

Component I: S280GD to S320GD - EN 10346

Component II: S235 – EN 10025-1
S280GD to S320GD - EN 10346

Drilling-capacity

see table below

Timber substructures


-

		Component II t II [mm]							
		1,25	1,50	2,00	3,00	4,00	6,00	≥ 7,00	
d _{pd}		Ø 5,0		Ø 5,3			Ø 5,5	Ø 5,7	
M _{t,nom}		5 Nm							
	0,63	2,50 ac	2,70 ac	2,90 abcd	3,00 abcd	3,10 abcd	3,10 abcd	3,10 abcd	
	0,75	2,60 ac	3,10 ac	3,30 ac	3,60 ac	3,70 abcd	3,70 abcd	3,70 abcd	
	0,88	2,80 ac	3,20 ac	3,80 ac	4,10 ac	4,30 ac	4,40 ac	4,40 ac	
	1,00	3,20 -	3,60 ac	4,10 ac	4,80 ac	4,90 ac	5,10 ac	5,10 ac	
	1,13	3,40 -	4,00 -	4,60 ac	5,40 ac	5,60 ac	5,80 ac	5,80 ac	
	1,25	3,60 -	4,20 -	5,00 ac	6,10 ac	6,30 ac	6,50 ac	6,50 ac	
	1,50	3,70 -	4,40 -	5,70 -	6,80 -	7,10 -	7,30 -	7,30 -	
	1,75	3,70 -	4,70 -	6,20 -	7,60 -	7,70 -	8,10 -	8,10 -	
	2,00	3,80 -	4,90 -	6,90 -	7,80 -	7,90 -	8,10 -	8,10 -	
	N _{R,k} [kN]	0,50	0,97 ac	1,35 ac	1,51 abcd	1,51 abcd	1,51 abcd	1,51 abcd	1,51 abcd
		0,55	1,23 ac	1,71 ac	1,91 abcd	1,91 abcd	1,91 abcd	1,91 abcd	1,91 abcd
		0,63	1,80 ac	2,50 ac	2,80 abcd	2,80 abcd	2,80 abcd	2,80 abcd	2,80 abcd
0,75		2,00 ac	2,60 ac	3,10 ac	3,60 ac	3,60 abcd	3,60 abcd	3,60 abcd	
0,88		2,00 ac	2,70 ac	3,30 ac	3,80 ac	3,80 ac	3,80 ac	3,80 ac	
1,00		2,00 -	2,70 ac	3,40 ac	4,00 ac	4,00 ac	4,00 ac	4,00 ac	
1,13		2,00 -	2,70 -	3,60 ac	4,40 ac	4,40 ac	4,40 ac	4,40 ac	
1,25		2,00 -	2,70 -	3,60 ac	4,80 ac	4,80 ac	4,80 ac	4,80 ac	
1,50		2,00 -	2,70 -	3,60 -	5,60 -	5,60 -	5,60 -	5,60 -	
1,75		2,00 -	2,70 -	3,60 -	5,80 -	6,90 -	7,10 -	7,10 -	
2,00		2,00 -	2,70 -	3,60 -	6,00 -	7,30 -	7,60 -	7,60 -	
N _{R,k,II}		2,00 -	2,70 -	3,60	6,00 -	7,30 -	7,60 -	7,60 -	

Self-tapping screw

PMJ-tec 7673
with hexagon head and sealing washer ≥ Ø16 mm

Annex 38

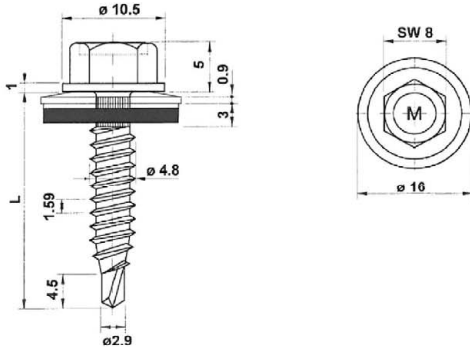

Materials

Fastener: Carbon steel (1.1147) – EN 10263
case hardened, galvanized and coated with "Dural 250"

Washer: Carbon steel, galvanized

Component I: S235 to S275 - EN 10025-1

Component II: S235 – EN 10025-1
S280GD to S320GD - EN 10346

Drilling-capacity $\Sigma(t_i) \leq 2.50$ mm

Timber substructures


-

		Component II								
		t II [mm]								
		0,50	0,55	0,63	0,75	0,88	1,00	1,13	1,25	
M _{t,nom}		-								
Component I t I [mm]	V _{R,k} [kN]	0,50	0,89 -	0,89 -	0,89 -	0,89 -	0,89 -	0,89 -	0,89 -	0,89 -
		0,55	0,89 -	0,96 -	0,96 -	0,96 -	0,96 -	0,96 -	0,96 -	0,96 -
		0,63	0,89 -	0,96 -	1,02 -	1,02 -	1,02 -	1,02 -	1,02 -	1,02 -
		0,75	0,89 -	0,96 -	1,02 -	1,55 ac	1,55 ac	1,55 ac	1,55 ac	1,55 ac
		0,88	0,89 -	0,96 -	1,02 -	1,55 ac	1,55 ac	1,55 ac	1,55 ac	1,55 ac
		1,00	0,89 -	0,96 -	1,02 -	1,55 ac	1,55 ac	1,55 ac	1,55 ac	1,55 ac
		1,13	0,89 -	0,96 -	1,02 -	1,55 ac	1,55 ac	1,55 ac	1,55 ac	1,55 ac
		1,25	0,89 -	0,96 -	1,02 -	1,55 ac	1,55 ac	1,55 ac	1,55 ac	1,55 ac
	N _{R,k} [kN]	0,50	0,65 -	0,67 -	0,70 -	0,70 -	1,00 -	1,30 -	1,60 -	1,90 -
		0,55	0,65 -	0,67 -	0,70 -	0,70 -	1,00 -	1,30 -	1,60 -	1,90 -
		0,63	0,65 -	0,67 -	0,70 -	0,70 -	1,00 -	1,30 -	1,60 -	1,90 -
		0,75	0,65 -	0,67 -	0,70 -	0,70 ac	1,00 ac	1,30 ac	1,60 ac	1,90 ac
		0,88	0,65 -	0,67 -	0,70 -	0,70 ac	1,00 ac	1,30 ac	1,60 ac	1,90 ac
		1,00	0,65 -	0,67 -	0,70 -	0,70 ac	1,00 ac	1,30 ac	1,60 ac	1,90 ac
		1,13	0,65 -	0,67 -	0,70 -	0,70 ac	1,00 ac	1,30 ac	1,60 ac	1,90 ac
		1,25	0,65 -	0,67 -	0,70 -	0,70 ac	1,00 ac	1,30 ac	1,60 ac	1,90 ac
N _{R,k,II}		0,65 -	0,67 -	0,70 -	0,70 -	1,00 -	1,30 -	1,60 -	1,90 -	

Self-drilling screw

PMJ-tec 7335
with hexagon head and sealing washer $\geq \varnothing 16$ mm

Annex 39

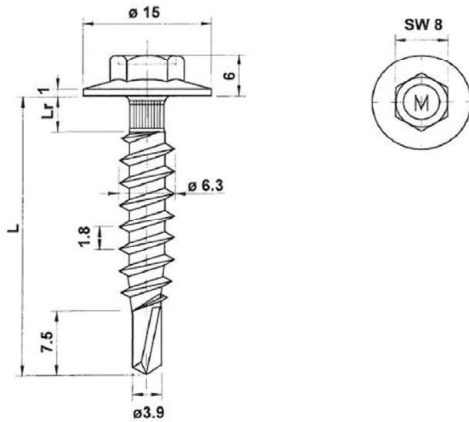

Materials

Fastener: Carbon steel (1.1147) – EN 10263
case hardened, galvanized and coated with "Dural 250"

Washer: none

Component I: S280GD to S320GD - EN 10346

Component II: S235 – EN 10025-1
S280GD to S320GD - EN 10346

Drilling-capacity $\Sigma(t_i) \leq 2.50$ mm

Timber substructures


-

		Component II t II [mm]					
		0,63	0,75	0,88	1,00	1,13	1,25
M _{t,nom}		-					
Component I t I [mm]	V _{R,k} [kN]	0,63	1,80 -	1,80 -	1,80 -	1,80 -	1,80 -
		0,75	1,80 -	2,48 -	2,48 -	2,48 -	2,48 -
		0,88	1,80 -	2,48 -	3,36 -	3,36 -	3,36 -
		1,00	1,80 -	2,48 -	3,36 -	4,23 ac	4,23 ac
		1,13	1,80 -	2,48 -	3,36 -	4,23 ac	4,23 ac
		1,25	1,80 -	2,48 -	3,36 -	4,23 ac	4,23 ac
	N _{R,k} [kN]	0,63	0,70 -	0,70 -	1,00 -	1,30 -	1,60 -
		0,75	0,70 -	0,70 -	1,00 -	1,30 -	1,60 -
		0,88	0,70 -	0,70 -	1,00 -	1,30 -	1,60 -
		1,00	0,70 -	0,70 -	1,00 -	1,30 ac	1,60 ac
		1,13	0,70 -	0,70 -	1,00 -	1,30 ac	1,60 ac
		1,25	0,70 -	0,70 -	1,00 -	1,30 ac	1,60 ac
N _{R,k,II}		0,70	-	0,70 -	1,00 -	1,30 -	1,60 -

Self-drilling screw

PMJ-tec 7339
with hexagon head

Annex 40

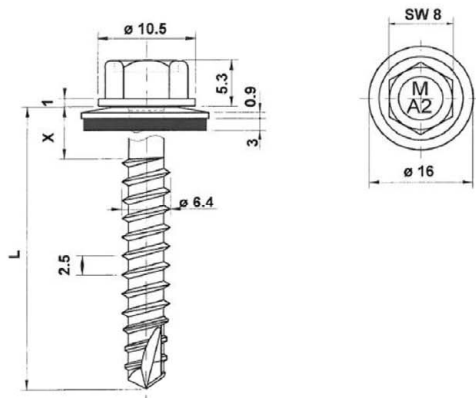

Materials

Fastener: Stainless steel A2, A4, A5 – EN ISO 3506
Washer: Stainless steel A2, A4, A5 – EN ISO 3506

Component I: S280GD to S320GD - EN 10346

Component II: Structural timber – EN 14081

Drilling-capacity

$\Sigma(t_i) \leq 1.00 \text{ mm}$

Timber substructures

$M_{y,Rk} = 14,830 \text{ Nm}$
 $f_{ax,k} = 8,575 \text{ N/mm}^2$ for $l_{ef} \geq 35,0 \text{ mm}$


		Component II													
		t II [mm]													
I _{ef}		35	38	41	44	47	50	53	56	59	62	65			
M _{t,nom}		-													
Component I t I [mm]	V _{R,k} [kN]	0,50	1,24	1,38	1,38 ^a	1,38 ^a	1,38 ^a	1,38 ^a	1,38 ^a	1,38 ^a	1,38 ^a	1,38 ^a	1,38 ^a	1,38 ^a	Failure of component I
		0,55	1,24	1,38	1,52	1,63	1,63 ^a	1,63 ^a	1,63 ^a	1,63 ^a	1,63 ^a	1,63 ^a	1,63 ^a	1,63 ^a	
		0,63	1,24	1,38	1,52	1,66	1,81	1,95	2,00	2,00 ^a	2,00 ^a	2,00 ^a	2,00 ^a	2,00 ^a	
		0,75	1,24	1,38	1,52	1,66	1,81	1,95	2,09	2,23	2,38	2,52	2,62	2,62 ^a	
		0,88	1,24	1,38	1,52	1,66	1,81	1,95	2,09	2,23	2,38	2,52	2,66	2,71 ^a	
		1,00	1,24	1,38	1,52	1,66	1,81	1,95	2,09	2,23	2,38	2,52	2,66	2,79 ^a	
	N _{R,k} [kN]	0,50	1,30	1,45	1,57	1,57 ^a	1,57 ^a	1,57 ^a	1,57 ^a	1,57 ^a	1,57 ^a	1,57 ^a	1,57 ^a	1,57 ^a	Failure of component I
		0,55	1,30	1,45	1,61	1,76	1,78 ^a	1,78 ^a	1,78 ^a	1,78 ^a	1,78 ^a	1,78 ^a	1,78 ^a	1,78 ^a	
		0,63	1,30	1,45	1,61	1,76	1,91	2,06	2,10	2,10 ^a	2,10 ^a	2,10 ^a	2,10 ^a	2,10 ^a	
		0,75	1,30	1,45	1,61	1,76	1,91	2,06	2,21	2,36	2,51	2,62	2,62	2,62 ^a	
		0,88	1,30	1,45	1,61	1,76	1,91	2,06	2,21	2,36	2,51	2,66	2,81	3,09 ^a	
		1,00	1,30	1,45	1,61	1,76	1,91	2,06	2,21	2,36	2,51	2,66	2,81	3,55 ^a	
		N _{R,k,II}	1,30	1,45	1,61	1,76	1,91	2,06	2,21	2,36	2,51	2,66	2,81		

Index a: If component I is made of S320GD or S350GD the values may be increased by 8,0%.
The values listed above in dependence on the screw in length l_{ef} are valid for $k_{mod} = 0,90$ and $\rho_k = 350 \text{ kg/m}^3$. For other combinations of k_{mod} and timber densities see Annex 3.

Self-drilling screw

PMJ-tec 7641
with hexagon head and sealing washer $\geq \text{Ø}16,0 \text{ mm}$

Annex 41

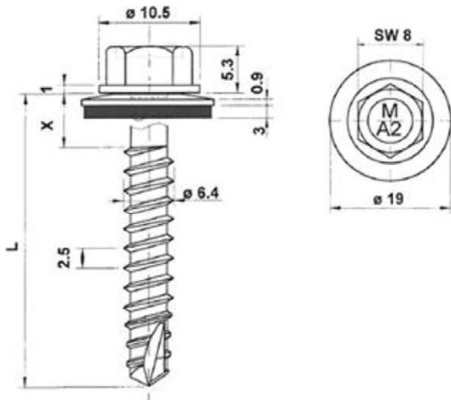

Materials

Fastener: Stainless steel A2, A4, A5 – EN ISO 3506
Washer: Stainless steel A2, A4, A5 – EN ISO 3506

Component I: S280GD to S320GD - EN 10346

Component II: Structural timber – EN 14081

Drilling-capacity

$\Sigma(t_i) \leq 1.00 \text{ mm}$

Timber substructures

$M_{y,Rk} = 14,830 \text{ Nm}$
 $f_{ax,k} = 8,575 \text{ N/mm}^2$ for $l_{ef} \geq 35,0 \text{ mm}$


		Component II												
		t II [mm]												
		35	38	41	44	47	50	53	56	59	62	65		
		-												
Component I	V _{R,k} [kN]	0,50	1,24	1,38	1,38 ^a	1,38 ^a	1,38 ^a	1,38 ^a	1,38 ^a	1,38 ^a	1,38 ^a	1,38 ^a	1,38 ^a	Failure of component I
		0,55	1,24	1,38	1,52	1,63	1,63 ^a	1,63 ^a	1,63 ^a	1,63 ^a	1,63 ^a	1,63 ^a	1,63 ^a	
		0,63	1,24	1,38	1,52	1,66	1,81	1,95	2,00	2,00 ^a	2,00 ^a	2,00 ^a	2,00 ^a	
		0,75	1,24	1,38	1,52	1,66	1,81	1,95	2,09	2,23	2,38	2,52	2,62	
		0,88	1,24	1,38	1,52	1,66	1,81	1,95	2,09	2,23	2,38	2,52	2,66	
		1,00	1,24	1,38	1,52	1,66	1,81	1,95	2,09	2,23	2,38	2,52	2,66	
		1,30	1,30	1,45	1,61	1,76	1,91	2,06	2,21	2,36	2,51	2,66	2,81	
	N _{R,k} [kN]	0,50	1,30	1,45	1,61	1,76	1,91	2,06	2,21	2,36	2,51	2,66	2,81	Failure of component I
		0,55	1,30	1,45	1,61	1,76	1,91	2,06	2,21	2,36	2,51	2,66	2,81	
		0,63	1,30	1,45	1,61	1,76	1,91	2,06	2,21	2,36	2,51	2,66	2,81	
		0,75	1,30	1,45	1,61	1,76	1,91	2,06	2,21	2,36	2,51	2,66	2,81	
		0,88	1,30	1,45	1,61	1,76	1,91	2,06	2,21	2,36	2,51	2,66	2,81	
		1,00	1,30	1,45	1,61	1,76	1,91	2,06	2,21	2,36	2,51	2,66	2,81	
		1,30	1,30	1,45	1,61	1,76	1,91	2,06	2,21	2,36	2,51	2,66	2,81	

Index a: If component I is made of S320GD or S350GD the values may be increased by 8,0%.
The values listed above in dependence on the screw in length l_{ef} are valid for $k_{mod} = 0,90$ and $\rho_k = 350 \text{ kg/m}^3$. For other combinations of k_{mod} and timber densities see Annex 3.

Self-drilling screw

PMJ-tec 7641
with hexagon head and sealing washer $\geq \text{Ø}19,0 \text{ mm}$

Annex 42

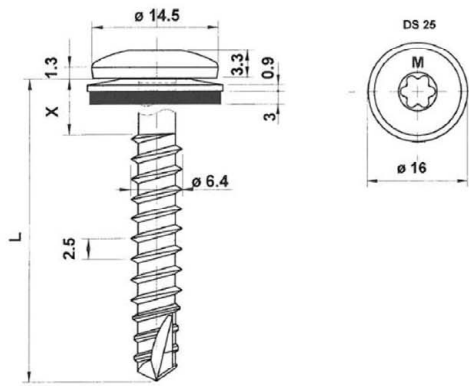

Materials

Fastener: Stainless steel A2, A4, A5 – EN ISO 3506
Washer: Stainless steel A2, A4, A5 – EN ISO 3506

Component I: S280GD to S320GD - EN 10346

Component II: Structural timber – EN 14081

Drilling-capacity

$\Sigma(t_i) \leq 1.00 \text{ mm}$

Timber substructures

$M_{y,Rk} = 14,830 \text{ Nm}$
 $f_{ax,k} = 8,575 \text{ N/mm}^2$ for $l_{ef} \geq 35,0 \text{ mm}$


		Component II													
		t II [mm]													
l _{ef}		35	38	41	44	47	50	53	56	59	62	65			
M _{t,nom}		-													
Component I t I [mm]	V _{R,k} [kN]	0,50	1,24	1,38	1,38 ^a	1,38 ^a	1,38 ^a	1,38 ^a	1,38 ^a	1,38 ^a	1,38 ^a	1,38 ^a	1,38 ^a	1,38 ^a	Failure of component I
		0,55	1,24	1,38	1,52	1,63	1,63 ^a	1,63 ^a	1,63 ^a	1,63 ^a	1,63 ^a	1,63 ^a	1,63 ^a	1,63 ^a	
		0,63	1,24	1,38	1,52	1,66	1,81	1,95	2,00	2,00 ^a	2,00 ^a	2,00 ^a	2,00 ^a	2,00 ^a	
		0,75	1,24	1,38	1,52	1,66	1,81	1,95	2,09	2,23	2,38	2,52	2,62	2,62 ^a	
		0,88	1,24	1,38	1,52	1,66	1,81	1,95	2,09	2,23	2,38	2,52	2,66	2,71 ^a	
		1,00	1,24	1,38	1,52	1,66	1,81	1,95	2,09	2,23	2,38	2,52	2,66	2,79 ^a	
	N _{R,k} [kN]	0,50	1,30	1,45	1,57	1,57 ^a	1,57 ^a	1,57 ^a	1,57 ^a	1,57 ^a	1,57 ^a	1,57 ^a	1,57 ^a	1,57 ^a	Failure of component I
		0,55	1,30	1,45	1,61	1,76	1,78 ^a	1,78 ^a	1,78 ^a	1,78 ^a	1,78 ^a	1,78 ^a	1,78 ^a	1,78 ^a	
		0,63	1,30	1,45	1,61	1,76	1,91	2,06	2,10	2,10 ^a	2,10 ^a	2,10 ^a	2,10 ^a	2,10 ^a	
		0,75	1,30	1,45	1,61	1,76	1,91	2,06	2,21	2,36	2,51	2,62	2,62	2,62 ^a	
		0,88	1,30	1,45	1,61	1,76	1,91	2,06	2,21	2,36	2,51	2,66	2,81	3,09 ^a	
		1,00	1,30	1,45	1,61	1,76	1,91	2,06	2,21	2,36	2,51	2,66	2,81	3,55 ^a	
N _{R,k,II}		1,30	1,45	1,61	1,76	1,91	2,06	2,21	2,36	2,51	2,66	2,81			

Index a: If component I is made of S320GD or S350GD the values may be increased by 8,0%.
The values listed above in dependence on the screw in length l_{ef} are valid for $k_{mod} = 0,90$ and $\rho_k = 350 \text{ kg/m}^3$. For other combinations of k_{mod} and timber densities see Annex 3.

Self-drilling screw

PMJ-tec 7642
with rounded flat head and sealing washer $\geq \text{Ø}16,0 \text{ mm}$

Annex 43

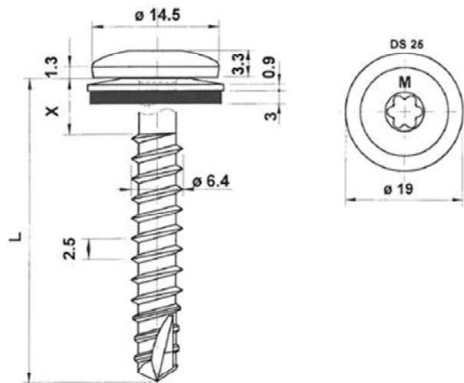

Materials

Fastener: Stainless steel A2, A4, A5 – EN ISO 3506
Washer: Stainless steel A2, A4, A5 – EN ISO 3506

Component I: S280GD to S320GD - EN 10346

Component II: Structural timber – EN 14081

Drilling-capacity

$\Sigma(t_i) \leq 1.00 \text{ mm}$

Timber substructures

$M_{y,Rk} = 14,830 \text{ Nm}$
 $f_{ax,k} = 8,575 \text{ N/mm}^2$ for $l_{ef} \geq 35,0 \text{ mm}$


		Component II													
		t II [mm]													
l _{ef}		35	38	41	44	47	50	53	56	59	62	65			
M _{l,nom}		-													
Component I t I [mm]	V _{R,k} [kN]	0,50	1,24	1,38	1,38 ^a	1,38 ^a	1,38 ^a	1,38 ^a	1,38 ^a	1,38 ^a	1,38 ^a	1,38 ^a	1,38 ^a	1,38 ^a	Failure of component I
		0,55	1,24	1,38	1,52	1,63	1,63 ^a	1,63 ^a	1,63 ^a	1,63 ^a	1,63 ^a	1,63 ^a	1,63 ^a		
		0,63	1,24	1,38	1,52	1,66	1,81	1,95	2,00	2,00 ^a	2,00 ^a	2,00 ^a	2,00 ^a		
		0,75	1,24	1,38	1,52	1,66	1,81	1,95	2,09	2,23	2,38	2,52	2,62		
		0,88	1,24	1,38	1,52	1,66	1,81	1,95	2,09	2,23	2,38	2,52	2,66		
		1,00	1,24	1,38	1,52	1,66	1,81	1,95	2,09	2,23	2,38	2,52	2,66		
	N _{R,k} [kN]	0,50	1,30	1,45	1,61	1,64 ^a	1,64 ^a	1,64 ^a	1,64 ^a	1,64 ^a	1,64 ^a	1,64 ^a	1,64 ^a	1,64 ^a	Failure of component I
		0,55	1,30	1,45	1,61	1,76	1,81 ^a	1,87 ^a	1,87 ^a	1,87 ^a	1,87 ^a	1,87 ^a	1,87 ^a		
		0,63	1,30	1,45	1,61	1,76	1,91	2,06	2,21	2,23	2,23 ^a	2,23 ^a	2,23 ^a		
		0,75	1,30	1,45	1,61	1,76	1,91	2,06	2,21	2,36	2,51	2,62	2,62		
		0,88	1,30	1,45	1,61	1,76	1,91	2,06	2,21	2,36	2,51	2,66	2,81		
		1,00	1,30	1,45	1,61	1,76	1,91	2,06	2,21	2,36	2,51	2,66	2,81		
N _{R,k,II}		1,30	1,45	1,61	1,76	1,91	2,06	2,21	2,36	2,51	2,66	2,81			

Index a: If component I is made of S320GD or S350GD the values may be increased by 8,0%.
The values listed above in dependence on the screw in length l_{ef} are valid for $k_{mod} = 0,90$ and $\rho_k = 350 \text{ kg/m}^3$. For other combinations of k_{mod} and timber densities see Annex 3.

Self-drilling screw

PMJ-tec 7642
with rounded flat head and sealing washer $\geq \text{Ø}19,0 \text{ mm}$


Annex 44

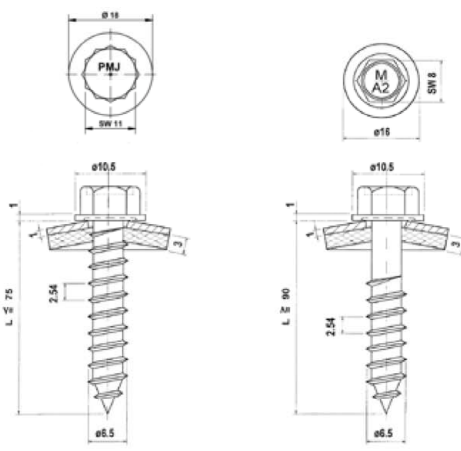	Materials Fastener: Stainless steel A2, A4, A5 – EN ISO 3506 Washer: Stainless steel A2, A4, A5 – EN ISO 3506 Component I: S280GD to S320GD - EN 10346 Component II: S235 – EN 10025-1 S280GD or S320GD – EN 10346 Pre drill diameter see table below Timber substructures $M_{y,Rk} = 14,830 \text{ Nm}$ $f_{ax,k} = 8,575 \text{ N/mm}^2$ for $l_{ef} \geq 26,0 \text{ mm}$
---	---

		Component II										Timber ≥ C24 L _g ≥ 24 mm	
		t II [mm]											
		0,63	0,75	0,88	1,00	1,13	1,25	1,50	2,00	3,00			
d _{pd}		Ø 4,0		Ø 4,5				Ø 5,0		Ø 5,7			
M _{t,nom}		3 Nm					5 Nm						
Component I t I [mm]	V _{Rk} [kN]	0,63	1,30 -	1,50 -	1,80 -	2,00 ac	2,30 ac	2,50 ac	2,90 ac	2,90 ac	2,90 ac	2,90	Failure of component I
		0,75	1,40 -	1,60 -	1,90 -	2,20 ac	2,50 ac	2,60 ac	3,10 ac	3,10 ac	3,10 ac	3,20	
		0,88	1,50 -	1,70 -	2,00 -	2,30 -	2,60 -	2,80 ac	3,20 ac	3,20 ac	3,20 ac	3,40	
		1,00	1,50 -	1,80 -	2,10 -	2,50 -	2,80 -	3,10 -	3,60 -	3,60 -	3,60 ac	3,50	
		1,25	1,60 -	1,90 -	2,30 -	2,70 -	3,00 -	3,30 -	4,00 -	4,00 -	4,00 ac	4,00	
		1,50	1,60 -	1,90 -	2,40 -	2,80 -	3,20 -	3,50 -	4,00 -	4,30 -	4,30 ac	4,30	
		1,75	1,60 -	1,90 -	2,40 -	2,80 -	3,20 -	3,50 -	4,00 -	4,30 -	4,30 -	4,30	
		2,00	1,60 -	1,90 -	2,40 -	2,80 -	3,20 -	3,50 -	4,00 -	4,30 -	4,30 -	4,30	
	N _{R,k} [kN]	0,50	0,90 -	1,20 -	1,40 -	1,50 -	1,64 ^a	1,64 ^a -	1,64 ^a -	1,64 ^a -	1,64 ^a -	1,64 ^a	Failure of component I
		0,55	0,90 -	1,20 -	1,40 -	1,50 -	1,70 -	1,87 ^a -	1,87 ^a -	1,87 ^a -	1,87 ^a -	1,87 ^a	
		0,63	0,90 -	1,20 -	1,40 -	1,50 ac	1,70 ac	1,90 ac	2,20 ac	2,20 ac	2,20 ac	2,20	
		0,75	0,90 -	1,20 -	1,40 -	1,50 ac	1,70 ac	1,90 ac	2,30 ac	2,80 ac	2,80 ac	2,80	
		0,88	0,90 -	1,20 -	1,40 -	1,50 -	1,70 -	1,90 ac	2,30 ac	3,50 ac	3,50 ac	3,50	
		1,00	0,90 -	1,20 -	1,40 -	1,50 -	1,70 -	1,90 -	2,30 -	3,60 -	3,60 ac	3,60	
		1,25	1,00 -	1,20 -	1,40 -	1,50 -	1,70 -	1,90 -	2,30 -	3,60 -	3,60 ac	3,60	
		1,50	1,00 -	1,20 -	1,40 -	1,50 -	1,70 -	1,90 -	2,30 -	3,60 -	3,60 ac	3,60	
		1,75	1,00 -	1,20 -	1,40 -	1,50 -	1,70 -	1,90 -	2,30 -	3,60 -	3,60 -	3,60	
		2,00	1,00 -	1,20 -	1,40 -	1,50 -	1,70 -	1,90 -	2,30 -	3,60 -	3,60 -	3,60	
		N _{R,k,II}	1,00 -	1,20 -	1,40 -	1,50 -	1,70 -	1,90 -	2,30 -	3,60 -	3,60 -		
											Failure of component II see Annex 3		

Index a: If component I is made of S320GD or S350GD the values may be increased by 8,0%.
The values listed above in dependence on the screw in length l_{ef} are valid for $k_{mod} = 0,90$ and $\rho_k = 350 \text{ kg/m}^3$. For other combinations of k_{mod} and timber densities see Annex 3.

Self-tapping screw PMJ-tec 7653 with hexagon head and sealing washer $\geq \text{Ø}19,0 \text{ mm}$	Annex 45
---	------------------------

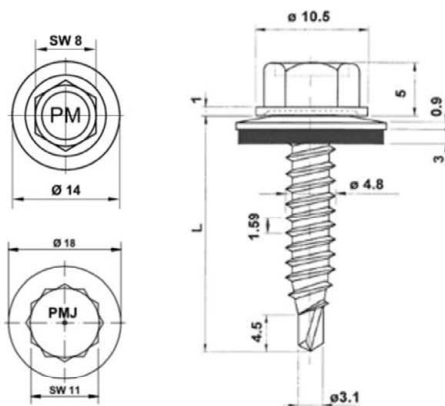	<u>Materials</u> Fastener: Stainless steel A2, A4, A5 – EN ISO 3506 organic coated Washer: Stainless steel A2, A4, A5 – EN ISO 3506 Component I: S280GD to S320GD - EN 10346 Component II: S235 – EN 10025-1 S280GD or S320GD – EN 10346 <u>Drilling capacity:</u> $\Sigma(t_i) \leq 2.50 \text{ mm}$ <u>Timber substructures</u> -
---	--


		Component II									
		t II [mm]									
		0,40	0,50	0,55	0,63	0,75	0,88	1,00	1,13	1,25	
M _{t,nom}		-									
Component I t I [mm]	V _{R,k} [kN]	0,40	0,59 -	0,59 -	0,59 -	0,59 -	0,59 -	0,59 -	0,59 -	0,59 -	0,59 -
		0,50	0,59 -	0,59 -	0,59 -	0,59 -	0,59 -	0,59 -	0,59 -	0,59 -	0,59 -
		0,55	0,59 -	0,59 -	0,71 -	0,71 -	0,71 -	0,71 -	0,71 -	0,71 -	0,71 -
		0,63	0,59 -	0,59 -	0,71 -	0,90 -	0,90 -	1,50 -	2,10 ac	2,10 ac	2,10 ac
		0,75	0,59 -	0,59 -	0,71 -	0,90 -	0,90 -	1,50 -	2,10 ac	2,10 a	2,10 a
		0,88	0,59 -	0,59 -	0,71 -	0,90 -	0,90 -	1,70 -	2,40 -	2,40 -	2,40 -
		1,00	0,59 -	0,59 -	0,71 -	0,90 -	0,90 -	1,90 -	2,80 -	2,80 -	2,80 -
		1,13	0,59 -	0,59 -	0,71 -	0,90 -	0,90 -	1,90 -	2,80 -	2,80 -	2,80 -
		1,25	0,59 -	0,59 -	0,71 -	0,90 -	0,90 -	1,90 -	2,80 -	2,80 -	2,80 -
	N _{R,k} [kN]	0,40	0,41 -	0,53 -	0,60 -	0,70 -	0,70 -	1,00 -	1,30 -	1,46 -	1,46
		0,50	0,41 -	0,53 -	0,60 -	0,70 -	0,70 -	1,00 -	1,30 ac	1,52 ac	1,65 ac
		0,55	0,41 -	0,53 -	0,60 -	0,70 -	0,70 -	1,00 -	1,30 ac	1,55 ac	1,75 ac
		0,63	0,41 -	0,53 -	0,60 -	0,70 -	0,70 -	1,00 -	1,30 ac	1,60 ac	1,90 ac
		0,75	0,41 -	0,53 -	0,60 -	0,70 -	0,70 -	1,00 -	1,30 ac	1,60 a	1,90 a
		0,88	0,41 -	0,53 -	0,60 -	0,70 -	0,70 -	1,00 -	1,30 -	1,60 -	1,90 -
		1,00	0,41 -	0,53 -	0,60 -	0,70 -	0,70 -	1,00 -	1,30 -	1,60 -	1,90 -
		1,13	0,41 -	0,53 -	0,60 -	0,70 -	0,70 -	1,00 -	1,30 -	1,60 -	1,90 -
		1,25	0,41 -	0,53 -	0,60 -	0,70 -	0,70 -	1,00 -	1,30 -	1,60 -	1,90 -
		N _{R,k,II}	0,41 -	0,53 -	0,60 -	0,70 -	0,70 -	1,00 -	1,30 -	1,60 -	1,90

Index a: If component I is made of S320GD or S350GD the values may be increased by 8,0%.

Self-drilling screw

PMJ-tec 7550 – 4,8
bimetal with hexagon head and sealing washer $\geq \text{Ø}14,0 \text{ mm}$


Annex 46

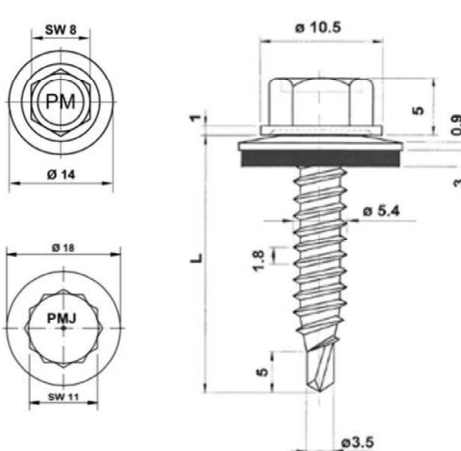	<u>Materials</u> Fastener: Stainless steel A2, A4, A5 – EN ISO 3506 organic coated Washer: Stainless steel A2, A4, A5 – EN ISO 3506 Component I: S280GD to S320GD - EN 10346 Component II: S235 – EN 10025-1 S280GD or S320GD – EN 10346 <u>Drilling capacity:</u> $\Sigma(t_i) \leq 2.50 \text{ mm}$ <u>Timber substructures</u> -
---	--

		Component II									
		t II [mm]									
		0,50	0,55	0,63	0,75	0,88	1,00	1,13	1,25	2 x 0,75	
M _{t,nom}		-									
Component I t I [mm]	V _{R,k} [kN]	0,50	0,96 ^a -	0,96 ^a -	0,96 ^a -	0,96 ^a -	0,96 ^a -	0,96 ^a ac	0,96 ^a ac	0,96 ^a ac	0,96 ^a a
		0,55	0,96 ^a -	1,09 -	1,09 -	1,09 -	1,09 -	1,09 ac	1,09 ac	1,09 ac	1,09 a
		0,63	0,96 ^a -	1,09 -	1,30 -	1,50 -	1,50 -	1,50 ac	1,50 ac	1,50 ac	1,80 a
		0,75	0,96 ^a -	1,09 -	1,30 -	1,50 -	1,50 -	1,50 -	1,50 -	1,50 -	1,80 -
		0,88	0,96 ^a -	1,09 -	1,30 -	1,50 -	1,90 -	2,30 -	2,30 -	2,40 -	2,40 -
		1,00	0,96 ^a -	1,09 -	1,30 -	1,50 -	2,30 -	3,00 -	3,10 -	3,20 -	3,00 -
		1,13	0,96 -	1,09 -	1,30 -	1,50 -	2,30 -	3,00 -	3,10 -	3,20 -	- -
		1,25	0,96 -	1,09 -	1,30 -	1,50 -	2,30 -	3,00 -	3,10 -	3,20 -	- -
	N _{R,k} [kN]	0,50	0,54 ^a -	0,57 -	0,70 -	1,00 -	1,30 -	1,46 ac	1,46 ac	1,46 ac	1,46 ^a a
		0,55	0,54 ^a -	0,57 -	0,70 -	1,00 -	1,30 -	1,60 ac	1,71 ac	1,71 ac	1,71 a
		0,63	0,54 ^a -	0,57 -	0,70 -	1,00 -	1,30 -	1,60 ac	1,90 ac	2,10 ac	2,10 a
		0,75	0,54 ^a -	0,57 -	0,70 -	1,00 -	1,30 -	1,60 -	1,90 -	2,20 -	2,30 -
		0,88	0,54 ^a -	0,57 -	0,70 -	1,00 -	1,30 -	1,60 -	1,90 -	2,20 -	2,30 -
		1,00	0,54 ^a -	0,57 -	0,70 -	1,00 -	1,30 -	1,60 -	1,90 -	2,20 -	2,30 -
		1,13	0,54 ^a -	0,57 -	0,70 -	1,00 -	1,30 -	1,60 -	1,90 -	2,20 -	- -
		1,25	0,54 ^a -	0,57 -	0,70 -	1,00 -	1,30 -	1,60 -	1,90 -	2,20 -	- -
N _{R,k,II}		0,54 -	0,57 -	0,70 -	1,00 -	1,30 -	1,60 -	1,90 -	2,20 -	2,30 -	

Index a: If component I is made of S320GD or S350GD the values may be increased by 8,0%.

Self-drilling screw	Annex 47
PMJ-tec 7550 – 5,5 bimetal with hexagon head and sealing washer $\geq \varnothing 14,0 \text{ mm}$	

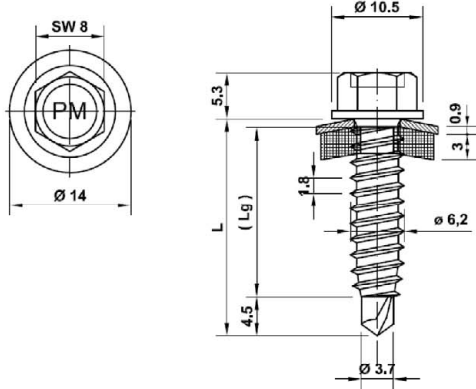

Materials

Fastener: Stainless steel A2, A4, A5 – EN ISO 3506
organic coated

Washer: Stainless steel A2, A4, A5 – EN ISO 3506

Component I: S280GD to S320GD - EN 10346

Component II: S235 – EN 10025-1
S280GD or S320GD – EN 10346

Drilling capacity: $\Sigma(t_i) \leq 2.50 \text{ mm}$

Timber substructures

-


		Component II								
		t II [mm]								
		0,50	0,55	0,63	0,75	0,88	1,00	1,13	1,25	2 x 0,75
$M_{t,nom}$		-								
Component I t I [mm]	$V_{R,k}$ [kN]	0,50	1,13 ^a -	1,13 ^a -	1,13 ^a -	1,13 ^a -	1,13 ^a -	1,13 ^a ac	1,13 ^a ac	1,13 ^a ac
		0,55	1,13 ^a -	1,31 -	1,31 -	1,31 -	1,31 -	1,31 ac	1,31 ac	1,31 ac
		0,63	0,96 ^a -	1,60 -	1,60 -	1,60 -	1,60 -	1,60 ac	1,60 ac	1,60 ac
		0,75	0,96 ^a -	1,60 -	1,60 -	1,60 -	1,60 -	1,60 -	1,60 -	1,80 -
		0,88	0,96 ^a -	1,60 -	1,60 -	1,60 -	1,90 -	2,30 -	2,30 -	2,40 -
		1,00	0,96 ^a -	1,60 -	1,60 -	1,60 -	2,30 -	3,00 -	3,10 -	3,20 -
		1,13	0,96 -	1,60 -	1,60 -	1,60 -	2,30 -	3,00 -	3,10 -	3,20 -
		1,25	0,96 -	1,60 -	1,60 -	1,60 -	2,30 -	3,00 -	3,10 -	3,20 -
	$N_{R,k}$ [kN]	0,50	0,70 ^a -	0,74 -	0,88 -	1,00 -	1,30 -	1,46 ac	1,46 ac	1,46 ^a a
		0,55	0,70 ^a -	0,74 -	0,88 -	1,00 -	1,30 -	1,60 ac	1,71 ac	1,71 ac
		0,63	0,70 ^a -	0,74 -	0,88 -	1,00 -	1,30 -	1,60 ac	1,90 ac	2,10 ac
		0,75	0,70 ^a -	0,74 -	0,88 -	1,00 -	1,30 -	1,60	1,90 -	2,20 -
		0,88	0,70 ^a -	0,74 -	0,88 -	1,00 -	1,30 -	1,60	1,90 -	2,20 -
		1,00	0,70 ^a -	0,74 -	0,88 -	1,00 -	1,30 -	1,60	1,90 -	2,20 -
		1,13	0,70 ^a -	0,74 -	0,88 -	1,00 -	1,30 -	1,60	1,90 -	2,20 -
		1,25	0,70 ^a -	0,74 -	0,88 -	1,00 -	1,30 -	1,60	1,90 -	2,20 -
	$N_{R,k,II}$	0,70 -	0,74 -	0,88 -	1,00 -	1,30 -	1,60	1,90 -	2,20 -	- -

Index a: If component I is made of S320GD or S350GD the values may be increased by 8,0%.

Self-drilling screw

PMJ-tec 7550 – 6,3
bimetal with hexagon head and sealing washer $\geq \varnothing 14,0 \text{ mm}$

Annex 48

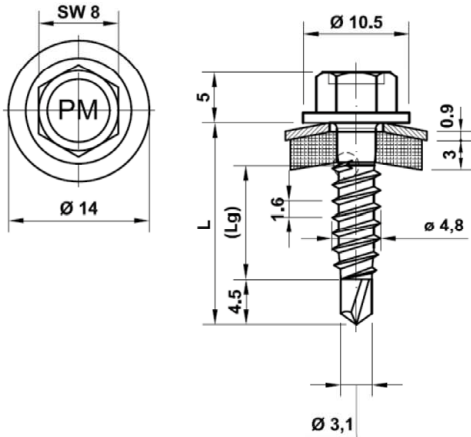

Materials

Fastener: Stainless steel A2, A4, A5 – EN ISO 3506
organic coated

Washer: Stainless steel A2, A4, A5 – EN ISO 3506

Component I: S280GD to S320GD - EN 10346

Component II: S235 – EN 10025-1
S280GD or S320GD – EN 10346

Drilling capacity: $\Sigma(t_i) \leq 2.50$ mm

Timber substructures

-


		Component II								
		t II [mm]								
		0,40	0,50	0,55	0,63	0,75	0,88	1,00	1,13	1,25
M _{t,nom}		-								
Component I t I [mm]	V _{R,k} [kN]	0,40	0,59 -	0,59 -	0,59 -	0,59 -	0,59 -	0,59 -	0,59 -	0,59 -
		0,50	0,59 -	0,59 -	0,59 -	0,59 -	0,59 -	0,59 -	0,59 -	0,59 -
		0,55	0,59 -	0,59 -	0,71 -	0,71 -	0,71 -	0,71 -	0,71 -	0,71 -
		0,63	0,59 -	0,59 -	0,71 -	0,90 -	0,90 -	1,50 -	2,10 ac	2,10 ac
		0,75	0,59 -	0,59 -	0,71 -	0,90 -	0,90 -	1,50 -	2,10 ac	2,10 a
		1,88	0,59 -	0,59 -	0,71 -	0,90 -	0,90 -	1,70 -	2,40 -	2,40 -
		1,00	0,59 -	0,59 -	0,71 -	0,90 -	0,90 -	1,90 -	2,80 -	2,80 -
		1,13	0,59 -	0,59 -	0,71 -	0,90 -	0,90 -	1,90 -	2,80 -	2,80 -
		1,25	0,59 -	0,59 -	0,71 -	0,90 -	0,90 -	1,90 -	2,80 -	2,80 -
	N _{R,k} [kN]	0,40	0,41 -	0,53 -	0,60 -	0,70 -	0,70 -	1,00 -	1,30 -	1,46 -
		0,50	0,41 -	0,53 -	0,60 -	0,70 -	0,70 -	1,00 -	1,30 ac	1,52 ac
		0,55	0,41 -	0,53 -	0,60 -	0,70 -	0,70 -	1,00 -	1,30 ac	1,55 ac
		0,63	0,41 -	0,53 -	0,60 -	0,70 -	0,70 -	1,00 -	1,30 ac	1,60 ac
		0,75	0,41 -	0,53 -	0,60 -	0,70 -	0,70 -	1,00 -	1,30 ac	1,60 a
		1,88	0,41 -	0,53 -	0,60 -	0,70 -	0,70 -	1,00 -	1,30 -	1,60 -
		1,00	0,41 -	0,53 -	0,60 -	0,70 -	0,70 -	1,00 -	1,30 -	1,60 -
		1,13	0,41 -	0,53 -	0,60 -	0,70 -	0,70 -	1,00 -	1,30 -	1,60 -
		1,25	0,41 -	0,53 -	0,60 -	0,70 -	0,70 -	1,00 -	1,30 -	1,60 -
		N _{R,k,II}	0,41 -	0,53 -	0,60 -	0,70 -	0,70 -	1,00 -	1,30 -	1,60 -

Indicated characteristic values of longitudinal tension capacity are valid, if component II lies completely in the thread of the screw.

Self-drilling screw

PMJ-tec 7553 – 4,8
bimetal with hexagon head and sealing washer $\geq \varnothing 14,0$ mm

Annex 49

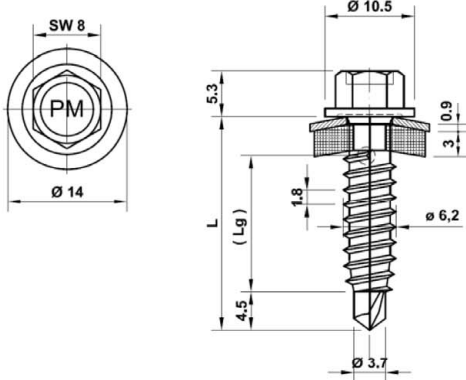

Materials

Fastener: Stainless steel A2, A4, A5 – EN ISO 3506
organic coated

Washer: Stainless steel A2, A4, A5 – EN ISO 3506

Component I: S280GD to S320GD - EN 10346

Component II: S235 – EN 10025-1
S280GD or S320GD – EN 10346

Drilling capacity: $\Sigma(t_i) \leq 2.50$ mm

Timber substructures

-

		Component II								
		t II [mm]								
		0,50	0,55	0,63	0,75	0,88	1,00	1,13	1,25	
M _{t,nom}		-								
Component I t I [mm]	V _{R,k} [kN]	0,50	1,03 ^a -	1,03 ^a -	1,03 ^a -	1,03 ^a -	1,03 ^a -	1,03 ^a -	1,03 ^a -	1,03 ^a -
		0,55	1,03 ^a -	1,19 ^a -	1,19 ^a -	1,19 ^a -	1,19 ^a -	1,19 ^a -	1,19 ^a -	1,19 ^a -
		0,63	1,03 ^a -	1,19 ^a -	1,44 ^a -	1,44 ^a -	1,44 ^a -	1,44 ^a -	1,44 ^a -	1,44 ^a -
		0,75	1,03 ^a -	1,19 ^a -	1,44 ^a -	1,84 ac	1,84 ac	1,84 ac	1,84 a	1,84 a
		0,88	1,03 ^a -	1,19 ^a -	1,44 ^a -	1,84 a	2,25 a	2,25 a	2,25 a	2,25 a
		1,00	1,03 ^a -	1,19 ^a -	1,44 ^a -	1,84 a	2,25 a	2,66 a	2,66 a	2,66 a
		1,13	1,03 ^a -	1,19 ^a -	1,44 ^a -	1,84 a	2,25 a	2,66 a	2,66 a	2,66 a
		1,25	1,03 ^a -	1,19 ^a -	1,44 ^a -	1,84 a	2,25 a	2,66 a	2,66 a	2,66 a
	N _{R,k} [kN]	0,50	0,70 ^a -	0,74 -	0,88 -	1,00 -	1,30 -	1,46 -	1,46 -	1,46 -
		0,55	0,70 ^a -	0,74 -	0,88 -	1,00 -	1,30 -	1,60 -	1,71 -	1,71 -
		0,63	0,70 ^a -	0,74 -	0,88 -	1,00 -	1,30 -	1,60 -	1,90 -	2,10 -
		0,75	0,70 ^a -	0,74 -	0,88 -	1,00 ac	1,30 ac	1,60 ac	1,90 a	2,20 a
		0,88	0,70 ^a -	0,74 -	0,88 -	1,00 a	1,30 a	1,60 a	1,90 a	2,20 a
		1,00	0,70 ^a -	0,74 -	0,88 -	1,00 a	1,30 a	1,60 a	1,90 a	2,20 a
		1,13	0,70 ^a -	0,74 -	0,88 -	1,00 a	1,30 a	1,60 a	1,90 a	2,20 a
		1,25	0,70 ^a -	0,74 -	0,88 -	1,00 a	1,30 a	1,60 a	1,90 a	2,20 a
N _{R,k,II}		0,70 -	0,74 -	0,88 -	1,00 -	1,30 -	1,60	1,90 -	2,20	

Index a: For t_i and t_{II} made of S320GD or S350GD values can be increased by 8,0%.

Indicated characteristic values of longitudinal tension capacity are valid, if component II lies completely in the thread of the screw.

Self-drilling screw

PMJ-tec 7553 – 6,3
bimetal with hexagon head and sealing washer $\geq \varnothing 14,0$ mm


Annex 50

	<u>Materials</u> Fastener: Stainless steel A2, A4, A5 – EN ISO 3506 organic coated Washer: Stainless steel A2, A4, A5 – EN ISO 3506 Component I: S280GD to S320GD - EN 10346 Component II: S235 – EN 10025-1 S280GD or S320GD – EN 10346 <u>Drilling capacity:</u> $\Sigma(t_i) \leq 2.50 \text{ mm}$ <u>Timber substructures</u> -
--	--

		Component II									
		t II [mm]									
		0,50	0,55	0,63	0,75	0,88	1,00	1,13	1,25		
M _{t,nom}		-									
Component I t I [mm]	V _{R,k} [kN]	0,50	1,03 ^a -	1,03 ^a -	1,03 ^a -	1,03 ^a -	1,03 ^a -	1,03 ^a -	1,03 ^a -	1,03 ^a -	
		0,55	1,03 ^a -	1,19 ^a -	1,19 ^a -	1,19 ^a -	1,19 ^a -	1,19 ^a -	1,19 ^a -	1,19 ^a -	
		0,63	1,03 ^a -	1,19 ^a -	1,44 ^a -	1,44 ^a -	1,44 ^a -	1,44 ^a -	1,44 ^a -	1,44 ^a -	
		0,75	1,03 ^a -	1,19 ^a -	1,44 ^a -	1,84 ac	1,84 ac	1,84 ac	1,84 a	1,84 a	
		0,88	1,03 ^a -	1,19 ^a -	1,44 ^a -	1,84 a	2,25 a	2,25 a	2,25 a	2,25 a	
		1,00	1,03 ^a -	1,19 ^a -	1,44 ^a -	1,84 a	2,25 a	2,66 a	2,66 a	2,66 a	
		1,13	1,03 ^a -	1,19 ^a -	1,44 ^a -	1,84 a	2,25 a	2,66 a	2,66 a	2,66 a	
		1,25	1,03 ^a -	1,19 ^a -	1,44 ^a -	1,84 a	2,25 a	2,66 a	2,66 a	2,66 a	
	N _{R,k} [kN]	0,50	0,70 ^a -	0,74 -	0,88 -	1,00 -	1,30 -	1,60 -	1,82 -	1,82 -	
		0,55	0,70 ^a -	0,74 -	0,88 -	1,00 -	1,30 -	1,60 -	1,88 -	1,88 -	
		0,63	0,70 ^a -	0,74 -	0,88 -	1,00 -	1,30 -	1,60 -	1,90 -	2,10 -	
		0,75	0,70 ^a -	0,74 -	0,88 -	1,00 ac	1,30 ac	1,60 ac	1,90 a	2,20 a	
		0,88	0,70 ^a -	0,74 -	0,88 -	1,00 a	1,30 a	1,60 a	1,90 a	2,20 a	
		1,00	0,70 ^a -	0,74 -	0,88 -	1,00 a	1,30 a	1,60 a	1,90 a	2,20 a	
		1,13	0,70 ^a -	0,74 -	0,88 -	1,00 a	1,30 a	1,60 a	1,90 a	2,20 a	
		1,25	0,70 ^a -	0,74 -	0,88 -	1,00 a	1,30 a	1,60 a	1,90 a	2,20 a	
		N _{R,k,II}		0,70 -	0,74 -	0,88 -	1,00 -	1,30 -	1,60	1,90 -	2,20

Index a: For t_i and t_{II} made of 320GD or S350GD values can be increased by 8,0%.
Indicated characteristic values of longitudinal tension capacity are valid, if component II lies completely in the thread of the screw.

Self-drilling screw	
PMJtec 7553 – 6,3 bimetal with hexagon head and sealing washer $\geq \varnothing 16,0 \text{ mm}$	Annex 51


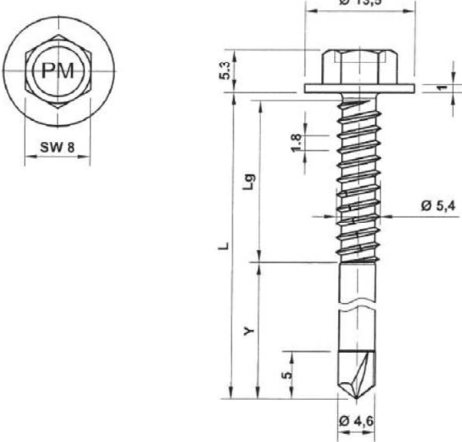
	Materials Fastener: Stainless steel A2, A4, A5 – EN ISO 3506 Washer: none Component I: S280GD to S320GD - EN 10346 Component II: S235 – EN 10025-1 S280GD or S320GD – EN 10346 Drilling capacity: $\Sigma(t_i) \leq 3.50 \text{ mm}$ Timber substructures -
---	---

		Component II							
		t II [mm]							
		1,00	1,25	1,50	2,00	3,00	2 x 0,75	2 x 0,88	2 x 1,00
M _{t,nom}									
Component I t I [mm]	V _{R,k} [kN]	0,50	1,20 -	1,20 -	1,20 -	1,20 -	1,20 -	- -	- -
		0,55	1,32 -	1,32 -	1,32 -	1,32 -	- -	- -	- -
		0,63	1,51 -	1,51 -	1,51 -	1,51 -	- -	2,27 -	2,27 -
		0,75	1,80 -	1,80 -	1,80 -	1,80 -	- -	2,46 -	2,86 -
		0,88	2,13 -	2,13 -	2,13 -	2,13 -	- -	2,46 -	2,86 -
		1,00	2,43 -	2,43 -	2,43 -	2,43 -	- -	2,46 -	2,86 -
		1,13	2,43 -	2,97 -	2,97 -	3,75 -	- -	2,46 -	2,86 -
		1,25	2,43 -	3,47 -	3,47 -	4,96 -	- -	2,46 -	2,86 -
		1,50	- -	- -	- -	- -	- -	2,46 -	2,86 -
		1,75	- -	- -	- -	- -	- -	2,46 -	2,86 -
		2,00	- -	- -	- -	- -	- -	2,46 -	- -
	N _{R,k} [kN]	0,50	0,90 -	1,16 -	1,16 -	1,16 -	1,16 -	1,16 -	1,16 -
		0,55	0,90 -	1,30 -	1,35 -	1,35 -	- -	1,35 -	1,35 -
		0,63	0,90 -	1,30 -	1,65 -	1,65 -	- -	1,65 -	1,65 -
		0,75	0,90 -	1,30 -	1,70 -	2,50 -	- -	1,70 -	1,90 -
		0,88	0,90 -	1,30 -	1,70 -	2,50 -	- -	1,70 -	1,90 -
		1,00	0,90 -	1,30 -	1,70 -	2,50 -	- -	1,70 -	1,90 -
		1,13	0,90 -	1,30 -	1,70 -	2,50 -	- -	1,70 -	1,90 -
		1,25	0,90 -	1,30 -	1,70 -	2,50 -	- -	1,70 -	1,90 -
		1,50	- -	- -	- -	- -	- -	1,70 -	1,90 -
		1,75	- -	- -	- -	- -	- -	1,70 -	1,90 -
		2,00	- -	- -	- -	- -	- -	1,70 -	- -
	N _{R,k,II}	0,90	-	1,30	-	1,70	-	2,50	-

Self-drilling screw

PMJ-tec 7510 – 5,5
bimetal with hexagon head and flange Ø 13,5 mm

Annex 52

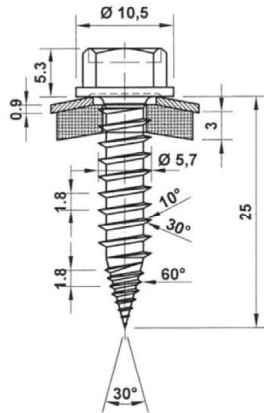

Materials

Fastener: Stainless steel A2, A4, A5 – EN ISO 3506

Washer: Stainless steel A2, A4, A5 – EN ISO 3506

Component I: S280GD to S320GD - EN 10346

Component II: S235 – EN 10025-1
S280GD or S320GD – EN 10346

Drilling capacity: $\Sigma(t_i) \leq 2.00 \text{ mm}$

Timber substructures


-

		Component II t II [mm]						
		0,40	0,50	0,55	0,63	0,75	0,88	1,00
Component I t I [mm]	$V_{R,k}$ [kN]	0,40	0,77 -	0,77 -	0,77 -	0,77 -	0,77 -	0,77 -
		0,50	0,77 -	0,97 -	0,97 -	0,97 -	0,97 -	0,97 -
		0,55	0,77 -	0,97 -	1,06 -	1,06 -	1,06 -	1,06 -
		0,63	0,77 -	0,97 -	1,06 -	1,21 -	1,21 -	1,21 -
		0,75	0,77 -	0,97 -	1,06 -	1,21 -	2,15 -	2,15 -
		0,88	0,77 -	0,97 -	1,06 -	1,21 -	2,15 -	3,17 -
		1,00	0,77 -	0,97 -	1,06 -	1,21 -	2,15 -	3,32 -
	$N_{R,k}$ [kN]	0,40	0,62 -	0,84 -	0,96 -	1,16 -	1,50 -	1,50 -
		0,50	0,62 -	0,84 -	0,96 -	1,16 -	1,52 -	1,89 -
		0,55	0,62 -	0,84 -	0,96 -	1,16 -	1,52 -	1,92 -
		0,63	0,62 -	0,84 -	0,96 -	1,16 -	1,52 -	1,92 -
		0,75	0,62 -	0,84 -	0,96 -	1,16 -	1,52 -	1,92 -
		0,88	0,62 -	0,84 -	0,96 -	1,16 -	1,52 -	1,92 -
		1,00	0,62 -	0,84 -	0,96 -	1,16 -	1,52 -	1,92 -
	$N_{R,k,II}$	0,62 -	0,84 -	0,96 -	1,16 -	1,52 -	1,92 -	1,92 -

Self-drilling screw

PMJ-tec 7563 – 5,5
bimetal with hexagon head and sealing washer $\geq \text{Ø } 16,0 \text{ mm}$

Annex 53

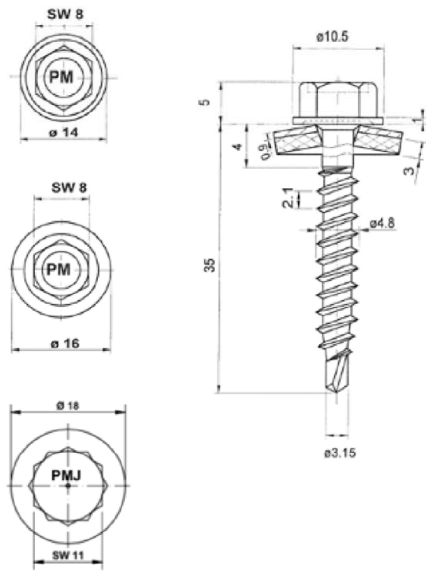

Materials

Fastener: Stainless steel A2, A4, A5 – EN ISO 3506

Washer: Stainless steel A2, A4, A5 – EN ISO 3506

Component I: S280GD to S320GD - EN 10346

Component II: structural timber

Drilling capacity:

$\Sigma(t_i) \leq 2.00 \text{ mm}$

Timber substructures

$M_{y,Rk} = 6,947 \text{ Nm}$


$f_{ax,k} = 8,93 \text{ N/mm}^2$ for $l_{ef} \geq 30,0 \text{ mm}$

		Component II		
		Timber ≥ C24 L _g ≥ 35 mm (l _{eff} ≥ 30 mm)		
Component I S280 GD to S350 GD - 10346 t I [mm]	V _{R,I,k} [kN]	0,50	1,28	Failure of component I
		0,55	1,44	
		0,63	1,71	
		0,75	2,10	
		0,88	2,10	
		1,00	2,10	
	N _{R,I,k} [kN]	0,50	1,68	Failure of component I
		0,55	1,90	
		0,63	2,24	
		0,75	2,80	
		0,88	2,80	
		1,00	2,80	
	V _{R,k,II} ; N _{R,k,II}		see Annex 3	

Self-drilling screw

PMJ-tec 7561 – 4,8
bimetal with sealing washer $\geq \text{Ø } 14,0 \text{ mm}$

Annex 54

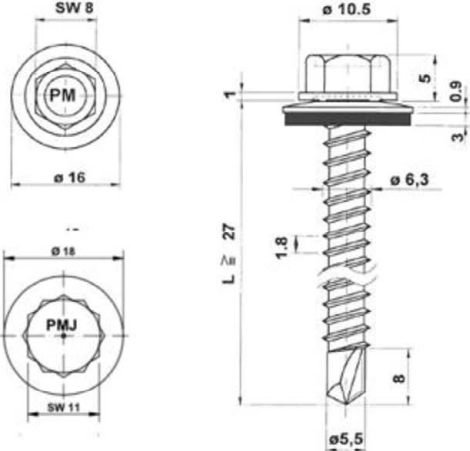
	<u>Materials</u> Fastener: Stainless steel A2, A4, A5 – EN ISO 3506 Washer: Stainless steel A2, A4, A5 – EN ISO 3506 Component I: S280GD to S350GD - EN 10346 Component II: S235 – EN 10025-1 S280GD or S320GD – EN 10346 <u>Drilling capacity:</u> $\Sigma(t_i) \leq 6.00$ mm <u>Timber substructures</u> -
---	---

		Component II t II [mm]				
		2,00	2,50	3,00	4,00	5,00
Component I t I [mm]	$M_{l,nom}$	-				
	$V_{R,k}$ [kN]					
	0,50	1,51 ac	1,51 ac	1,51 ac	1,51 ac	1,51 ac
	0,55	1,51 ac	1,81 ac	1,93 ac	1,93 ac	1,93 a
	0,63	1,51 ac	2,30 ac	2,60 ac	2,60 ac	2,60 a
	0,75	1,51 ac	2,80 ac	3,10 ac	3,10 ac	3,10 a
	0,88	1,51 ac	3,40 ac	3,60 ac	3,60 ac	3,60 a
	1,00	1,51 ac	4,00 ac	4,10 ac	4,10 ac	4,10 a
	1,13	1,51 ac	4,00 ac	4,50 a	4,80 -	- -
	1,25	1,51 ac	4,00 ac	5,70 a	6,00 -	- -
	1,50	1,51 ac	4,00 -	5,70 -	6,00 -	- -
	1,75	1,51 ac	4,00 -	5,70 -	6,00 -	- -
	2,00	1,51 ac	4,00 -	5,70 -	6,00 -	- -
	$N_{R,k}$ [kN]					
	0,50	1,52 ac	1,52 ac	1,52 ac	1,52 ac	1,52 ac
	0,55	1,81 ac	1,81 ac	1,81 ac	1,81 ac	1,81 a
	0,63	2,22 ac	2,22 ac	2,22 ac	2,22 ac	2,22 a
	0,75	2,76 ac	2,92 ac	2,92 ac	2,92 ac	2,92 a
	0,88	2,76 ac	3,61 ac	3,61 ac	3,61 ac	3,61 a
	1,00	2,76 ac	3,76 ac	4,31 ac	4,31 ac	4,31 a
	1,13	2,76 ac	3,76 ac	4,76 a	4,95 -	- -
	1,25	2,76 ac	3,76 ac	4,76 a	5,58 -	- -
	1,50	2,76 ac	3,76 -	4,76 -	5,58 -	- -
	1,75	2,76 ac	3,76 -	4,76 -	5,58 -	- -
	2,00	2,76 ac	3,76 -	4,76 -	5,58 -	- -
	$N_{R,k,II}$	2,76 -	3,76 -	4,76 -	5,58 -	5,58 -

Self-drilling screw

PMJ-tec 7525 – 6,3
bimetal with sealing washer $\geq \varnothing 16,0$ mm

Annex 55

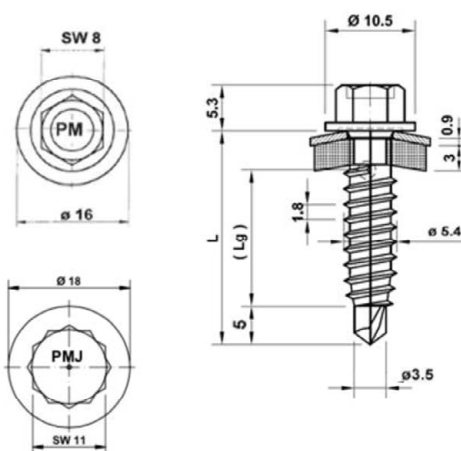	<u>Materials</u> Fastener: Stainless steel A2, A4, A5 – EN ISO 3506 Washer: Stainless steel A2, A4, A5 – EN ISO 3506 Component I: S280GD to S350GD - EN 10346 Component II: S235 – EN 10025-1 S280GD or S350GD – EN 10346 <u>Drilling capacity:</u> $\Sigma(t_i) \leq 2.50 \text{ mm}$ <u>Timber substructures</u> -
---	---


		Component II							
		t II [mm]							
		0,50	0,55	0,63	0,75	0,88	1,00	1,13	1,25
Component I	$M_{t,nom}$	-							
	$V_{R,k}$ [kN]	0,50	1,03 -	1,03 -	1,03 -	1,03 -	1,03 -	1,03 -	1,03 -
		0,55	1,03 -	1,19 -	1,19 -	1,19 -	1,19 -	1,19 -	1,19 -
		0,63	1,03 -	1,19 -	1,45 -	1,45 -	1,45 -	1,45 -	1,45 -
		0,75	1,03 -	1,19 -	1,45 -	1,84 -	1,84 -	1,84 -	1,84 -
		1,88	1,03 -	1,19 -	1,45 -	1,84 -	2,27 -	2,27 -	2,27 -
		1,00	1,03 -	1,19 -	1,45 -	1,84 -	2,27 -	2,66 -	2,66 -
		1,13	1,03 -	1,19 -	1,45 -	1,84 -	2,27 -	2,66 -	2,66 -
		1,25	1,03 -	1,19 -	1,45 -	1,84 -	2,27 -	2,66 -	2,66 -
	$N_{R,k}$ [kN]	0,50	0,54 ^a -	0,57 -	0,70 -	1,00 -	1,30 -	1,60 -	1,82 -
		0,55	0,54 ^a -	0,57 -	0,70 -	1,00 -	1,30 -	1,60 -	1,88 -
		0,63	0,54 ^a -	0,57 -	0,70 -	1,00 -	1,30 -	1,60 -	1,90 -
		0,75	0,54 ^a -	0,57 -	0,70 -	1,00 -	1,30 -	1,60 -	1,90 -
		1,88	0,54 ^a -	0,57 -	0,70 -	1,00 -	1,30 -	1,60 -	1,90 -
		1,00	0,54 ^a -	0,57 -	0,70 -	1,00 -	1,30 -	1,60 -	1,90 -
		1,13	0,54 ^a -	0,57 -	0,70 -	1,00 -	1,30 -	1,60 -	1,90 -
		1,25	0,54 ^a -	0,57 -	0,70 -	1,00 -	1,30 -	1,60 -	1,90 -
	$N_{R,k,II}$	0,54	-	0,57 -	0,70 -	1,00 -	1,30 -	1,60 -	1,90 -

Index a: If component I is made of S320GD or S350GD the values may be increased by 8,0%.

Self-drilling screw

PMJ-tec 7553 – 5,5
bimetal with sealing washer $\geq \varnothing 16,0 \text{ mm}$

Annex 56

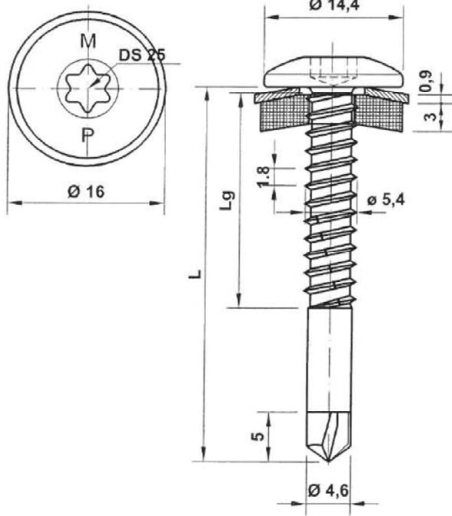

Materials

Fastener: stainless steel (1.4301) – EN 10088

Washer: stainless steel (1.4301) – EN 10088

Component I: S280GD to S320GD - EN 10346

Component II: S235 - EN 10025-1
S280GD to S320GD - EN 10346

Drilling-capacity $\Sigma(t_i) \leq 3.50$ mm

Timber substructures


No performance determined

		Component II				
		t II [mm]				
		1,00	1,25	1,50	2,00	3,00
M _{t,nom}		-				
Component I	V _{R,k} [kN]	0,63	1,90 ac	2,10 ac	2,40 ac	2,60 ac
		0,75	2,10 -	2,40 ac	2,60 ac	3,00 ac
		0,88	2,30 -	2,60	2,90 ac	3,40 ac
		1,00	2,50 -	2,80	3,20 -	3,70 -
		1,13	2,70 -	3,00	3,40 -	4,10 -
		1,25	2,80 -	3,20	3,60 -	4,30 -
	N _{R,k} [kN]	0,50	0,49 -	0,70 ac	0,92 ac	1,35 ac
		0,55	0,61 -	0,89 ac	1,16 ac	1,71 ac
		0,63	0,90 -	1,30 ac	1,70 ac	2,50 ac
		0,75	0,90 -	1,30 ac	1,70 ac	2,50 ac
		0,88	0,90 -	1,30 -	1,70 ac	2,50 ac
		1,00	0,90 -	1,30 -	1,70 -	2,50 -
		1,13	0,90 -	1,30 -	1,70 -	2,50 -
		1,25	0,90 -	1,30 -	1,70 -	2,50 -
		N _{R,k,II}	0,90 -	1,30 -	1,70 -	2,50 -

Self-drilling screw

PMJ-tec 7110-5,5
bimetal with rounded flat head and sealing washer $\geq \varnothing 16$ mm

Annex 57

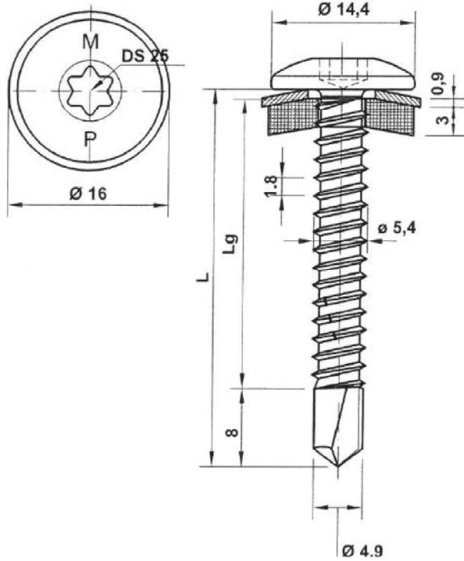

Materials

Fastener: stainless steel (1.4301) – EN 10088

Washer: stainless steel (1.4301) – EN 10088

Component I: S280GD to S320GD - EN 10346

Component II: S235 - EN 10025-1
S280GD to S320GD - EN 10346

Drilling-capacity $\Sigma(t_i) \leq 6.00$ mm

Timber substructures



No performance determined

		Component II t II [mm]				
		2,50	3,00	4,00	5,00	6,00
M _{t,nom}		5 Nm				
Component I t I [mm]	V _{R,k} [kN]	0,50	1,40 ac	1,80 ac	1,80 ac	1,80 a
		0,55	1,80 ac	2,10 ac	2,10 ac	2,10 a
		0,63	2,20 -	2,40 ac	2,40 ac	2,40 a
		0,75	2,90 -	2,90 -	2,90 ac	2,90 a
	N _{R,k} [kN]	0,50	1,90 ac	1,90 ac	1,90 ac	1,90 a
		0,55	2,30 ac	2,30 ac	2,30 ac	2,30 a
		0,63	2,80 -	2,80 ac	2,80 ac	2,80 a
		0,75	3,00 -	3,80 -	3,80 ac	3,80 a
	N _{R,k,II}		3,00 -	3,80 -	3,80 -	3,80 -

Self-drilling screw

PMJ-tec 7120-5,5
bimetal with rounded flat head and sealing washer $\geq \varnothing 16$ mm

Annex 58

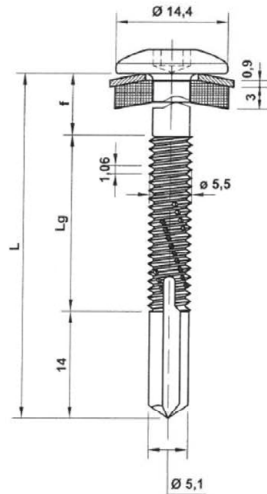

Materials

Fastener: stainless steel (1.4301) – EN 10088

Washer: stainless steel (1.4301) – EN 10088

Component I: S280GD to S320GD - EN 10346

Component II: S235 - EN 10025-1
S280GD to S320GD - EN 10346

Drilling-capacity $\Sigma(t_i) \leq 12.50$ mm

Timber substructures

No performance determined

		Component II t II [mm]		
		6,00	8,00	10,0
M _{t,nom}		5 Nm		
Component I t I [mm]	V _{R,k} [kN]	0,63	2,60 abcd	2,60 abcd
		0,75	3,10 abcd	3,10 abcd
		0,88	3,60 ac	3,60 ac
		1,00	4,10 ac	4,10 ac
		1,13	4,60 ac	4,60 ac
		1,25	5,10 ac	5,10 ac
		1,50	6,00 -	6,00 -
		1,75	6,00 -	6,00 -
		2,00	6,00 -	6,00 -
	N _{R,k} [kN]	0,50	1,35 abcd	1,35 abcd
		0,55	1,71 abcd	1,71 abcd
		0,63	2,50 abcd	2,50 abcd
		0,75	2,90 abcd	2,90 abcd
		0,88	3,70 ac	3,70 ac
		1,00	4,50 ac	4,50 ac
		1,13	5,00 ac	5,00 ac
		1,25	5,50 ac	5,50 ac
		1,50	5,70 -	5,70 -
		1,75	5,70 -	5,70 -
		2,00	5,70 -	5,70 -
	N _{R,k,II}	5,70	-	5,70 -

Self-drilling screw

PMJ-tec 7130-5,5
bimetal with rounded flat head and sealing washer $\geq \varnothing 16$ mm

Annex 59


	Materials Fastener: stainless steel (1.4301) – EN 10088 Washer: stainless steel (1.4301) – EN 10088 Component I: S280GD to S320GD - EN 10346 Component II: S235 - EN 10025-1 S280GD to S320GD - EN 10346 Drilling-capacity $\Sigma(t_i) \leq 2.50$ mm Timber substructures No performance determined
--	--

		Component II t II [mm]					
		0,63	0,75	0,88	1,00	1,13	1,25
M _{t,nom}		5 Nm					
Component I t I [mm]	V _{R,k} [kN]	0,63	0,90 -	0,90 -	1,50 -	2,10 ac	2,10 ac
		0,75	0,90 -	0,90 -	1,50 -	2,10 ac	2,10 ac
		0,88	0,90 -	0,90 -	1,70 -	2,40 -	2,40 -
		1,00	0,90 -	0,90 -	1,90 -	2,80 -	2,80 -
		1,13	0,90 -	0,90 -	1,90 -	2,80 -	2,80 -
		1,25	0,90 -	0,90 -	1,90 -	2,80 -	2,80 -
	N _{R,k} [kN]	0,50	0,38 -	0,38 -	0,54	0,70 ac	0,86 ac
		0,55	0,48 -	0,48 -	0,68	0,89 ac	1,09 ac
		0,63	0,70 -	0,70 -	1,00	1,30 ac	1,60 ac
		0,75	0,70 -	0,70 -	1,00	1,30 ac	1,60 a
		0,88	0,70 -	0,70 -	1,00	1,30	1,60 -
		1,00	0,70 -	0,70 -	1,00	1,30	1,60 -
		1,13	0,70 -	0,70 -	1,00	1,30	1,60 -
		1,25	0,70 -	0,70 -	1,00	1,30	1,60 -
		N _{R,k,II}	0,70 -	0,70 -	1,00	1,30	1,60 -

Self-drilling screw

PMJ-tec 7140-4,8
bimetal with rounded flat head and sealing washer $\geq \varnothing 16$ mm

Annex 60

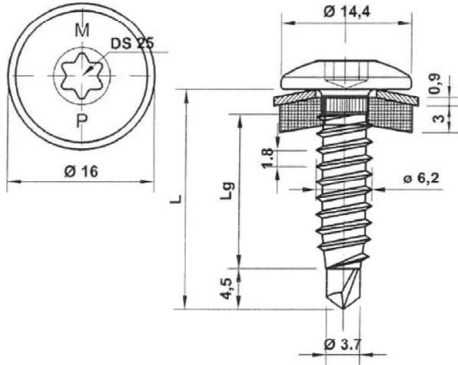

Materials

Fastener: stainless steel (1.4301) – EN 10088

Washer: stainless steel (1.4301) – EN 10088

Component I: S280GD to S320GD - EN 10346

Component II: S235 - EN 10025-1
S280GD to S320GD - EN 10346

Drilling-capacity $\Sigma(t_i) \leq 2.50$ mm

Timber substructures


No performance determined

		Component II							
		t II [mm]							
		0,63	0,75	0,88	1,00	1,13	1,25	2x0,75	
M _{t,nom}		4 Nm				5 Nm			5 Nm
Component I t I [mm]	V _{R,k} [kN]	0,63	1,60 -	1,60 -	1,60 -	1,60 ac	1,60 ac	1,60 ac	1,80 ac
		0,75	1,60 -	1,60 -	1,60 -	1,60 -	1,60 -	1,60 -	1,80 -
		0,88	1,60 -	1,60 -	1,90	2,30 -	2,30 -	2,40 -	2,40 -
		1,00	1,60 -	1,60 -	2,30	3,00 -	3,10 -	3,20 -	3,00 -
	N _{R,k} [kN]	0,50	0,43 -	0,54 -	0,70 -	0,86 -	1,03 ac	1,19 ac	1,30 ac
		0,55	0,55 -	0,68 -	0,89 -	1,09 -	1,30 ac	1,50 ac	1,64 ac
		0,63	0,80 -	1,00 -	1,30 -	1,60 -	1,90 ac	2,20 ac	2,40 ac
		0,75	0,80 -	1,00 -	1,30 -	1,60 -	1,90 -	2,20 -	2,60 -
		0,88	0,80 -	1,00 -	1,30 -	1,60 -	1,90 -	2,20 -	2,60 -
		1,00	0,80 -	1,00 -	1,30 -	1,60 -	1,90 -	2,20 -	2,60 -
		N _{R,k,II}	0,80 -	1,00 -	1,30 -	1,60 -	1,90 -	2,20 -	2,60 -

Self-drilling screw

PMJ-tec 7140-6,3
bimetal with rounded flat head and sealing washer $\geq \varnothing 16$ mm

Annex 61

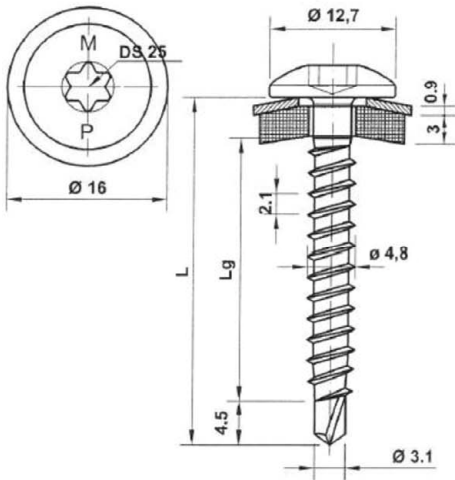

Materials

Fastener: stainless steel (1.4301) – EN 10088

Washer: stainless steel (1.4301) – EN 10088

Component I: S280GD to S320GD - EN 10346

Component II: structural timber – EN 14081

Drilling-capacity $\Sigma(t_i) \leq 2.00$ mm

Timber substructures

$M_{y,Rk} = 4,429$ Nm

$f_{ax,k} = 8,575$ N/mm² for $l_{ef} \geq 30,0$ mm


		Component II t II [mm]	
		-	
		M _{t,nom} 5 Nm	
Component I t I [mm]	V _{R,I,k} [kN]	0,50	1,10 ac
		0,55	1,30 ac
		0,63	1,60 ac
		0,75	2,00 ac
	N _{R,I,k} [kN]	0,50	1,80 ac
		0,55	2,10 ac
		0,63	2,50 ac
		0,75	3,20 ac

The values listed above in dependence on the screw in length l_{ef} are valid for $k_{mod} = 0,90$ and $\rho_k = 350$ kg/m³. For other combinations of k_{mod} and timber densities see Annex 3.

Self-drilling screw

PMJ-tec 7160-4,8
bimetal with rounded flat head and sealing washer $\geq \text{Ø}16$ mm

Annex 62

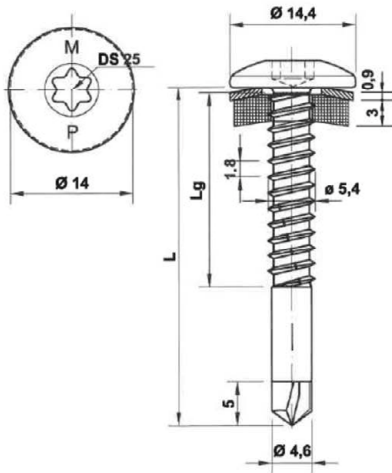

Materials

Fastener: stainless steel (1.4301) – EN 10088

Washer: stainless steel (1.4301) – EN 10088

Component I: S280GD to S320GD - EN 10346

Component II: S235 - EN 10025-1
S280GD to S320GD - EN 10346

Drilling-capacity $\Sigma(t_i) \leq 3.50$ mm

Timber substructures


No performance determined

		Component II t II [mm]					
		1,00	1,25	1,50	2,00	3,00	
M _{t,nom}		-					
Component I t I [mm]	V _{R,k} [kN]	0,63	1,60 ac	1,77 ac	2,02 ac	2,19 ac	2,19 ac
		0,75	1,77 -	2,02 ac	2,19 ac	2,53 ac	- -
		0,88	1,94 -	2,19	2,44 ac	2,86 ac	- -
		1,00	2,11 -	2,36	2,69 -	3,12 -	- -
		1,13	2,27 -	2,53	2,86 -	3,45 -	- -
		1,25	2,36 -	2,69	3,03 -	3,62 -	- -
	N _{R,k} [kN]	0,50	0,90 ac	1,22 ac	1,22 ac	1,22 ac	1,22 ac
		0,55	0,90 ac	1,30 ac	1,59 ac	1,59 ac	1,59 ac
		0,63	0,90 ac	1,30 ac	1,70 ac	2,17 ac	2,17 ac
		0,75	0,90 -	1,30 ac	1,70 ac	2,50 ac	- -
		0,88	0,90 -	1,30 -	1,70 ac	2,50 ac	- -
		1,00	0,90 -	1,30 -	1,70 -	2,50 -	- -
		1,13	0,90 -	1,30 -	1,70 -	2,50 -	- -
		1,25	0,90 -	1,30 -	1,70 -	2,50 -	- -
		N _{R,k,II}	0,90 -	1,30 -	1,70 -	2,50 -	2,50 -

Self-drilling screw

PMJ-tec 7110-5,5
bimetal with rounded flat head and sealing washer $\geq \text{Ø}14$ mm

Annex 63

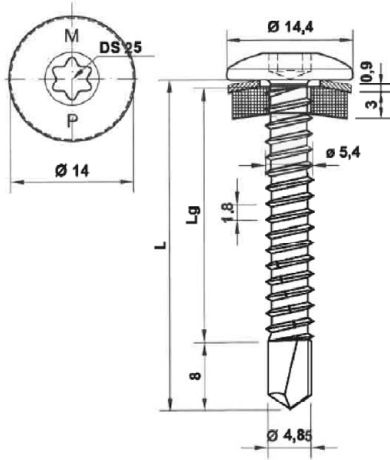

Materials

Fastener: stainless steel (1.4301) – EN 10088

Washer: stainless steel (1.4301) – EN 10088

Component I: S280GD to S320GD - EN 10346

Component II: S235 - EN 10025-1
S280GD to S320GD - EN 10346

Drilling-capacity $\Sigma(t_i) \leq 6.00$ mm

Timber substructures


No performance determined

		Component II t II [mm]					
		2,50	3,00	4,00	5,00		
M _{It,nom}		5 Nm					
Component I t I [mm]	V _{R,k} [kN]	0,50	1,40 ac	1,80 ac	1,80 ac	1,80 ac	
		0,55	1,80 ac	2,10 ac	2,10 ac	2,10 ac	
		0,63	2,20 -	2,40 ac	2,40 ac	2,40 ac	
		0,75	2,90 -	2,90 -	2,90 ac	2,90 ac	
	N _{R,k} [kN]	0,50	1,22 ac	1,22 ac	1,22 ac	1,22 ac	
		0,55	1,59 ac	1,59 ac	1,59 ac	1,59 ac	
		0,63	2,17 -	2,17 ac	2,17 ac	2,17 ac	
		0,75	3,00 -	3,05 -	3,05 ac	3,05 ac	
		N _{R,k,II}		3,00 -	3,80 -	3,80 -	3,80 -

Self-drilling screw

PMJ-tec 7120-5,5
bimetal with rounded flat head and sealing washer $\geq \varnothing 14$ mm

Annex 64

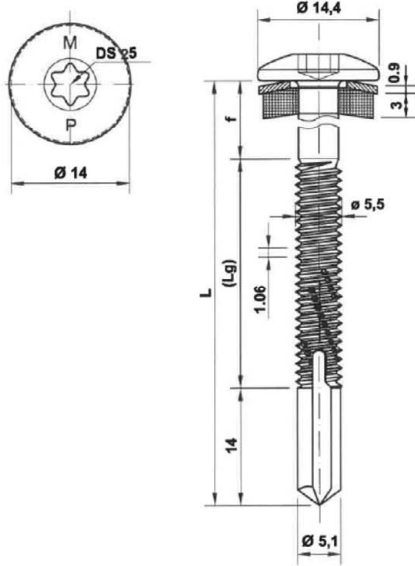

Materials

Fastener: stainless steel (1.4301) – EN 10088

Washer: stainless steel (1.4301) – EN 10088

Component I: S280GD to S320GD - EN 10346

Component II: S235 - EN 10025-1
S280GD to S320GD - EN 10346

Drilling-capacity $\Sigma(t_i) \leq 12.50$ mm

Timber substructures


No performance determined

		Component II		
		t II [mm]		
		6,00	8,00	10,0
M _{t,nom}		5 Nm		
Component I	V _{R,k} [kN]	0,63	2,29 abcd	2,29 abcd
		0,75	2,80 abcd	2,80 abcd
		0,88	3,35 ac	3,35 ac
		1,00	3,87 ac	3,87 ac
		1,13	4,42 ac	4,42 ac
		1,25	4,93 ac	4,93 ac
		1,50	6,00 -	6,00 -
		1,75	6,00 -	6,00 -
		2,00	6,00 -	6,00 -
	N _{R,k} [kN]	0,50	1,51 abcd	1,51 abcd
		0,55	1,78 abcd	1,78 abcd
		0,63	2,23 abcd	2,23 abcd
		0,75	2,90 abcd	2,90 abcd
		0,88	3,63 ac	3,63 ac
		1,00	4,30 ac	4,30 ac
		1,13	5,03 ac	5,03 ac
		1,25	5,70 ac	5,70 ac
		1,50	5,70 -	5,70 -
		1,75	5,70 -	5,70 -
		2,00	5,70 -	5,70 -
		N _{R,k,II}	5,70 -	5,70 -

Self-drilling screw

PMJ-tec 7130-5,5
bimetal with rounded flat head and sealing washer $\geq \varnothing 14$ mm

Annex 65

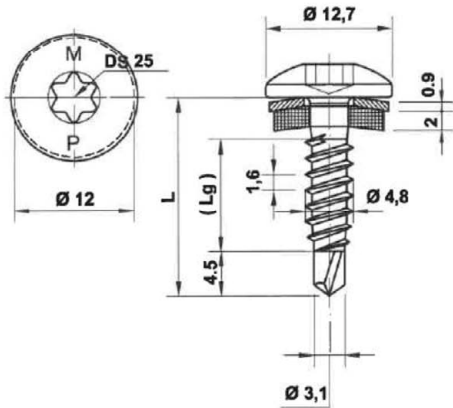

Materials

Fastener: stainless steel (1.4301) – EN 10088

Washer: stainless steel (1.4301) – EN 10088

Component I: S280GD to S320GD - EN 10346

Component II: S235 - EN 10025-1
S280GD to S320GD - EN 10346

Drilling-capacity $\Sigma(t_i) \leq 2.50$ mm

Timber substructures


No performance determined

		Component II t II [mm]					
		0,63	0,75	0,88	1,00	1,13	1,25
M _{t,nom}		5 Nm					
Component I t I [mm]	V _{R,k} [kN]	0,63	1,53 -	1,53 -	1,53 -	1,53 -	1,53 -
		0,75	1,53 -	1,94 -	1,94 -	1,94 -	1,94 -
		0,88	1,53 -	1,94 -	2,39 -	2,39 -	2,39 -
		1,00	1,53 -	1,94 -	2,39 -	2,80 -	2,80 -
		1,13	1,53 -	1,94 -	2,39 -	2,80 -	2,80 -
		1,25	1,53 -	1,94 -	2,39 -	2,80 -	2,80 -
	N _{R,k} [kN]	0,50	0,70 -	0,70 -	1,00 -	1,30 -	1,39 -
		0,55	0,70 -	0,70 -	1,00 -	1,30 -	1,39 -
		0,63	0,70 -	0,70 -	1,00 -	1,30 -	1,39 -
		0,75	0,70 -	0,70 -	1,00 -	1,30 -	1,39 -
		0,88	0,70 -	0,70 -	1,00 -	1,30 -	1,39 -
		1,00	0,70 -	0,70 -	1,00 -	1,30 -	1,39 -
		1,13	0,70 -	0,70 -	1,00 -	1,30 -	1,39 -
		1,25	0,70 -	0,70 -	1,00 -	1,30 -	1,39 -
		N _{R,k,II}	0,70 -	0,70 -	1,00 -	1,30 -	1,60 -

Self-drilling screw

PMJ-tec 7140-4,8
bimetal with rounded flat head and sealing washer $\geq \text{Ø}12$ mm

Annex 66

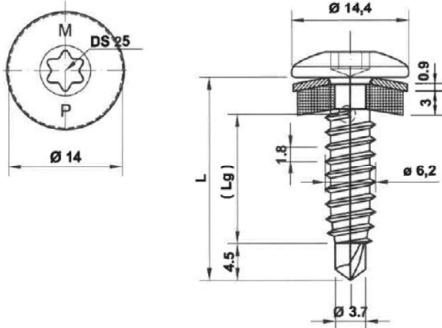

Materials

Fastener: stainless steel (1.4301) – EN 10088

Washer: stainless steel (1.4301) – EN 10088

Component I: S280GD to S320GD - EN 10346

Component II: S235 - EN 10025-1
S280GD to S320GD - EN 10346

Drilling-capacity $\Sigma(t_i) \leq 2.50$ mm

Timber substructures


No performance determined

		Component II t II [mm]					
		0,63	0,75	0,88	1,00	1,13	1,25
Component I t I [mm]	$V_{R,k}$ [kN]	0,63	1,53 -	1,53 -	1,53 -	1,53 -	1,53 -
		0,75	1,53 -	1,94 -	1,94 -	1,94 -	1,94 -
		0,88	1,53 -	1,94 -	2,39 -	2,39 -	2,39 -
		1,00	1,53 -	1,94 -	2,39 -	2,80 -	2,80 -
		1,13	1,53 -	1,94 -	2,39 -	2,80 -	2,80 -
		1,25	1,53 -	1,94 -	2,39 -	2,80 -	2,80 -
	$N_{R,k}$ [kN]	0,50	0,70 -	0,70 -	1,00 -	1,30 -	1,39 -
		0,55	0,70 -	0,70 -	1,00 -	1,30 -	1,39 -
		0,63	0,70 -	0,70 -	1,00 -	1,30 -	1,39 -
		0,75	0,70 -	0,70 -	1,00 -	1,30 -	1,39 -
		0,88	0,70 -	0,70 -	1,00 -	1,30 -	1,39 -
		1,00	0,70 -	0,70 -	1,00 -	1,30 -	1,39 -
		1,13	0,70 -	0,70 -	1,00 -	1,30 -	1,39 -
		1,25	0,70 -	0,70 -	1,00 -	1,30 -	1,39 -
	$N_{R,k,II}$	0,70	-	0,70 -	1,00 -	1,30 -	1,60 -

Self-drilling screw

PMJ-tec 7140-6,3
bimetal with rounded flat head and sealing washer $\geq \text{Ø}14$ mm

Annex 67

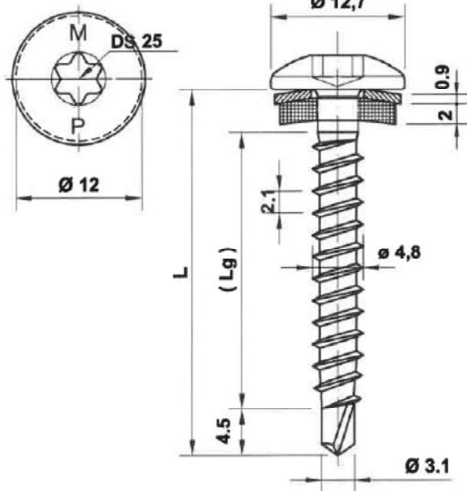

Materials

Fastener: stainless steel (1.4301) – EN 10088

Washer: stainless steel (1.4301) – EN 10088

Component I: S280GD to S320GD - EN 10346

Component II: structural timber – EN 14081

Drilling-capacity $\Sigma(t_i) \leq 2.00$ mm

Timber substructures

$M_{y,Rk} = 4,429$ Nm

$f_{ax,k} = 8,575$ N/mm² for $l_{ef} \geq 30,0$ mm

		Component II t II [mm]	
		-	
		$M_{t,nom}$ 5 Nm	
Component I t I [mm]	$V_{R,i,k}$ [kN]	0,50	1,21 ac
		0,55	1,25 ac
		0,63	1,32 ac
		0,75	1,43 ac
	$N_{R,i,k}$ [kN]	0,50	1,45 ac
		0,55	1,45 ac
		0,63	1,45 ac
		0,75	1,45 ac

The values listed above in dependence on the screw in length l_{ef} are valid for $k_{mod} = 0,90$ and $\rho_k = 350$ kg/m³. For other combinations of k_{mod} and timber densities see Annex 3.

Self-drilling screw

PMJ-tec 7160-4,8
bimetal with rounded flat head and sealing washer $\geq \text{Ø}12$ mm

Annex 68