

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments



European Technical Assessment

ETA-12/0452
of 10 September 2021

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Würth nails NG CSM-1 SLB, NG CSM-1 HFB
and NG CS-2/3 HFB for gas actuated pin driver
DIGA CSM-1, DIGA CS-2 POWER and DIGA CS-3

Product family
to which the construction product belongs

Power-actuated fastener for multiple use
in concrete for non-structural applications

Manufacturer

Adolf Würth GmbH & Co. KG
Reinhold-Würth-Straße 12-17
74653 Künzelsau-Gaisbach
DEUTSCHLAND

Manufacturing plant

Werk 17, Werk 24 und Werk 29
Plant 17, plant 24 and plant 29

This European Technical Assessment
contains

11 pages including 3 annexes which form an integral part
of this assessment

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

EAD 330083-02-0601, Edition 03/2018

This version replaces

ETA-12/0452 issued on 24 November 2016

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The Würth nails NG CSM-1 SLB, NG CSM-1 HFB and NG CS-2/3 HFB are power-actuated fasteners which are placed into the concrete without previous drill by use of a gas actuated tool DIGA CSM-1, DIGA CS-2 POWER and DIGA CS-3. They are anchored in the concrete by sintering and mechanical interlock.

The fastener (nail) is made of galvanised steel. The nails are arranged and connected with each other by special plastic strips that guides the nails in the gas actuated tool magazine.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the fastener is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the fastener of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic values of resistance and displacements	See Annex B2 and C1
Durability	See Annex B1

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	See Annex C1

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with EAD No. 330083-02-0601, the applicable European legal act is: 1997/463/EC (EU).

The system to be applied is: 2+

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document


Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.

Issued in Berlin on 10 September 2021 by Deutsches Institut für Bautechnik


Dipl.-Ing. Beatrix Wittstock
Head of Section

beglaubigt:
Baderschneider

Nail Types

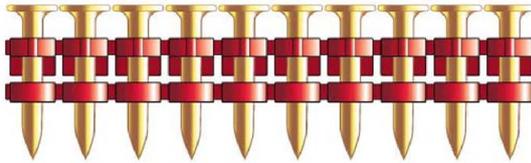


Würth nails
NG CSM-1 HFB and NG CS-2/3 HFB

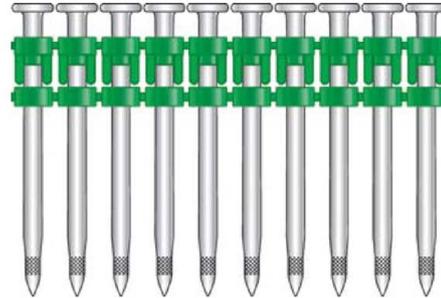

Würth nails
NG CSM-1 SLB

Installed condition

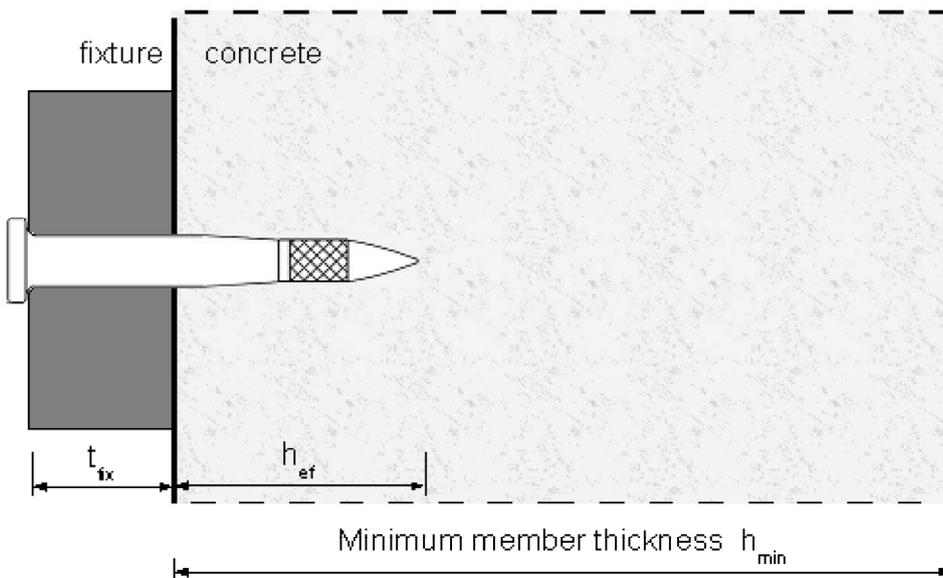


Würth nails NG CSM-1 SLB, NG CSM-1 HFB and NG CS-2/3 HFB for gas actuated pin driver DIGA CSM-1, DIGA CS-2 POWER and DIGA CS-3

Product

Annex A1

Würth nails NG CSM-1 SLB

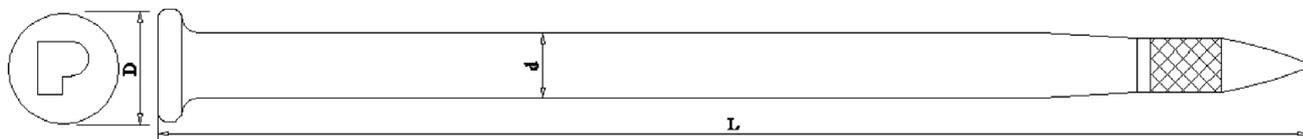

Würth nails NG CSM-1 HFB and NG CS-2/3 HFB

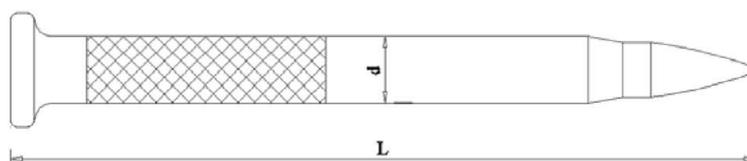


Table 1: Dimensions and materials

Würth DIGA®		SLB nails	HFB nails	HFB nails	
For use with gas tool	[-]	DIGA CSM-1	DIGA CSM-1	DIGAS CS-2 POWER	DIGA CS-3
Length of nails L	[mm]	22-65	22-38	22-38	
Shaft diameter d	[mm]	3,7	3,0	3,0	
Head diameter D	[mm]	6,3	6,3	6,3	
Material nail	[-]	Hardened C-steel			
Material plastic collation	[-]	Polyethylene (red/green/yellow)			
Zinc plating	[-]	Mechanical galvanized min. 8 µm	Mechanical or Electro galvanized min. 5 µm	Mechanical or Electro galvanized min. 5 µm	

Würth nails NG CSM-1 SLB, NG CSM-1 HFB and NG CS-2/3 HFB for gas actuated pin driver DIGA CSM-1, DIGA CS-2 POWER and DIGA CS-3

Material and Dimensions

Annex A2

Specification of intended use

Anchorage subject to:

- Static and quasi-static loads.

Base materials:

- Reinforced or unreinforced normal weight concrete according to EN 206-1:2000.
- Strength classes C20/25 to C50/60 according to EN 206-1:2000 for use of setting tool DIGA CSM-1.
- Strength classes C20/25 to C40/50 according to EN 206-1:2000 for use of setting tool DIGA CS-2 POWER or DIGA CS-3.
- For cracked and non-cracked concrete.
- Anchorages in two-dimensional load-bearing structures (slabs and walls).

Use conditions (Environmental conditions):

- Structures subject to dry conditions.

Design:

- Verifiable calculation notes and drawings shall be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the drawings (e.g. position of the fastener relative to reinforcement or to supports etc.).
- The anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- The anchorages are designed in accordance with EN 1992-4:2018, Design Method C
- Under fire exposure it must be ensured that local spalling of the concrete cover does not occur.
- The fastener is to be used only for multiple use for non-structural applications with following definition:
 - Number of fixing points $n_1 \geq 4$,
 - Number of fasteners per fixing point $n_2 = 1$,
 - Design value of actions F_{sd} per fixing point $n_3 \leq 0,6$ kN.
- The design of the fixture is such that in the case of excessive slip or failure of one fastener the load can be transmitted to neighboring fasteners without significantly violating the requirements on the fixture in the serviceability and ultimate limit state.

Installation:

- Fastener installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.

Würth nails NG CSM-1 SLB, NG CSM-1 HFB and NG CS-2/3 HFB for gas actuated pin driver DIGA CSM-1, DIGA CS-2 POWER and DIGA CS-3

Intended use

Annex B1

Table 2: Installation parameters (no previous drilling needed)

Würth DIGA®			SLB nails	HFB nails	HFB nails	
For use with gas tool		[-]	DIGA CSM-1	DIGA CSM-1	DIGAS CS-2 POWER	DIGA CS-3
Maximum concrete strength class		[-]	C50/60	C50/60	C40/50	
Effective anchorage depth	h_{ef}	[mm]	≥ 18	≥ 18	≥ 18	
Average anchorage depth when used in maximum concrete strength class	$h_{ef,m}$	[mm]	22	25	22	
Diameter of clearance hole in the fixture	d_f	[mm]	4,0	3,5	3,5	
Max. Thickness of fixture	t_{fix}	[mm]	L - 21 mm	L - 21 mm	L - 21 mm	
Member thickness, edge distances and spacing						
Minimum member thickness	h_{min}	[mm]	80	80	80	
Minimum spacing	s_{min}	[mm]	200	200	200	
Minimum edge distance	c_{min}	[mm]	150	150	150	

Installation instructions

- Fastener installation in accordance with the manufacturer's specifications and drawings and using the specified installation device.
- Fasteners to be installed perpendicular to the surface of the base material.
- When setting, pay attention to setting defects. A setting defect is present if the nail can be pull out of the concrete by hand.
- Fasteners to be installed ensuring not less than the minimum effective anchorage depth of 18 mm. If the embedment depth is smaller than the minimum effective anchorage depth the nail must be assumed as a setting defect and it must not be loaded.
- Damages on the concrete surface, caused by setting defects, have to be repaired according to EN 1504-3:2005. A new fastener is set at a minimum distance away of 100 mm of the edge of the damaged surface.
- Use of setting tools according to Annex B3. The setting tool shall be complied with EN 792-13:2009.

Würth nails NG CSM-1 SLB, NG CSM-1 HFB and NG CS-2/3 HFB for gas actuated pin driver DIGA CSM-1, DIGA CS-2 POWER and DIGA CS-3

Installation parameters, installation instructions

Annex B2

Gas actuated tool and gas can

Würth DIGA CSM-1
150 Joule gas actuated tool



Würth DIGA CS-2 POWER (long track version) and DIGA CS-2 POWER (short track version)
105 Joule gas actuated tool



Würth nails NG CSM-1 SLB, NG CSM-1 HFB and NG CS-2/3 HFB for gas actuated pin driver DIGA CSM-1, DIGA CS-2 POWER and DIGA CS-3

Gas tools DIGA CSM-1 and DIGA CS-2 POWER and corresponding gas can

Annex B3

Gas actuated tool and gas can

Würth DIGA CS-3
105 Joule gas actuated tool



Würth nails NG CSM-1 SLB, NG CSM-1 HFB and NG CS-2/3 HFB for gas actuated pin driver DIGA CSM-1, DIGA CS-2 POWER and DIGA CS-3

Gas tools DIGA CS-3 and corresponding gas can

Annex B3

Table 3: Characteristic values, Design method C

Würth DIGA®			SLB and HFB nails
Characteristic resistance for all load directions	F_{Rk}	[N]	44
Characteristic resistance for steel failure with lever arm	$M^0_{Rk,s}$	[Nm]	16,4
Partial safety factor	γ_M ¹⁾	[-]	1,5
Characteristic spacing	s_{cr}	[mm]	200
Characteristic edge distance	c_{cr}	[mm]	150
Displacements for all load directions	δ_0, δ_∞	[mm]	$\leq 0,1$

¹⁾ In absence of other national regulations

Table 4: Characteristic values under fire exposure

Fire resistance class	Würth DIGA®		SLB and HFB nails
R 30	Characteristic resistance for all load directions	$F_{Rk,fi}$	[N] 11
	Characteristic bending resistance	$M^0_{Rk,s,fi}$	[Nm] 0,035
	Partial safety factor	$\gamma_{M,fi}$ ¹⁾	[-] 1,0
	Characteristic spacing	$s_{min,fi} = s_{cr,fi}$	[mm] 200
	Characteristic edge distance	$c_{min,fi} = c_{cr,fi}$	[mm] 150 ²⁾

¹⁾ In absence of other national regulations

²⁾ If the fire attack is from more than one side, the edge distance shall be $c \geq 300$ mm.

Würth nails NG CSM-1 SLB, NG CSM-1 HFB and NG CS-2/3 HFB for gas actuated pin driver DIGA CSM-1, DIGA CS-2 POWER and DIGA CS-3

Characteristic values

Annex C1