

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments



European Technical Assessment

ETA-20/0195
of 17 November 2021

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

ubolt concrete screw CSG-III

Product family
to which the construction product belongs

Fasteners for use in concrete for redundant non-structural
systems

Manufacturer

UIP Verbindungstechnik GmbH
Kapellenstraße 47
65830 Kriftel
DEUTSCHLAND

Manufacturing plant

UIP Herstellwerk 5

This European Technical Assessment
contains

16 pages including 3 annexes which form an integral part
of this assessment

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

EAD 330747-00-0601, Edition 06/2018

**European Technical Assessment
ETA-20/0195**

English translation prepared by DIBt

Page 2 of 16 | 17 November 2021

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The ubolt concrete screw CSG-III is an anchor of size 5 and 6 mm made of galvanised steel respectively steel with zinc flake coating and of stainless steel. The anchor is screwed into a predrilled cylindrical drill hole. The special thread of the anchor cuts an internal thread into the member while setting. The anchorage is characterised by mechanical interlock in the special thread.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable EAD

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	See Annex C 3

3.2 Safety in use (BWR 4)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading)	See Annex B 2, Annex C 1 and C 2
Characteristic resistance to shear load (static and quasi-static loading)	See Annex C 1 and C 2
Durability	See Annex B 1

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with European Assessment Document EAD No. 330747-00-0601, the applicable European legal act is: [97/161/EC].

The system to be applied is: 2+

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.

Issued in Berlin 17 November 2021 by Deutsches Institut für Bautechnik


Dipl.-Ing. Beatrix Wittstock
Head of Section

beglaubigt:
Tempel


Product in installed condition

UIP concrete screw CSG-III-SZ, CSG-III-A4 and CSG-III-HCR (5 and 6)


- Galvanized carbon steel
- Zinc flakes coated carbon steel

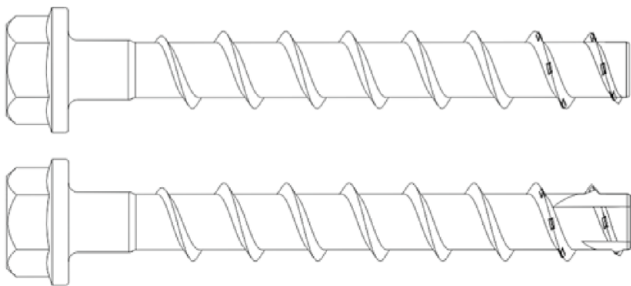

- Stainless steel A4
- Stainless steel HCR

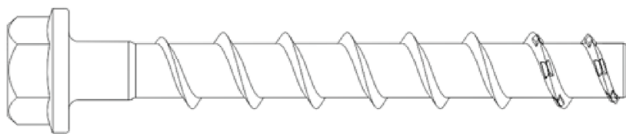

e.g. UIP concrete screw, zinc flakes coated, with hexagon head and fixture

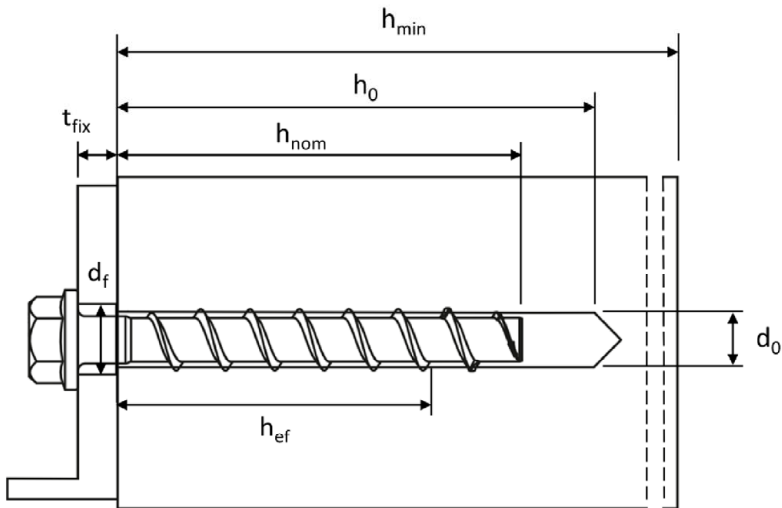

d_0 = nominal drill hole diameter
 t_{fix} = thickness of fixture
 d_f = clearance hole diameter

h_{min} = minimum thickness of member
 h_{nom} = nominal embedment depth
 h_0 = drill hole depth
 h_{ef} = effective embedment depth


UIP ubolt concrete screw CSG-III

Product description

Product in installed condition

Annex A1

Installed condition in precast prestressed hollow core slabs

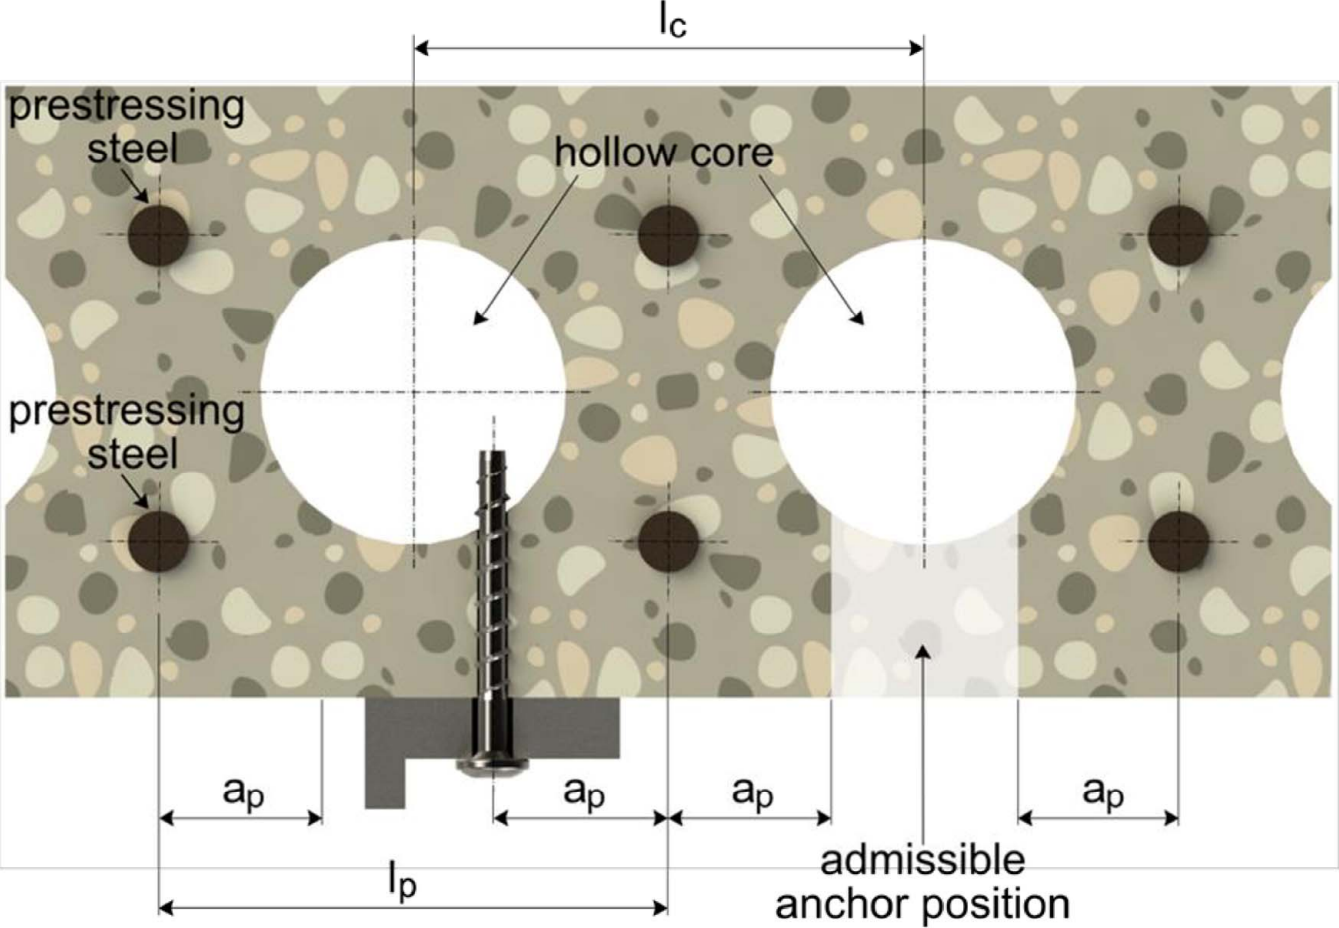

Important ratio: $\frac{w}{e} \leq 4,2$

w = core width

e = web thickness

l_c = core distance ≥ 100 mm

l_p = prestressing steel ≥ 100 mm


a_p = distance between anchor position and prestressing steel ≥ 50mm

UIP ubolt concrete screw CSG-III

Product description

Installed condition in precast prestressed hollow core slabs


Annex A2




1. Configuration with metric connection thread and hexagon socket e.g. CSG-III-MA 8x105 M10 SW5




2. Configuration with metric connection thread and hexagon drive e.g. CSG-III-MA 8x105 M10 SW7




3. Configuration with washer and hexagon head e.g. CSG-III-SU 8x80 SW13 VZ 40




4. Configuration with washer, hexagon head and TORX drive e.g. CSG-III-SU 8x80 SW13




5. Configuration with hexagon head e.g. CSG-III-S 8x80 SW13 OS




6. Configuration with countersunk head and TORX drive e.g. CSG-III-SK 8x80 C VZ 40



7. Configuration with pan head and TORX drive e.g. CSG-III-LK 8x80 P VZ 40





8. Configuration with large pan head and TORX drive e.g. CSG-III-LKG 8x80 LP VZ 40



9. Configuration with countersunk head and connection thread e.g. CSG-III-BSK 6x55 AG M8



10. Configuration with hexagon drive and connection thread e.g. CSG-III-MAA 6x55 M8 SW10



11. Configuration with internal thread and hexagon drive e.g. CSG-III-MI 6x55 IM M8/10

UIP ubolt concrete screw CSG-III

Product description
Screw types

Annex A3


Table 1: Material

Part	Product name	Material
all types	CSG-III-SZ	- Steel EN 10263-4:2017 galvanized acc. to EN ISO 4042:2018 - Zinc flake coating according to EN ISO 10683:2018 ($\geq 5\mu\text{m}$)
	CSG-III-A4	1.4401; 1.4404; 1.4571; 1.4578
	CSG-III-HCR	1.4529

Part	Product name	Nominal characteristic steel		Rupture elongation A_5 [%]
		Yield strength f_{yk} [N/mm ²]	Ultimate strength f_{uk} [N/mm ²]	
all types	CSG-III-SZ	560	700	≤ 8
	CSG-III-A4			
	CSG-III-HCR			

Table 2: Dimensions


Anchor size			5	6
Screw length	$\leq L$	[mm]	200	
Core diameter	d_k	[mm]	4,0	5,1
Thread outer diameter	d_s	[mm]	6,5	7,5

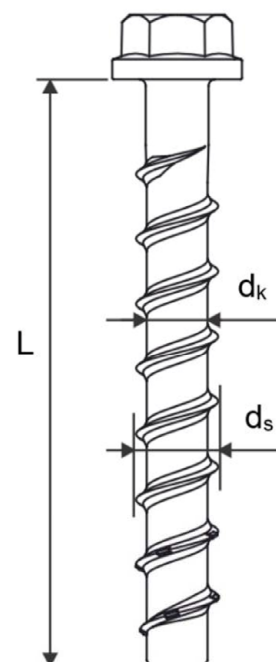

Marking:


CSG-III-SZ

Screw type: TSM
Screw size: 10
Screw length: 100




CSG-III-A4

Screw type: TSM
Screw size: 10
Screw length: 100
Material: A4




CSG-III-HCR

Screw type: TSM
Screw size: 10
Screw length: 100
Material: HCR



Marking "k" or "x"
for anchors with
connection thread
and $h_{nom} = 35\text{mm}$



UIP ubolt concrete screw CSG-III

Product description

Material, Dimensions and markings

Annex A4

Specification of Intended use

Anchorage subject to:

- static and quasi static loads
- Used only for multiple use for non-structural application according to EN 1992-4:2018
- Used for anchorages with requirements related to resistance of fire (not for using in prestressed hollow core slabs): size 6
- Used for anchorages in prestressed hollow core slabs: size 6

Base materials:

- Compacted reinforced and compacted unreinforced concrete without fibers according to EN 206:2013.
- Strength classes C20/25 to C50/60 according to EN 206:2013.
- Cracked and uncracked concrete.

Use conditions (Environmental conditions):

- Concrete screws subject to dry internal conditions: all screw types.
- Structural subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition no particular aggressive conditions exists: screw types made of stainless steel with marking A4.
- Structural subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition if particular aggressive conditions exists: screw types made of stainless steel with marking HCR.

Note: Such particular aggressive conditions are e.g. permanent, alternating immersion in seawater or splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used).

Design:

- Anchorages are to be designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages are designed according to EN 1992-4:2018 and EOTA Technical Report TR 055, Edition February 2018
- The design for shear load according to EN 1992-4:2018, Section 6.2.2 applies for all specified diameters d_f of clearance hole in the fixture in Annex B2, Table 3.

Installation:

- Hammer drilling or hollow drilling.
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters on site.
- In case of aborted hole: new drilling must be drilled at a minimum distance of twice the depth of aborted hole or closer, if the aborted hole is filled with high strength mortar and only if the hole is not in the direction of the oblique tensile or shear load.
- After installation further turning of the anchor must not be possible. The head of the anchor is supported in the fixture and is not damaged.

UIP ubolt concrete screw CSG-III

Intended use
Specification


Annex B1

Table 3: Installation parameters

CSG-III concrete screw size			5	6	
Nominal embedment depth		h_{nom}	h_{nom1}	h_{nom1}	h_{nom2}
		[mm]	35	35	55
Nominal drill hole diameter	d_0	[mm]	5	6	
Cutting diameter of drill bit	$d_{cut} \leq$	[mm]	5,40	6,40	
Drill hole depth	$h_0 \geq$	[mm]	40	40	60
Clearance hole diameter	$d_f \leq$	[mm]	7	8	
Installation torque (version with connection thread)	$T_{inst} \leq$	[Nm]	8	10	
Recommended torque impact screw driver		[Nm]	Max. torque according to manufacturer's instructions		
			110	160	

Table 4: Minimum thickness of member, minimum edge distance and minimum spacing

CSG-III concrete screw size			5	6	
Nominal embedment depth	h_{nom1}	[mm]	h_{nom1}	h_{nom1}	h_{nom2}
			35	35	55
Minimum thickness of member	h_{min}	[mm]	80	80	100
Minimum edge distance	c_{min}	[mm]	35	35	40
Minimum spacing	s_{min}	[mm]	35	35	40

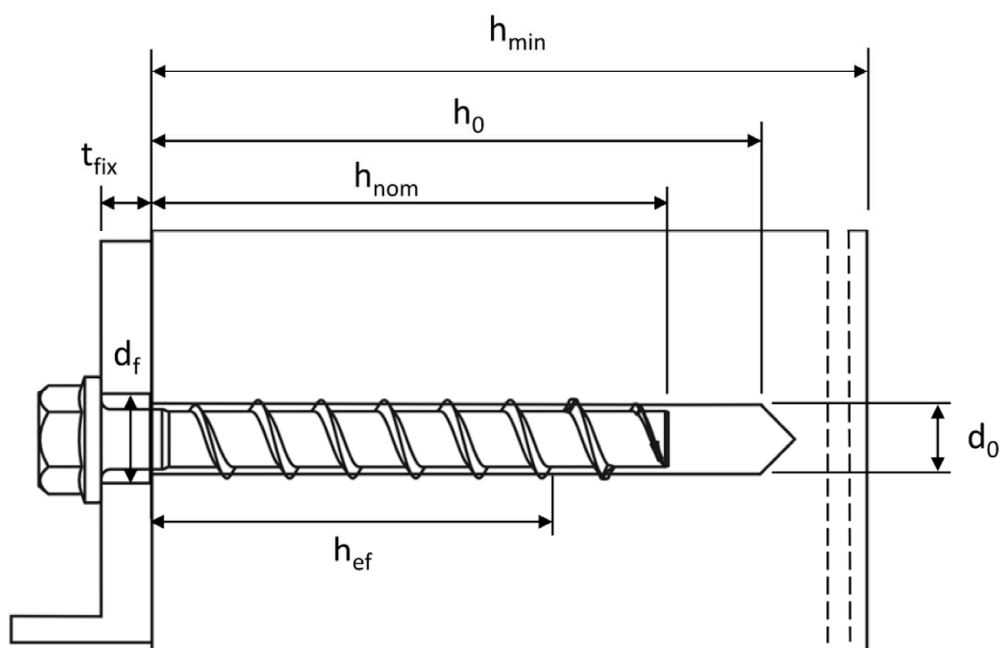


UIP ubolt concrete screw CSG-III

Intended use
Installation parameters

Annex B2

Installation parameters for anchorages in precast prestressed hollow core slabs

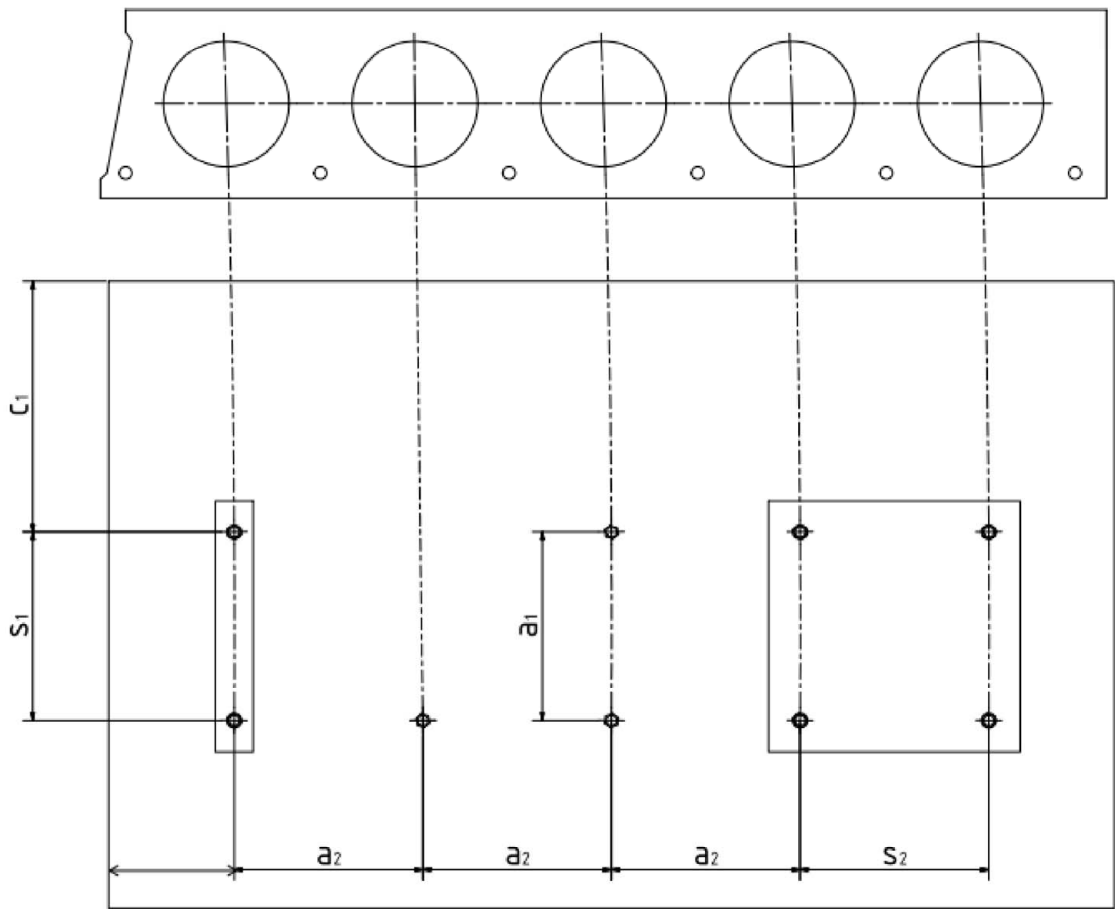

- c_1, c_2 = edge distance
- s_1, s_2 = anchor spacing
- a_1, a_2 = distance between anchor groups
- c_{min} = minimum edge distance ≥ 100 mm
- s_{min} = minimum anchor spacing ≥ 100 mm
- a_{min} = minimum distance between anchor groups ≥ 100 mm


UIP ubolt concrete screw CSG-III

Intended use
Installation parameters for anchorages in precast prestressed hollow
slabs

Annex B3


Installation Instructions

1

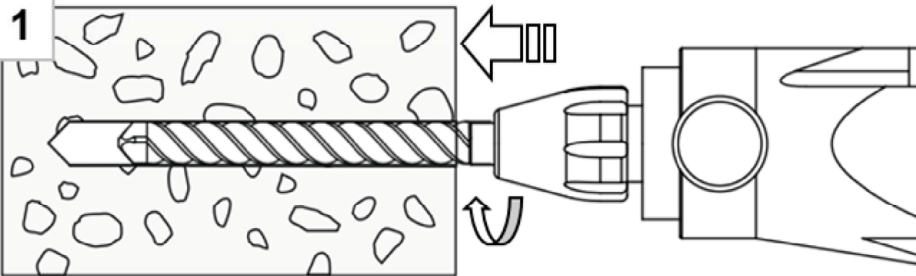


Create hammer drilled or hollow drilled borehole

2

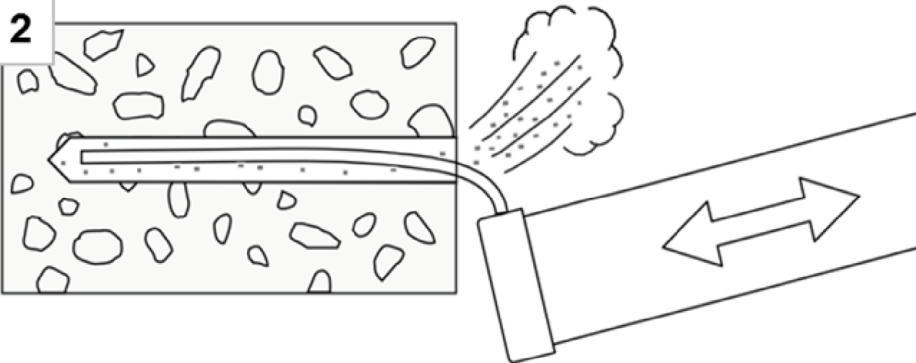


Remove drill dust by vacuuming or blowing of

3

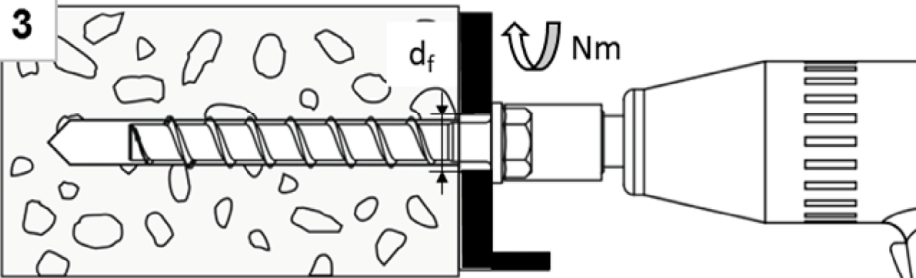

Install with torque impact screw driver or torque wrench

4

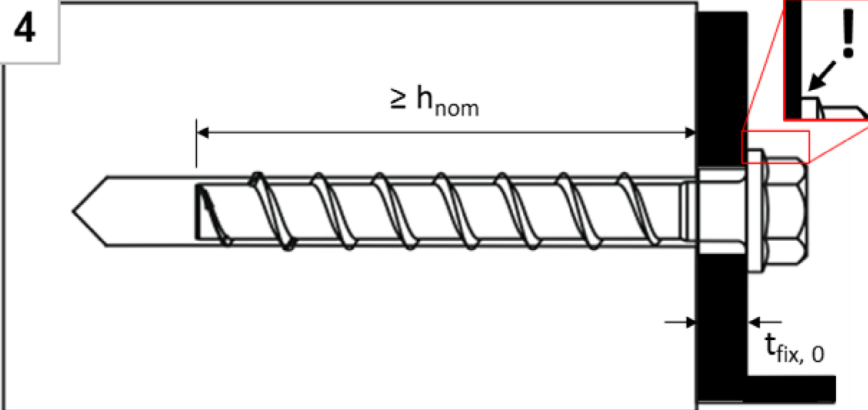


The head must be undamaged and in contact with the fixture

UIP ubolt concrete screw CSG-III

Intended use
Installation instructions

Annex B4

Installation Instructions for anchorages in prestressed hollow slabs

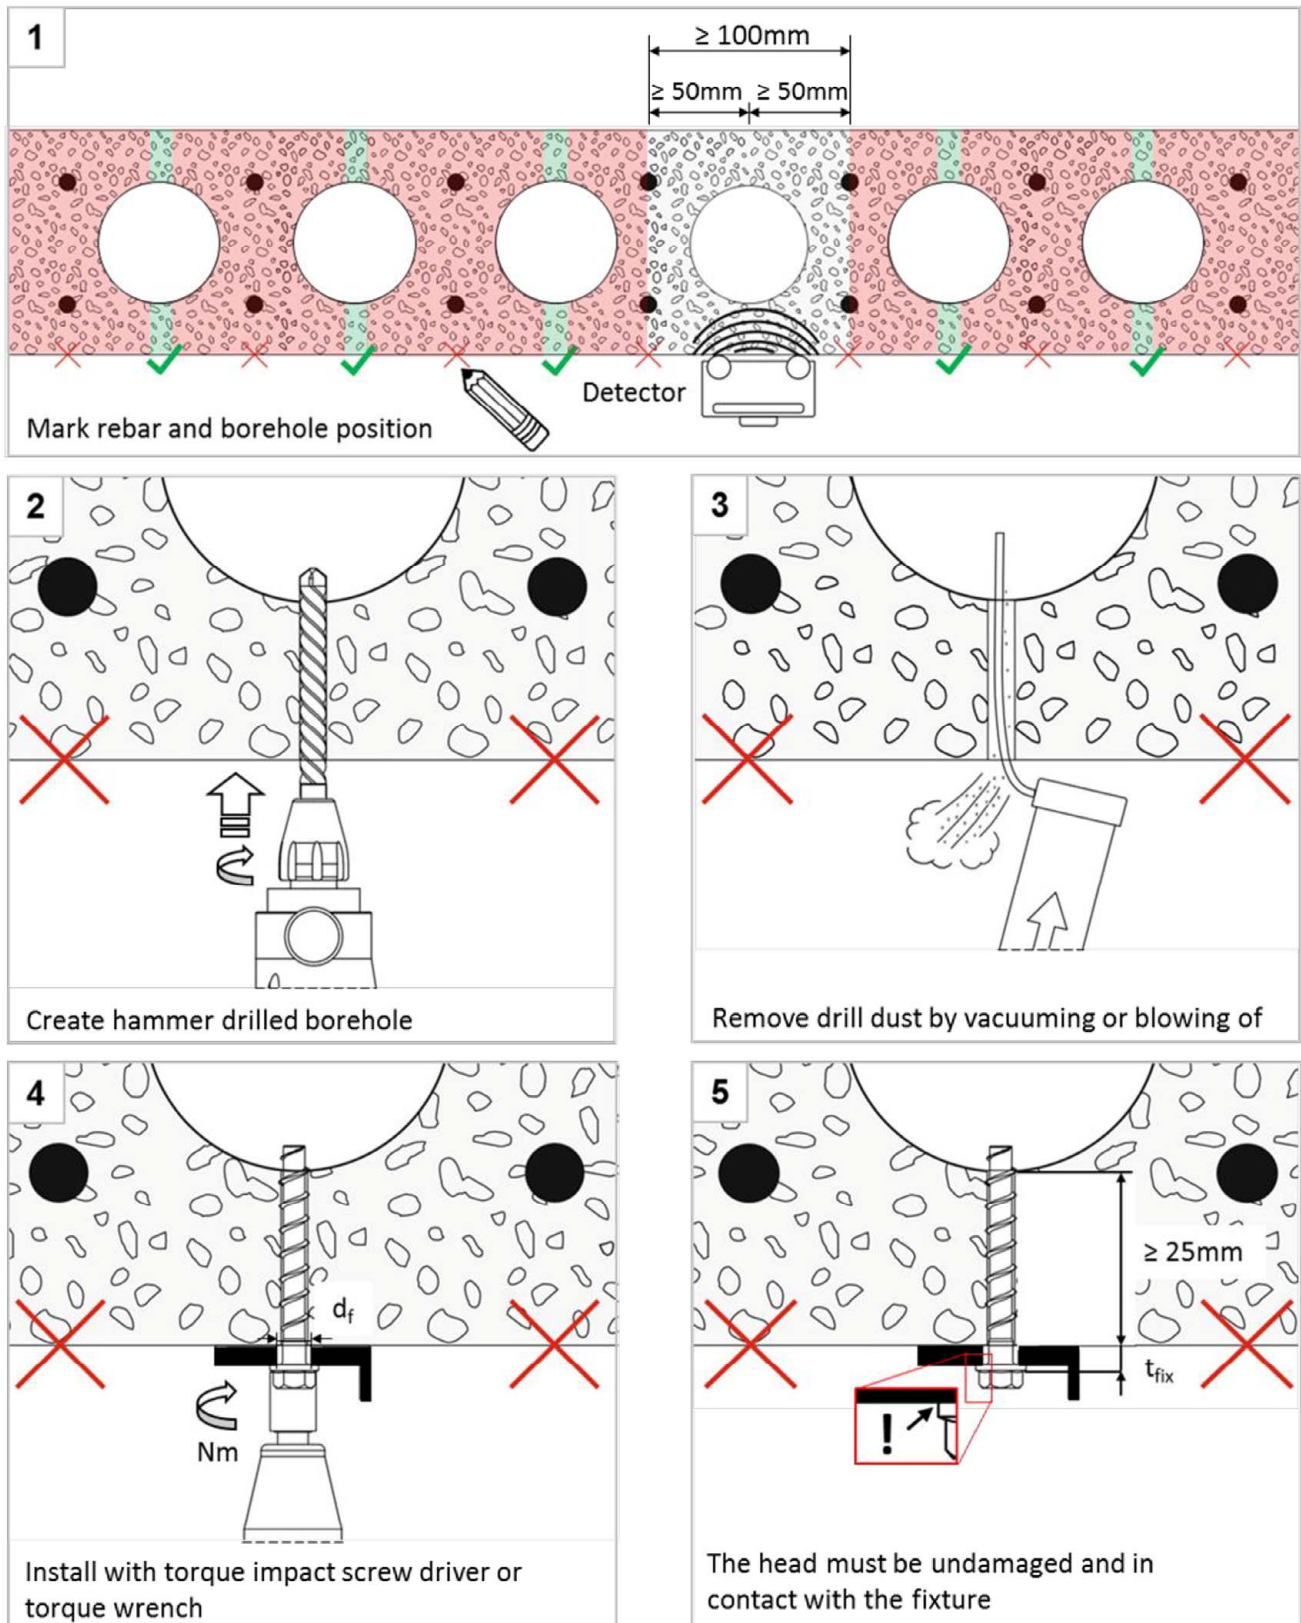

UIP ubolt concrete screw CSG-III

Intended use

Installation instructions for anchorages in prestressed hollow slabs

Annex B5

Table 5: Characteristic values for static and quasi-static loading

CSG-III concrete screw size				5		6		
Nominal embedment depth		h_{nom}	h_{nom1}		h_{nom1}		h_{nom2}	
		[mm]	35		35		55	
Steel failure for tension and shear loading								
Characteristic tension load		$N_{Rk,s}$	[kN]	8,7		14,0		
Partial factor		$\gamma_{Ms,N}$	[-]	1,5				
Characteristic shear load		$V_{Rk,s}$	[kN]	4,4		7,0		
Partial factor		$\gamma_{Ms,V}$	[-]	1,25				
Ductility factor		k_7	[-]	0,8				
Characteristic bending load		$M^0_{Rk,s}$	[Nm]	5,3		10,9		
Pull-out failure								
Characte- ristic tension load C20/25	cracked	$N_{Rk,p}$	[kN]	1,5		3,0		7,5
	uncracked	$N_{Rk,p}$	[kN]	1,5		3,0		7,5
Increasing factor for $N_{Rk,p}$	C25/30	Ψ_c	[-]	1,12				
	C30/37			1,22				
	C40/50			1,41				
	C50/60			1,58				
Concrete failure: Splitting failure, concrete cone failure and pry-out failure								
Effective embedment depth		h_{ef}	[mm]	27		27		44
k-factor	cracked	$k_1=k_{cr}$	[-]	7,7				
	uncracked	$k_1=k_{ucr}$	[-]	11,0				
Concrete cone failure	spacing	$s_{cr,N}$	[mm]	3 x h_{ef}				
	edge distance	$c_{cr,N}$	[mm]	1,5 x h_{ef}				
Splitting failure	resistance	$N^0_{Rk,Sp}$	[kN]	$\min(N^0_{Rk,c}; N_{Rk,p})$				
	spacing	$s_{cr,Sp}$	[mm]	120		120		160
	edge distance	$c_{cr,Sp}$	[mm]	60		60		80
Factor for pry-out failure		k_8	[-]	1,0				
Installation factor		γ_{inst}	[-]	1,2		1,0		1,0
Concrete edge failure								
Effective length in concrete		$l_f = h_{ef}$	[mm]	27		27		44
Nominal outer diameter of screw		d_{nom}	[mm]	5		6		

UIP ubolt concrete screw CSG-III

Performances

Characteristic values for static and quasi-static loading

Annex C1

Table 6: Characteristic values of resistance in precast prestressed hollow core slabs C30/37 to C50/60

CSG-III concrete screw size			6		
Bottom flange thickness	d_b	[mm]	≥ 25	≥ 30	≥ 35
Characteristic resistance	F_{Rk}^0	[kN]	1	2	3
Edge distance	c_{cr}	[mm]	100		
Spacing	s_{cr}	[mm]	200		
Installation factor	γ_{inst}	[-]	1,0		

Table 7: Limiting distances for application in precast prestressed hollow core slabs

Distances for application in precast prestressed hollow core slabs			
Minimum edge distance	c_{min}	[mm]	≥ 100
Minimum anchor spacing	s_{min}	[mm]	≥ 100
Minimum distance between anchor groups	a_{min}	[mm]	≥ 100
Distance of core	l_c	[mm]	≥ 100
Distance of prestressing steel	l_p	[mm]	≥ 100
Distance between anchor position and prestressing steel	a_p	[mm]	≥ 50

UIP ubolt concrete screw CSG-III

Performances

Characteristic values and limiting distances in precast prestressed hollow core slabs

Annex C2

Table 8: Fire exposure – characteristic values of resistance ¹⁾

CSG-III concrete screw size				6			
Material				CSG-III-SZ		CSG-III-A4 CSG-III-HCR	
Nominal embedment depth			h_{nom}	h_{nom1}	h_{nom2}	h_{nom1}	h_{nom2}
			[mm]	35	55	35	55
Steel failure for tension and shear load ($F_{Rk,s,fi} = N_{Rk,s,fi} = V_{Rk,s,fi}$)							
Characteristic Resistance	R30	$F_{Rk,s,fi30}$	[kN]	0,9		1,2	
	R60	$F_{Rk,s,fi60}$	[kN]	0,8		1,2	
	R90	$F_{Rk,s,fi90}$	[kN]	0,6		1,2	
	R120	$F_{Rk,s,fi120}$	[kN]	0,4		0,8	
	R30	$M^0_{Rk,s,fi30}$	[Nm]	0,7		0,9	
	R60	$M^0_{Rk,s,fi60}$	[Nm]	0,6		0,9	
	R90	$M^0_{Rk,s,fi90}$	[Nm]	0,5		0,9	
	R120	$M^0_{Rk,s,fi120}$	[Nm]	0,3		0,6	
Pull-out failure							
Characteristic Resistance	R30-R90	$N_{Rk,p,fi}$	[kN]	0,75	1,875	0,75	1,875
	R120	$N_{Rk,p,fi}$	[kN]	0,6	1,5	0,6	1,5
Concrete cone failure							
Characteristic Resistance	R30-R90	$N^0_{Rk,c,fi}$	[kN]	0,86	2,76	0,86	2,76
	R120	$N^0_{Rk,c,fi}$	[kN]	0,68	2,21	0,68	2,21
Edge distance							
R30 - R120		$C_{cr,fi}$	[mm]	2 x h_{ef}			
In case of fire attack from more than one side, the minimum edge distance shall be ≥ 300 mm.							
Spacing							
R30 - R120		$S_{cr,fi}$	[mm]	4 x h_{ef}			
Pry-out failure							
R30 - R120		k_8	[-]	1,0			
The anchorage depth has to be increased for wet concrete by at least 30 mm compared to the given value.							

¹⁾ Not for application in prestressed hollow core slabs

UIP ubolt concrete screw CSG-III

Performances

Characteristic values under fire exposure

Annex C3