

Approval body for construction products  
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and  
Laender Governments



## European Technical Assessment

ETA-21/0501  
of 3 September 2021

English translation prepared by DIBt - Original version in German language

### General Part

Technical Assessment Body issuing the  
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Prima Ceiling Anchor

Product family  
to which the construction product belongs

Fasteners for use in concrete for  
redundant non-structural systems

Manufacturer

EUROBAUSTOFF  
Handelsgesellschaft mbH & Co.KG  
Auf dem Hohenstein 2  
61231 Bad Nauheim  
DEUTSCHLAND

Manufacturing plant

EUROBAUSTOFF

This European Technical Assessment  
contains

8 pages including 3 annexes which form an integral part  
of this assessment

This European Technical Assessment is  
issued in accordance with Regulation (EU)  
No 305/2011, on the basis of

EAD 330747-00-0601, Edition 06/2018

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

## Specific Part

### 1 Technical description of the product

The Prima Ceiling Anchor is an anchor made of galvanized steel which is placed into a drilled hole and anchored by deformation-controlled expansion.

The product description is given in Annex A.

### 2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	See Annex C 1

#### 3.2 Safety and accessibility in use (BWR 4)

Essential characteristic	Performance
Characteristic resistance for all load directions and modes of failure for simplified design	See Annex C 1
Durability	See Annex B 1

### 4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with European Assessment Document EAD No. 330747-00-0601, the applicable European legal act is: [97/161/EC].

The system to be applied is: 2+

**5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document**


Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.

Issued in Berlin on 3 September 2021 by Deutsches Institut für Bautechnik

Dipl.-Ing. Beatrix Wittstock  
Head of Section


*beglaubigt:*  
Baderschneider

**Product installation conditions, product marking and product dimensions**

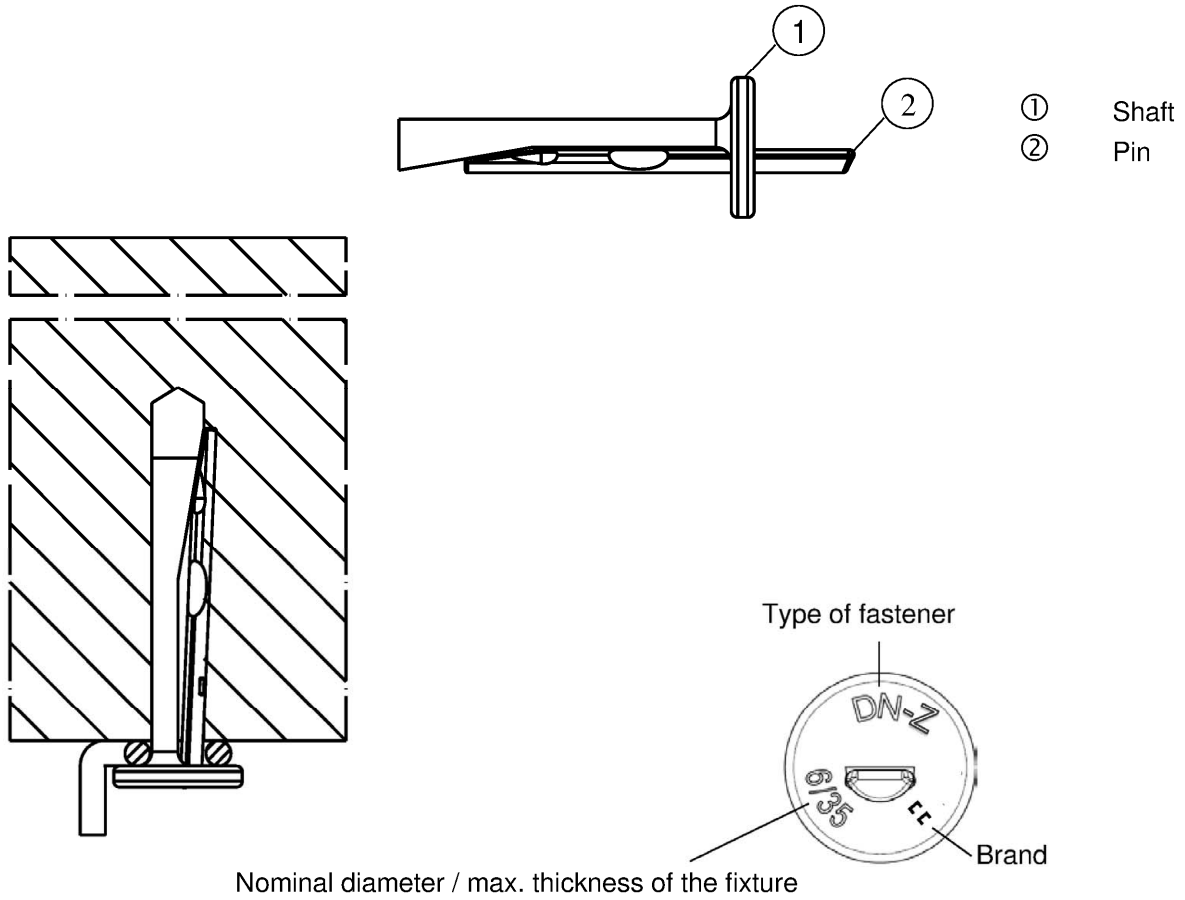

**Table A1.1:** Dimensions

Size	PRIMA CEILING ANCHOR	
	6/5	6/35
Length of the $\frac{\text{pin}}{\text{shaft}}$	$L_1$	43
	$L_2$	37,5
Diameter of the head	$D \geq$	13

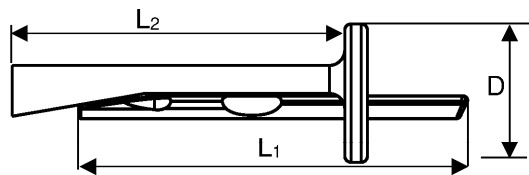

(Fig. not to scale)

**PRIMA Ceiling Anchor**

**Product description**

Product installation conditions, product marking and product dimensions

**Annex A 1**

## Specifications of intended use

### Anchorage subject to:

Size	PRIMA CEILING ANCHOR 6  ✓
Static and quasi-static loads	
Only for use in concrete for redundant non-structural systems	
Fire exposure	

### Base materials:

- Compacted reinforced and unreinforced normal weight concrete without fibres according to EN 206:2013
- Strength classes C12/15 to C50/60 according to EN 206:2013
- Cracked and non-cracked concrete

### Use conditions (Environmental conditions):

- Anchorage subject to dry internal conditions

### Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work
- Verifiable calculation notes and drawings have to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.).
- Design of fastenings according to EN 1992-4:2018, Design Method B and Technical Report TR 055, Edition February 2018


**PRIMA Ceiling Anchor**

**Intended use**  
Specifications

**Annex B 1**


**Table B2.1:** Installation parameters

Size			PRIMA CEILING ANCHOR	
			6/5	6/35
Thickness of the fixture	$t_{fix}$	$\leq$	5	35
Nominal drill hole diameter	$d_0$		6	
Diameter of clearance hole in the fixture	$d_f$	$\leq$	7	
Maximum bit diameter	$d_{cut,max}$		6,40	
Effective embedment depth	$h_{ef}$	[mm]	32	
Depth of drill hole to deepest point	with hole cleaning	$h_1$	37	
	without hole cleaning		42	
Minimum thickness of concrete member	$h_{min}$		80	

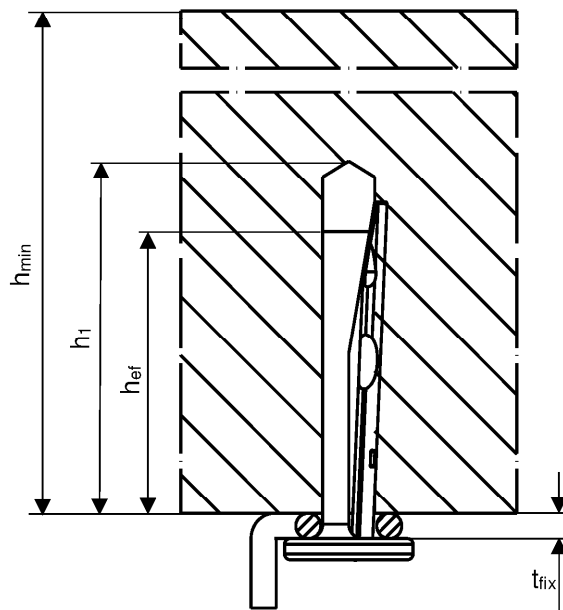


**Installation instructions**


- Hammer or hollow drilling only
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- Positioning of the drill holes without damaging the reinforcement
- In case of aborted hole: New drilling at a minimum distance twice the depth of aborted hole away of or smaller distance if the aborted hole is filled with high strength mortar and if under shear or oblique tension load it is not in the direction of the load application




1: Drill the hole



2: Set the fastener



3: Set the pin, until flush to the surface



4: Installed fastener

(Fig. not to scale)

**PRIMA Ceiling Anchor**

**Intended use**

Installation parameters and installation instructions

**Annex B 2**

**Table C1.1: Characteristic resistance**

Size		PRIMA CEILING ANCHOR	
<b>For all load directions and for all failures modes</b>			
Effective embedment depth	$h_{ef}$ [mm]		32
Characteristic resistance in cracked and non-cracked concrete	C12/15	$F_{Rk}^0$ [kN]	1,5
	C20/25 to C50/60		2,0
Characteristic edge distance	$C_{cr,N} = C_{min}$	[mm]	60
	$S_{cr,N} = S_{min}$		50
Partial factor	$\gamma_M$ [-]		1,5
Installation factor	$\gamma_{inst}$ [-]		1,0
<b>Shear load with lever arm</b>			
Characteristic bending resistance	$M_{Rk,s}^0$ [Nm]		4,4
Partial factor for steel failure	$\gamma_{Ms}^{1)}$ [-]		1,25

<sup>1)</sup> In absence of other national regulations

**Table C1.2: Characteristic resistance under fire exposure for all effective embedment depths**

Size		PRIMA CEILING ANCHOR 6	
<b>Steel failure for tension and shear load</b>			
R30	Characteristic resistance without lever arm	$F_{Rk,s,fi}$ [kN]	1,00
R60			0,50
R90			0,34
R120			0,26
R30 – R120	Characteristic resistance with lever arm	$M_{Rk,s,fi}^0$ [Nm]	No performance assessed
<b>Spacing and edge distance</b>			
R30 – R120		$S_{cr,fi}$ [mm]	200
			$C_{cr,fi}$

<sup>1)</sup>  $N_{Rk,s,fi} = N_{Rk,p,fi} = V_{Rk,s,fi} = F_{Rk,s,fi}$   
For fire exposure from more than one side  $C_{min} \geq 300$  mm

**PRIMA Ceiling Anchor**

**Performances**

Characteristic resistance and characteristic resistance under fire exposure

**Annex C 1**