

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments



European Technical Assessment

ETA-13/0222
of 5 April 2022

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

DEMU Fixing anchor T-FIXX

Product family
to which the construction product belongs

Cast-in anchor with internal threaded socket

Manufacturer

Leviat GmbH
Liebigstraße 14
40764 Langenfeld
DEUTSCHLAND

Manufacturing plant

Leviat Herstellwerke

This European Technical Assessment
contains

16 pages including 3 annexes which form an integral part
of this assessment

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

EAD 330012-01-0601, Edition 02/ 2021

This version replaces

ETA-13/0222 issued on 4 December 2015

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The DEMU Fixing anchor T-FIXX in the size of M10, M12, M16 and M20 is an anchor consisting of an internal threaded socket deformed at one end. The socket is made of galvanised steel or stainless steel. The anchor is imbedded surface-flush or sunk in the concrete. The anchorage is characterised by mechanical interlock at the deformed end of the socket.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic values for tension loading under static and quasi-static actions and displacements	
- Resistance to steel failure for tension loading	See Annex C1
- Resistance to pull-out failure	See Annex C1
- Resistance to concrete cone failure	See Annex C1
- Resistance to splitting and edge distance to prevent splitting and blow-out failure	See Annex C1
- Minimum edge distance and spacing	See Annex B3
- Maximum torque moment	See Annex B5
- Displacements for tension loading	See Annex C2

Essential characteristic	Performance
Characteristic values for shear loading under static and quasi-static actions and displacements <ul style="list-style-type: none"> - Resistance to steel failure for shear loading - Resistance to concrete edge failure without supplementary reinforcement - Resistance to concrete edge failure with supplementary reinforcement - Resistance to pry-out failure - Displacements for shear loading 	See Annex C2 See Annex C3 No performance assessed See Annex C3 See Annex C3
Characteristic values for seismic performance categories C1 and C2 and displacements	No performance assessed

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	See Annex C4

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with EAD No. 330012-01-0601, the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable EAD


Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.

Issued in Berlin on 5 April 2022 by Deutsches Institut für Bautechnik

Dipl.-Ing. Beatrix Wittstock
Head of Section

beglaubigt:
Aksünger

DEMU T-FIXX

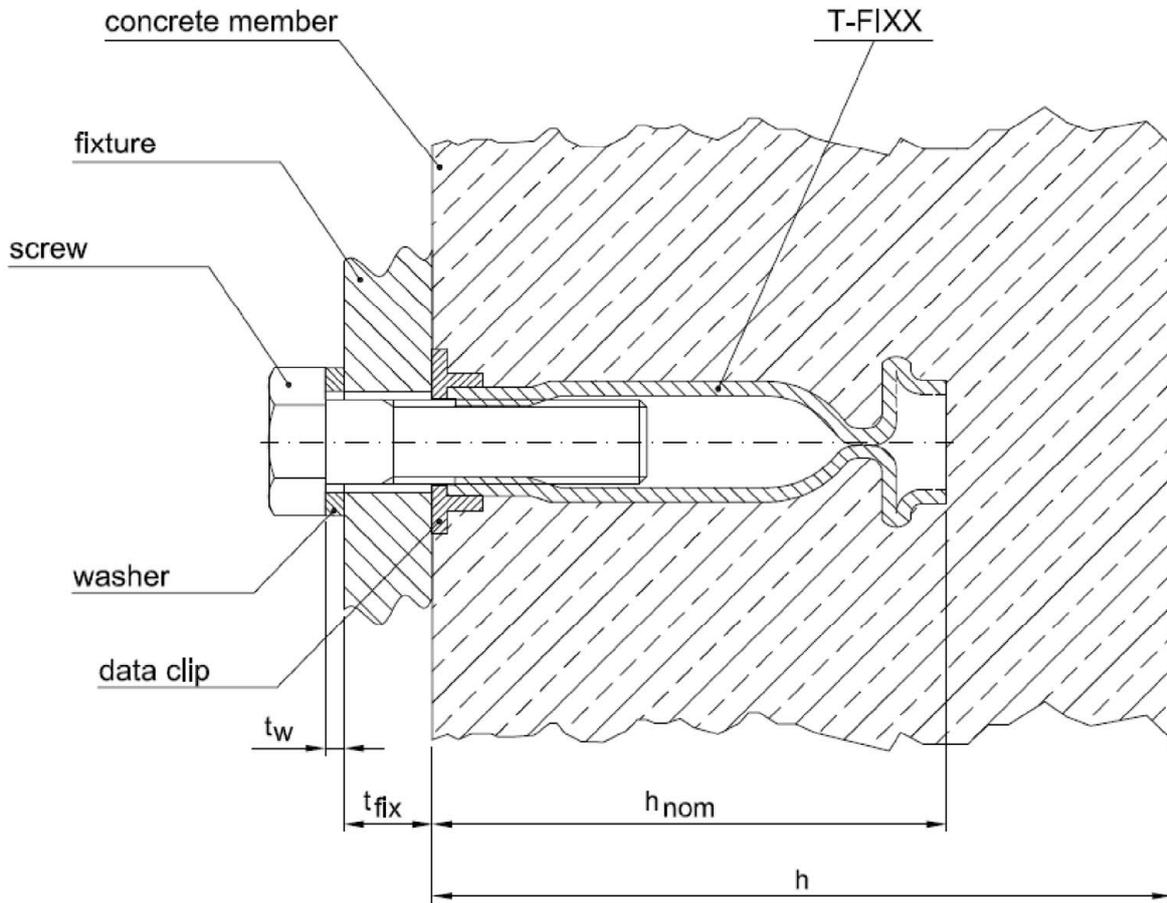


- h = thickness of concrete member
- t_{fix} = thickness of fixture
- t_w = thickness of washer
- h_{nom} = embedment depth

DEMU Fixing anchor T-FIXX

Product description
Installed condition

Annex A1

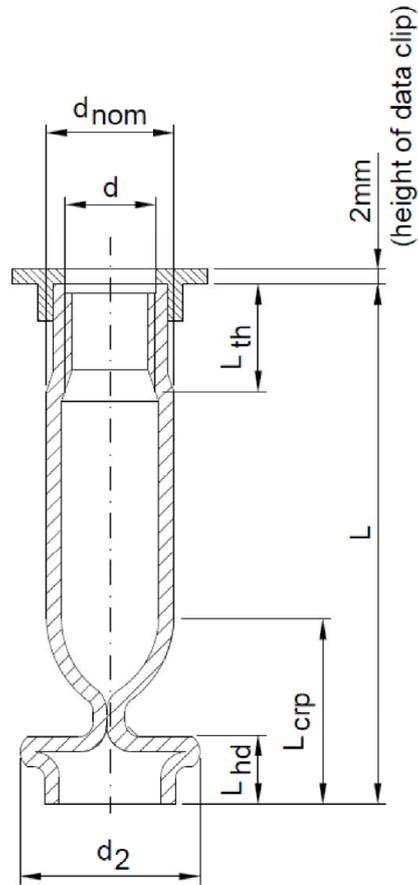

There are two different materials available for the DEMU Fixing anchor T-FIXX:

Material 1: Fixing anchor in galvanised steel

Material 2: Fixing anchor in stainless steel


Table A1: Dimensions of DEMU Fixing anchor T-FIXX

d	d_{nom}		L_{th}	L_{hd}	L_{crp}	d_2		L	
	Material 1	Material 2				Material 1 + 2	Material 1 + 2	Material 1	Material 2
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
M10	13,5	13,5	10,4 - 13,6	8,3	9,2	18,1	17,3	50 / 75	50 / 65
M12	17,0	17,2	12,5 - 16,1	9,5	8,5	23,0	23,0	50 / 70 / 95	50 / 70 / 115
M16	21,3	21,3	16,1 - 22,1	10,7	7,3	29,1	28,0	60 / 100 / 125	60 / 80 / 110
M20	26,9	26,9	20,2 - 27,6	10,8	7,2	34,7	33,5	70 / 100 / 145	70 / 100 / 125

DEMU Fixing anchor T-FIXX

Product description
Dimensions

Annex A2

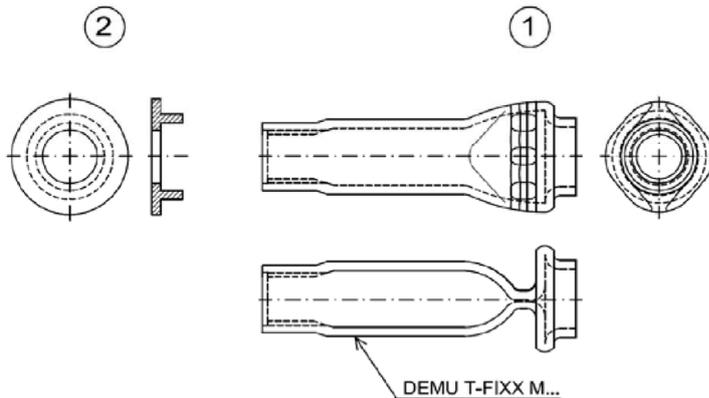

Marking:

e.g.: DEMU T-FIXX M10x50 GV

DEMU: identifying mark of the producer

T-FIXX: name of the anchor

M10x50: size

GV: material

Material:

GV: galvanised steel

A4: stainless steel


Table A2: Specification and material of fixing anchor

Item	Component	Material 1	Material 2
		Fixing anchor in galvanised steel (GV)	Fixing anchor in stainless steel (A4)
1	Fixing anchor	1.0308 (E235), 1.0122, 1.0038 (S235), 1.0225 (E275), 1.0044 (S275), 1.0533 (E295), 1.0570 (S355), 1.0580 (E355), 1.0255 (P235TR2) in accordance with EN 10305-1, -2 or -3:2016, all delivery condition +N, galvanised ¹⁾	CRC III: 1.4401, 1.4404, 1.4571, 1.4362, 1.4578, 1.4062, 1.4162, 1.4662; CRC IV: 1.4439, 1.4462, 1.4539; CRC V: 1.4565, 1.4529, 1.4547; in accordance with EN 10217-7:2014
2	Data clip	for fixing anchor made of material 1: for fixing anchor made of material 2:	HDPE / RAL 7035 / (light-) grey HDPE / RAL 9003 / (signal-) white

Table A3: Specification and material of fixing components / suppl. reinforcement
(not included with the fixing system)

Appr. Component	Material for use with fixing anchors made of material 1	Material for use with fixing anchors made of material 2
Washer	Steel in accordance with EN 10025:2004, galvanised ¹⁾	Stainless steel: CRC III: 1.4401, 1.4404, 1.4571, 1.4362, 1.4578, 1.4062, 1.4162, 1.4662; CRC IV: 1.4439, 1.4462, 1.4539; CRC V: 1.4565, 1.4529, 1.4547 in accordance with EN 10088:2009
	Dimensions in accordance with EN ISO 7089:2000/7093-1:2000	
Screw	Steel in accordance with EN ISO 898-1:2013, galvanised ¹⁾ , strength grade 4.6, 5.6 or 8.8	Stainless steel: CRC III: 1.4401, 1.4404, 1.4571, 1.4362, 1.4578, 1.4062, 1.4162, 1.4662; CRC IV: 1.4439, 1.4462, 1.4539; CRC V: 1.4565, 1.4529, 1.4547 in accordance with EN ISO 3506-1:2009, strength grade A4-50, A4-70 or A4-80
Suppl. reinforcement	B500A or B500B in accordance with EN 1992-1-1:2004+AC 2010 in accordance with EN 1992-4:2018	Stainless reinforcement steel B500A or B500B meeting the requirements for concrete cover c_{nom} in accordance with EN 1992-1-1:2004+AC 2010

¹⁾ thickness of coating $\geq 5\mu\text{m}$ acc. EN ISO 4042:2018



Data clip: section and top view (with example for marking)

DEMU Fixing anchor T-FIXX

Product description
Marking and materials

Annex A3

Specifications of Intended use

Anchorage subject to:

- Static and quasi-static loads.
- Fire exposure: only for concrete C20/25 to C50/60.

Base material:

- Reinforced or unreinforced compacted normal weight concrete without fibers in accordance with EN 206:2013+A1:2016
- Strength classes C20/25 to C90/105 in accordance with EN 206:2013+A1:2016
- Cracked or uncracked concrete

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (material 1 and 2 in accordance with Annex A3).
- In accordance with EN 1993-1-4:2015 according to the Corrosion Resistance Class – see Annex A3 Table A2 and Table A3, Material 2.

Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e. g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages under static or quasi-static actions are designed in accordance with:
 - EN 1992-4:2018
- Anchorages under fire exposure are designed in accordance with:
 - EN 1992-4:2018, Annex D
(local spalling of the concrete cover must be avoided)
- Requirements for the screw:
 - Material in accordance with Annex A3, Table A3
 - Strength class in accordance with Annex C1 and C2
 - Length in accordance with Annex B2, Table B1

Installation:

- Anchor installation carried out by appropriately quantified personnel and under the supervision of the person responsible for technical matters of the site.
- Use of the anchor only as supplied by the manufacturer without any manipulation or exchanging the components.
- The anchors are fixed on the formwork so that no movement of the anchors will occur during the time of laying the reinforcement and of placing and compacting the concrete.
- Adequate compaction close to the anchor particularly at head of eth bolt, e.g. without significant voids. The cast-in anchor is protected against ingress of concrete into the threaded socket.
- The installation torques given in Annex B2 are not exceeded.
- The inner area of the socket of the anchor made of galvanised steel has to be protected against ingress water.


DEMU Fixing anchor T-FIXX

Intended use
Specifications

Annex B1

Direct contact between fixture and data clip


The fixture is braced to the data clip, if necessary by suitable washers.

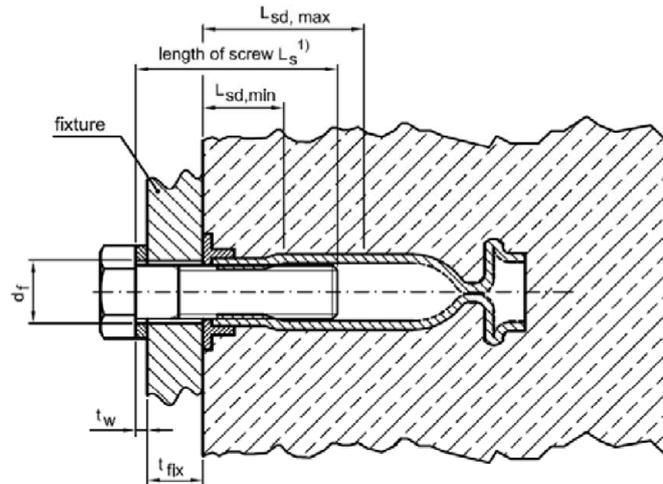

$$1) t_w + t_{fix} + L_{sd,min} \leq L_s \leq t_w + t_{fix} + L_{sd,max}$$

General application

The fixture is braced to the concrete, the fixing anchor being embedded flush or recessed in the concrete.

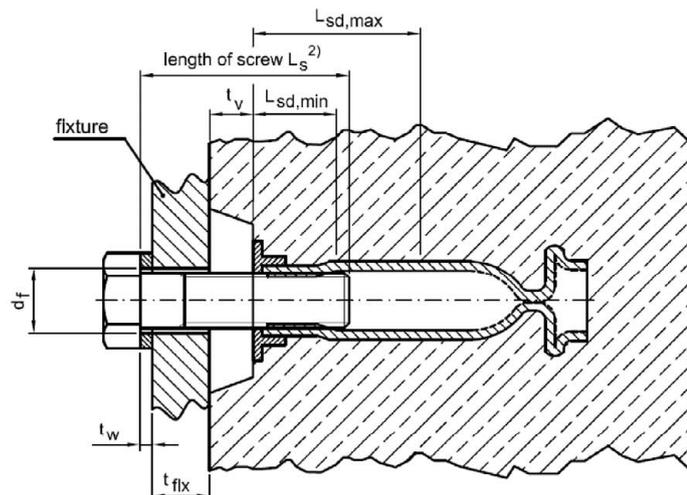

$$2) t_w + t_{fix} + t_v + L_{sd,min} \leq L_s \leq t_w + t_{fix} + t_v + L_{sd,max}$$


Table B1: Installation parameters

Thread	d	[mm]	M10	M12	M16	M20
Maximum torque moment	max. T_{inst}	[Nm]	≤ 8	≤ 10	≤ 30	≤ 60
Minimum screw-in length	$L_{sd,min}$	[mm]	17,0	20,0	26,0	32,0
Maximum screw-in length	$L_{sd,max}$	[mm]	32,0	M12x50: 30,0	M16x60: 32,0	M20x70: 44,0
				M12x ≥70: 38,0	M16x ≥80: 50,0	M20x ≥100: 62,0
Diameter of clearance hole in fixture	d_f	[mm]	12,0	14,0	18,0	22,0

DEMU Fixing anchor T-FIXX

Intended use
Positions of the fixture, installation parameters

Annex B2

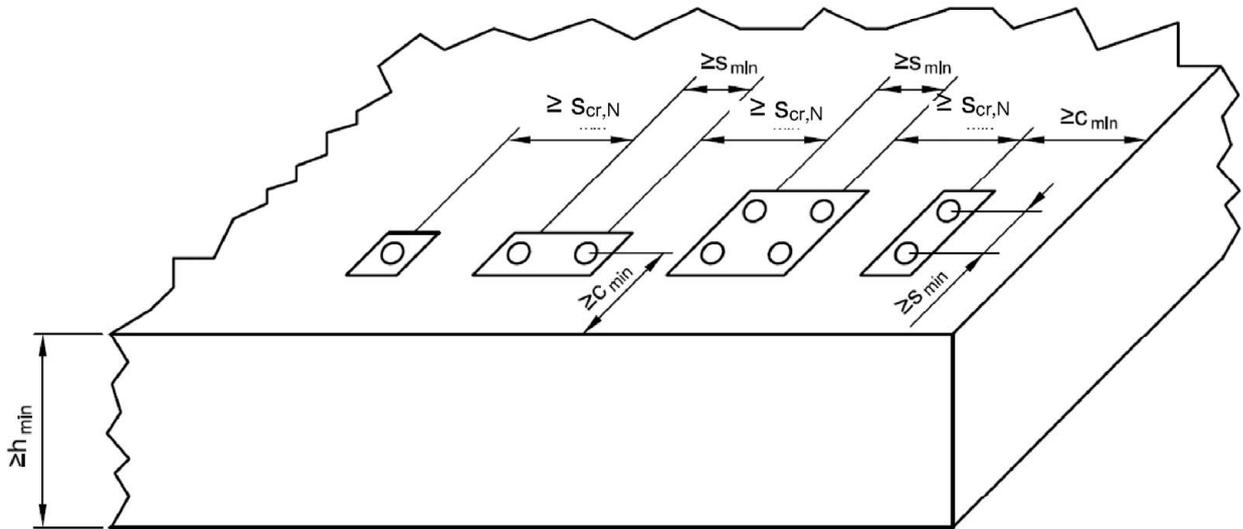

The mentioned spacings, edge distances and member thicknesses apply also for fixing anchors installed in the front edge.

Table B2: Min. thickness of concrete member, min. edge distances and spacing

Thread	d	[mm]	M10	M12	M16	M20
Minimum spacing	S_{min}	[mm]	100	100	100	120
Minimum edge distance	C_{min}	[mm]	50	50	50	60
Minimum thickness of concrete member	h_{min}	[mm]	$h_{nom} + c_{nom}^{1)}$			
¹⁾ c_{nom} in accordance with EN 1992-1-1:2004+AC 2010 with $c_{nom} \geq 20$ mm						
For fixing anchors made of stainless steel a minimum concrete cover $c_{nom} = 20$ mm is sufficient.						

DEMU Fixing anchor T-FIXX

Intended use
Arrangement of fixing anchors and member thickness

Annex B3


Installation instruction - part 1

1. Scope of delivery



- 1) Selection of fixing anchor in accordance with the planning documents.
- 1a) DEMU T-FIXX made of galvanised steel (GV) or stainless steel (A4)
- 1b) Data clip for T-FIXX GV, colour: grey
Data clip for T-FIXX A4, colour: white

2. Fixing of the anchor to the formwork

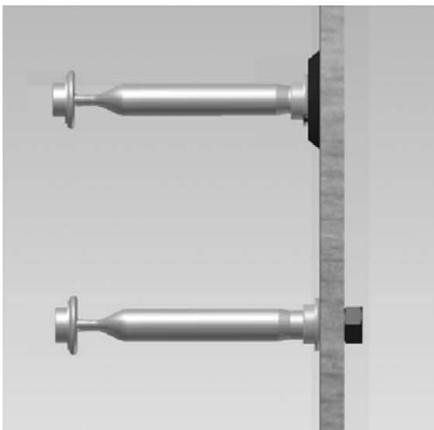

- 1) Attach data clip to the fixing anchor.
- 2) Fix the anchor to the formwork with the help of DEMU assembly accessories (e. g. nailing plate) or alternatively by hexagon bolts.
→ The inside of the threaded socket must be protected against ingress of dirt and water.
- 3) If necessary, supplementary reinforcement has to be placed according to the planning documents.

3. Pouring and compacting of concrete



- 1) Pour concrete carefully, make sure the anchor stays in place!
- 2) Compact concrete carefully, avoid direct contact between compacting device and anchor.
→ The anchor must not be moved by force or damaged!


DEMU Fixing anchor T-FIXX

Intended use
Installation instruction – part 1

Annex B4


Installation instruction - part 2

4. Hardening of the concrete, striking the formwork

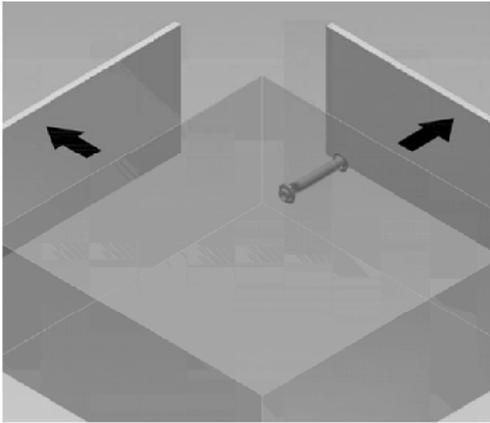


- 1) Remove assembly accessories and formwork.
- 2) Check if the inside of the threaded socket is free from dirt, otherwise clean it; further protection against ingress of water, dirt, etc. until required for use.

5. Mounting of fixture

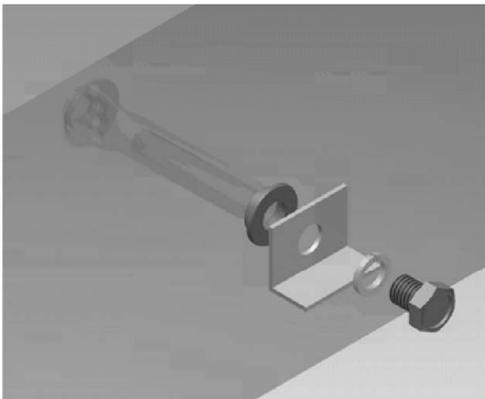

- 1) Make sure that the concrete has reached its final strength.
- 2) Check the length of the required bolt.
→ Maximum / minimum screw-in length in accordance with Annex B2!
- 3) Mounting of the fixture
→ Use fixing components according Annex A3, Table A3.
→ Maximum torque moments, see table below!
→ Take additionally care of assembly advices for the fixture.

6. Maximum torque moments

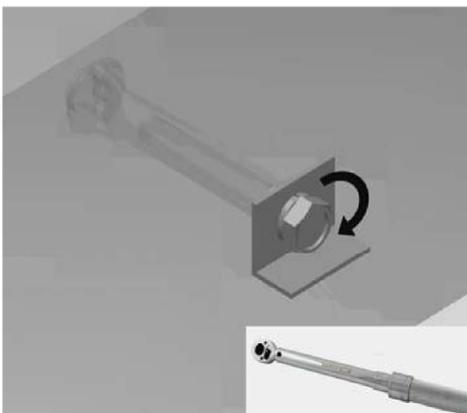

Apply torque moment with the help of a torque wrench.
 T_{inst} must not be exceeded.

Maximum torque moment T_{inst}						
Thread	d	[mm]	M10	M12	M16	M20
maximum installation torque	max. T_{inst}	[Nm]	≤ 8	≤ 10	≤ 30	≤ 60

DEMU Fixing anchor T-FIXX

Intended use
Installation instruction – part 2

Annex B5

Table C1: **Characteristic values for tension loads**

Thread	d	[mm]	M10	M12	M16	M20				
Steel failure, fixing anchor and screw (min. steel strength 4.6) made of galvanised steel										
Characteristic resistance	$N_{Rk,s}$	[kN]	17,5	29,2	47,4	61,4				
Partial factor	γ_{Ms}	¹⁾ [-]	1,74							
Steel failure, fixing anchor and screw (min. steel strength A4-50) made of stainless steel										
Characteristic resistance	$N_{Rk,s}$	[kN]	24,9	42,2	69,7	90,3				
Partial factor	γ_{Ms}	¹⁾ [-]	2,79	2,86	2,79					
Steel failure, fixing anchor and screw (min. steel strength A4-70) made of stainless steel										
Characteristic resistance	$N_{Rk,s}$	[kN]	24,9	43,5	69,7	90,3				
Partial factor	γ_{Ms}	¹⁾ [-]	2,79							
Pull-out failure										
Fixing anchor electrolytically galvanised										
Char. resistance in cr. concrete	C20/25	$N_{Rk,p}$	[kN]	17,1	28,3	46,3	56,6			
Char. resistance in uncr. concrete	C20/25	$N_{Rk,p}$	[kN]	24,0	39,6	64,8	79,2			
Fixing anchor in stainless steel										
Char. resistance in cr. concrete	C20/25	$N_{Rk,p}$	[kN]	13,8	27,5	38,9	47,0			
Char. resistance in uncr. concrete	C20/25	$N_{Rk,p}$	[kN]	19,3	38,5	54,5	65,7			
Increasing factors for $N_{Rk,p} = N_{Rk,p(C20/25)} \cdot \Psi_c$ in cracked and uncracked concrete	C25/30	Ψ_c	[-]	1,25						
	C30/37	Ψ_c	[-]	1,50						
	C35/45	Ψ_c	[-]	1,75						
	C40/50	Ψ_c	[-]	2,00						
	C45/55	Ψ_c	[-]	2,25						
	C50/60	Ψ_c	[-]	2,50						
Partial factor		γ_{Mp}	¹⁾ [-]	1,50						
Concrete cone failure			M10	M12	M16	M20				
Effective anchorage depth	h_{ef}	[mm]	.x50:	43,7	.x50:	42,5	.x60:	51,3	.x70:	61,2
			.x65 ²⁾ :	58,7	.x70:	62,5	.x80 ²⁾ :	71,3	.x100:	91,2
			.x75 ³⁾ :	68,7	.x95 ³⁾ :	87,5	.x100 ³⁾ :	91,3	.x125 ²⁾ :	116,2
					.x115 ²⁾ :	107,5	.x110 ²⁾ :	101,3	.x145 ³⁾ :	136,2
					.x125 ³⁾ :	116,3				
		$L \geq 50: h_{ef}^{4)}$		$L \geq 50: h_{ef}^{4)}$		$L \geq 60: h_{ef}^{4)}$		$L \geq 70: h_{ef}^{4)}$		
Factor to take into account the influence of load transfer mechanisms in cracked and uncracked concrete	k_1	[-]	8,9							
			12,7							
Characteristic spacing	$s_{cr,N}$	[mm]	$3,0 \cdot h_{ef}$							
Characteristic edge distance	$c_{cr,N}$	[mm]	$1,5 \cdot h_{ef}$							
Partial factor		γ_{Mc}	¹⁾ [-]	1,50						
Splitting										
Minimum thickness of concrete member	$h \geq$	[mm]	$2,0 \cdot h_{ef}$							
Characteristic spacing	$s_{cr,sp}$	[mm]	$3,0 \cdot h_{ef}$							
Characteristic edge distance	$c_{cr,sp}$	[mm]	$1,5 \cdot h_{ef}$							
Partial factor		γ_{Msp}	¹⁾ [-]	1,50						

¹⁾ in absence of other national regulations; ²⁾ only stainless steel; ³⁾ only galvanised steel; ⁴⁾ $h_{ef} = L - L_{hd} + 2$ [mm]

DEMU Fixing anchor T-FIXX

Performances
Characteristic values for tension loads

Annex C1

Table C2: Displacements under tension loads

Thread	d	[mm]	M10	M12	M16	M20
Tension load	N	[kN]	7	12	19	25
Short time displacements	δ_{N0}	[mm]	0,3	0,5	0,3	0,2
Long time displacements	$\delta_{N\infty}$	[mm]	0,6	1,0	0,6	0,4

Table C3: Characteristic values for shear loads - steel failure

Thread	d	[mm]	M10	M12	M16	M20
Shear loads without lever arm						
Group factor (EN 1992-4:2019, 7.2.2.3.1)	k_7	[-]	1,0			
Steel failure, fixing anchor and screw (min. steel strength 4.6) made of galvanised steel						
Characteristic resistance	$V_{Rk,s}$	[kN]	8,8	14,6	23,7	30,7
Partial factor	$\gamma_{Ms}^{1)}$	[-]	1,45			
Steel failure, fixing anchor and screw (min. steel strength A4-50) made of stainless steel						
Characteristic resistance	$V_{Rk,s}$	[kN]	12,5	21,1	34,8	45,1
Partial factor	$\gamma_{Ms}^{1)}$	[-]	2,33	2,38	2,33	
Steel failure, fixing anchor and screw (min. steel strength A4-70) made of stainless steel						
Characteristic resistance	$V_{Rk,s}$	[kN]	12,5	21,8	34,8	45,1
Partial factor	$\gamma_{Ms}^{1)}$	[-]	2,33			
Shear loads with lever arm						
Steel failure, fixing anchor and screw (min. steel strength 4.6) made of galvanised steel						
Characteristic resistance	$M_{Rk,s}^0$	[Nm]	29,9	52,4	133,2	259,6
Partial factor	$\gamma_{Ms}^{1)}$	[-]	1,67			
Steel failure, fixing anchor and screw (min. steel strength 5.6) made of galvanised steel						
Characteristic resistance	$M_{Rk,s}^0$	[Nm]	37,4	65,5	166,5	324,5
Partial factor	$\gamma_{Ms}^{1)}$	[-]	1,67			
Steel failure, fixing anchor and screw (min. steel strength 8.8) made of galvanised steel						
Characteristic resistance	$M_{Rk,s}^0$	[Nm]	68,9	104,8	263,8	541,4
Partial factor	$\gamma_{Ms}^{1)}$	[-]	1,45	1,25	1,45	
Steel failure, fixing anchor and screw (min. steel strength A4-50) made of stainless steel						
Characteristic resistance	$M_{Rk,s}^0$	[Nm]	37,4	65,5	166,5	324,5
Partial factor	$\gamma_{Ms}^{1)}$	[-]	2,38			
Steel failure, fixing anchor and screw (min. steel strength A4-70) made of stainless steel						
Characteristic resistance	$M_{Rk,s}^0$	[Nm]	52,3	91,7	233,1	454,4
Partial factor	$\gamma_{Ms}^{1)}$	[-]	1,56			
Steel failure, fixing anchor and screw (min. steel strength A4-80) made of stainless steel						
Characteristic resistance	$M_{Rk,s}^0$	[Nm]	101,3	104,8	388,0	796,2
Partial factor	$\gamma_{Ms}^{1)}$	[-]	2,33	1,33	2,33	

¹⁾ in absence of other national regulations

DEMU Fixing anchor T-FIXX

Performances
Displacements under tension loads and characteristic values for shear loads

Annex C2

Table C4: Characteristic values for shear loads - concrete failure

Pry-out failure			M10	M12	M16	M20
Factor	k_8	[-]	.x50: 1,0	.x50: 1,0	.x60: 1,0	.x70: 1,0
			.x65 ²⁾ : 1,0	.x70: 2,0	.x80 ²⁾ : 2,0	.x100: 2,0
			.x75 ³⁾ : 2,0	.x95 ³⁾ : 2,0	.x100 ³⁾ : 2,0	.x125 ²⁾ : 2,0
				.x115 ²⁾ : 2,0	.x110 ²⁾ : 2,0	.x145 ³⁾ : 2,0
					.x125 ³⁾ : 2,0	
			$h_{ef} < 60 \text{ mm}: 1,0; \quad h_{ef} \geq 60 \text{ mm}: 2,0$			
Partial factor	γ_{Mcp} ¹⁾	[-]	1,50			
Concrete edge failure (without suppl. reinf.)			M10	M12	M16	M20
Effective length of fixing anchor (for shear loads)	l_f	[mm]	.x50: 34,5	.x50: 34,0	.x60: 44,0	.x70: 54,0
			.x65 ²⁾ : 49,5	.x70: 54,0	.x80 ²⁾ : 64,0	.x100: 84,0
			.x75 ³⁾ : 59,5	.x95 ³⁾ : 79,0	.x100 ³⁾ : 84,0	.x125 ²⁾ : 109,0
				.x115 ²⁾ : 99,0	.x110 ²⁾ : 94,0	.x145 ³⁾ : 129,0
					.x125 ³⁾ : 109,0	
		$L \geq 50: l_f$ ⁵⁾	$L \geq 50: l_f$ ⁵⁾	$L \geq 60: l_f$ ⁵⁾	$L \geq 70: l_f$ ⁵⁾	
Effective outside diameter	d_{nom}	[mm]	13,5	17,0 / 17,2 ⁴⁾	21,3	26,9
Partial factor	γ_{Mce} ¹⁾	[-]	1,50			
¹⁾ in absence of other national regulations; ²⁾ only stainless steel; ³⁾ only galvanized steel; ⁴⁾ higher value applies for stainless steel; ⁵⁾ $l_f = h_{ef} - L_{crp}$						

Table C5: Displacements under shear loads

Thread	d	[mm]	M10	M12	M16	M20
Shear load	V	[kN]	13	19	24	28
Short time displacements	$\bar{\delta}_{V0}$	[mm]	2,0	2,0	2,0	3,0
Long time displacements	$\bar{\delta}_{V\infty}$	[mm]	3,0	3,0	3,0	4,5

DEMU Fixing anchor T-FIXX

Performances
Characteristic values for shear loads and displacements under shear loads

Annex C3

Table C5: **Characteristic values for resistance to fire**

Thread size	d	[mm]	M10	M12	M16	M20	
Steel failure for tension and shear load ($F_{Rk,s,fi} = N_{Rk,s,fi} = V_{Rk,s,fi}$),							
fixing anchor and screw made of galvanised steel							
Characteristic resistance	R30	$F_{Rk,s,fi}$	[kN]	0,8	1,7	2,8	3,6
	R60	$F_{Rk,s,fi}$	[kN]	0,7	1,3	2,1	2,7
	R90	$F_{Rk,s,fi}$	[kN]	0,5	1,1	1,8	2,3
	R120	$F_{Rk,s,fi}$	[kN]	0,4	0,8	1,4	1,8
Partial factor		$\gamma_{Ms,fi}^{1)}$	[-]	1,00			
Characteristic resistance	R30	$M_{Rk,s,fi}^o$	[Nm]	1,1	2,6	6,7	13,0
	R60	$M_{Rk,s,fi}^o$	[Nm]	1,0	2,0	5,0	9,7
	R90	$M_{Rk,s,fi}^o$	[Nm]	0,7	1,7	4,3	8,4
	R120	$M_{Rk,s,fi}^o$	[Nm]	0,6	1,3	3,3	6,5
Partial factor		$\gamma_{Ms,fi}^{1)}$	[-]	1,00			
Steel failure for tension and shear load ($F_{Rk,s,fi} = N_{Rk,s,fi} = V_{Rk,s,fi}$),							
fixing anchor and screw made of stainless steel							
Characteristic resistance	R30	$F_{Rk,s,fi}$	[kN]	1,2	2,5	4,2	5,4
	R60	$F_{Rk,s,fi}$	[kN]	1,0	2,1	3,5	4,5
	R90	$F_{Rk,s,fi}$	[kN]	0,8	1,7	2,8	3,6
	R120	$F_{Rk,s,fi}$	[kN]	0,7	1,3	2,2	2,9
Partial factor		$\gamma_{Ms,fi}^{1)}$	[-]	1,00			
Characteristic resistance	R30	$M_{Rk,s,fi}^o$	[Nm]	1,9	3,9	10,0	19,5
	R60	$M_{Rk,s,fi}^o$	[Nm]	1,5	3,3	8,3	16,2
	R90	$M_{Rk,s,fi}^o$	[Nm]	1,2	2,6	6,7	13,0
	R120	$M_{Rk,s,fi}^o$	[Nm]	1,0	2,1	5,3	10,4
Partial factor		$\gamma_{Ms,fi}^{1)}$	[-]	1,00			
Pull-out failure							
Characteristic resistance	R90	$N_{Rk,p,fi}$	[kN]	$N_{Rk,p,fi(90)} = 0,25 \cdot N_{Rk,p}$			
	R120	$N_{Rk,p,fi}$	[kN]	$N_{Rk,p,fi(120)} = 0,20 \cdot N_{Rk,p}$			
Partial factor		$\gamma_{Mp,fi}^{1)}$	[-]	1,00			

¹⁾ In absence of other national regulations

DEMU Fixing anchor T-FIXX

Performances
Characteristic values for resistance to fire

Annex C4