

Approval body for construction products  
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and  
Laender Governments



## European Technical Assessment

**ETA-15/0435**  
**of 16 November 2022**

English translation prepared by DIBt - Original version in German language

### General Part

Technical Assessment Body issuing the  
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Hilti metal expansion anchor HST2 and HST2-R

Product family  
to which the construction product belongs

Mechanical fastener for use in concrete

Manufacturer

Hilti AG  
BU Anchors  
Feldkircherstraße 100  
9494 SCHAAN  
FÜRSTENTUM LIECHTENSTEIN

Manufacturing plant

Hilti Werke

This European Technical Assessment  
contains

29 pages including 3 annexes which form an integral part  
of this assessment

This European Technical Assessment is  
issued in accordance with Regulation (EU)  
No 305/2011, on the basis of

EAD 330232-01-0601, Edition 05/2021

This version replaces

ETA-15/0435 issued on 21 December 2017

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

## Specific Part

### 1 Technical description of the product

The Hilti metal expansion anchor HST2 and HST2-R is an anchor made of galvanized steel (HST2) or stainless steel (HST2-R) which is placed into a drilled hole and anchored by torque controlled expansion.

The product description is given in Annex A.

### 2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading) Method A	See Annex B6 to B8, C1 to C2
Characteristic resistance to shear load (static and quasi-static loading)	See Annex C3
Displacements (static and quasi-static loading)	See Annex C4
Characteristic resistance and displacements for seismic performance category C1 and C2	See Annex C5 to C8

#### 3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	See Annex C9 to C10

#### 3.3 Aspects of durability linked with the Basic Works Requirements

Essential characteristic	Performance
Durability	See Annex B1

English translation prepared by DIBt

**4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base**

In accordance with the European Assessment Document EAD 330232-01-0601 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

**5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable EAD**


Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.

Issued in Berlin on 16 November 2022 by Deutsches Institut für Bautechnik


Dipl.-Ing. Beatrix Wittstock  
Head of Section

*beglaubigt:*  
Ziegler

### Installed condition for HST2 and HST2-R

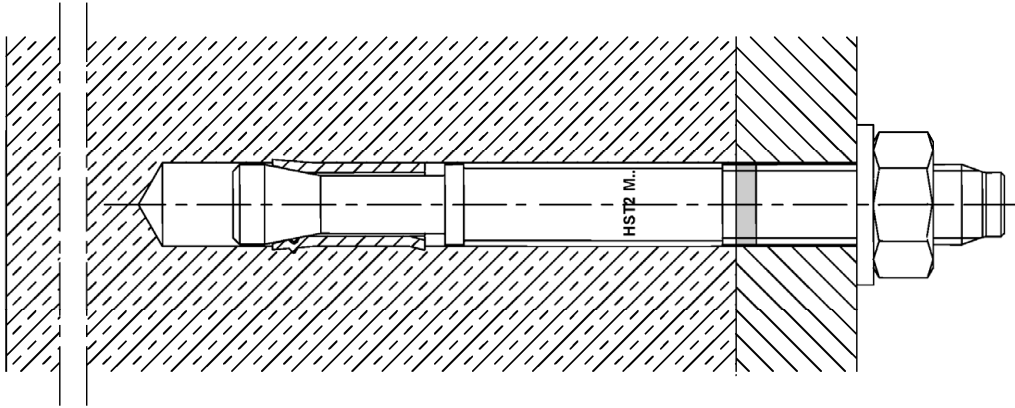

### Product description and marking for HST2 and HST2-R

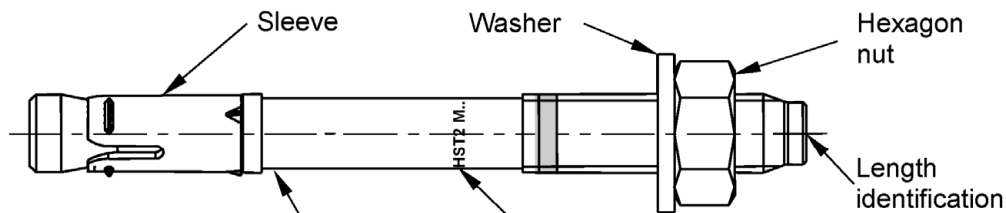

Marking:  
HST2: HST2 M .../t<sub>fix</sub>  
HST2-R: HST2-R M .../t<sub>fix</sub>

### Hilti metal expansion anchor HST2 and HST2-R

#### Product description

Installation condition, anchor types, marking and identification

Annex A1

**Table A1: Length identification HST2 and HST2-R**

Letter		A	B	C	D	E	f	II
Anchor length	≥ [mm]	38,1	50,8	63,5	76,2	88,9	100,0	100,0
	< [mm]	50,8	63,5	76,2	88,9	101,6	100,0	100,0

Letter		F	G	Δ	H	I	J	K
Anchor length	≥ [mm]	101,6	114,3	125,0	127,0	139,7	152,4	165,1
	< [mm]	114,3	127,0	125,0	139,7	152,4	165,1	177,8

Letter		L	M	N	O	P	Q	R
Anchor length	≥ [mm]	177,8	190,5	203,2	215,9	228,6	241,3	254,0
	< [mm]	190,5	203,2	215,9	228,6	241,3	254,0	279,4

Letter		r	S	T	U	V	W	X
Anchor length	≥ [mm]	260,0	279,4	304,8	330,2	355,6	381,0	406,4
	< [mm]	260,0	304,8	330,2	355,6	381,0	406,4	431,8

Letter		Y	Z	AA	BB	CC	DD	EE
Anchor length	≥ [mm]	431,8	457,2	482,6	508,0	533,4	558,8	584,2
	< [mm]	457,2	482,6	508,0	533,4	558,8	584,2	609,6

Letter		FF	GG	HH	II	JJ	KK	LL
Anchor length	≥ [mm]	609,6	635,0	660,4	685,8	711,2	736,6	762,0
	< [mm]	635,0	660,4	685,8	711,2	736,6	762,0	787,4

Letter		MM	NN	OO	PP	QQ	RR	SS
Anchor length	≥ [mm]	787,4	812,8	838,2	863,6	889,0	914,4	939,8
	< [mm]	812,8	838,2	863,6	889,0	914,4	939,8	965,2

Letter		TT	UU	VV
Anchor length	≥ [mm]	965,2	990,6	1016,0
	< [mm]	990,6	1016,0	1041,4

**Hilti metal expansion anchor HST2 and HST2-R**

**Product description**  
Length identification

**Annex A2**

**Table A2: Materials**

Designation	Material
<b>HST2</b>	
Expansion sleeve	Stainless steel A2 according to EN 10088-1:2014
Bolt	Carbon steel, galvanized, coated (transparent), rupture elongation ( $l_0 = 5d$ ) > 8 %
Washer	Carbon steel, galvanized
Hexagon nut	Carbon steel, galvanized
<b>Filling set (Carbon steel)</b>	
Sealing washer	Carbon steel, galvanized
Spherical washer	Carbon steel, galvanized
<b>HST2-R (Stainless steel A4)</b> Corrosion resistance class III according to EN 1993-1-4:2006+A1:2015	
Expansion sleeve	Stainless steel A4 according to EN 10088-1:2014
Bolt	Stainless steel A4 or Duplex A4 according to EN 10088-1:2014, cone coated (transparent), rupture elongation ( $l_0 = 5d$ ) > 8 %
Washer	Stainless steel A4
Hexagon nut	Stainless steel A4, coated
<b>Filling Set (Stainless steel)</b> Corrosion resistance class III according EN 1993-1-4:2006+A1:2015	
Sealing washer	Stainless steel A4 according to ASTM A 240/A 240M:2019
Spherical washer	Stainless steel A4 according to EN 10088-1:2014

Hilti metal expansion anchor HST2 and HST2-R

Product description  
Materials

**Annex A3**

### Injection mortar Hilti HIT-HY 200-A

Hybrid system with resin, hardener, cement and water  
Foil pack 330 ml and 500 ml

Marking:  
HILTI HIT  
Production number and  
production line  
Expiry date mm/yyyy



Product name: "Hilti HIT-HY 200-A"

### Static mixer Hilti HIT-RE-M



### Dispensers



Hilti HDM 330



Hilti HDE 500

**Table A3: curing time Hilti HIT-HY 200-A**

Temperature of base material / environment	Curing time $t_{cure}$ Hilti HIT-HY 200-A
-10 °C to -5 °C	7 hours
-4 °C to 0 °C	4 hours
1 °C to 5 °C	2 hours
6 °C to 10 °C	75 minutes
11 °C to 20 °C	45 minutes
21 °C to 30 °C	30 minutes
31 °C to 40 °C	30 minutes

Hilti metal expansion anchor HST2 and HST2-R

**Product description**  
Injection mortar


**Annex A4**



**Table A4: Dimensions HST2 and HST2-R**

HST2, HST2-R		M8	M10	M12	M16
Maximum length of anchor	$l_{\max}$ [mm]	260	280	295	350
Shaft diameter at the cone	$d_R$ [mm]	5,5	7,2	8,5	11,6
Length of expansion sleeve	$l_s$ [mm]	14,8	18,2	22,7	24,3
Diameter of washer	$d_w \geq$ [mm]	15,57	19,48	23,48	29,48

**HST2 and HST2-R**

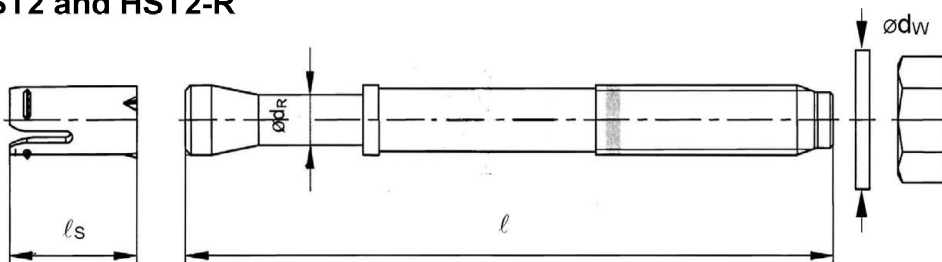


**Filling Set to fill the annular gap between anchor and fixture**

**Table A5: Dimensions Filling Set**

Filling Set used for HST2, HST2-R		M10	M12	M16
Diameter of sealing washer	$d_{vs}$ [mm]	42	44	52
Thickness of sealing washer	$h_{vs}$ [mm]	5		6

Sealing washer

Spherical washer

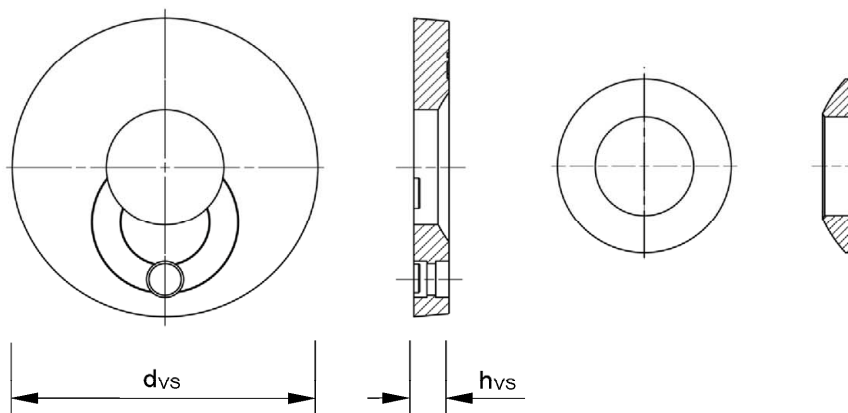

Hilti metal expansion anchor HST2 and HST2-R

Product description  
Dimensions

Annex A5

## Specifications of intended use

### Base materials:

- Compacted reinforced or unreinforced normal weight concrete without fibres according to EN 206-1:2013 + A1:2016.
- Strength classes C20/25 to C50/60 according to EN 206-1:2013 + A1:2016.
- Cracked and uncracked concrete.

### Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (all materials).
- For all other conditions according EN 1993-1-4:2006+A1:2015 corresponding to corrosion resistance classes Annex A, Table A2 (stainless steel).

### Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e. g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages are designed in accordance with:  
EN 1992-4:2018 and EOTA Technical Report TR 055:2018-02.
- In case of requirements to resistance to fire local spalling of the concrete cover must be avoided.

### Installation:




- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- The anchor may only be set once.
- Overhead applications are permitted.

Hilti metal expansion anchor HST2 and HST2-R




Intended Use  
Specifications

Annex B1



**Table B1: Drilling technique**

HST2, HST2-R		M8	M10	M12	M16
Hammer drilling (HD)		✓	✓	✓	✓
Diamond coring (DD) with <ul style="list-style-type: none"> <li>DD EC-1 coring tool and DD-C ... TS/TL core bits or DD-C ... T2/T4 core bits</li> <li>DD 30-W coring tool and C+ ... SPX-T (abrasive) core bits</li> </ul>		✓	✓	✓	✓
Hammer drilling with Hilti hollow drill bit TE-CD/YD ... drilling system (HDB)		-	-	✓	✓

**Table B2: Drill hole cleaning**

<b>Manual cleaning (MC):</b> Hilti hand pump for blowing out drill holes	
<b>Compressed air cleaning (CAC):</b> Air nozzle with an orifice opening of 3,5 mm in diameter	
<b>Automated cleaning (AC):</b> Cleaning is performed during drilling with Hilti TE-CD and TE-YD drilling system including vacuum cleaner	

**Table B3: Methods for application of torque moment**

HST2, HST2-R		M8	M10	M12	M16
Torque wrench		✓	✓	✓	✓
Machine torqueing with Hilti SIW 6AT-A22 impact wrench and SI-AT-A22 <sup>1)</sup> adaptive torque module		✓	✓	✓	-

<sup>1)</sup> Equivalent combination of Hilti SIW + SI-AT tool, compatible to this anchor type, may be used

Hilti metal expansion anchor HST2 and HST2-R

Intended Use  
Specifications

Annex B2

**Table B4: Overview use and performance categories**

<b>Anchorage subject to:</b>	<b>HST2, HST2-R</b>
Static and quasi static loading	M8 to M16 Table : C1 - C3
Seismic performance category C1/C2	M10 to M16 (HST2 only) Table : C4 - C9
Static and quasi static loading under fire exposure	M8 to M16 Table : C10 - C11

**Hilti metal expansion anchor HST2 and HST2-R**


**Intended Use**  
Specifications

**Annex B3**

**Table B5: Installation parameters for HST2 and HST2-R**

HST2, HST2-R			M8	M10	M12	M16
Nominal diameter of drill bit	$d_0$	[mm]	8	10	12	16
Cutting diameter of drill bit	$d_{cut} \leq$	[mm]	8,45	10,45	12,50	16,50
Drill hole depth <sup>1)</sup>	$h_1 \geq$	[mm]	60	74	88	103
Effective embedment depth	$h_{ef}$	[mm]	47	60	70	82
Nominal embedment depth	$h_{nom}$	[mm]	55	69	80	95
Maximum diameter of clearance hole in the fixture	$d_f$	[mm]	9	12	14	18
Installation torque moment	$T_{inst}$	[Nm]	20	45	60	110
Maximum thickness of fixture	$t_{fix,max}$	[mm]	195	200	200	235
Width across flats	SW	[mm]	13	17	19	24

<sup>1)</sup> In case of diamond drilling + 5 mm for M8 to M10 and + 2 mm for M12 to M16

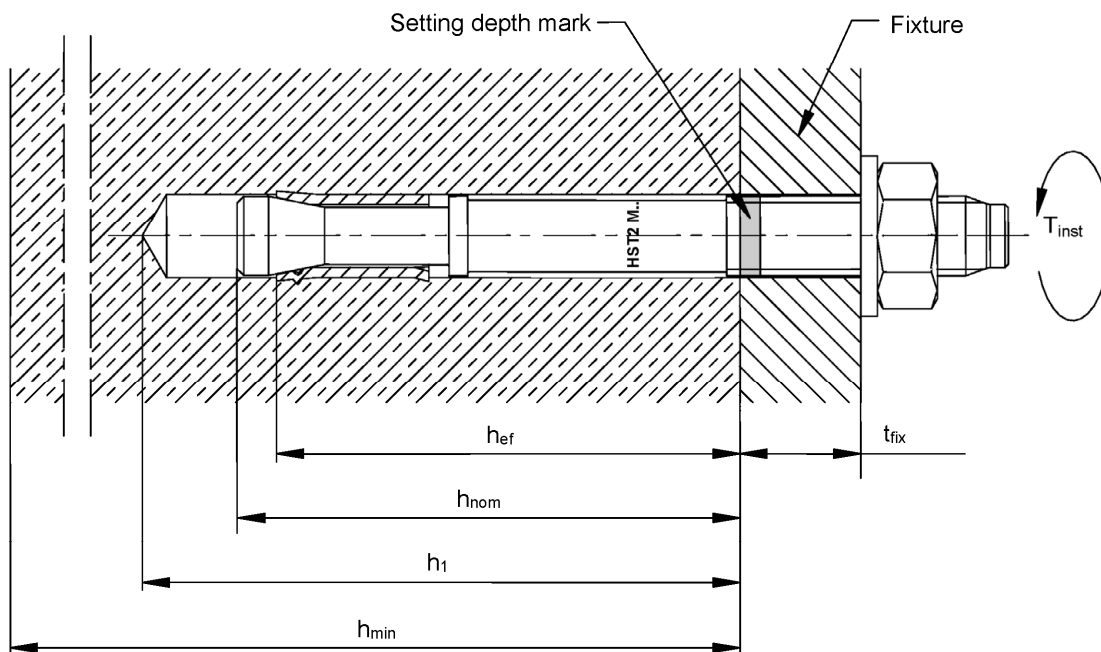


**Hilti metal expansion anchor HST2 and HST2-R**

**Intended Use**  
Installation parameters

**Annex B4**

### HST2 with Filling Set to fill the annular gap between anchor and fixture

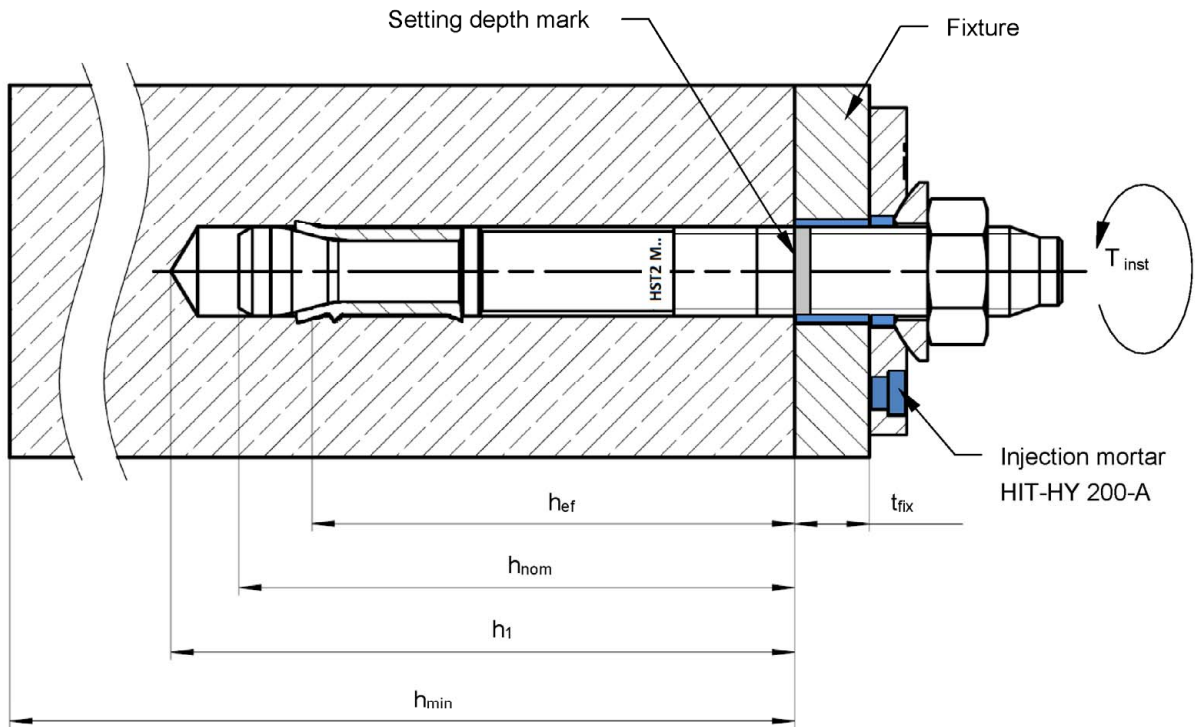

Hilti metal expansion anchor HST2 and HST2-R


**Intended Use**  
Installation parameters

**Annex B5**

**Table B6: Minimum spacing and edge distance for HST2 and HST2-R**

		M8	M10	M12	M16
Minimum thickness of concrete member	$h_{min,1}$ [mm]	100	120	140	160
<b>Cracked concrete</b>					
<b>HST2</b>					
Minimum spacing <sup>1)</sup>	$s_{min}$ [mm]	40	55	60	70
	for $c \geq$ [mm]	50	70	75	100
Minimum edge distance <sup>1)</sup>	$c_{min}$ [mm]	45	55	55	70
	for $s \geq$ [mm]	50	90	120	150
<b>HST2-R</b>					
Minimum spacing <sup>1)</sup>	$s_{min}$ [mm]	40	55	60	70
	for $c \geq$ [mm]	50	65	75	100
Minimum edge distance <sup>1)</sup>	$c_{min}$ [mm]	45	50	55	60
	for $s \geq$ [mm]	50	90	110	160

<sup>1)</sup> Linear interpolation for  $s_{min}$  and  $c_{min}$  allowed

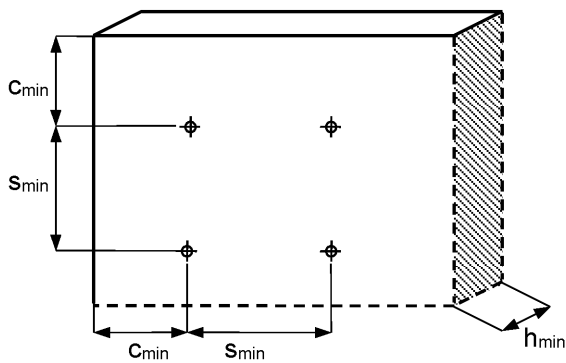

**Hilti metal expansion anchor HST2 and HST2-R**


**Intended Use**  
Minimum spacing and minimum edge distance

**Annex B6**

**Table B6 continued**

		<b>M8</b>	<b>M10</b>	<b>M12</b>	<b>M16</b>
Minimum thickness of concrete member	$h_{min,1}$ [mm]	100	120	140	160
<b>Uncracked concrete</b>					
<b>HST2</b>					
Minimum spacing <sup>1)</sup>	$s_{min}$ [mm]	60	55	60	70
	for $c \geq$ [mm]	50	80	85	110
Minimum edge distance <sup>1)</sup>	$c_{min}$ [mm]	50	55	55	85
	for $s \geq$ [mm]	60	115	145	150
<b>HST2-R</b>					
Minimum spacing <sup>1)</sup>	$s_{min}$ [mm]	60	55	60	70
	for $c \geq$ [mm]	60	70	80	110
Minimum edge distance <sup>1)</sup>	$c_{min}$ [mm]	60	50	55	70
	for $s \geq$ [mm]	60	115	145	160

<sup>1)</sup> Linear interpolation for  $s_{min}$  and  $c_{min}$  allowed

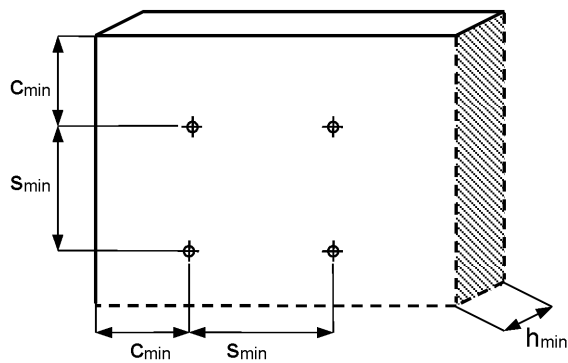

**Hilti metal expansion anchor HST2 and HST2-R**

**Intended Use**  
Minimum spacing and minimum edge distance


**Annex B7**



Table B6 continued

		M8	M10	M12	M16
Minimum thickness of concrete member	$h_{min,2}$ [mm]	80	100	120	140
<b>Cracked concrete</b>					
<b>HST2 and HST2-R</b>					
Minimum spacing	$s_{min}$ [mm]	50	55	60	80
	for $c \geq$ [mm]	60	110	100	140
Minimum edge distance	$c_{min}$ [mm]	55	70	70	80
	for $s \geq$ [mm]	60	100	130	180
<b>Uncracked concrete</b>					
<b>HST2 and HST2-R</b>					
Minimum spacing	$s_{min}$ [mm]	60	55	60	80
	for $c \geq$ [mm]	75	115	100	140
Minimum edge distance	$c_{min}$ [mm]	70	70	70	80
	for $s \geq$ [mm]	80	110	130	180

<sup>1)</sup> Linear interpolation for  $s_{min}$  and  $c_{min}$  allowed

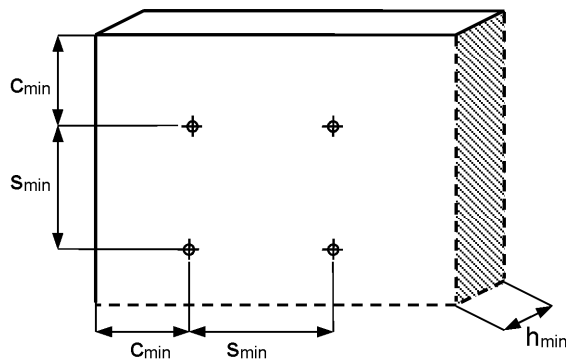

Hilti metal expansion anchor HST2 and HST2-R


**Intended Use**  
Minimum spacing and minimum edge distance

**Annex B8**


## Installation instruction

### Hole drilling and cleaning


a) Hammer drilling (HD):  
M8 to M16



b) Diamond coring (DD):  
M8 to M16




c) Hammer drilling with Hilti hollow drill bit (HDB):  
M12 to M16

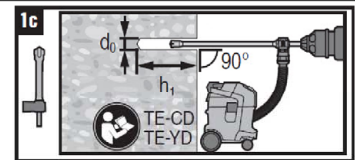


### Anchor setting


a) Hammer setting:  
M8 to M16



b) Machine setting (setting tool):  
M8 to M16




### Check setting




### Anchor torquing

a) Torque wrench:  
M8 to M16



b) Machine torquing:  
M8 to M12

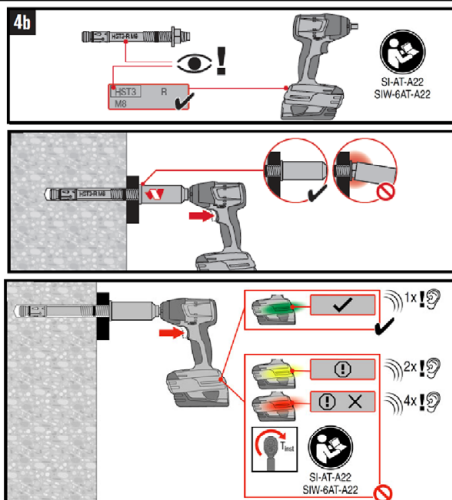




Hilti metal expansion anchor HST2 and HST2-R

Intended Use  
Installation instructions

Annex B9



## Installation instruction HST2 with Filling Set

### Installation of sealing washer





### Anchor torquing



a) Torque wrench:  
M8 to M20



### Installation of counter nut (optional)



### Injection of mortar



Hilti metal expansion anchor HST2 and HST2-R

Intended Use  
Installation instructions

Annex B10

**Table C1: Characteristic tension resistance for HST2 and HST2-R in cracked and uncracked concrete**

		M8	M10	M12	M16
<b>Steel failure</b>					
<b>HST2</b>					
Characteristic resistance	$N_{Rk,s}$ [kN]	17,8	31,4	44,8	78,2
Partial safety factor	$\gamma_{Ms}^{1)}$ [-]	1,40			
<b>HST2-R</b>					
Characteristic resistance	$N_{Rk,s}$ [kN]	17,6	30,5	43,1	78,2
Partial safety factor	$\gamma_{Ms}^{1)}$ [-]	1,40			
<b>Pullout failure</b>					
<b>HST2</b>					
Characteristic resistance in cracked concrete C20/25	$N_{Rk,p}$ [kN]	5,0	9,0	12,0	20,0
Characteristic resistance in uncracked concrete C20/25	$N_{Rk,p}$ [kN]	9,0	16,0	20,0	35,0
Installation safety factor	$\gamma_{inst}$ [-]	1,00			
<b>HST2-R</b>					
Characteristic resistance in cracked concrete C20/25	$N_{Rk,p}$ [kN]	5,0	9,0	12,0	25,0
Characteristic resistance in uncracked concrete C20/25	$N_{Rk,p}$ [kN]	9,0	16,0	20,0	35,0
Installation safety factor	$\gamma_{inst}$ [-]	1,00			
<b>HST2 and HST2-R</b>					
Increasing factor for $N_{Rk,p}$ for cracked and uncracked concrete	$\psi_C$ C20/25	1,00			
	$\psi_C$ C30/37	1,22			
	$\psi_C$ C40/50	1,41			
	$\psi_C$ C50/60	1,55			

<sup>1)</sup> In absence of other national regulations

**Hilti metal expansion anchor HST2 and HST2-R**

**Performances**

Characteristic values of resistance under tension loading in cracked and uncracked concrete

**Annex C1**

**Table C1 continued**

			M8	M10	M12	M16
<b>Concrete cone and splitting failure</b>						
<b>HST2 and HST2-R</b>						
Effective embedment depth	$h_{ef}$	[mm]	47	60	70	82
Installation safety factor	$\gamma_{inst}$	[-]	1,00			
Factor for cracked concrete	$k_1 = k_{cr,N}$	[-]	7,7			
Factor for uncracked concrete	$k_1 = k_{ucr,N}$	[-]	11,0			
Characteristic resistance	$N^0_{Rk,sp}$	[kN]	Min ( $N_{Rk,p}$ ; $N^0_{Rk,c}$ ) <sup>1)</sup>			
Spacing	$s_{cr,N}$ $s_{cr,sp}$	[mm]	3 $h_{ef}$			
Edge distance	$c_{cr,N}$ $c_{cr,sp}$	[mm]	1,5 $h_{ef}$			

<sup>1)</sup>  $N^0_{Rk,c}$  according to EN 1992-4

**Hilti metal expansion anchor HST2 and HST2-R**

**Performances**

Characteristic values of resistance under tension loading in cracked and uncracked concrete

**Annex C2**

**Table C2: Characteristic shear resistance for HST2 and HST2-R in cracked and uncracked concrete**

			M8	M10	M12	M16
<b>Steel failure</b>						
<b>HST2</b>						
Characteristic resistance	$V_{RK,s}^0$	[kN]	11,4	21,6	31,4	55,3
Partial safety factor	$\gamma_{Ms}^{1)}$	[-]	1,25			
Ductility factor	$k_7$	[-]	1,0			
<b>HST2-R</b>						
Characteristic resistance	$V_{RK,s}^0$	[kN]	15,7	25,3	36,7	63,6
Partial safety factor	$\gamma_{Ms}^{1)}$	[-]	1,25			
Ductility factor	$k_7$	[-]	1,0			
<b>Steel failure with lever arm</b>						
<b>HST2</b>						
Characteristic resistance	$M_{RK,s}^0$	[Nm]	25	55	93	240
Partial safety factor	$\gamma_{Ms}^{1)}$	[-]	1,25			
<b>HST2-R</b>						
Characteristic resistance	$M_{RK,s}^0$	[Nm]	27	53	93	216
Partial safety factor	$\gamma_{Ms}^{1)}$	[-]	1,25			
<b>Concrete pryout failure</b>						
<b>HST2 and HST2-R</b>						
Installation safety factor	$\gamma_{inst}$	[-]	1,00			
Pryout factor	$k_8$	[-]	2,0	2,0	2,2	2,5
<b>Concrete edge failure</b>						
<b>HST2 and HST2-R</b>						
Effective length of anchor in shear loading	$l_f$	[mm]	47	60	70	82
Diameter of anchor	$d_{nom}$	[mm]	8	10	12	16
Installation safety factor	$\gamma_{inst}$	[-]	1,00			

<sup>1)</sup> In absence of other national regulations

**Hilti metal expansion anchor HST2 and HST2-R**

**Performances**

Characteristic values of resistance under shear loading in cracked and uncracked concrete

**Annex C3**

**Table C3: Displacements under tension and shear loads for HST2 and HST2-R for static and quasi static loading**

			M8	M10	M12	M16
<b>Displacements under tension loading</b>						
<b>HST2</b>						
Tension load in cracked concrete	N	[kN]	2,0	4,3	5,7	9,5
Corresponding displacement	$\delta_{N0}$	[mm]	1,3	0,2	0,1	0,5
	$\delta_{N\infty}$	[mm]	1,2	1,0	1,2	1,2
Tension load in uncracked concrete	N	[kN]	3,6	7,6	9,5	16,7
Corresponding displacement	$\delta_{N0}$	[mm]	0,2	0,1	0,1	0,4
	$\delta_{N\infty}$	[mm]	1,1	1,1	1,1	1,1
<b>HST2-R</b>						
Tension load in cracked concrete	N	[kN]	2,4	4,3	5,7	11,9
Corresponding displacement	$\delta_{N0}$	[mm]	0,6	0,2	0,8	1,0
	$\delta_{N\infty}$	[mm]	1,5	1,2	1,4	1,2
Tension load in uncracked concrete	N	[kN]	4,3	7,6	9,5	16,7
Corresponding displacement	$\delta_{N0}$	[mm]	0,1	0,1	0,1	0,1
	$\delta_{N\infty}$	[mm]	1,5	1,2	1,4	1,2
<b>Displacements under shear loading</b>						
<b>HST2</b>						
Shear load in cracked and uncracked concrete	V	[kN]	6,5	12,3	17,9	31,6
Corresponding displacement	$\delta_{V0}$	[mm]	2,0	2,3	3,3	4,0
	$\delta_{V\infty}$	[mm]	3,1	3,4	4,9	6,0
<b>HST2-R</b>						
Shear load in cracked and uncracked concrete	V	[kN]	9,0	14,5	21,0	36,3
Corresponding displacement	$\delta_{V0}$	[mm]	1,9	4,3	6,0	2,9
	$\delta_{V\infty}$	[mm]	2,9	6,4	9,1	4,4

Hilti metal expansion anchor HST2 and HST2-R

**Performances**  
Displacements under tension and shear loading

**Annex C4**

**Table C4: Characteristic tension resistance for seismic loading for HST2, performance category C1**

		M8	M10	M12	M16
<b>Steel failure</b>					
<b>HST2</b>					
Characteristic resistance	$N_{RK,s,C1}$ [kN]	<sup>3)</sup>	31,4	44,8	78,2
Partial safety factor	$\gamma_{Ms,C1}$ <sup>1)</sup> [-]	<sup>3)</sup>	1,40		
<b>Pullout failure</b>					
<b>HST2</b>					
Characteristic resistance	$N_{RK,p,C1}$ [kN]	<sup>3)</sup>	8,0	10,7	18,0
Installation safety factor	$\gamma_{inst}$ [-]	<sup>3)</sup>	1,00		
<b>Concrete cone failure <sup>2)</sup></b>					
<b>HST2</b>					
Installation safety factor	$\gamma_{inst}$ [-]	<sup>3)</sup>	1,00		
<b>Splitting failure <sup>2)</sup></b>					
<b>HST2</b>					
Installation safety factor	$\gamma_{inst}$ [-]	<sup>3)</sup>	1,00		

<sup>1)</sup> In absence of other national regulations

<sup>2)</sup> For concrete cone failure and splitting failure see EN 1992-4:2018

<sup>3)</sup> No performance assessed

**Hilti metal expansion anchor HST2 and HST2-R**

**Performances**  
Characteristic tension resistance for performance category C1

**Annex C5**



**Table C5: Characteristic shear resistance for seismic loading for HST2,  
performance category C1**

			M8	M10	M12	M16
<b>Steel failure</b>						
<b>HST2</b>						
Partial safety factor	$\gamma_{Ms,C1}$ <sup>1)</sup>	[-]	<sup>3)</sup>	1,25		
Installation with Hilti filling set						
Characteristic resistance	$V_{Rk,s,C1}$	[kN]	<sup>3)</sup>	16,0	27,0	41,3
Reduction factor according to EN 1992-4:2018	$\alpha_{gap}$	[-]	<sup>3)</sup>	1,0		
Installation without Hilti filling set						
Characteristic resistance	$V_{Rk,s,C1}$	[kN]	<sup>3)</sup>	16,0	27,0	41,3
Reduction factor according to EN 1992-4:2018	$\alpha_{gap}$	[-]	<sup>3)</sup>	0,5		
<b>Concrete pryout failure <sup>2)</sup></b>						
<b>HST2</b>						
Installation safety factor	$\gamma_{inst}$	[-]	<sup>3)</sup>	1,00		
<b>Concrete edge failure <sup>2)</sup></b>						
<b>HST2</b>						
Installation safety factor	$\gamma_{inst}$	[-]	<sup>3)</sup>	1,00		

<sup>1)</sup> In absence of other national regulations

<sup>2)</sup> For concrete pryout failure and concrete edge failure see EN 1992-4:2018

<sup>3)</sup> No performance assessed

Hilti metal expansion anchor HST2 and HST2-R

**Performances**  
Characteristic shear resistance for performance category C1

**Annex C6**

**Table C6: Characteristic tension resistance for seismic loading for HST2, performance category C2**

		M8	M10	M12	M16
<b>Steel failure</b>					
<b>HST2</b>					
Characteristic resistance	$N_{RK,s,C2}$ [kN]	<sup>3)</sup>	31,4	44,8	78,2
Partial safety factor	$\gamma_{Ms,C2}$ <sup>1)</sup> [-]	<sup>3)</sup>	1,40		
<b>Pullout failure</b>					
<b>HST2</b>					
Characteristic resistance	$N_{RK,p,C2}$ [kN]	<sup>3)</sup>	3,3	10,0	12,8
Installation safety factor	$\gamma_{inst}$ [-]	<sup>3)</sup>	1,00		
<b>Concrete cone failure <sup>2)</sup></b>					
<b>HST2</b>					
Installation safety factor	$\gamma_{inst}$ [-]	<sup>3)</sup>	1,00		
<b>Splitting failure <sup>2)</sup></b>					
<b>HST2</b>					
Installation safety factor	$\gamma_{inst}$ [-]	<sup>3)</sup>	1,00		

<sup>1)</sup> In absence of other national regulations

<sup>2)</sup> For concrete cone failure and splitting failure see EN 1992-4:2018

<sup>3)</sup> No performance assessed

**Table C7: Displacements under tension loads for seismic loading for HST2, performance category C2**

		M8	M10	M12	M16
<b>Displacements under tension loading</b>					
<b>HST2</b>					
Displacement DLS	$\delta_{N,C2(DLS)}$ [mm]	<sup>3)</sup>	1,4	6,7	4,0
Displacement ULS	$\delta_{N,C2(ULS)}$ [mm]	<sup>3)</sup>	8,6	15,9	13,3

Hilti metal expansion anchor HST2 and HST2-R

**Performances**

Characteristic tension resistance and displacements for performance category C2

**Annex C7**

**Table C8: Characteristic shear resistance for seismic loading for HST2, performance category C2**

			M8	M10	M12	M16
<b>Steel failure</b>						
<b>HST2</b>						
Partial safety factor	$\gamma_{Ms,C2}$ <sup>1)</sup>	[-]	3)	1,25		
Installation with Hilti filling set						
Characteristic resistance	$V_{Rk,s,C2}$	[kN]	3)	16,0	24,2	41,3
Reduction factor according to EN 1992-4:2018	$\alpha_{gap}$	[-]	3)	1,0		
Installation without Hilti filling set						
Characteristic resistance	$V_{Rk,s,C2}$	[kN]	3)	16,0	24,2	41,3
Reduction factor according to EN 1992-4:2018	$\alpha_{gap}$	[-]	3)	0,5		
<b>Concrete pryout failure</b> <sup>2)</sup>						
<b>HST2</b>						
Installation safety factor	$\gamma_{inst}$	[-]	3)	1,00		
<b>Concrete edge failure</b> <sup>2)</sup>						
<b>HST2</b>						
Installation safety factor	$\gamma_{inst}$	[-]	3)	1,00		

<sup>1)</sup> In absence of other national regulations

<sup>2)</sup> For concrete pryout failure and concrete edge failure see EN 1992-4:2018

<sup>3)</sup> No performance assessed

**Table C9: Displacements under shear loads for seismic loading for HST2, performance category C2**

			M8	M10	M12	M16
<b>Displacements under tension loading</b>						
<b>HST2</b>						
Displacement DLS	$\delta_{V,C2(DLS)}$	[mm]	3)	4,7	4,8	5,7
Displacement ULS	$\delta_{V,C2(ULS)}$	[mm]	3)	7,7	7,9	8,9

Hilti metal expansion anchor HST2 and HST2-R

**Performances**  
Characteristic shear resistance and displacements for performance category C2

**Annex C8**

**Table C10: Characteristic tension resistance under fire exposure for HST2 and HST2-R in cracked and uncracked concrete**

				M8	M10	M12	M16
<b>Steel failure</b>							
<b>HST2 and HST2-R</b>							
Characteristic resistance	R30	$N_{RK,s,fi}$	[kN]	0,9	2,5	5,0	9,0
	R60	$N_{RK,s,fi}$	[kN]	0,7	1,5	3,5	6,0
	R90	$N_{RK,s,fi}$	[kN]	0,6	1,0	2,0	3,5
	R120	$N_{RK,s,fi}$	[kN]	0,5	0,7	1,0	2,0
<b>Pullout failure</b>							
<b>HST2 and HST2-R</b>							
Characteristic resistance in concrete $\geq C20/25$	R30	$N_{RK,p,fi}$	[kN]	1,3	2,3	3,0	5,0
	R60	$N_{RK,p,fi}$	[kN]				
	R90	$N_{RK,p,fi}$	[kN]				
	R120	$N_{RK,p,fi}$	[kN]	1,0	1,8	2,4	4,0
<b>Concrete cone failure</b>							
<b>HST2 and HST2-R</b>							
Characteristic resistance in concrete $\geq C20/25$	R30	$N^0_{RK,c,fi}$	[kN]	2,7	5,0	7,4	11,0
	R60	$N^0_{RK,c,fi}$	[kN]				
	R90	$N^0_{RK,c,fi}$	[kN]				
	R120	$N^0_{RK,c,fi}$	[kN]	2,2	4,0	5,9	8,8
Spacing	$s_{cr,N}$	[mm]	4 $h_{ef}$				
	$s_{min}$	[mm]	50	55	60	80	
Edge distance	$c_{cr,N}$	[mm]	2 $h_{ef}$				
	$c_{min}$	[mm]	Fire attack from one side: 2 $h_{ef}$ Fire attack from more than one side: $\geq 300$				

In absence of other national regulations the partial safety factor for resistance under fire exposure  $\gamma_{M,fi} = 1,0$  is recommended.

**Hilti metal expansion anchor HST2 and HST2-R**

**Performances**

Characteristic values of resistance under tension loading under fire exposure in cracked and uncracked concrete

**Annex C9**

**Table C11: Characteristic shear resistance under fire exposure for HST2 and HST2-R in cracked and uncracked concrete**

				M8	M10	M12	M16	
<b>Steel failure without lever arm</b>								
<b>HST2 and HST2-R</b>								
Characteristic resistance	R30	$V_{RK,s,fi}$	[kN]	0,9	2,5	5,0	9,0	
	R60	$V_{RK,s,fi}$	[kN]	0,7	1,5	3,5	6,0	
	R90	$V_{RK,s,fi}$	[kN]	0,6	1,0	2,0	3,5	
	R120	$V_{RK,s,fi}$	[kN]	0,5	0,7	1,0	2,0	
<b>Steel failure with lever arm</b>								
<b>HST2 and HST2-R</b>								
Characteristic resistance	R30	$M^0_{RK,s,fi}$	[Nm]	1,0	3,3	8,1	20,6	
	R60	$M^0_{RK,s,fi}$	[Nm]	0,8	2,4	5,7	14,4	
	R90	$M^0_{RK,s,fi}$	[Nm]	0,7	1,6	3,2	8,2	
	R120	$M^0_{RK,s,fi}$	[Nm]	0,6	1,2	2,0	5,1	
<b>Concrete pryout failure</b>								
<b>HST2 and HST2-R</b>								
Pryout factor	$k_8$			[-]	2,00	2,00	2,20	2,50
Characteristic resistance in concrete $\geq C20/25$	R30	$V^0_{RK,cp,fi}$	[kN]	5,4	10,0	16,0	27,2	
	R60	$V^0_{RK,cp,fi}$	[kN]					
	R90	$V^0_{RK,cp,fi}$	[kN]					
	R120	$V^0_{RK,cp,fi}$	[kN]					
<b>Concrete edge failure</b>								
<b>HST2 and HST2-R</b>								
The initial value $V^0_{RK,c,fi}$ of the characteristic resistance in concrete C20/25 to C50/60 under fire exposure may be determined by: $V^0_{RK,c,fi} = 0,25 \times V^0_{RK,c}$ ( $\leq R90$ ) $V^0_{RK,c,fi} = 0,20 \times V^0_{RK,c}$ (R120) with $V^0_{RK,c}$ initial value of the characteristic resistance in cracked concrete C20/25 under normal temperature.								

In absence of other national regulations the partial safety factor for resistance under fire exposure  $\gamma_{M,fi} = 1,0$  is recommended.

**Hilti metal expansion anchor HST2 and HST2-R**

**Performances**

Characteristic values of resistance under shear loading under fire exposure in cracked and uncracked concrete

**Annex C10**