

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments



European Technical Assessment

ETA-19/0520
of 21 February 2022

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II
Plus HCR

Product family
to which the construction product belongs

Mechanical fasteners for use in concrete

Manufacturer

fischerwerke GmbH & Co. KG
Klaus-Fischer-Straße 1
72178 Waldachtal
DEUTSCHLAND

Manufacturing plant

fischerwerke

This European Technical Assessment
contains

21 pages including 3 annexes which form an integral part
of this assessment

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

EAD 330232-01-0601 Edition 05/2021

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The Fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR is an anchor made of galvanized steel (FAZ II Plus), stainless steel (FAZ II Plus R) or high corrosion resistant steel (FAZ II Plus HCR) which is placed into a drilled hole and anchored by torque-controlled expansion.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

| Essential characteristic | Performance |
|--|-------------------------|
| Characteristic resistance to tension load (static and quasi-static loading), Method A | See Annex C1, C5 and C6 |
| Characteristic resistance to shear load (static and quasi-static loading) | See Annex C2 |
| Displacements and Durability | See Annex C9 and B1 |
| Characteristic resistance and displacements for seismic performance categories C1 and C2 | See Annex C7 to C9 |

3.2 Safety in case of fire (BWR 2)

| Essential characteristic | Performance |
|--------------------------|---------------------|
| Reaction to fire | Class A1 |
| Resistance to fire | See Annex C3 and C4 |

English translation prepared by DIBt

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with the European Assessment Document EAD 330232-01-0601 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable EAD


Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.

Issued in Berlin on 21 February 2022 by Deutsches Institut für Bautechnik


Dipl.-Ing. Beatrix Wittstock
Head of Section

beglaubigt:
Ziegler



Cone bolt manufactured by cold - forming:

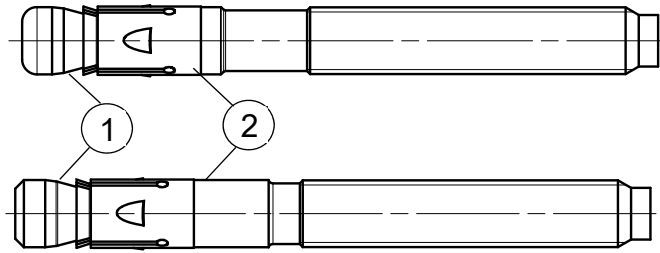

Cone bolt manufactured by turning:

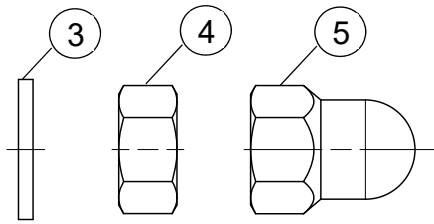

- ① Expansion sleeve
- ② Cone bolt (cold – formed or turned)
- ③ Washer
- ④ Hexagon nut
- ⑤ fischer FAZ II Plus dome nut

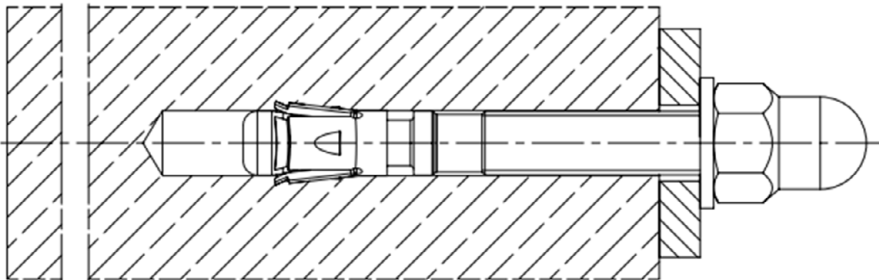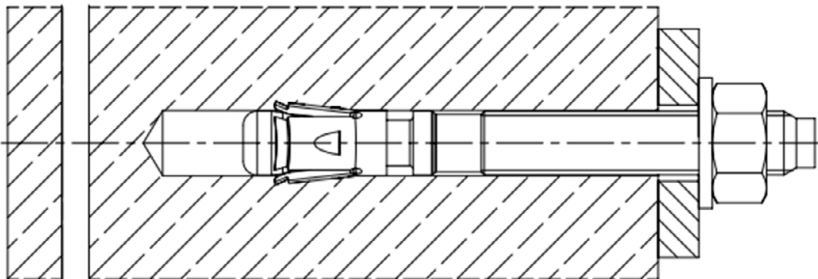


(Figure not to scale)

fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR


Product description
Installed condition

Annex A1

Product marking and letter-code:

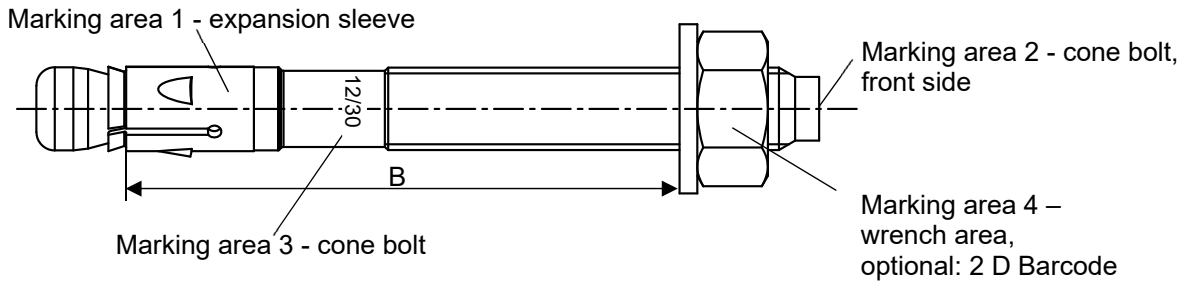

Product marking, example:



Brand | type of fastener placed at marking area 1 or 3

Thread size / max. thickness of the fixture (t_{fix}) identification R or HCR placed at marking area 1 or 3

- FAZ II Plus: carbon steel, galvanised
- FAZ II Plus R: stainless steel
- FAZ II Plus HCR: high corrosion resistant steel

Table A2.1: Letter - code at marking area 2:

| Marking | (a) | (b) | (c) | (d) | (A) | (B) | (C) | (D) | (E) | (F) | (G) | (H) | (I) | (K) | |
|---------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Max. t_{fix} [mm] | 5 | 10 | 15 | 20 | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | |
| B ≥ [mm] | M6 | - | | | | 45 | 50 | 55 | 60 | 65 | 70 | 75 | 80 | 85 | 90 |
| | M8 | 40 | 45 | - | | 50 | 55 | 60 | 65 | 70 | 75 | 80 | 85 | 90 | 95 |
| | M10 | 45 | 50 | 55 | 60 | 65 | 70 | 75 | 80 | 85 | 90 | 95 | 100 | 105 | 110 |
| | M12 | 55 | 60 | 65 | 70 | 75 | 80 | 85 | 90 | 95 | 100 | 105 | 110 | 115 | 120 |
| | M16 | 70 | 75 | 80 | 85 | 90 | 95 | 100 | 105 | 110 | 115 | 120 | 125 | 130 | 135 |
| | M20 | - | | | | 105 | 110 | 115 | 120 | 125 | 130 | 135 | 140 | 145 | 150 |
| | M24 | - | | | | 130 | 135 | 140 | 145 | 150 | 155 | 160 | 165 | 170 | 175 |

| Marking | (L) | (M) | (N) | (O) | (P) | (R) | (S) | (T) | (U) | (V) | (W) | (X) | (Y) | (Z) | |
|---------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Max. t_{fix} [mm] | 60 | 70 | 80 | 90 | 100 | 120 | 140 | 160 | 180 | 200 | 250 | 300 | 350 | 400 | |
| B ≥ [mm] | M6 | 100 | 110 | 120 | 130 | 140 | 160 | 180 | 200 | 220 | 240 | 290 | 340 | 390 | 440 |
| | M8 | 105 | 115 | 125 | 135 | 145 | 165 | 185 | 205 | 225 | 245 | 295 | 345 | 395 | 445 |
| | M10 | 120 | 130 | 140 | 150 | 160 | 180 | 200 | 220 | 240 | 260 | 310 | 360 | 410 | 460 |
| | M12 | 130 | 140 | 150 | 160 | 170 | 190 | 210 | 230 | 250 | 270 | 320 | 370 | 420 | 470 |
| | M16 | 145 | 155 | 165 | 175 | 185 | 205 | 225 | 245 | 265 | 285 | 335 | 385 | 435 | 485 |
| | M20 | 160 | 170 | 180 | 190 | 200 | 220 | 240 | 260 | 280 | 300 | 350 | 400 | 450 | 500 |
| | M24 | 185 | 195 | 205 | 215 | 225 | 245 | 265 | 285 | 305 | 325 | 375 | 425 | 475 | 525 |

Calculation existing h_{ef} for installed fasteners:

existing $h_{ef} = B_{(according\ to\ table\ A2.1)} - existing\ t_{fix}$

Thickness of the fixture t_{fix} including thickness of filling conical washer t and e.g. thickness of grout layer t_{grout} OR other non-structural layers

(Figure not to scale)

fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR

Product description
Product marking and letter code

Annex A2

Product dimensions

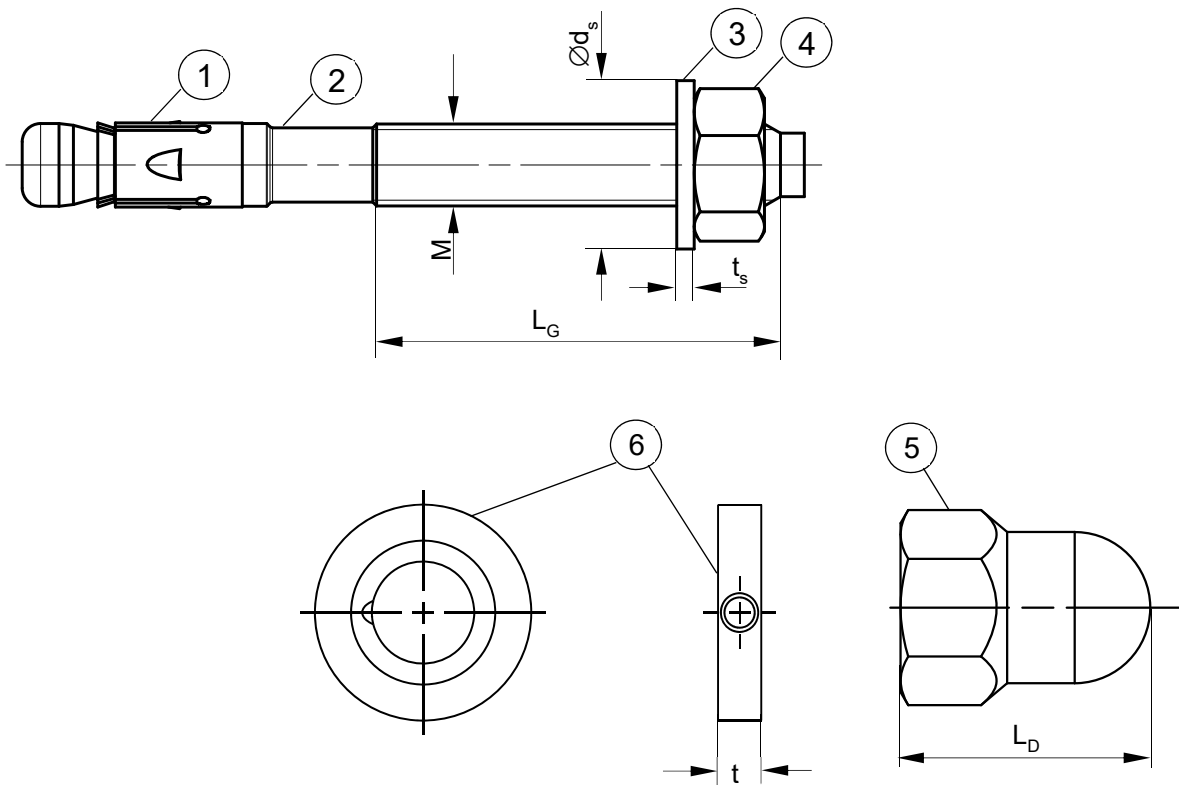


Table A3.1: Dimensions [mm]

| Part | Designation | FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR | | | | | | | |
|-------|--|---|------------------------|-----|-----|-----|------------|------------------------|-----|
| | | M6 | M8 | M10 | M12 | M16 | M20 | M24 | |
| 1 | Expansion sleeve | Sheet thickness | 0,8 | 1,3 | 1,4 | 1,6 | 2,4 | | 3,0 |
| 2 | Cone bolt | Thread size M | 6 | 8 | 10 | 12 | 16 | 20 | 24 |
| | | L_G | 10 | 19 | 26 | 31 | 40 | 50 | 57 |
| 3 | Washer | t_s | $\geq 1,4$ | | 1,8 | 2,3 | $\geq 2,7$ | | 3,7 |
| | | $\varnothing d_s$ | 11 | 15 | 19 | 23 | 29 | 36 | 43 |
| 4 & 5 | Hexagon nut / fischer FAZ II Plus dome nut | Wrench size ¹⁾ | 10 | 13 | 17 | 19 | 24 | 30 | 36 |
| 5 | | L_D | $\geq -$ ²⁾ | | 22 | 27 | 33 | $\geq -$ ²⁾ | |
| 6 | fischer filling conical washer FFD | t | = 6 | | | 7 | 8 | 10 | |

¹⁾ Alternatively according to ISO 4032:2013 allowed

²⁾ Not part of the assessment

(Figure not to scale)

fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR




Product description
Dimensions

Annex A3

| Table A4.1: Materials FAZ II Plus | | | | |
|---|--|--|--|--|
| Part | Designation | Material | | |
| | | FAZ II Plus | FAZ II Plus R | FAZ II Plus HCR |
| | Steel grade | Steel | Stainless steel R EN 10088:2014 | High corrosion resistant steel HCR EN 10088:2014 |
| | | Zinc plated $\geq 5 \mu\text{m}$, ISO 4042:2018 | Corrosion resistance class CRC III in accordance with EN 1993-1-4:2006+A1:2015 | Corrosion resistance class CRC V in accordance with EN 1993-1-4:2006+A1:2015 |
| 1 | Expansion sleeve | Cold strip, EN 10139:2016 or stainless steel EN 10088:2014 | Stainless steel EN 10088:2014 | |
| 2 | Cone bolt | Cold form steel or free cutting steel | Stainless steel EN 10088:2014 | High corrosion resistant steel EN 10088:2014 |
| 3 | Washer | Cold strip, EN 10139:2016 | | |
| 4 / 5 | Hexagon nut / fischer FAZ II Plus dome nut | Steel, property class min. 8, EN ISO 898-2:2012 | Stainless steel EN 10088:2014; ISO 3506-2:2020; property class – min. 70 | High corrosion resistant steel EN 10088:2014; ISO 3506-2:2020; property class – min. 70 |
| 6 | fischer filling conical washer FFD | Cold form steel or free cutting steel | Stainless steel EN 10088:2014 | High corrosion resistant steel EN 10088:2014 |
| fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR | | | | Annex A4 |
| Product description Materials | | | | |

Specifications of intended use

Fastenings subject to:

| Size | FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR | | | | | | |
|---|---|-----------------|-------------------------------------|-----|-----|-----|-----|
| | M6 | M8 | M10 | M12 | M16 | M20 | M24 |
| Hammer drilling with standard drill bit  | ✓ | | | | | | |
| Hammer drilling with hollow drill bit with automatic cleaning  | - ¹⁾ | ✓ | | | | | |
| Diamond drilling  | - ¹⁾ | ✓ | (for non seismic applications only) | | | | |
| Static and quasi-static loads | ✓ | | | | | | |
| Cracked and uncracked concrete | | | | | | | |
| Fire exposure | | | | | | | |
| Seismic performance category | C1 | - ¹⁾ | ✓ | | | | |
| | C2 | - ¹⁾ | | ✓ | | | |

¹⁾ No performance assessed

Base materials:

- Compacted reinforced and unreinforced normal weight concrete without fibres (cracked or uncracked) according to EN 206-1:2013+A2:2021
- Strength classes C20/25 to C50/60 according to EN 206:2013+A2:2021

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR)
- For all other conditions according to EN 1993-1-4:2006 + A1:2015 corresponding to corrosion resistance class
 - CRC III: for FAZ II Plus R
 - CRC V: for FAZ II Plus HCR

Design:

- Fastenings are to be designed under the responsibility of an engineer experienced in fastenings and concrete work
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the fastener is indicated on the design drawings (e.g. position of the fastener relative to reinforcement or to supports, etc.)
- Fastenings in stand-off installation or with a grout layer under seismic action are not covered
- In case of seismic applications the fastener shall be positioned outside of critical regions (e.g. plastic hinges) of the concrete structure
- Design of fastenings according to EN 1992-4:2018 and EOTA Technical Report TR 055:2018

fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR

Intended Use
Specifications


Annex B1

Table B2.1: Installation parameters

| Size | FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR | | | | | | |
|---|---|-------|---------------|--------|----------------|-----------------|-------|
| | M6 | M8 | M10 | M12 | M16 | M20 | M24 |
| Nominal drill hole diameter $d_0 =$ | 6 | 8 | 10 | 12 | 16 | 20 | 24 |
| Maximum bit diameter with hammer or hollow drilling $d_{cut,max}$ [mm] | 6,40 | 8,45 | 10,45 | 12,5 | 16,5 | 20,55 | 24,55 |
| Maximum bit diameter with diamond drilling | - ¹⁾ | 8,15 | | 12,25 | 16,45 | 20,50 | 24,40 |
| Effective embedment depth $h_{ef} \geq$ | 40-80 | 35-90 | 40-100 | 50-125 | 65-160 | 100-180 | 125 |
| Length from h_{ef} to end of cone bolt L | 6,5 | 9,5 | 11,5 | 13,5 | 17,5 | 20,0 | 23,5 |
| Overall fastener embedment depth in the concrete $h_{nom} \geq$ [mm] | $h_{ef} + L$ | | | | | | |
| Depth of drill hole to deepest point $h_1 \geq$ | $h_{nom} + 3$ | | $h_{nom} + 5$ | | $h_{nom} + 10$ | | |
| Diameter of clearance hole in the fixture $d_f \leq$ [mm] | 7 | 9 | 12 | 14 | 18 | 22 | 26 |
| Required setting torque $T_{inst} =$ [Nm] | 8 | 20 | 45 | 60 | 110 | 200 | 270 |
| Excess length after hammering-in the cone bolt (for fischer dome nut applications according to Annex B4) $O =$ [mm] | - ¹⁾ | | 12 | 16 | 20 | - ¹⁾ | |

¹⁾ Not part of the assessment

Setting gauge FAZ II Plus SL-H
for fastener with fischer FAZ II Plus dome nut:

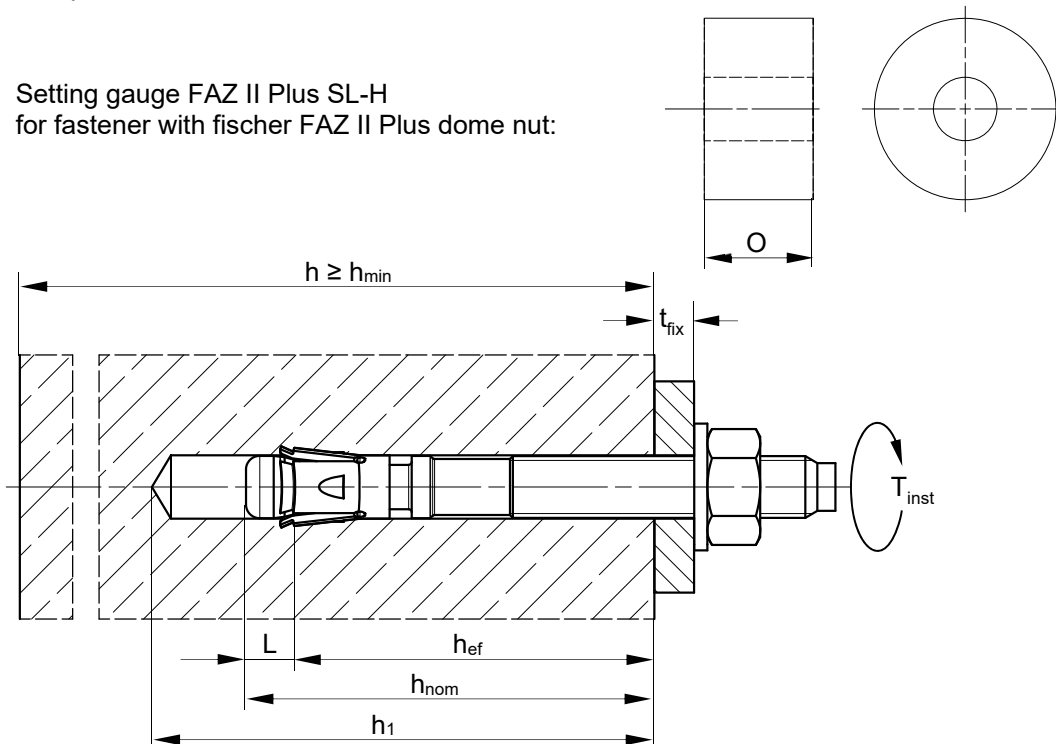

- h_{ef} = Effective embedment depth
- t_{fix} = Thickness of the fixture
- h_1 = Depth of drill hole to deepest point
- h = Thickness of the concrete member
- h_{min} = Minimum thickness of concrete member
- h_{nom} = Overall fastener embedment depth in the concrete

- O = Length of setting gauge
- L = Length from h_{ef} to end of cone bolt
- T_{inst} = Required setting torque

fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR

Intended Use
Installation parameters


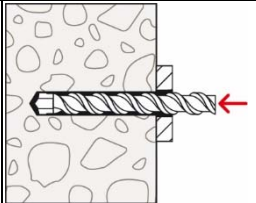
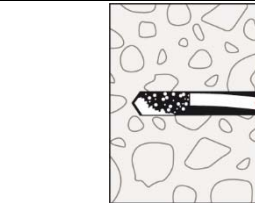

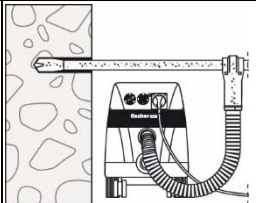






Annex B2

Installation instructions:

- Fastener installation carried out by appropriately qualified personnel according to the design drawings and under the supervision of the person responsible for technical matters on the site
- Use of the fastener only as supplied by the manufacturer without exchanging the components of the fastener
Exception: fischer FAZ II Plus dome nut
- Hammer, hollow or diamond drilling according to Annex B1 + B2
- Drill hole created perpendicular +/- 5° to concrete surface, positioning without damaging the reinforcement
- In case of aborted hole: new drilling at a minimum distance twice the depth of the aborted drill hole or smaller distance if the aborted drill hole is filled with high strength mortar and if under shear or oblique tension load it is not in the direction of load application

Installation instructions: Drilling and cleaning the hole

Types of drills and cleaning
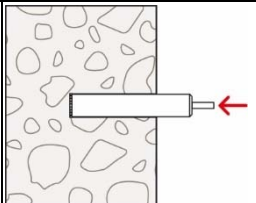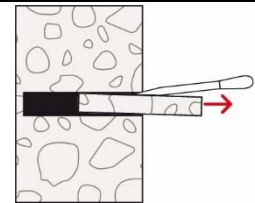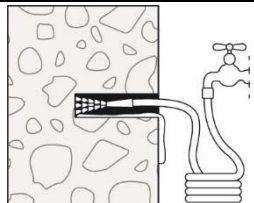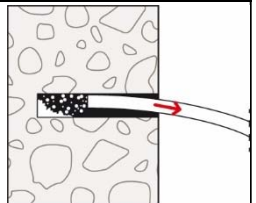
| | | | | | |
|---|---|---|---|---|--|
| <p>Hammer drill (e.g. fischer Quattric II)</p> |  |  <p>1: Drill the hole</p> |  <p>2: Clean the hole</p> | <p>Continue with step 5</p> | |
| <p>Hollow drill (e.g. fischer FHD)</p> |  |  <p>1: Drill the hole with automatic cleaning (e.g. fischer FVC)</p> |  <p>Cleaning obsolete</p> | <p>Continue with step 5</p> | |
| <p>Diamond drill, for non seismic applications only</p> |  |  <p>1: Drill the hole</p> |  <p>2: Break the drill core and remove it</p> |  <p>3: Flush the drill hole, until clear water emerges from the drill hole</p> |  <p>4: Clean the hole</p> |


fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR

Intended Use
Installation instructions


Annex B3

Installation instructions: Installation of the fastener


HEXAGON NUT:




5.a: Set the fastener e.g. with hammer



5.b: Set the fastener e.g. fischer FA-ST II




6: Apply T_{inst}




7: Installed fastener

fischer FAZ II Plus DOME NUT:


Option 1: Push through installation with setting gauge SL-H:




5.1: Set the fastener through the setting gauge and fixture




5.2: Check offset



5.3: Turn on the fischer FAZ II Plus dome nut




6: Apply T_{inst}




7: Installed fastener


Option 2: Push through installation with hexagon nut:



5.1: Check setting position: Visible one turn of a thread



5.2: Set the fastener







5.3: Remove nut

fischer Filling conical washer FFD optional for seismic C2 application or minimising the annular gap:

Optional

The gap between bolt and fixture may be filled with mortar (compressive strength $\geq 50 \text{ N/mm}^2$ e.g. fischer FIS SB) after last step (for eliminating the annular gap). The FFD is additional to the standard washer. The thickness of the FFD must be considered for definition of t_{fix} . Countersunk of the FFD in direction to the anchor plate. Installation with hexagon nut or dome nut is permitted.



fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR

Intended Use
Installation instructions

Annex B4

Table C1.1: Characteristic values of tension resistance under static and quasi-static action

| Size | | FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR | | | | | | | | | |
|---|--------------------------|---|--------------------------------------|-------------------------|--------------------|-----------------|-----------------|--------|---------|--------------------|--------------------|
| | | M6 | M8 | M10 | M12 | M16 | M20 | M24 | | | |
| Steel failure | | | | | | | | | | | |
| Characteristic resistance | FAZ II Plus | $N_{Rk,s}$ [kN] | 11,3 | 19,9 | 32,7 | 49,3 | 78,7 | 108,4 | 180,0 | | |
| | FAZ II Plus R | | 12,1 | 21,0 | 34,5 | 52,0 | 83,0 | 127,6 | 187,0 | | |
| | FAZ II Plus HCR | | 11,3 | 17,6 | 29,1 | 43,8 | 69,9 | | | | |
| Partial factor for steel failure | FAZ II Plus | $\gamma_{Ms}^{1)}$ [-] | 1,4 | | | | 1,4 | 1,5 | | | |
| | FAZ II Plus R | | 1,4 | | | | 1,45 | | | | |
| | FAZ II Plus HCR | | 1,5 | 1,45 | | 1,4 | 1,5 | | | | |
| Pullout failure | | | | | | | | | | | |
| Effective embedment depth for calculation | h_{ef} [mm] | | 40-80 | 40 ³⁾ - < 45 | 45-90 | 40-100 | 50-125 | 65-160 | 100-180 | 125 | |
| Characteristic resistance in cracked concrete C20/25 | $N_{Rk,p}$ (C20/25) [kN] | | 1,5 | 5,5 | 8 | 13 | 20 | 27,0 | 34,4 | 48,1 | |
| Characteristic resistance in uncracked concrete C20/25 | | | 10,5 | 14 | | 20 | 22 | 38,6 | 49,2 | 68,8 | |
| Increasing factor ψ_c for cracked or uncracked concrete | [-] | $N_{Rk,p} = \psi_c \cdot N_{Rk,p}$ (C20/25) | C25/30 | 1,12 | | | | | | | |
| | | | C30/37 | 1,22 | | | | | | | |
| | | | C35/45 | 1,32 | | | | | | | |
| | | | C40/50 | 1,41 | | | | | | | |
| | | | C45/55 | 1,50 | | | | | | | |
| | | | C50/60 | 1,58 | | | | | | | |
| Installation sensitivity factor | γ_{inst} [-] | | 1,0 | | | | | | | | |
| Concrete cone and splitting failure | | | | | | | | | | | |
| Factor for uncracked concrete | $k_{ucr,N}$ [-] | | 11,0 ²⁾ | | | | | | | | |
| Factor for cracked concrete | $k_{cr,N}$ [-] | | 7,7 ²⁾ | | | | | | | | |
| Characteristic spacing | $s_{cr,N}$ [mm] | | $3 \cdot h_{ef}$ | | | | | | | | |
| Characteristic edge distance | $c_{cr,N}$ [mm] | | $1,5 \cdot h_{ef}$ | | | | | | | | |
| Characteristic spacing for splitting failure | $s_{cr,sp}$ [mm] | | $2 \cdot c_{cr,sp}$ | | | | | | | | |
| Characteristic edge distance for splitting failure h | $c_{cr,sp}$ [mm] | ≥ 80 | 40 | $2,4 \cdot h_{ef}$ | $2 \cdot h_{ef}$ | - ⁵⁾ | | | | | |
| | | ≥ 100 | | $2 \cdot h_{ef}$ | $2,4 \cdot h_{ef}$ | | | | | $2 \cdot h_{ef}$ | |
| | | ≥ 120 | | | $1,9 \cdot h_{ef}$ | | | | | $2,1 \cdot h_{ef}$ | |
| | | ≥ 140 | | $1,9 \cdot h_{ef}$ | $1,5 \cdot h_{ef}$ | | | | | $2 \cdot h_{ef}$ | $2,4 \cdot h_{ef}$ |
| | | ≥ 160 | | | $2 \cdot h_{ef}$ | | | | | $2,4 \cdot h_{ef}$ | $2,2 \cdot h_{ef}$ |
| ≥ 200 | | | | | | | | | | | |
| Characteristic resistance to splitting | $N^0_{Rk,sp}$ [kN] | | $\min \{N^0_{Rk,c}; N_{Rk,p}\}^{4)}$ | | | | | | | | |
| <p>1) In absence of other national regulations</p> <p>2) Based on concrete strength as cylinder strength</p> <p>3) For dry internal exposure and statically indeterminate redundant components, the minimum effective embedment depth can be reduced to 35 mm without reduction of $N_{Rk,p}$.</p> <p>4) $N^0_{Rk,c}$ according to EN 1992-4:2018</p> <p>5) No performance assessed</p> | | | | | | | | | | | |
| fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR | | | | | | | Annex C1 | | | | |
| Performances Characteristic values of tension resistance under static and quasi-static action | | | | | | | | | | | |

Table C2.1: Characteristic values of **shear** resistance under static and quasi-static action

| Size | | FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR | | | | | | |
|---|--|---|-------------------------|-----------|-----------|-----------|-----------------|-------|
| | | M6 | M8 | M10 | M12 | M16 | M20 | M24 |
| Steel failure without lever arm | | | | | | | | |
| Characteristic resistance | FAZ II Plus without filling of the annular gap | 7,5 | 16,3 | 26,2 | 37,0 | 68,4 | 82,9 | 128,3 |
| | FAZ II Plus with filling | | 18,1 | 27,3 | 40,7 | 69,8 | 85,6 | |
| | FAZ II Plus without filling R | 8,8 | 17,6 | 26,5 | 42,1 | 71,1 | 107,9 | 158,1 |
| | FAZ II Plus with filling R | | | 27,6 | 44,3 | 73,6 | 117,9 | |
| | FAZ II Plus without filling HCR | | 17,4 | 23,7 | 42,1 | 71,1 | 107,9 | |
| | FAZ II Plus with filling HCR | | | 27,9 | 42,1 | 73,6 | 117,9 | |
| Partial factor for steel failure | $\gamma_{Ms}^{1)}$ | 1,25 | | | | | | |
| Factor for ductility | k_7 | 1,0 | | | | | | |
| Steel failure with lever arm and Concrete pryout failure | | | | | | | | |
| Effective embedment depth for calculation | h_{ef} [mm] | 40-80 | 45-90 | 60-100 | 70-125 | 85-160 | 100-180 | 125 |
| Characteristic bending resistance | FAZ II Plus | 11 | 30 | 60 | 105 | 266 | 422 | 864 |
| | FAZ II Plus R | | 29 | 59 | 100 | 256 | 519 | 898 |
| | FAZ II Plus HCR | | | | | | | |
| Factor for pryout failure | k_8 [-] | 2,6 | 2,8 | 3,2 | | | | |
| Effective embedment depth for calculation | h_{ef} [mm] | - ²⁾ | 40 ³⁾ - < 45 | 40 - < 60 | 50 - < 70 | 65 - < 85 | - ²⁾ | |
| Characteristic bending resistance | FAZ II Plus | | 27 | 56 | 105 | 251 | | |
| | FAZ II Plus R | | 29 | 59 | 100 | 256 | | |
| | FAZ II Plus HCR | | 24 | 50 | | 223 | | |
| Factor for pryout failure | k_8 [-] | 2,5 | 2,6 | 3,1 | 3,2 | | | |
| Partial factor for steel failure | $\gamma_{Ms}^{1)}$ | 1,25 | | | | | | |
| Factor for ductility | k_7 | 1,0 | | | | | | |
| Concrete edge failure | | | | | | | | |
| Effective embedment depth for calculation | l_f [mm] | h_{ef} | | | | | | |
| Outside diameter of a fastener | d_{nom} [mm] | 6 | 8 | 10 | 12 | 16 | 20 | 24 |
| <p>1) In absence of other national regulations</p> <p>2) No performance assessed</p> <p>3) For dry internal exposure and statically indeterminate redundant components, the minimum effective embedment depth can be reduced to 35 mm without reduction of $N_{Rk,p}$.</p> | | | | | | | | |
| fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR | | | | | | | Annex C2 | |
| Performances Characteristic values of shear resistance under static and quasi-static action | | | | | | | | |

Table C3.1: Characteristic values of tension resistance under fire exposure

| Size | | | FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR | | | | | | | | | | |
|---|------------------------|---------------|---|---------------------------------------|-----|-----|-----|-----|------|------|------|------|------|
| | | | M6 | | M8 | | M10 | | M12 | | M16 | | M20 |
| $h_{ef} \geq$ [mm] | | | 40 | 35 | 45 | 40 | 60 | 50 | 70 | 65 | 85 | 100 | 125 |
| Characteristic resistance steel failure | FAZ II Plus | $N_{Rk,s,fi}$ | R30 | 0,6 ¹⁾ / 0,9 ²⁾ | | 1,4 | 2,8 | | 5,0 | 9,4 | | 14,7 | 21,1 |
| | | R60 | 0,4 ¹⁾ / 0,9 ²⁾ | | 1,2 | 2,3 | | 4,1 | 7,7 | | 12,0 | 17,3 | |
| | | R90 | 0,3 ¹⁾ / 0,9 ²⁾ | | 0,9 | 1,9 | | 3,2 | 6,0 | | 9,4 | 13,5 | |
| | | R120 | 0,2 ¹⁾ / 0,7 ²⁾ | | 0,8 | 1,6 | | 2,8 | 5,2 | | 8,1 | 11,6 | |
| | FAZ II Plus R / HCR | $N_{Rk,s,fi}$ | R30 | 0,6 ¹⁾ / 0,9 ²⁾ | | 3,6 | 7,8 | | 11,5 | 21,8 | | 34,3 | 49,4 |
| | | R60 | 0,4 ¹⁾ / 0,9 ²⁾ | | 2,3 | 4,8 | | 7,1 | 13,2 | | 20,7 | 29,3 | |
| | | R90 | 0,3 ¹⁾ / 0,9 ²⁾ | | 1,9 | 3,8 | | 5,7 | 10,5 | | 18,3 | 26,4 | |
| | | R120 | 0,2 ¹⁾ / 0,7 ²⁾ | | 1,6 | 3,3 | | 4,9 | 8,6 | | 17,3 | 25,0 | |
| Characteristic resistance Concrete cone failure | $N_{Rk,c,fi}$ | R30 - R90 | $7,7 \cdot h_{ef}^{1,5} \cdot (20)^{0,5} \cdot h_{ef} / 200 / 1000$ | | | | | | | | | | |
| | | R120 | $7,7 \cdot h_{ef}^{1,5} \cdot (20)^{0,5} \cdot h_{ef} / 200 / 1000 \cdot 0,8$ | | | | | | | | | | |
| Characteristic resistance pullout failure | $N_{Rk,p,fi}$ | R30 | 0,4 | 0,9 | 2,0 | 2,2 | 3,3 | 3,0 | 5,0 | 4,5 | 6,8 | 8,6 | 12,0 |
| | | R60 | | 0,8 | | | | | | | | | |
| | | R90 | | 0,5 | | | | | | | | | |
| | | R120 | 0,3 | | 1,6 | 1,7 | 2,6 | 2,4 | 4,0 | 3,6 | 5,4 | 6,9 | 9,6 |

Table C3.2: Characteristic values of shear resistance under fire exposure

| FAZ II Plus | | | R30 | | R60 | |
|-------------|---------------|-----|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| | | | $V_{Rk,s,fi,30}$ [kN] | $M^0_{Rk,s,fi,30}$ [Nm] | $V_{Rk,s,fi,60}$ [kN] | $M^0_{Rk,s,fi,60}$ [Nm] |
| M6 | $h_{ef} \geq$ | 40 | 0,6 ¹⁾ / 0,9 ²⁾ | 0,5 ¹⁾ / 0,2 ²⁾ | 0,4 ¹⁾ / 0,9 ²⁾ | 0,3 ¹⁾ / 0,1 ²⁾ |
| M8 | | 35 | 1,8 | 1,4 | 1,6 | 1,2 |
| M10 | | 40 | 3,6 | 3,6 | 2,9 | 3,0 |
| M12 | | 50 | 6,3 | 7,8 | 4,9 | 6,4 |
| M16 | | 65 | 11,7 | 19,9 | 9,1 | 16,3 |
| M20 | | 100 | 18,2 | 39,0 | 14,2 | 31,8 |
| M24 | | 125 | 26,3 | 67,3 | 20,5 | 55,0 |

| FAZ II Plus | | | R90 | | R120 | |
|-------------|---------------|-----|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| | | | $V_{Rk,s,fi,90}$ [kN] | $M^0_{Rk,s,fi,90}$ [Nm] | $V_{Rk,s,fi,120}$ [kN] | $M^0_{Rk,s,fi,120}$ [Nm] |
| M6 | $h_{ef} \geq$ | 40 | 0,3 ¹⁾ / 0,9 ²⁾ | 0,2 ¹⁾ / 0,1 ²⁾ | 0,2 ¹⁾ / 0,7 ²⁾ | 0,2 ¹⁾ / 0,1 ²⁾ |
| M8 | | 35 | 1,3 | 1,0 | 1,2 | 0,8 |
| M10 | | 40 | 2,2 | 2,4 | 1,9 | 2,1 |
| M12 | | 50 | 3,5 | 5,0 | 2,8 | 4,3 |
| M16 | | 65 | 6,6 | 12,6 | 5,3 | 11,0 |
| M20 | | 100 | 10,3 | 24,6 | 8,3 | 21,4 |
| M24 | | 125 | 14,8 | 42,6 | 11,9 | 37,0 |

Concrete pryout failure according to EN 1992-4:2018

¹⁾ FAZ II Plus

²⁾ FAZ II Plus R / FAZ II Plus HCR

fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR

Performances
Characteristic values of resistance under fire exposure

Annex C3

Table C4.1: Characteristic values of shear resistance under fire exposure

| FAZ II Plus R, FAZ II Plus HCR | | | R30 | | R60 | |
|--------------------------------|---------------|-----|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| | | | $V_{Rk,s,fi,30}$ [kN] | $M^0_{Rk,s,fi,30}$ [Nm] | $V_{Rk,s,fi,60}$ [kN] | $M^0_{Rk,s,fi,60}$ [Nm] |
| M6 | $h_{ef} \geq$ | 40 | 0,6 ¹⁾ / 0,9 ²⁾ | 0,5 ¹⁾ / 0,2 ²⁾ | 0,4 ¹⁾ / 0,9 ²⁾ | 0,3 ¹⁾ / 0,1 ²⁾ |
| M8 | | 35 | 3,6 | 3,7 | 2,3 | 2,4 |
| M10 | | 40 | 7,8 | 10,1 | 4,8 | 6,2 |
| M12 | | 50 | 11,5 | 17,9 | 7,1 | 11,1 |
| M16 | | 65 | 21,8 | 46,2 | 13,2 | 27,9 |
| M20 | | 100 | 34,3 | 90,9 | 20,7 | 54,9 |
| M24 | | 125 | 49,4 | 157,2 | 29,3 | 93,1 |

| FAZ II Plus R, FAZ II Plus HCR | | | R90 | | R120 | |
|--------------------------------|---------------|-----|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| | | | $V_{Rk,s,fi,90}$ [kN] | $M^0_{Rk,s,fi,90}$ [Nm] | $V_{Rk,s,fi,120}$ [kN] | $M^0_{Rk,s,fi,120}$ [Nm] |
| M6 | $h_{ef} \geq$ | 40 | 0,3 ¹⁾ / 0,9 ²⁾ | 0,2 ¹⁾ / 0,1 ²⁾ | 0,2 ¹⁾ / 0,7 ²⁾ | 0,2 ¹⁾ / 0,1 ²⁾ |
| M8 | | 35 | 1,9 | 1,9 | 1,6 | 1,7 |
| M10 | | 40 | 3,8 | 4,9 | 3,3 | 4,3 |
| M12 | | 50 | 5,7 | 8,8 | 4,9 | 7,6 |
| M16 | | 65 | 10,5 | 22,1 | 8,6 | 18,3 |
| M20 | | 100 | 18,3 | 48,6 | 17,3 | 45,9 |
| M24 | | 125 | 26,4 | 84,0 | 25,0 | 79,4 |

¹⁾ FAZ II Plus

²⁾ FAZ II Plus R / FAZ II Plus HCR

Concrete pryout failure according to EN 1992-4:2018

Table C4.2: Minimum spacings and minimum edge distances of fasteners under fire exposure for tension and shear load

| Size | FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR | | | | | | |
|------------------------------|---|----|-----|-----|-----|-----|-----|
| | M6 | M8 | M10 | M12 | M16 | M20 | M24 |
| Spacing s_{min} | Annex C5 | | | | | | |
| Edge distance c_{min} [mm] | $c_{min} = 2 \cdot h_{ef}$, for fire exposure from more than one side $c_{min} \geq 300$ mm | | | | | | |

fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR

Performances
Characteristic values of resistance under fire exposure

Annex C4

Table C5.1: Minimum thickness of concrete members, minimum spacing and minimum edge distance

| Size | FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR | | | | | | | |
|--------------------------------------|--|-----|-----|-----|-----|-----|-----|-------|
| | M6 | M8 | M10 | M12 | M16 | M20 | M24 | |
| Minimum edge distance | | | | | | | | |
| Uncracked concrete | 40 | 40 | 45 | 55 | 65 | 95 | 135 | |
| Cracked concrete | | | | | | 85 | 100 | |
| Corresponding | s [mm] according to Annex C6 | | | | | | | |
| Minimum thickness of concrete member | 80 | | 100 | 140 | 160 | 200 | | |
| Thickness of concrete member | h ≥ max. {h _{min} ; 1,5 · h _{ef} } | | | | | | | |
| Minimum spacing | | | | | | | | |
| Uncracked concrete | 35 | 40 | 40 | 50 | 65 | 95 | 100 | |
| Cracked concrete | | 35 | | | | | | |
| Corresponding | c [mm] according to Annex C6 | | | | | | | |
| Minimum thickness of concrete member | 80 | | 100 | 140 | 160 | 200 | | |
| Thickness of concrete member | h ≥ max. {h _{min} ; 1,5 · h _{ef} } | | | | | | | |
| Minimum splitting area | | | | | | | | |
| Uncracked concrete | A _{sp,req} [-1000 mm ²] | 5,1 | 18 | 37 | 54 | 67 | 100 | 117,5 |
| Cracked concrete | | 1,5 | 12 | 27 | 40 | 50 | 77 | 87,5 |

Table C5.2: Minimum spacing and minimum edge distances - calculated values for **cracked concrete with one edge** (c₂ and c₃ ≥ 1,5 c₁)

| Type of anchor / size | FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR | | | | | | | | | | | |
|--------------------------------------|---|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| | M6 | M8 | M10 | M12 | M16 | M20 | M24 | | | | | |
| Effective anchorage depth | h _{ef} ≥ [mm] | 40 | 35 | 45 | 40 | 60 | 50 | 70 | 65 | 85 | 100 | 125 |
| Minimum thickness of concrete member | h ≥ [mm] | 80 | | 85 | 80 | 120 | 100 | 140 | 140 | 180 | 160 | 200 |
| Minimum spacing | s _{min} [mm] | 35 | | 40 | 50 | 65 | 95 | 100 | | | | |
| | for c ≥ [mm] | 40 | 100 | 65 | 120 | 80 | 100 | 75 | 130 | 115 | | |
| Minimum edge distance | c _{min} [mm] | 40 | 60 | 45 | 70 | 55 | 65 | 85 | 100 | | | |
| | for s ≥ [mm] | 35 | | 160 | 90 | 190 | 125 | 165 | 85 | 230 | 140 | |

fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR

Performances
Minimum thickness of member, minimum spacing and edge distances

Annex C5

Determination of $A_{sp,ef}$ for each existing free edge

Splitting failure applied for minimum edge distance and spacing in depending on h_{ef}


Definition Index:

cal = calculatory

e.g.: $s_{x,y}$

x = load direction

y = number anchor plate

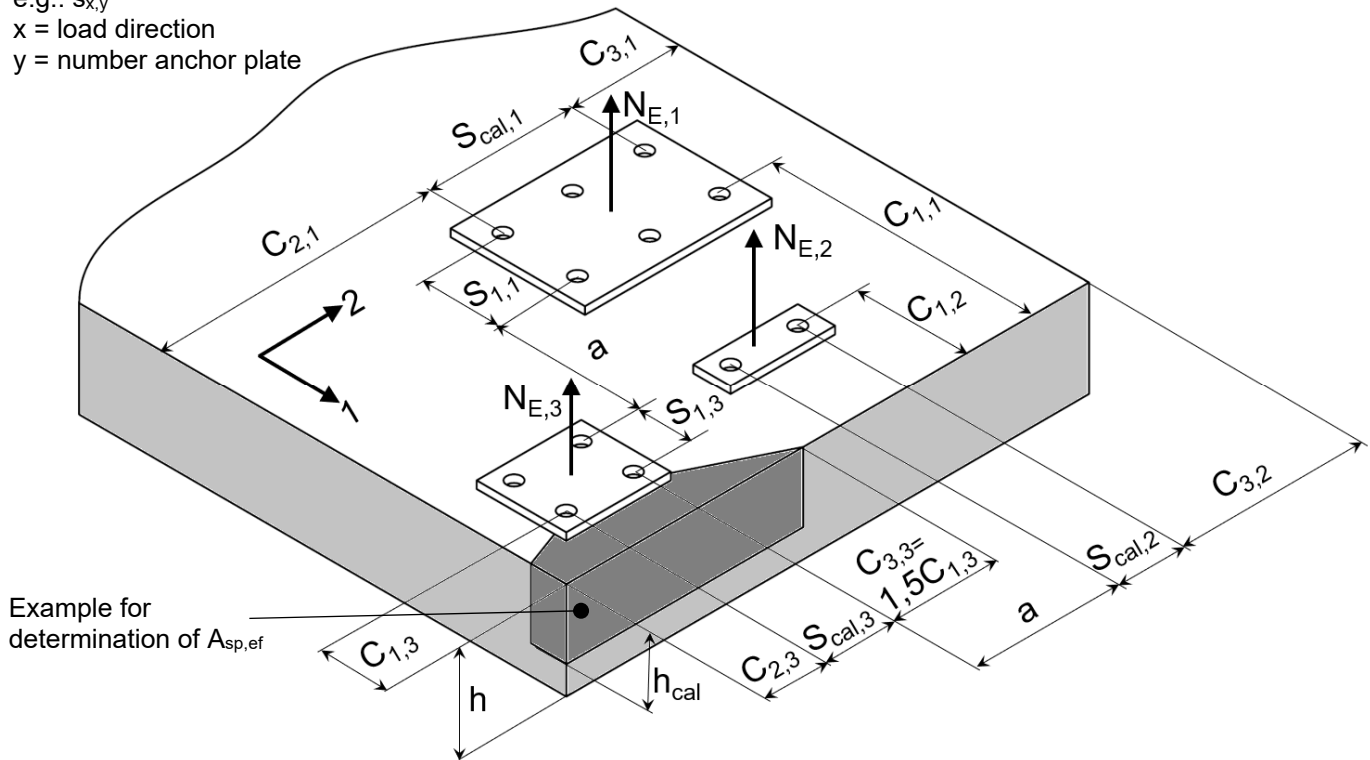

Example for determination of $A_{sp,ef}$

Example for different anchor plates: For considering all free edges the direction 1 and 2 must be swapped.

General formulation for each free edge: $A_{sp,ef} = (C_2 + S_{cal} + C_3) \cdot h_{cal} \geq (n/2) \cdot A_{sp,req}$

with:

Edge distance c_1 : $c_{min} \leq C_1$

Edge distance c_2 : $c_{min} \leq C_2 \leq 1,5 \cdot C_1$

Edge distance c_3 : $c_{min} \leq C_3 \leq 1,5 \cdot C_1$

Calculation spacing, distance between outer anchors s_{cal} : $s_{min} \leq S_{cal} \leq 3,0 \cdot C_1$

Distance between group of anchors a : For $a \geq 3,0 \cdot c_1$ no influence between the anchor groups is taken into account.

Number of anchors n of an anchor plate as well close and parallel to the edge

Effective member thickness h_{cal} : $h_{min} \leq h$; $h_{cal} \leq h$; $h_{cal} \leq (h_{ef} + 1,5 \cdot C_1)$

C_1 , C_2 , C_3 , h and s_{cal} have to be set in way that the requirement is fulfilled

For the calculation of minimum spacing and minimum edge distance of fasteners in combination with different embedment depths and thicknesses of concrete members the following equation shall be fulfilled:

$$A_{sp,req} < A_{sp,ef}$$

$A_{sp,req}$ = required splitting area (according to Annex C 5)

$A_{sp,ef}$ = effective splitting area

(Figure not to scale)

fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR

Performances

Minimum thickness of member, minimum spacings and edge distances

Annex C6

Table C7.1: Characteristic values of tension and shear resistance under seismic action category C1

| Size | FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR | | | | | | | | | |
|--|---|--------------------|--------------------|--------|--------|--------|---------|-----------------|---------|-------|
| | M6 | M8 | M10 | M12 | M16 | M20 | M24 | | | |
| Effective embedment depth h_{ef} [mm] | - 2) | 40 - <45 | 45-90 | 40-100 | 50-125 | 85-160 | 100-180 | 125 | | |
| With filling of the annular gap | | 1,0 | | | | | | | | |
| Without filling of the annular gap α_{gap} [-] | | 0,5 | | | | | | | | |
| Steel failure $N_{Rk,s,C1} = N_{Rk,s}$; $\gamma_{Ms,C1} = \gamma_{Ms}$ (see Annex C1) | | | | | | | | | | |
| Pullout failure | | | | | | | | | | |
| Characteristic resistance in cracked concrete C1 $N_{Rk,p,C1}$ [kN] | - 2) | 5,1 | 7,4 | 11,6 | 20,0 | 27,0 | 34,4 | 48,1 | | |
| Installation sensitivity factor γ_{inst} [-] | | 1,0 | | | | | | | | |
| Concrete cone failure and splitting failure $N_{Rk,c,C1} = N_{Rk,c}$; $N_{Rk,sp,C1} = N_{Rk,sp}$ (see Annex C1) | | | | | | | | | | |
| Steel failure without lever arm | | | | | | | | | | |
| FAZ II Plus | | | | | | | | | | |
| Characteristic resistance C1 | h_{ef} [mm] | Without filling | $V_{Rk,s,C1}$ [kN] | - 2) | 45-90 | 60-100 | 70-125 | 85-160 | 100-180 | 125 |
| | | | | | 14,8 | 23,6 | 33,3 | 58,1 | 71,2 | 102,6 |
| | With filling | $V_{Rk,s,C1}$ [kN] | - 2) | 16,5 | 24,6 | 39,9 | 59,3 | 85,6 | - 2) | |
| | | | | 40-<45 | 40-<60 | 50-<70 | - 2) | | | |
| | h_{ef} [mm] | Without filling | $V_{Rk,s,C1}$ [kN] | - 2) | - 2) | | | - 2) | | |
| | | | | | 15,6 | 19,7 | 39,9 | - 2) | | |
| | FAZ II Plus R | | | | | | | | | |
| | h_{ef} [mm] | Without filling | $V_{Rk,s,C1}$ [kN] | - 2) | 45-90 | 60-100 | 70-125 | 85-160 | 100-180 | 125 |
| | | | | | 16,0 | 23,9 | 37,9 | 60,4 | 86,3 | 126,5 |
| | With filling | $V_{Rk,s,C1}$ [kN] | - 2) | 24,8 | 43,4 | 62,6 | 94,3 | - 2) | | |
| | | | | 40-<45 | 40-<60 | 50-<70 | - 2) | | | |
| | h_{ef} [mm] | Without filling | $V_{Rk,s,C1}$ [kN] | - 2) | - 2) | | | - 2) | | |
| 15,1 | | | | | 19,9 | 43,4 | - 2) | | | |
| FAZ II Plus HCR | | | | | | | | | | |
| h_{ef} [mm] | Without filling | $V_{Rk,s,C1}$ [kN] | - 2) | 45-90 | 60-100 | 70-125 | 85-160 | 100-180 | 125 | |
| | | | | 15,8 | 21,3 | 37,9 | 60,4 | 86,3 | 126,5 | |
| With filling | $V_{Rk,s,C1}$ [kN] | - 2) | 25,1 | 41,3 | 62,6 | 94,3 | - 2) | | | |
| | | | 40-<45 | 40-<60 | 50-<70 | - 2) | | | | |
| h_{ef} [mm] | Without filling | $V_{Rk,s,C1}$ [kN] | - 2) | - 2) | | | - 2) | | | |
| | | | | 15,0 | 20,1 | 41,3 | - 2) | | | |
| Partial factor for steel failure $\gamma_{Ms,C1}^{1)}$ [-] | 1,25 | | | | | | | | | |
| ¹⁾ In absence of other national regulations ²⁾ No performance assessed | | | | | | | | | | |
| fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR | | | | | | | | Annex C7 | | |
| Performances Characteristic values of tension and shear resistance under seismic action category C1 | | | | | | | | | | |

Table C8.1: Characteristic values of tension and shear resistance under seismic action category C2

| Size | FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR | | | | | | | | |
|--|---|---------------------------|--------------------|--------------------|----------|-----------------|-----------------|-------|-------|
| | M6 | M8 | M10 | M12 | M16 | M20 | M24 | | |
| With filling of the annular gap | α_{gap} [-] | | 1,0 | | | | | | |
| Without filling of the annular gap | - ²⁾ | | 0,5 | | | | | | |
| Steel failure $N_{Rk,s,C2} = N_{Rk,s}$; $\gamma_{Ms,C2} = \gamma_{Ms}$ (see Annex C1) | | | | | | | | | |
| Pullout failure | | | | | | | | | |
| Characteristic resistance in cracked concrete C2 | h_{ef} [mm] | - ²⁾ | 60-100 | 70-125 | 85-160 | 100-180 | 125 | | |
| | $N_{Rk,p,C2}$ [kN] | | 5,1 | 7,4 | 21,5 | 30,7 | 39,6 | | |
| | h_{ef} [mm] | | 40 - <60 | 50 - <70 | 65 - <85 | - ²⁾ | | | |
| | $N_{Rk,p,C2}$ [kN] | | 2,7 | 4,4 | 16,4 | | | | |
| Installation sensitivity factor | γ_{inst} [-] | 1,0 | | | | | | | |
| Concrete cone failure and splitting failure $N_{Rk,c,C2} = N_{Rk,c}$; $N_{Rk,sp,C2} = N_{Rk,sp}$ (see Annex C1) | | | | | | | | | |
| Steel failure without lever arm | | | | | | | | | |
| FAZ II Plus | | | | | | | | | |
| Characteristic resistance C2 | h_{ef} [mm] | - ²⁾ | 60-100 | 70-125 | 85-160 | 100-180 | 125 | | |
| | Without filling | | $V_{Rk,s,C2}$ [kN] | 17,6 | 27,8 | 37,6 | 62,2 | 70,6 | |
| | With filling | | $V_{Rk,s,C2}$ [kN] | 20,5 | 30,5 | 52,4 | 68,5 | 102,6 | |
| | h_{ef} [mm] | | 40 - <60 | 50 - <70 | 65 - <85 | - ²⁾ | | | |
| | Without filling | | $V_{Rk,s,C2}$ [kN] | 14,1 | 24,4 | 31,2 | | | |
| | With filling | | $V_{Rk,s,C2}$ [kN] | 14,7 | 30,5 | 52,4 | | | |
| | FAZ II Plus R | | | | | | | | |
| | h_{ef} [mm] | | - ²⁾ | 60-100 | 70-125 | 85-160 | 100-180 | 125 | |
| | Without filling | | | $V_{Rk,s,C2}$ [kN] | 17,8 | 31,6 | 39,1 | 70,5 | 87,0 |
| | With filling | | | $V_{Rk,s,C2}$ [kN] | 20,7 | 33,2 | 55,2 | 104,9 | 126,5 |
| | h_{ef} [mm] | | | 40 - <60 | 50 - <70 | 65 - <85 | - ²⁾ | | |
| | Without filling | | | $V_{Rk,s,C2}$ [kN] | 14,3 | 27,8 | 32,4 | | |
| With filling | $V_{Rk,s,C2}$ [kN] | 14,9 | | 33,2 | 55,2 | | | | |
| FAZ II Plus HCR | | | | | | | | | |
| h_{ef} [mm] | - ²⁾ | 60-100 | | 70-125 | 85-160 | 100-180 | 125 | | |
| Without filling | | $V_{Rk,s,C2}$ [kN] | | 15,9 | 31,6 | 39,1 | 70,5 | 87,0 | |
| With filling | | $V_{Rk,s,C2}$ [kN] | | 20,9 | | 55,2 | 104,9 | 126,5 | |
| h_{ef} [mm] | | 40 - <60 | | 50 - <70 | 65 - <85 | - ²⁾ | | | |
| Without filling | | $V_{Rk,s,C2}$ [kN] | | 12,8 | 27,8 | 32,4 | | | |
| With filling | | $V_{Rk,s,C2}$ [kN] | 15,1 | 31,6 | 55,2 | | | | |
| Partial factor for steel | | $\gamma_{Ms,C2}^{1)}$ [-] | 1,25 | | | | | | |
| 1) In absence of other national regulations | | | | | | | | | |
| 2) No performance assessed | | | | | | | | | |
| fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR | | | | | | Annex C8 | | | |
| Performances Characteristic values of resistance under tension and shear loads under seismic action category C2 | | | | | | | | | |

Table C9.1: Displacements under static and quasi static tension loads

| Size | FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR | | | | | | |
|--|---|------|------|------|------|------|------|
| | M6 | M8 | M10 | M12 | M16 | M20 | M24 |
| Displacement – factor for tensile load¹⁾ | | | | | | | |
| δ_{N0} - factor | 0,13 | 0,22 | 0,12 | 0,09 | 0,08 | 0,07 | 0,05 |
| $\delta_{N\infty}$ - factor | 1,00 | 0,78 | 0,40 | 0,19 | 0,09 | | 0,07 |
| δ_{N0} - factor | 0,16 | 0,07 | 0,05 | 0,06 | | 0,05 | 0,04 |
| $\delta_{N\infty}$ - factor | 0,24 | 0,29 | 0,21 | 0,14 | 0,10 | 0,06 | 0,05 |

Table C9.2: Displacements under static and quasi static shear loads

| Size | FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR | | | | | | |
|--|---|------|------|------|------|------|------|
| | M6 | M8 | M10 | M12 | M16 | M20 | M24 |
| Displacement – factor for shear load²⁾ | | | | | | | |
| FAZ II Plus | | | | | | | |
| δ_{V0} - factor | 0,6 | 0,35 | 0,37 | 0,27 | 0,10 | 0,09 | 0,07 |
| $\delta_{V\infty}$ - factor | 0,9 | 0,52 | 0,55 | 0,40 | 0,14 | 0,15 | 0,11 |
| FAZ II Plus R, FAZ II Plus HCR | | | | | | | |
| δ_{V0} - factor | 0,6 | 0,23 | 0,19 | 0,18 | 0,10 | 0,11 | 0,07 |
| $\delta_{V\infty}$ - factor | 0,9 | 0,35 | 0,29 | 0,27 | 0,15 | 0,17 | 0,11 |

¹⁾ Calculation of effective displacement:

$$\delta_{N0} = \delta_{N0} - \text{factor} \cdot N$$

$$\delta_{N\infty} = \delta_{N\infty} - \text{factor} \cdot N$$

N = Action tension loading

²⁾ Calculation of effective displacement:

$$\delta_{V0} = \delta_{V0} - \text{factor} \cdot V$$

$$\delta_{V\infty} = \delta_{V\infty} - \text{factor} \cdot V$$

V = Action shear loading

Table C9.3: Displacements under tension loads for category C2 for all embedment depths

| Size | FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR | | | | | | |
|-------------------------------|---|----|------|------|------|------|------|
| | M6 | M8 | M10 | M12 | M16 | M20 | M24 |
| DLS $\delta_{N,C2(DLS)}$ [mm] | - ¹⁾ | | 2,7 | 4,4 | | 5,6 | 4,8 |
| ULS $\delta_{N,C2(ULS)}$ [mm] | - ¹⁾ | | 11,5 | 13,0 | 12,3 | 14,4 | 15,2 |

¹⁾ No performance assessed

Table C9.4: Displacements under shear loads for category C2 for all embedment depths

| Size | FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR | | | | | | |
|--|---|----|-----|-----|-----|-----|-----|
| | M6 | M8 | M10 | M12 | M16 | M20 | M24 |
| DLS without filling $\delta_{V,C2(DLS)}$ | - ¹⁾ | | 5,0 | | | 4,8 | 4,2 |
| ULS without filling $\delta_{V,C2(ULS)}$ | - ¹⁾ | | 7,8 | 6,3 | 8,8 | 6,3 | 7,4 |
| DLS with filling $\delta_{V,C2(DLS)}$ | - ¹⁾ | | 1,2 | | | 2,0 | 4,2 |
| ULS with filling $\delta_{V,C2(ULS)}$ | - ¹⁾ | | 4,2 | 5,8 | 3,1 | 4,4 | 7,4 |

¹⁾ No performance assessed

| | |
|--|-----------------|
| fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR | Annex C9 |
| Performances Displacements under tension and shear loads | |