

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments

★ ★ ★
★ Designated
according to
Article 29 of Regula-
tion (EU) No 305/2011
and member of EOTA
(European Organi-
sation for Technical
Assessment)
★ ★ ★
★ ★

European Technical Assessment

ETA-20/0867
of 14 July 2022

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Trade name of the construction product

Product family
to which the construction product belongs

Manufacturer

Manufacturing plant

This European Technical Assessment
contains

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

This version replaces

Deutsches Institut für Bautechnik

Hilti screw anchor HUS4

Mechanical fastener for use in concrete

Hilti Aktiengesellschaft
Feldkircherstrasse 100
9494 SCHAAN
FÜRSTENTUM LIECHTENSTEIN

Hilti Werke

38 pages including 3 annexes which form an integral part
of this assessment

EAD 330232-01-0601, Edition 05/2021

ETA-20/0867 issued on 14 April 2022

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part**1 Technical description of the product**

The Hilti screw anchor HUS4 is an anchor in size 8, 10, 12, 14 and 16 mm made of galvanized or stainless steel. The anchor is screwed into a predrilled cylindrical drill hole. The special thread of the anchor cuts an internal thread into the member while setting. The anchorage is characterised by mechanical interlock in the special thread.

Product and product description are given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment**3.1 Mechanical resistance and stability (BWR 1)**

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading)	See Annex B4 to B9, Annex C1, C3 and C5
Characteristic resistance to shear load (static and quasi-static loading)	See Annex C2, C4 and C5
Displacements (static and quasi-static loading)	See Annex C15 and C16
Characteristic resistance and displacements for seismic performance categories C1 and C2	See Annex C5 to C9 and C17

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	See Annex C10 to C14

3.3 Aspects of durability linked with the Basic Works Requirements

Essential characteristic	Performance
Durability	See Annex B1

European Technical Assessment

ETA-20/0867

English translation prepared by DIBt

Page 4 of 38 | 14 July 2022

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with European Assessment Document EAD No. 330232-01-0601 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document

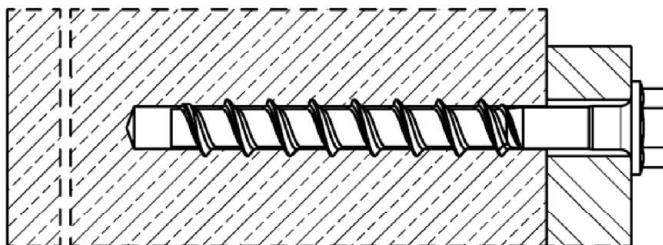
Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.

Issued in Berlin on 14 July 2022 by Deutsches Institut für Bautechnik

Dipl.-Ing. Beatrix Wittstock
Head of Section

beglaubigt:
Tempel


Installed condition without adjustment



HUS4-H (hexagon head configuration sizes 8, 10, 12, 14 and 16)


HUS4-HF (hexagon head configuration sizes 8, 10, 14 and 16)

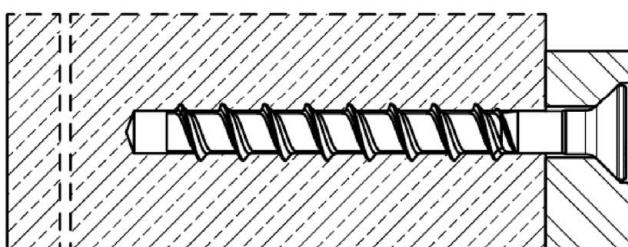HUS4-HR (hexagon head configuration sizes 6, 8, 10 and 14)



HUS4-C (countersunk head configuration sizes 8 and 10)

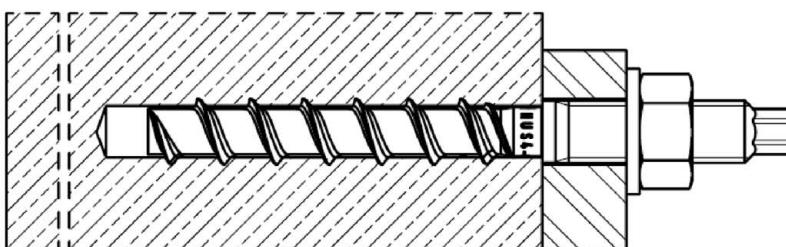
HUS4-CR (countersunk head configuration size 6, 8 and 10)



HUS4-A
(threaded rod connection sizes 10 with M12 and 14 with M16)


HUS4-AF
(threaded rod connection sizes 10 with M12 and 14 with M16)

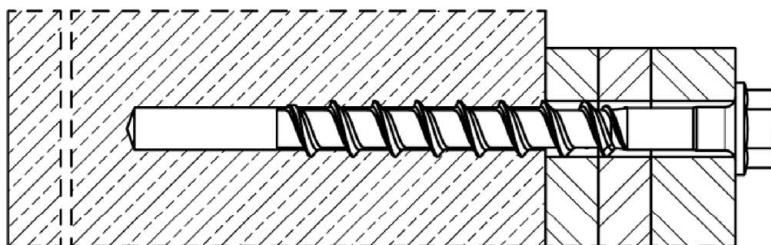Installed condition with adjustment - h_{nom2} , h_{nom3}



HUS4-H (hexagon head configuration sizes 8, 10, 12, and 14)

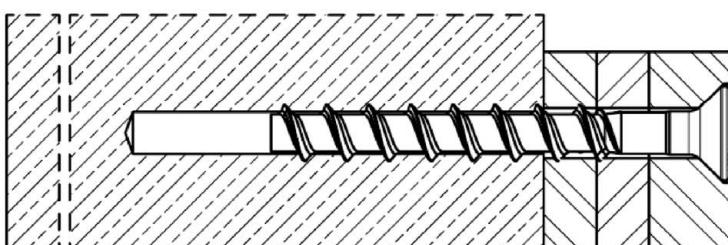HUS4-HF (hexagon head configuration sizes 8, 10, and 14)



HUS4-C (countersunk head configuration sizes 8 and 10)

Hilti screw anchor HUS4


Product description

Installed condition with and without adjustment

Annex A1

Table A1: Screw types

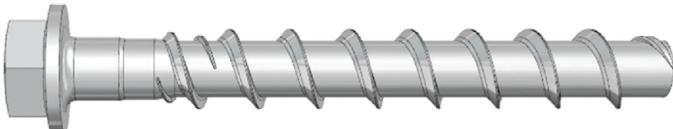
Hilti HUS4-H, sizes 8, 10, 12, 14 and 16, hexagonal head configuration, carbon steel galvanized
Hilti HUS4-HF, sizes 8, 10, 14 and 16, hexagonal head configuration, carbon steel multilayer coating



Hilti HUS4-HR, sizes 6, 8, 10 and 14 hexagonal head configuration, stainless steel



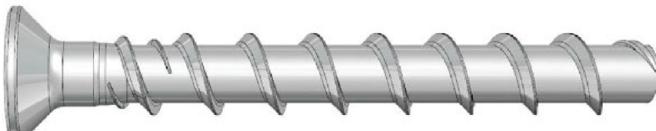Hilti HUS4-C, sizes 8 and 10, countersunk head configuration, carbon steel galvanized



Hilti HUS4-CR, sizes 6, 8 and 10 countersunk head configuration, stainless steel



Hilti HUS4-A, size 10 with external thread M12 and size 14 with external thread M16, carbon steel galvanized
Hilti HUS4-AF, size 10 with external thread M12 and size 14 with external thread M16, carbon steel multilayer coating



Hilti screw anchor HUS4

Product description
HUS4 screw types

Annex A2

Table A2: Hilti filling set (for HUS4-H (F, R) and HUS4-A (F)) and Hilti injection mortar

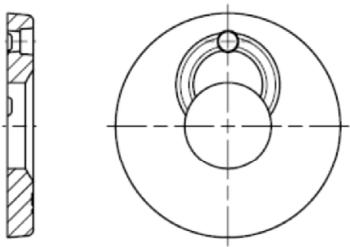

Filling washer	Spherical washer	Injection mortar
		 Hilti HIT-HY ... with ETA Hilti HIT-RE ... with ETA

Table A3: Materials

Part	Material
HUS4-H(F), HUS4-C and HUS4-A(F) screw anchor	Carbon steel Rupture elongation $A_5 \leq 8\%$
HUS4-HR and HUS-CR	Stainless steel (A4 grade) Rupture elongation $A_5 > 8\%$ Stainless steel of corrosion resistance class CRC III according to EN 1993-1-4:2006+A1:2015 1.4401 or 1.4404 according to EN 10088-1:2014
Hilti Filling set (carbon steel)	Filling washer: Carbon steel Spherical washer: Carbon steel
Hilti Filling set (stainless steel)	Corrosion resistance class CRC III according to EN 1993-1-4:2006+A1:2015 Filling washer: Stainless steel A4 according to ASTM A240/A 240M:2019 Spherical washer: Stainless steel A4 according to EN 10088-1:2014

Table A4: Filling set dimensions

Filling set size	M10	M12	M16	M20	
Diameter d_{vs} [mm]	42	44	52	60	
Thickness h_{vs} [mm]	5	5	6	6	
HUS4-H (F, R) 	8	10	$12 + 14$	16	
HUS4-A (F) 	-	10	14	-	


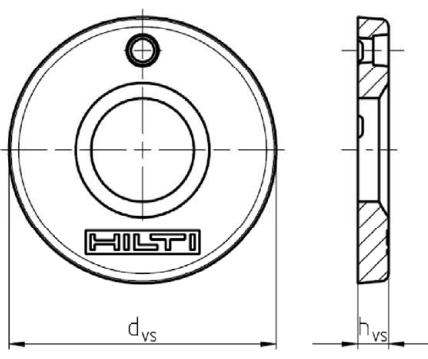


Table A5: Fastener dimensions and marking HUS4-A(F)

Fastener size HUS4-	A(F) 10			A(F) 14		
Nominal fastener diameter d [mm]	10			14		
Metric thread connection	M12			M16		
Pitch of the thread h_t [mm]	10			14		
Nominal embedment depth h_{nom} [mm]	h_{nom1}	h_{nom2}	h_{nom3}	h_{nom1}	h_{nom2}	h_{nom3}
	55	75	85	65	80	115
Effective embedment depth h_{ef} [mm]	$h_{ef} = 0,85 * (h_{nom} - 0,5 * h_t) \leq h_{ef,max}$					
Limits of effective embedment depth $h_{ef,max}$ [mm]	68,0			91,8		
Length of screw min / max	L [mm]	120 / 165			155 / 205	

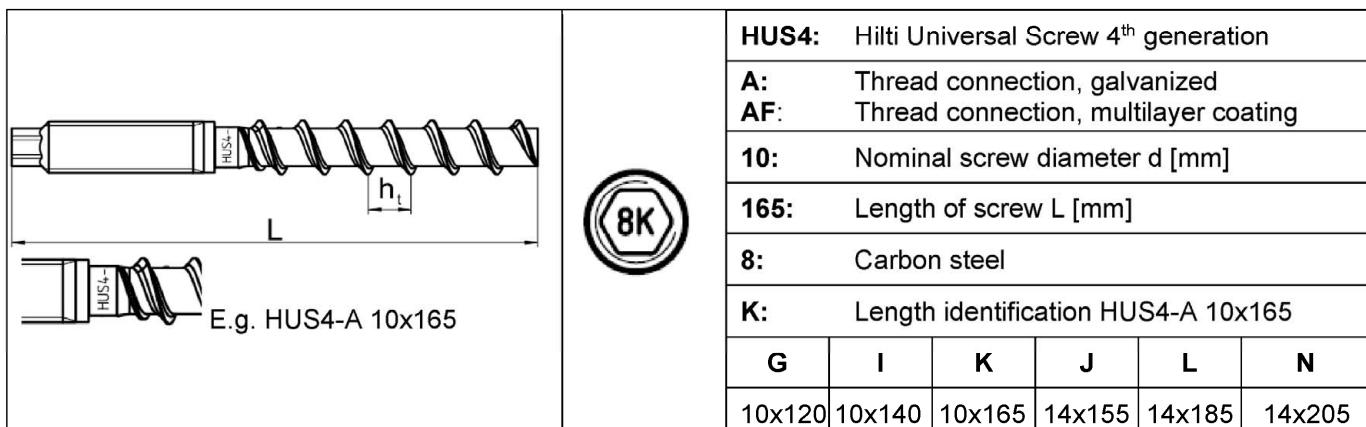

Hilti screw anchor HUS4


Production description
Fastener dimensions and head marking

Annex A4

Table A6: Fastener dimensions and marking HUS4-H...

Fastener size HUS4-	H(F) 8			H(F) 10			H 12			H(F) 14			H(F) 16	
Nominal fastener diameter d [mm]	8			10			12			14			16	
Pitch of the thread h _t [mm]	8			10			12			14			13,2	
Nominal embedment depth h _{nom} [mm]	h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}
	40	60	70	55	75	85	60	80	100	65	85	115	85	130
Effective embedment depth h _{ef} [mm]	$h_{ef} = 0,85 * (h_{nom} - 0,5 * h_t) \leq h_{ef,max}$													
Limits of effective embedment depth h _{ef,max} [mm]	56,1			68,0			79,9			91,8			104,9	
Length of screw min / max L [mm]	45 / 150			60 / 305			70 / 150			75 / 150			100 / 205	

Fastener size HUS4-	HR 6		HR 8		HR 10		HR 14	
Nominal fastener diameter d [mm]	6		8		10		14	
Pitch of the thread h _t [mm]	4,75		7,6		8,0		9,8	
Non-load bearing tip h _s [mm]	-		1,03		2,43		4,1	
Nominal embedment depth h _{nom} [mm]	h _{nom1}		h _{nom1}		h _{nom2}		h _{nom1}	
	55		60		80		70	
Effective embedment depth h _{ef} [mm]	$h_{ef} = 0,85 * (h_{nom} - 0,5 * h_t - h_s) \leq h_{ef,max}$							
Limits of effective embedment depth h _{ef,max} [mm]	45		64		71		86	
Length of screw min / max L [mm]	60 / 70		65 / 105		75 / 130		80 / 135	

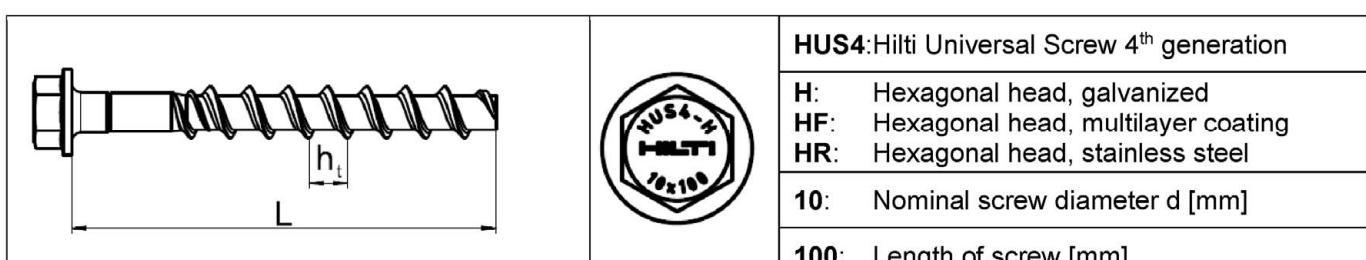

Hilti screw anchor HUS4


Production description
Fastener dimensions and head marking

Annex A5

Table A7: Fastener dimensions and marking HUS4-C...

Fastener size HUS4-		C 8			C 10		
Nominal fastener diameter	d [mm]	8			10		
Pitch of the thread	h _t [mm]	8			10		
Nominal embedment depth	h _{nom} [mm]	h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}
		40	60	70	55	75	85
Effective embedment depth	h _{ef} [mm]	$h_{ef} = 0,85 * (h_{nom} - 0,5 * h_t) \leq h_{ef,max}$					
Limits of effective embedment depth	h _{ef,max} [mm]	56,1			68,0		
Length of screw min / max	L [mm]	55 / 85			70 / 120		

Fastener size HUS4-		CR 6	CR 8		CR 10	
Nominal fastener diameter	d [mm]	6	8		10	
Pitch of the thread	h _t [mm]	-	7,6		8,0	
Non-load bearing tip	h _s [mm]	-	1,03		2,43	
Nominal embedment depth	h _{nom} [mm]	h _{nom2}	h _{nom2}	h _{nom3}	h _{nom2}	h _{nom3}
		55	60	80	70	90
Effective embedment depth	h _{ef} [mm]	$h_{ef} = 0,85 * (h_{nom} - 0,5 * h_t - h_s) \leq h_{ef,max}$				
Limits of effective embedment depth	h _{ef,max} [mm]	45	64		71	
Length of screw min / max	L [mm]	60 / 70	65 / 95		75 / 105	

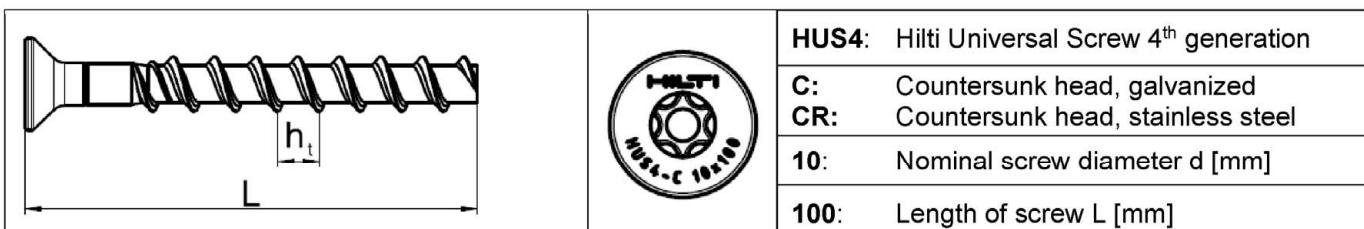

HUS4: Hilti Universal Screw 4th generation

C: Countersunk head, galvanized

CR: Countersunk head, stainless steel

10: Nominal screw diameter d [mm]

100: Length of screw L [mm]

Hilti screw anchor HUS4

Production description
Fastener dimensions and head marking

Annex A6

Specifications of intended use

Anchorage subject to:

- Static and quasi-static loadings
- Seismic action for performance category C1 and C2 for HUS4-H(F)/-C/-A(F) (carbon steel screw)
- Seismic action for performance category C1: HUS4-HR/-CR (stainless steel screw)
- Fire exposure

Base materials:

- Compacted reinforced or unreinforced normal weight concrete without fibres according to EN 206:2013+A1:2016.
- Strength classes C20/25 to C50/60 according to EN 206-1:2010+A1:2016.
- Cracked and uncracked concrete.

Use conditions (Environmental conditions):

- Anchorages subject to dry internal conditions: all screw types
- For all other conditions corresponding to corrosion resistance classes CRC according to EN 1993-1-4:2006+A1:2015
 - Stainless steel according to Annex A3, Table A3, screw types HUS4-HR/-CR: CRC III

Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the fastener is indicated on the design drawings (e. g. position of the fastener relative to reinforcement or to supports, etc.).
- Anchorages are designed in accordance with:
EN 1992-4:2018 and EOTA Technical Report TR 055 edition February 2018.
- In case of requirements to resistance to fire local spalling of the concrete cover must be avoided.

Installation:

- Fastener installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters on site.
- In case of aborted hole: new drilling at a minimum distance away of twice the depth of the aborted hole or smaller distance if the aborted hole is filled with high strength mortar and if under shear or oblique tension load it is not the direction of the load application.
- After installation further turning of the fastener must not be possible.
- The head of the fastener (HUS4-H (F, R) and HUS4-C/-CR) must be supported on the fixture and is not damaged.
- Hilti filling set is suitable for HUS4-H (F, R) and HUS4-A (F)

Hilti screw anchor HUS4

Intended use
Specifications

Annex B1

Specifications of intended use: Drilling and cleaning for HUS4 carbon steel

Table B1: Static and quasi static loading for HUS4-H(F)/-C/-A(F)

HUS4-H(F)/-C/-A(F) carbon steel	Fastener size and embedment depth h_{nom}	
Cracked and uncracked concrete		
Hammer drilling (HD) ¹⁾	cleaned	sizes 8 to 16 at all h_{nom}
	not cleanded	sizes 8 to 14 at all h_{nom}
Hammer drilling with Hilti hollow drill bit TE-CD (HDB) ¹⁾		
Uncracked concrete		
Diamond coring (DD) DD30-W handheld and with stand DD-EC1 handheld		sizes 10 to 14 at h_{nom3}

¹⁾ Adjustment according to Annex B11 is possible for sizes 8 to 14 at h_{nom2+3}

Table B2: Seismic performance category C1 for HUS4-H(F)/-C/-A(F)

HUS4-H(F)/-C/-A(F) carbon steel	Fastener size and embedment depth h_{nom}	
Hammer drilling (HD) ¹⁾	cleaned	sizes 8 to 14 at h_{nom2+3} size 16 at h_{nom1+2}
	not cleanded	sizes 8 to 14 at h_{nom2+3}
Hammer drilling with Hilti hollow drill bit TE-CD (HDB) ¹⁾		sizes 12 and 14 at h_{nom2+3}

¹⁾ Adjustment according to Annex B11 is possible for sizes 8 to 14 at h_{nom2+3}

Table B3: Seismic performance category C2 for HUS4-H(F)/-C/-A(F)

HUS4-H(F)/-C/-A(F) carbon steel	Fastener size and embedment depth h_{nom}	
Hammer drilling (HD) ¹⁾	cleaned	sizes 8 to 14 at h_{nom3}
	not cleanded	sizes 8 to 14 at h_{nom3}

¹⁾ Adjustment according to Annex B11 is possible for sizes 8 to 14 at h_{nom3}

Table B4: Static and quasi static loading under fire exposure for HUS4-H(F)/-C/-A(F)

HUS4-H(F)/-C/-A(F) carbon steel	Fastener size and embedment depth h_{nom}	
Hammer drilling (HD) ¹⁾	cleaned	sizes 8 to 16 at all h_{nom}
	not cleanded	sizes 8 to 14 at all h_{nom}
Hammer drilling with Hilti hollow drill bit TE-CD (HDB) ¹⁾		sizes 12 and 14 at all h_{nom}

¹⁾ Adjustment according to Annex B11 is possible for sizes 8 to 14 at h_{nom2+3}

Hilti screw anchor HUS4	
Intended use Specifications	Annex B2

Specifications of intended use: Drilling and cleaning for HUS4 stainless steel

Table B5: Static and quasi static loading for HUS4-HR/-CR

HUS4-HR/-CR stainless steel		Fastener size and embedment depth h_{nom}
Cracked and uncracked concrete		
Hammer drilling (HD)	cleaned not cleanded	 sizes 6 to 14 at all h_{nom}

Table B6: Seismic performance category C1 for HUS4-HR/-CR

HUS4-HR/-CR stainless steel		Fastener size and embedment depth h_{nom}
Hammer drilling (HD)	cleaned	sizes 8 to 14 at h_{nom2}
	not cleanded	sizes 8 to 14 at h_{nom2}

Table B7: Static and quasi static loading under fire exposure for HUS4-HR/-CR

HUS4-HR/-CR stainless steel		Fastener size and embedment depth h_{nom}
Hammer drilling (HD)	cleaned	sizes 6 to 14 at all h_{nom}
	not cleanded	sizes 6 to 14 at all h_{nom}

Installation parameters

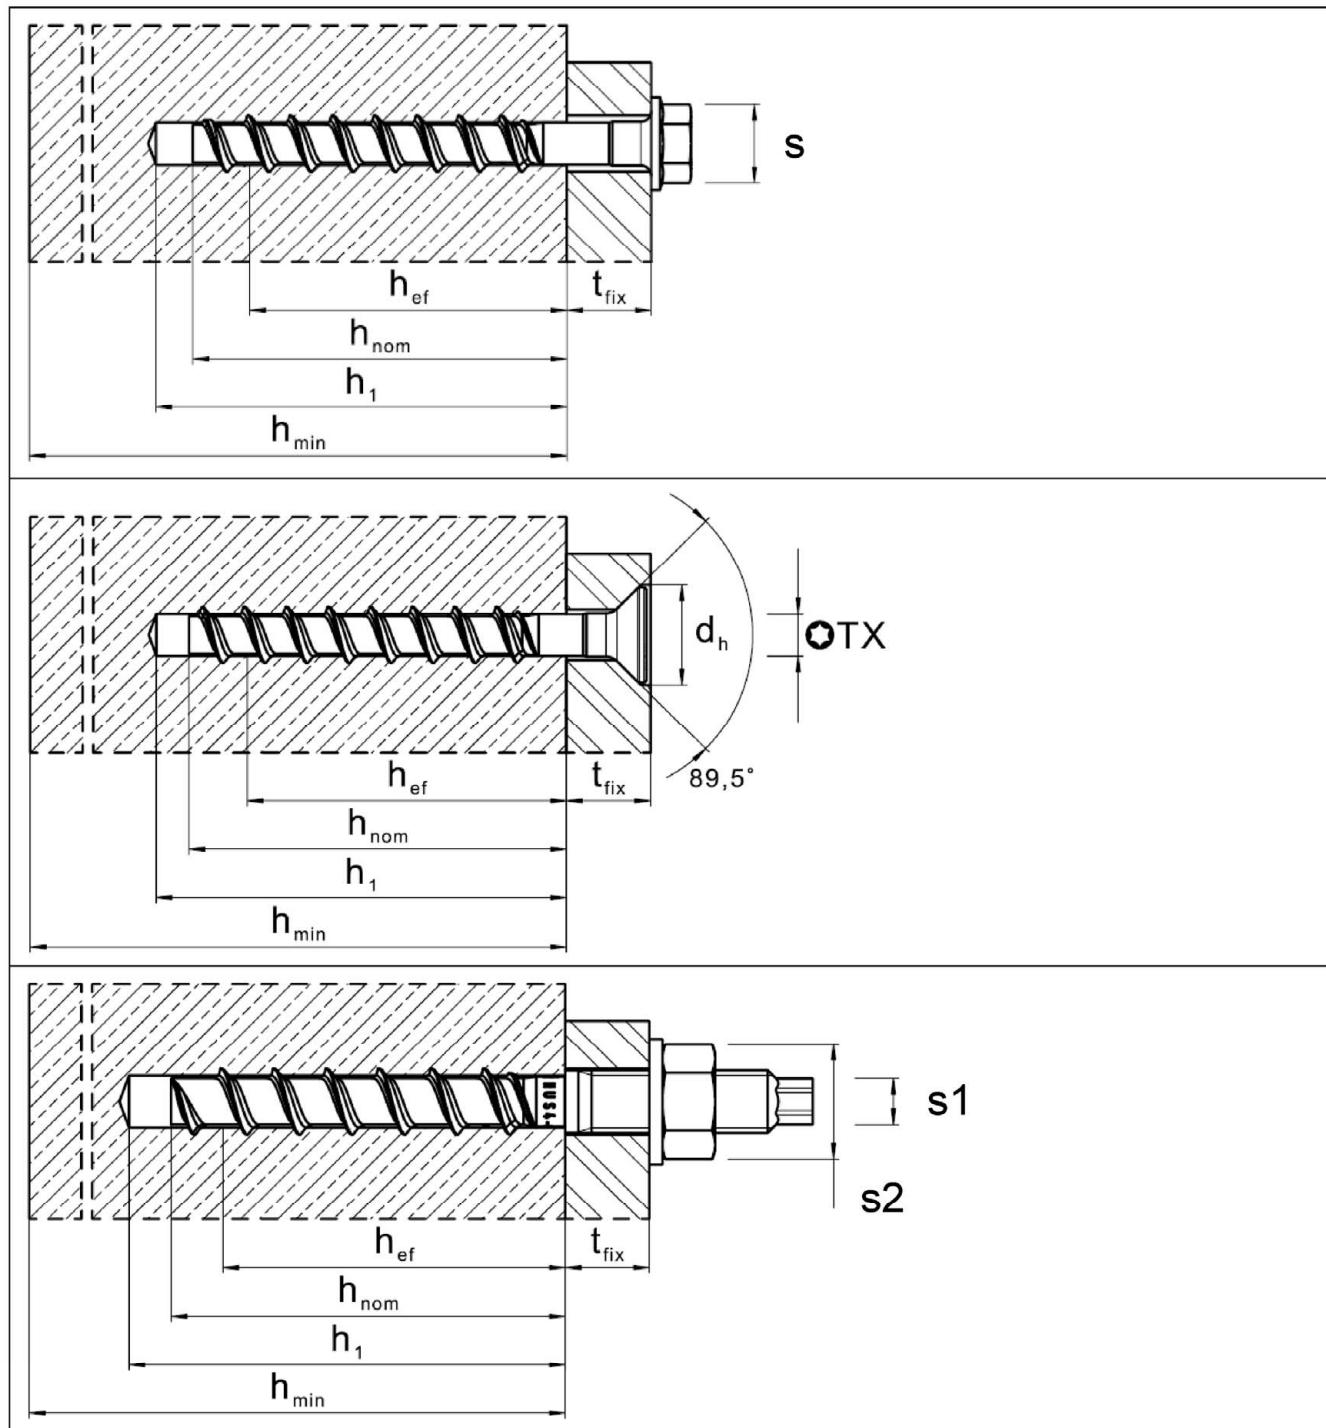


Table B8: Installation parameters HUS4-8 and 10

Fastener size HUS4	Type	8			10		
		H(F), C		H(F), C, A(F)			
Nominal embedment depth	h_{nom} [mm]	40	60	70	55	75	85
Nominal drill hole diameter	d_0 [mm]		8			10	
Cutting diameter of drill bit	$d_{\text{cut}} \leq$ [mm]		8,45			10,45	
Cutting diameter of diamond core bit	$d_{\text{cut}} \leq$ [mm]		-			9,9	
Clearance hole diameter through setting	d_f min max [mm]		11			13	
			12			14	
Clearance hole diameter pre setting (A-type)	$d_f \leq$ [mm]		-			14	
Wrench size (H, HF-type)	s [mm]		13			15	
Wrench size for hex head (A-type)	s_1 [mm]		-			8	
Wrench size for nut (A-type)	s_2 [mm]		-			19	
Maximum installation torque (A-type)	$\max T_{\text{inst}}$ [Nm]		-			40	
Torx size (C-type)	TX	-	45			50	
Diameter of countersunk head	d_h [mm]		18			21	
Depth of drill hole for cleaned hole hammer drilling, diamond coring or for uncleanched hole when drilling upwards	$h_1 \geq$ [mm]		$(h_{\text{nom}} + 10 \text{ mm})$				
			50	70	80	65	85
			95				
Depth of drill hole for uncleanched hole hammer drilling in wall and floor position	$h_1 \geq$ [mm]		$(h_{\text{nom}} + 10 \text{ mm}) + 2 * d_0$				
			66	86	96	85	105
			115				
Depth of drill hole (with adjustability) for cleaned hole hammer drilling, diamond coring or for uncleanched hole when drilling upwards	$h_1 \geq$ [mm]		$(h_{\text{nom}} + 20 \text{ mm})$				
			-	80	90	-	95
			105				
Depth of drill hole (with adjustability) for uncleanched hole hammer drilling in wall and floor position	$h_1 \geq$ [mm]		$(h_{\text{nom}} + 20 \text{ mm}) + 2 * d_0$				
			-	96	106	-	115
			125				
Minimum thickness of concrete member	$h_{\min} \geq$ [mm]		$(h_1 + 30 \text{ mm})$				
			80	100	120	100	130
			140				
Minimum spacing	$s_{\min} \geq$ [mm]		35		40		
Minimum edge distance	$c_{\min} \geq$ [mm]		35		40		
Hilti Setting tool ¹⁾			SIW 6AT-A22 1/2" SIW 6-22 1/2" gear 1			SIW 6AT-A22 1/2" SIW 22T-A 1/2" SIW 6-22 1/2" gear 1 SIW 8-22 1/2" gear 1 SIW 9-A22 3/4"	

¹⁾ Installation with other impact screw driver of equivalent power is possible.

Hilti screw anchor HUS4

Intended use
Installation parameters

Annex B5

Table B9: Installation parameters HUS4-12 and 14

Fastener size HUS4 Type	12			14		
	H			H(F), A(F)		
Nominal embedment depth h_{nom} [mm]	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$
Nominal embedment depth h_{nom} [mm]	60	80	100	65	85	115
Nominal drill hole diameter d_0 [mm]			12			14
Cutting diameter of drill bit $d_{\text{cut}} \leq$ [mm]			12,50			14,50
Cutting diameter of diamond core bit $d_{\text{cut}} \leq$ [mm]			12,2			-
Clearance hole diameter through setting d_f $\frac{\text{min}}{\text{max}}$ [mm]			16			18
Clearance hole diameter pre setting (A-type) $d_f \leq$ [mm]			-			18
Wrench size (H, HF-type) s [mm]			17			21
Wrench size for hex head (A-type) s_1 [mm]			-			12
Wrench size for nut (A-type) s_2 [mm]			-			24
Maximum installation torque (A-type) $\text{max } T_{\text{inst}}$ [Nm]			-			80
Depth of drill hole for cleaned hole hammer drilling, diamond coring or for uncleaned hole when drilling upwards $h_1 \geq$ [mm]	$(h_{\text{nom}} + 10 \text{ mm})$					
	70	90	110	75	95	125
Depth of drill hole for uncleaned hole hammer drilling in wall and floor position $h_1 \geq$ [mm]	$(h_{\text{nom}} + 10 \text{ mm}) + 2 * d_0$					
	94	114	134	103	123	153
Depth of drill hole (with adjustability) for cleaned hole hammer drilling, diamond coring or for uncleaned hole when drilling upwards $h_1 \geq$ [mm]	$(h_{\text{nom}} + 20 \text{ mm})$					
	-	100	120	-	105	135
Depth of drill hole (with adjustability) for uncleaned hole hammer drilling in wall and floor position $h_1 \geq$ [mm]	$(h_{\text{nom}} + 20 \text{ mm}) + 2 * d_0$					
	-	124	144	-	133	163
Minimum thickness of concrete member $h_{\text{min}} \geq$ [mm]	$(h_1 + 30 \text{ mm})$					
	110	130	150	120	160	200
Minimum spacing $s_{\text{min}} \geq$ [mm]	50			60		
Minimum edge distance $c_{\text{min}} \geq$ [mm]	50			60		
Hilti Setting tool ¹⁾	SIW 22T-A 1/2" SIW 6-22 1/2" SIW 8-22 1/2" SIW 9-A22 3/4"			SIW 22T-A 1/2" SIW 6-22 1/2" SIW 8-22 1/2" SIW 9-A22 3/4"		

¹⁾ Installation with other impact screw driver of equivalent power is possible.

Table B10: Installation parameters HUS4-16

Fastener size HUS4			16	
Type	H(F)			
Nominal embedment depth	h_{nom}	[mm]	$h_{\text{nom}1}$	$h_{\text{nom}2}$
Nominal drill hole diameter	d_0	[mm]	85	130
Cutting diameter of drill bit	$d_{\text{cut}} \leq$	[mm]		16,50
Clearance hole diameter through setting	$d_f \leq$	[mm]		20
Wrench size	s	[mm]		24
Depth of drill hole for cleaned hole hammer drilling or for uncleared hole when drilling upwards	$h_1 \geq$	[mm]	$(h_{\text{nom}} + 10 \text{ mm})$	
Minimum thickness of concrete member	$h_{\text{min}} \geq$	[mm]	95	140
Minimum spacing	$s_{\text{min}} \geq$	[mm]	130	195
Minimum edge distance	$c_{\text{min}} \geq$	[mm]	90	65
Hilti Setting tool ¹⁾			SIW 22T-A 1/2" SIW 6-22 1/2" SIW 8-22 1/2" SIW 9-A22 3/4"	

¹⁾ Installation with other impact screw driver of equivalent power is possible.

Table B11: Installation parameters HUS4-HR/-CR 6 and 8

Fastener size HUS4			6	8	
Type			HR, CR	HR, CR	
	h_{nom}	[mm]	$h_{\text{nom}1}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$
Nominal embedment depth	h_{nom}	[mm]	55	60	80
Nominal drill hole diameter	d_0	[mm]	6	8	
Cutting diameter of drill bit	$d_{\text{cut}} \leq$	[mm]	6,40	8,45	
Clearance hole diameter	$d_r \leq$	[mm]	9	12	
Wrench size (H-type)	s	[mm]	13	13	
Torx size (C-type)	TX	[–]	30	45	
Diameter of countersunk head	d_h	[mm]	11	18	
Depth of drill hole for cleaned hole hammer drilling or for uncleared hole when drilling upwards	$h_1 \geq$	[mm]	$(h_{\text{nom}} + 10\text{mm})$		
			65	70	90
Depth of drill hole for uncleared hole hammer drilling in wall and floor position	$h_1 \geq$	[mm]	$(h_{\text{nom}} + 10\text{ mm}) + 2 * d_0$		
			77	86	106
Minimum thickness of concrete member	$h_{\text{min}} \geq$	[mm]	$(h_1 + 30\text{ mm})$		
			100	100	120
Minimum spacing	$s_{\text{min}} \geq$	[mm]	35	45	60
Minimum edge distance	$c_{\text{min}} \geq$	[mm]	35	45	60
Hilti Setting tool ¹⁾			SIW 6AT-A22 1/2" gear 3	SIW 22T-A 1/2" SIW 6AT-A22 1/2" gear 3 SIW 6-22 1/2" gear 2	

¹⁾ Installation with other impact screw driver of equivalent power is possible.

Table B12: Installation parameters HUS4-HR/-CR 10 and 14


Fastener size HUS4			10		14		
Type	HR, CR			HR			
Nominal embedment depth	h_{nom}	[mm]	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	
Nominal drill hole diameter	d_0	[mm]	70	90	70	110	
Cutting diameter of drill bit	$d_{\text{cut}} \leq$	[mm]	10,45		14,50		
Clearance hole diameter	$d_r \leq$	[mm]	14		18		
Wrench size (H-type)	s	[mm]	15		21		
Torx size (C-type)	TX	[-]	50		-		
Diameter of countersunk head	d_h	[mm]	21		-		
Depth of drill hole for cleaned hole hammer drilling, diamond coring or for uncleaned hole when drilling upwards	$h_1 \geq$	[mm]	$(h_{\text{nom}} + 10\text{mm})$				
			80	100	80	120	
Depth of drill hole for uncleaned hole hammer drilling in wall and floor position	$h_1 \geq$	[mm]	$(h_{\text{nom}} + 10\text{ mm}) + 2 * d_0$				
			100	120	108	148	
Installation Torque	T_{inst}	[Nm]	45		65		
Minimum thickness of concrete member	$h_{\text{min}} \geq$	[mm]	120	140	140	160	
Minimum spacing	$s_{\text{min}} \geq$	[mm]	50		60		
Minimum edge distance	$c_{\text{min}} \geq$	[mm]	50		60		
Hilti Setting tool ¹⁾			SIW 22T-A 1/2" SIW 6AT-A22 1/2" gear 3 SIW 6-22 1/2" gear 2		SIW 22T-A 1/2" SIW 6-22 1/2" gear 2 SIW 8-22 1/2" gear 1 SIW 9-A22 3/4"		

¹⁾ Installation with other impact screw driver of equivalent power is possible.


Installation instructions

Hole drilling and cleaning


Hammer drilling (HD) all sizes for carbon and stainless steel screw types (size 16 with cleaning only)



Mark drilling depth h_1 for pre or through installation.
Details for drilling depth h_1 see table B5 to B9.




Cleaning needed in downward and horizontal installation direction with drill hole depth.
 $h_1 = h_{\text{nom}} + 10 \text{ mm}$




No cleaning is allowed in upward installation direction.
No cleaning is allowed in downward and horizontal installation direction when 3x ventilation¹⁾ after drilling is executed.
Drill hole depth $h_1 = h_{\text{nom}} + 10 \text{ mm} + 2 * d_0$
¹⁾ moving the drill bit in and out of the drill hole 3 times after the recommended drilling depth h_1 is achieved. This procedure shall be done with both revolution and hammer functions activated in the drilling machine. For more details read the relevant installation instruction (MPII).

Hammer drilling with Hilti hollow drill bit (HDB) TE-CD size 12 and 14 for carbon steel screw types



No cleaning needed.
 $h_1 = h_{\text{nom}} + 10 \text{ mm}$

Diamond coring with DD-EC1 or DD-30W size 10 to 14 for carbon steel screw types



Cleaning needed in all installation directions.
 $h_1 = h_{\text{nom}} + 10 \text{ mm}$


Hilti screw anchor HUS4

Intended use
Installation instructions

Annex B10


Fastener setting without adjustment

Setting by impact screw driver




Setting parameters listed in Table B5 to B7.

Setting check




Fastener setting with adjustment for carbon steel screw types

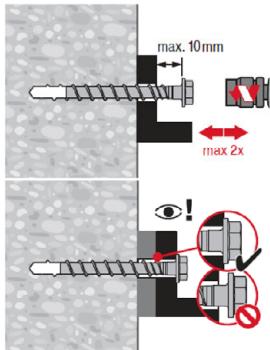Adjusting process




A screw can be adjusted maximum two times. The total allowed thickness of shims added during the adjustment process is 10 mm. The final embedment depth after adjustment process must be larger or equal than h_{nom2} or h_{nom3} .

Fastener setting with Hilti filling set



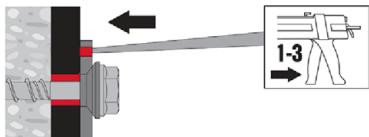Injection of Hilti HIT mortar and curing time



Fill the annular gap between screw and fixture with 1-3 strokes of a Hilti injection mortar HIT-HY ... or HIT-RE

Follow the installation instructions supplied with the respective Hilti injection mortar.

After required curing time t_{cure} the fastening can be loaded.

Hilti screw anchor HUS4

Intended use

Installation instructions

Annex B11

Table C1: Essential characteristics under static and quasi-static load in concrete for HUS4 carbon steel size 8 and 10

Fastener size HUS4	8			10						
Type	H(F), C			H(F), C, A(F)						
	h_{nom1}	h_{nom2}	h_{nom3}	h_{nom1}	h_{nom2}	h_{nom3}				
Nominal embedment depth	h_{nom} [mm]	40	60	70	55	75				
Adjustment										
Total max. thickness of adjustment layers	t_{adj} [mm]	-	10	10	-	10				
Max. number of adjustments	n_a [-]	-	2	2	-	2				
Steel failure for tension load										
Characteristic resistance	$N_{Rk,s}$ [kN]	36,0			55,0					
Partial factor	$\gamma_{Ms,N}^{1)}$ [-]	1,5								
Pull-out failure										
Characteristic resistance in uncracked concrete C20/25	$N_{Rk,p}$ [kN]	$\geq N_{Rk,c}^0$ ³⁾			13	22				
Characteristic resistance in cracked concrete C20/25	$N_{Rk,p}$ [kN]	5,5	$\geq N_{Rk,c}^0$ ³⁾							
Increasing factor for $N_{Rk,p} = N_{Rk,p}(C20/25) * \psi_c$	ψ_c [-]	$(f_{ck}/20)^{0,5}$								
Concrete cone and splitting failure										
Effective embedment depth	$h_{ef}^{2)}$ [mm]	30,6	47,6	56,1	42,5	59,5				
Factor for	Uncracked	$k_{ucr,N}$ [-]	11,0							
	Cracked	$k_{cr,N}$ [-]	7,7							
Concrete cone failure	Edge distance	$c_{cr,N}$ [mm]	1,5 h_{ef}							
	Spacing	$s_{cr,N}$ [mm]	3 h_{ef}							
Characteristic resistance	$N_{Rk,sp}^0$ [kN]	$N_{Rk,p}$								
Splitting failure	Edge distance	$c_{cr,sp}$ [mm]	1,5 h_{ef}		1,65 h_{ef}					
	Spacing	$s_{cr,sp}$ [mm]	3 h_{ef}		3,3 h_{ef}					
Installation factor	γ_{inst} [-]	1,0			1,2	1,0				

¹⁾ In absence of other national regulations.

²⁾ In case $h_{nom} > h_{nom1}$ and $< h_{nom3}$ the actual h_{ef} for concrete failure can be calculated according to: $h_{ef} = 0,85 * (h_{nom} - 0,5 * h_t)$

³⁾ $N_{Rk,c}^0$ according to EN 1992-4:2018

Hilti screw anchor HUS4

Performances

Essential characteristics under static and quasi-static load in concrete

Annex C1

Table C1 continued

Fastener size HUS4		8			10				
Type		H(F), C			H(F), C, A(F)				
		h_{nom1}	h_{nom2}	h_{nom3}	h_{nom1}	h_{nom2}	h_{nom3}		
Nominal embedment depth	h_{nom} [mm]	40	60	70	55	75	85		
Steel failure for shear load									
Characteristic resistance	$V^0_{Rk,s}$ [kN]	18,8		21,9	28,8		32,0		
Partial factor	$\gamma_{Ms,V}^{1)}$ [-]	1,25							
Ductility factor	k_7 [-]	0,8							
Characteristic resistance	$M^0_{Rk,s}$ [Nm]	32		64					
Concrete pry-out failure									
Pry-out factor	k_8 [-]	1,0	2,0		1,0	2,0			
Concrete edge failure									
Effective length of fastener	l_f [mm]	40	60	70	55	75	85		
Outside diameter of fastener	d_{nom} [mm]	8			10				

¹⁾ In absence of other national regulations.

Hilti screw anchor HUS4

Performances

Essential characteristics under static and quasi-static load in concrete

Annex C2

Table C2: Essential characteristics under static and quasi-static load in concrete for HUS4 carbon steel size 12 to 16

Fastener size HUS4 Type	12 H			14 H(F), A(F)			16 H(F)						
	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$					
Nominal embedment depth h_{nom} [mm]	60	80	100	65	85	115	85	130					
Adjustment													
Total max. thickness of adjustment layers t_{adj} [mm]	-	10	10	-	10	10	-	-					
Max. number of adjustments n_a [-]	-	2	2	-	2	2	-	-					
Steel failure for tension load													
Characteristic resistance $N_{Rk,s}$ [kN]	79,0			101,5			107,7						
Partial factor $\gamma_{Ms,N}^{1)}$ [-]	1,5												
Pull-out failure													
Characteristic resistance in uncracked concrete C20/25 $N_{Rk,p}$ [kN]	$\geq N_{Rk,c}^0$ ³⁾					22	46						
Characteristic resistance in cracked concrete C20/25 $N_{Rk,p}$ [kN]	10	$\geq N_{Rk,c}^0$ ³⁾					16	32					
Increasing factor for $N_{Rk,p} = N_{Rk,p}(C20/25) * \psi_c$ ψ_c [-]	$(f_{ck}/20)^{0,5}$												
Concrete cone and splitting failure													
Effective embedment depth $h_{\text{ef}}^{2)}$ [mm]	45,9	62,9	79,9	49,3	66,3	91,8	66,6	104,9					
Factor for	Uncracked $k_{ucr,N}$ [-]	11,0											
	Cracked $k_{cr,N}$ [-]	7,7											
Concrete cone failure	Edge distance $c_{cr,N}$ [mm]	1,5 h_{ef}											
	Spacing $s_{cr,N}$ [mm]	3 h_{ef}											
Characteristic resistance $N_{Rk,sp}^0$ [kN]		$N_{Rk,p}$											
Splitting failure	Edge distance $c_{sp,sp}$ [mm]	1,65 h_{ef}			1,60 h_{ef}								
	Spacing $s_{sp,sp}$ [mm]	3,30 h_{ef}			3,20 h_{ef}								
Installation factor γ_{inst} [-]	1,0												

¹⁾ In absence of other national regulations.

²⁾ In case $h_{\text{nom}} > h_{\text{nom}1}$ and $< h_{\text{nom}3}$ the actual h_{ef} for concrete failure can be calculated according to: $h_{\text{ef}} = 0,85 * (h_{\text{nom}} - 0,5 * h_t)$

³⁾ $N_{Rk,c}^0$ according to EN 1992-4:2018

Hilti screw anchor HUS4

Performances

Essential characteristics under static and quasi-static load in concrete

Annex C3

Table C2 continued

Fastener size HUS4		12			14			16								
Type		H			H(F), A(F)			H(F)								
		$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$							
Nominal embedment depth	h_{nom} [mm]	60	80	100	65	85	115	85	130							
Steel failure for shear load																
Characteristic resistance	$V^0_{Rk,s}$ [kN]	38,9		44,9	55	62		65,1	73,1							
Partial factor	$\gamma_{Ms,V}^{1)}$ [-]	1,25														
Ductility factor	k_7 [-]	0,8														
Characteristic resistance	$M^0_{Rk,s}$ [Nm]	120			186			240								
Concrete pry-out failure																
Pry-out factor	k_8 [-]	2,0														
Concrete edge failure																
Effective length of fastener	l_f [mm]	60	80	100	65	85	115	85	130							
Outside diameter of fastener	d_{nom} [mm]	12			14			16								

¹⁾ In absence of other national regulations.

Hilti screw anchor HUS4

Performances

Essential characteristics under static and quasi-static load in concrete

Annex C4

Table C3: Essential characteristics under static and quasi-static load in concrete for HUS4 stainless steel

Fastener size HUS4	6	8		10		14	
Type	HR, CR	HR, CR		HR, CR	HR		
	$h_{\text{nom}1}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$
Nominal embedment depth	h_{nom} [mm]	55	60	80	70	90	70
Steel failure for tension and shear load							
Characteristic resistance	$N_{Rk,s}$ [kN]	24,0	34,0	52,6	102,2		
Partial factor	$\gamma_{Ms,N}^{1)}$ [-]			1,4			
Characteristic resistance	$V_{Rk,s}$ [kN]	17,0	26,0	33,0	55,0	77,0	
Partial factor	$\gamma_{Ms,V}^{1)}$ [-]			1,5			
Ductility factor	k_7 [-]			1,0			
Characteristic resistance	$M^0_{Rk,s}$ [Nm]	19	36	66	193		
Pull-out failure							
Characteristic resistance in cracked concrete C20/25	$N_{Rk,p}$ [kN]	5	8,5	15	12	16	12
Characteristic resistance in uncracked concrete C20/25	$N_{Rk,p}$ [kN]	9	12	16	16	25	$\geq N^0_{Rk,c}^{2)}$
Increasing factor for $N_{Rk,p} = N_{Rk,p}(C20/25) * \psi_c$	ψ_c [-]				$(f_{ck}/20)^{0,5}$		
Concrete cone and splitting failure							
Effective anchorage depth	h_{ef} [mm]	45	47	64	54	71	52
Factor for	Cracked	$k_{cr,N}$ [-]			7,7		
	Uncracked	$k_{ucr,N}$ [-]			11,0		
Concrete cone failure	Edge distance	$c_{cr,N}$ [mm]			1,5 h_{ef}		
	Spacing	$s_{cr,N}$ [mm]			3 h_{ef}		
Splitting failure	Edge distance	$c_{cr,sp}$ [mm]	1,5 h_{ef}	1,5 h_{ef}	1,8 h_{ef}	1,8 h_{ef}	
	Spacing	$s_{cr,sp}$ [mm]	3 h_{ef}	3 h_{ef}	3,6 h_{ef}	3,6 h_{ef}	
Robustness	γ_{inst} [-]	1,4	1,0	1,2	1,2	1,0	1,2
Concrete pry-out failure							
Pry-out factor	k_8 [mm]	1,5			2,0		
Concrete edge failure							
Effective length of anchor	$l_f = h_{\text{ef}}$ [mm]	45	47	64	54	71	52
Effective diameter of anchor	d_{nom} [mm]	6	8		10		14

¹⁾ In absence of other national regulations.

²⁾ $N^0_{Rk,c}$ according to EN 1992-4:2018

Hilti screw anchor HUS4

Annex C5

Performances
Essential characteristics under static and quasi-static load in concrete

Table C4: Essential characteristics for seismic performance category C1 in concrete for HUS4 carbon steel

Fastener size HUS4	8		10		12		14								
Type	H(F), C		H(F), C, A(F)		H		H(F), A(F)								
	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$							
Nominal embedment depth h_{nom} [mm]	60	70	75	85	80	100	85	115							
Steel failure for tension and shear load															
Characteristic resistance $N_{Rk,s,C1}$ [kN]	36,0		55,0		79,0		101,5								
Partial factor $\gamma_{Ms,N}^{1)}$ [-]	1,5														
Characteristic resistance $V_{Rk,s,C1}$ [kN]	18,8		26,7		38,9		22,5	34,5							
Partial factor $\gamma_{Ms,V}^{1)}$ [-]	1,25														
Reduction factor acc. to EN 1992-4:2018 annular gap unfilled α_{gap} [-]	0,5														
Reduction factor acc. to EN 1992-4:2018 annular gap filled α_{gap} [-]	1,0														
Pull-out failure															
Characteristic resistance in cracked concrete $N_{Rk,p,C1}$ [kN]	$\geq N_{Rk,c}^0$ ³⁾														
Concrete cone failure															
Effective embedment depth $h_{\text{ef}}^{2)}$ [mm]	47,6	56,1	59,5	68,0	62,9	79,9	66,3	91,8							
Concrete cone failure	Edge distance $c_{cr,N}$ [mm]	1,5 h_{ef}													
	Spacing $s_{cr,N}$ [mm]	3 h_{ef}													
Installation factor γ_{inst} [-]	1,0														
Concrete pry-out failure															
Pry-out factor k_8 [-]	2,0														
Concrete edge failure															
Effective length of fastener l_f [mm]	60	70	75	85	80	100	85	115							
Outside diameter of fastener d_{nom} [mm]	8		10		12		14								

¹⁾ In absence of other national regulations.

²⁾ In case $h_{\text{nom}} > h_{\text{nom}2}$ and $< h_{\text{nom}3}$ the actual h_{ef} for concrete failure can be calculated according to " $h_{\text{ef}} = 0,85 * (h_{\text{nom}} - 0,5 * h_t)$ "

³⁾ $N_{Rk,c}^0$ according to EN 1992-4:2018

Table C4 continued

Fastener size HUS4		16	
Type		H(F)	
		$h_{\text{nom}1}$	$h_{\text{nom}2}$
Nominal embedment depth	h_{nom} [mm]	85	130
Steel failure for tension and shear load			
Characteristic resistance	$N_{Rk,s,C1}$ [kN]	107,7	
Partial factor	$\gamma_{Ms,N}^{1)}$ [-]	1,5	
Characteristic resistance	$V_{Rk,s,C1}$ [kN]	42,9	25,3
Partial factor	$\gamma_{Ms,V}^{1)}$ [-]	1,25	
Partial factor annular gap unfilled	α_{gap} [-]	0,5	
Partial factor annular gap filled	α_{gap} [-]	1,0	
Pull-out failure			
Characteristic resistance in cracked concrete	$N_{Rk,p,C1}$ [kN]	7,5	19,0
Concrete cone failure			
Effective embedment depth	$h_{\text{ef}}^{2)}$ [mm]	66,6	104,9
Concrete cone failure	Edge distance $c_{\text{cr},N}$ [mm]	1,5 h_{ef}	
	Spacing $s_{\text{cr},N}$ [mm]	3 h_{ef}	
Installation factor	γ_{inst} [-]	1,0	
Concrete pry-out failure			
Pry-out factor	k_8 [-]	2,0	
Concrete edge failure			
Effective length of fastener	l_f [mm]	85	130
Outside diameter of fastener	d_{nom} [mm]	16	

¹⁾ In absence of other national regulations.

²⁾ In case $h_{\text{nom}} > h_{\text{nom}2}$ and $< h_{\text{nom}3}$ the actual h_{ef} for concrete failure can be calculated according to " $h_{\text{ef}} = 0,85 * (h_{\text{nom}} - 0,5 * h_t)$ "

Hilti screw anchor HUS4

Performances

Essential characteristics for seismic performance category C1 in concrete

Annex C7

Table C5: Essential characteristics for seismic performance category C1 in concrete for HUS4 stainless steel

Fastener size HUS4	8	10	14
Type	HR, CR	HR, CR	HR
	h_{nom2}	h_{nom2}	h_{nom2}
Nominal embedment depth h_{nom} [mm]	80	90	110
Steel failure for tension and shear load			
Characteristic resistance $N_{Rk,s,C1}$ [kN]	34,0	52,6	102,2
Partial factor $\gamma_{Ms,N}^{1)}$ [-]		1,4	
Characteristic resistance $V_{Rk,s,C1}$ [kN]	11,1	17,9	53,9
Partial factor $\gamma_{Ms,V}^{1)}$ [-]		1,5	
Pull-out failure			
Characteristic resistance in cracked concrete $N_{Rk,p,C1}$ [kN]	7,7	12,5	17,5
Concrete cone failure			
Effective embedment depth h_{ef} [mm]	64	71	86
Concrete cone failure	Edge distance $c_{cr,N}$ [mm]	1,5 h_{ef}	
	Spacing $s_{cr,N}$ [mm]	3 h_{ef}	
Robustness	γ_{inst} [-]	1,2	1,0
Concrete pry-out failure			
Pry-out factor k_8 [-]		2,0	
Concrete edge failure			
Effective length of fastener $l_f = h_{ef}$ [mm]	64	71	86
Outside diameter of fastener d_{nom} [mm]	8	10	14

¹⁾ In absence of other national regulations.

Table C6: Essential characteristics for seismic performance category C2 in concrete for HUS4 carbon steel

Fastener size HUS4	8 H(F), C	10 H(F), C, A(F)	12 H	14 H(F), A(F)
Type	$h_{\text{nom}3}$	$h_{\text{nom}3}$	$h_{\text{nom}3}$	$h_{\text{nom}3}$
Nominal embedment depth	h_{nom} [mm]	70	85	100
Adjustment				
Total max. thickness of adjustment layers	t_{adj} [mm]	10	10	10
Max. number of adjustments	n_a [-]	2	2	2
Steel failure for tension				
Characteristic resistance	$N_{Rk,s,C2}$ [kN]	36,0	55,0	79,0
Partial factor	$\gamma_{Ms,N}^{1)}$ [-]	1,5		
Steel failure for shear load				
Partial factor	$\gamma_{Ms,V}^{1)}$ [-]	1,25		
Installation with Hilti filling set (HUS4-H and HUS4-A)				
Characteristic resistance	$V_{Rk,s,C2}$ [kN]	13,9	21,5	27,2
Partial factor annular gap filled	α_{gap} [-]	1,0		
Installation without Hilti filling set				
Characteristic resistance	$V_{Rk,s,C2}$ [kN]	9,4	13,7	22,5
Partial factor annular gap not filled	α_{gap} [-]	0,5		
Pull-out failure				
Characteristic resistance in cracked concrete	$N_{Rk,p,C2}$ [kN]	2,7	5,4	11,4
Concrete cone failure				
Effective embedment depth	h_{ef} [mm]	56,1	68,0	79,9
Concrete cone failure	Edge distance $c_{\text{cr},N}$ [mm]	1,5 h_{ef}		
	Spacing $s_{\text{cr},N}$ [mm]	3 h_{ef}		
Installation factor	γ_{inst} [-]	1,0		
Concrete pry-out failure				
Pry-out factor	k_8 [-]	2,0		
Concrete edge failure				
Effective length of fastener	l_f [mm]	70	85	100
Outside diameter of fastener	d_{nom} [mm]	8	10	12
1) In absence of other national regulations.				
Hilti screw anchor HUS4				
Performances Essential characteristics for seismic performance category C2 in concrete				Annex C9

Table C7: Essential characteristics under fire exposure in concrete for HUS4-H carbon steel

Fastener size HUS4-H(F)		8			10							
Nominal embedment depth	h_{nom} [mm]	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$					
Steel failure for tension and shear load ($F_{Rk,s,fi} = N_{Rk,s,fi} = V_{Rk,s,fi}$)												
Characteristic resistance	R30	$F_{Rk,s,fi}$ [kN]	2,6		4,1	4,2						
	R60	$F_{Rk,s,fi}$ [kN]	1,9		3,1	3,1						
	R90	$F_{Rk,s,fi}$ [kN]	1,2		2,2	2,3						
	R120	$F_{Rk,s,fi}$ [kN]	0,9		1,5	1,7						
	R30	$M^0_{Rk,s,fi}$ [Nm]	2,3		4,8	4,9						
	R60	$M^0_{Rk,s,fi}$ [Nm]	1,7		3,6	3,7						
	R90	$M^0_{Rk,s,fi}$ [Nm]	1,1		2,6	2,7						
	R120	$M^0_{Rk,s,fi}$ [Nm]	0,8		1,8	1,9						
Pull-out failure												
Characteristic resistance	R30											
	R60	$N^0_{Rk,p,fi}$ [kN]	1,3	2,8	3,6	2,3	3,9					
	R90						4,7					
	R120	$N^0_{Rk,p,fi}$ [kN]	1,0	2,2	2,8	1,9	3,1					
Concrete cone failure												
Characteristic resistance	R30											
	R60	$N^0_{Rk,c,fi}$ [kN]	0,8	2,6	4,0	2,0	4,7					
	R90						6,5					
	R120	$N^0_{Rk,c,fi}$ [kN]	0,7	2,1	3,2	1,6	3,7					
Edge distance												
R30 to R120		$c_{cr,fi}$ [mm]	2 h_{ef}									
In case of fire attack from more than one side, the minimum edge distance shall be ≥ 300 mm												
Fastener spacing												
R30 to R120		$s_{cr,fi}$ [mm]	2 $c_{cr,fi}$									
Concrete pry-out failure												
R30 to R120		k_8 [-]	1,0	2,0	1,0	2,0						
The anchorage depth shall be increased for wet concrete by at least 30 mm compared to the given value												
Hilti screw anchor HUS4												
Performances Essential characteristics under fire exposure in concrete												
Annex C10												

Table C7 continued

Fastener size HUS4-H(F)		12			14			16								
Nominal embedment depth	h_{nom} [mm]	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$							
Steel failure for tension and shear load ($F_{Rk,s,fi} = N_{Rk,s,fi} = V_{Rk,s,fi}$)																
Characteristic resistance	R30	$F_{Rk,s,fi}$ [kN]	7,5	7,6	7,6	10,3	10,4	10,5	10,6	10,7						
	R60	$F_{Rk,s,fi}$ [kN]	5,5	5,7	5,8	7,7	7,9	8,0	8,1	8,2						
	R90	$F_{Rk,s,fi}$ [kN]	3,7	3,9	4,1	5,2	5,6	5,8	5,7	5,9						
	R120	$F_{Rk,s,fi}$ [kN]	2,8	3,0	3,1	3,9	4,2	4,4	4,3	4,5						
	R30	$M_{Rk,s,fi}^0$ [Nm]	11,4	11,6	11,6	18,9	19,2	19,3	23,7	23,9						
	R60	$M_{Rk,s,fi}^0$ [Nm]	8,4	8,8	8,9	14,1	14,6	14,8	18,1	18,3						
	R90	$M_{Rk,s,fi}^0$ [Nm]	5,7	6,0	6,2	9,5	10,2	10,7	12,7	13,2						
	R120	$M_{Rk,s,fi}^0$ [Nm]	4,3	4,6	4,7	7,2	7,7	8,1	9,6	10,0						
Pull-out failure																
Characteristic resistance	R30	$N_{Rk,p,fi}^0$ [kN]	2,6	4,2	6,1	2,9	4,5	7,5	4,6	8,7						
	R60	$N_{Rk,p,fi}^0$ [kN]	2,1	3,4	4,9	2,3	3,6	6,0	3,7	7,0						
	R90	$N_{Rk,p,fi}^0$ [kN]	1,9	4,3	7,8	2,3	4,9	11,1	4,9	15,5						
	R120	$N_{Rk,p,fi}^0$ [kN]	1,9	4,3	7,8	2,3	4,9	11,1	4,9	15,5						
Concrete cone failure																
Characteristic resistance	R30	$N_{Rk,c,fi}^0$ [kN]	2,4	5,4	9,8	2,9	6,1	13,9	6,2	19,4						
	R60	$N_{Rk,c,fi}^0$ [kN]	2,1	3,4	4,9	2,3	3,6	6,0	3,7	7,0						
	R90	$N_{Rk,c,fi}^0$ [kN]	1,9	4,3	7,8	2,3	4,9	11,1	4,9	15,5						
	R120	$N_{Rk,c,fi}^0$ [kN]	1,9	4,3	7,8	2,3	4,9	11,1	4,9	15,5						
Edge distance																
R30 to R120		$c_{\text{cr},fi}$ [mm]	2 h_{ef}													
In case of fire attack from more than one side, the minimum edge distance shall be ≥ 300 mm																
Fastener spacing																
R30 to R120		$s_{\text{cr},fi}$ [mm]	2 $c_{\text{cr},fi}$													
Concrete pry-out failure																
R30 to R120		k_8 [-]	2,0													
The anchorage depth shall be increased for wet concrete by at least 30 mm compared to the given value																
Hilti screw anchor HUS4								Annex C11								
Performances Essential characteristics under fire exposure in concrete																

Table C8: Essential characteristics under fire exposure in concrete for HUS4-C carbon steel

Fastener size HUS4-C		8			10							
Nominal embedment depth	h_{nom} [mm]	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$					
Steel failure for tension and shear load ($F_{Rk,s,fi} = N_{Rk,s,fi} = V_{Rk,s,fi}$)												
Characteristic resistance	R30	$F_{Rk,s,fi}$ [kN]	0,5		1,0							
	R60	$F_{Rk,s,fi}$ [kN]	0,4		0,9							
	R90	$F_{Rk,s,fi}$ [kN]	0,3		0,7							
	R120	$F_{Rk,s,fi}$ [kN]	0,2		0,6							
	R30	$M^0_{Rk,s,fi}$ [Nm]	0,4		1,2							
	R60	$M^0_{Rk,s,fi}$ [Nm]	0,3		1,0							
	R90	$M^0_{Rk,s,fi}$ [Nm]	0,2		0,8							
	R120	$M^0_{Rk,s,fi}$ [Nm]	0,2		0,6							
Pull-out failure												
Characteristic resistance	R30											
	R60	$N^0_{Rk,p,fi}$ [kN]	1,3	2,8	3,6	2,3	3,9					
	R90						4,7					
	R120	$N^0_{Rk,p,fi}$ [kN]	1,0	2,2	2,8	1,9	3,1					
Concrete cone failure												
Characteristic resistance	R30											
	R60	$N^0_{Rk,c,fi}$ [kN]	0,8	2,6	4,0	2,0	4,7					
	R90						6,5					
	R120	$N^0_{Rk,c,fi}$ [kN]	0,7	2,1	3,2	1,6	3,7					
Edge distance												
R30 to R120		$c_{cr,fi}$ [mm]	2 h_{ef}									
In case of fire attack from more than one side, the minimum edge distance shall be ≥ 300 mm												
Fastener spacing												
R30 to R120		$s_{cr,fi}$ [mm]	2 $c_{cr,fi}$									
Concrete pry-out failure												
R30 to R120		k_8 [-]	1,0	2,0	1,0	2,0						
The anchorage depth shall be increased for wet concrete by at least 30 mm compared to the given value												
Hilti screw anchor HUS4												
Performances Essential characteristics under fire exposure in concrete												
Annex C12												

Table C9: Essential characteristics under fire exposure in concrete for HUS4-A carbon steel

Fastener size HUS4-A(F)		10			14							
Nominal embedment depth	h_{nom} [mm]	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$					
Steel failure for tension and shear load ($F_{Rk,s,fi} = N_{Rk,s,fi} = V_{Rk,s,fi}$)												
Characteristic resistance	R30	$F_{Rk,s,fi}$ [kN]	4,2		8,4							
	R60	$F_{Rk,s,fi}$ [kN]	3,3		6,8							
	R90	$F_{Rk,s,fi}$ [kN]	2,5		5,1							
	R120	$F_{Rk,s,fi}$ [kN]	2,1		4,3							
	R30	$M^0_{Rk,s,fi}$ [Nm]	4,8		15,4							
	R60	$M^0_{Rk,s,fi}$ [Nm]	3,8		12,4							
	R90	$M^0_{Rk,s,fi}$ [Nm]	2,9		9,3							
	R120	$M^0_{Rk,s,fi}$ [Nm]	2,4		7,8							
Pull-out failure												
Characteristic resistance	R30											
	R60	$N^0_{Rk,p,fi}$ [kN]	2,3	3,9	4,7	2,9	4,5					
	R90						7,5					
	R120	$N^0_{Rk,p,fi}$ [kN]	1,9	3,1	3,7	2,3	3,6					
Concrete cone failure												
Characteristic resistance	R30											
	R60	$N^0_{Rk,c,fi}$ [kN]	2,0	4,7	6,5	2,9	6,1					
	R90						13,9					
	R120	$N^0_{Rk,c,fi}$ [kN]	1,6	3,7	5,2	2,3	4,9					
Edge distance												
R30 to R120		$c_{cr,fi}$ [mm]	2 h_{ef}									
In case of fire attack from more than one side, the minimum edge distance shall be ≥ 300 mm												
Fastener spacing												
R30 to R120		$s_{cr,fi}$ [mm]	2 $c_{cr,fi}$									
Concrete pry-out failure												
R30 to R120		k_8 [-]	1,0	2,0								
The anchorage depth shall be increased for wet concrete by at least 30 mm compared to the given value												
Hilti screw anchor HUS4												
Performances Essential characteristics under fire exposure in concrete												
Annex C13												

Table C10: Essential characteristics under fire exposure in concrete for HUS4 stainless steel

Fastener size HUS4		6		8				10				14												
Type		HR	CR	HR		CR		HR		CR		HR												
Nominal embedment depth	h_{nom} [mm]	55		$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}1}$												
Steel failure for tension and shear load ($F_{Rk,s,fi} = N_{Rk,p,fi} = V_{Rk,s,fi}$)																								
Characteristic resistance	R30	$F_{Rk,s,fi}$ [kN]	4,9	0,2	9,3		0,8		18,5		1,4		41,7											
	R60	$F_{Rk,s,fi}$ [kN]	3,3	0,2	6,3		0,6		12,0		1,1		26,9											
	R90	$F_{Rk,s,fi}$ [kN]	1,8	0,2	3,2		0,5		5,4		0,9		12,2											
	R120	$F_{Rk,s,fi}$ [kN]	1,0	0,1	1,7		0,4		2,4		0,8		5,4											
	R30	$M^0_{Rk,s,fi}$ [Nm]	4,0	0,2	8,2		0,8		19,4		1,5		65,6											
	R60	$M^0_{Rk,s,fi}$ [Nm]	2,7	0,2	5,5		0,7		12,6		1,2		42,4											
	R90	$M^0_{Rk,s,fi}$ [Nm]	1,4	0,1	2,8		0,5		5,7		0,9		19,2											
	R120	$M^0_{Rk,s,fi}$ [Nm]	0,8	0,1	1,5		0,4		2,5		0,8		8,5											
Concrete pull-out failure																								
Characteristic resistance	R30	$N_{Rk,p,fi}$ [kN]	1,3		$1,5$	$3,0$	$1,5$	$3,0$	$2,3$	$4,0$	$2,3$	$4,0$	$3,0$	$6,3$										
	R60	$N_{Rk,p,fi}$ [kN]	1,0		$1,2$	$2,4$	$1,2$	$2,4$	$1,8$	$3,2$	$1,8$	$3,2$	$2,4$	$5,0$										
Edge distance																								
R30 to R120		$c_{cr,fi}$ [mm]	$2 h_{ef}$																					
Anchor spacing																								
R30 to R120		$s_{cr,fi}$ [mm]	$2 c_{cr,fi}$																					
Concrete pry-out failure																								
R30 to R120		k_8 [-]	1,5		2,0																			
Hilti screw anchor HUS4																								
Performances Essential characteristics under fire exposure in concrete																								
Annex C14																								

Table C11: Displacements under tension loads for HUS4 carbon steel

Fastener size HUS4			8			10			
Type			H(F), C			H(F), C, A(F)			
			h_{nom1}	h_{nom2}	h_{nom3}	h_{nom1}	h_{nom2}	h_{nom3}	
Nominal embedment depth	h_{nom}	[mm]	40	60	70	55	75	85	
Cracked concrete C20/25 to C50/60	Tension Load	N	[kN]	2,6	5,4	6,9	3,8	7,5	8,6
	Displacement	δ_{N0}	[mm]	0,1	0,3	0,4	0,2	0,4	0,4
		$\delta_{N\infty}$	[mm]	0,3	0,4	0,4	0,7	0,7	0,9
Uncracked concrete C20/25 to C50/60	Tension Load	N	[kN]	3,7	7,1	9,1	5,2	10,5	12,2
	Displacement	δ_{N0}	[mm]	0,1	0,2	0,2	0,1	0,3	0,3
		$\delta_{N\infty}$	[mm]	0,3	0,4	0,4	0,7	0,7	0,9

Fastener size HUS4			12			14			16		
Type			H			H(F), A(F)			H(F)		
			h_{nom1}	h_{nom2}	h_{nom3}	h_{nom1}	h_{nom2}	h_{nom3}	h_{nom1}	h_{nom2}	
Nominal embedment depth	h_{nom}	[mm]	60	80	100	65	85	115	85	130	
Cracked concrete C20/25 to C50/60	Tension Load	N	[kN]	5,1	8,2	11,7	5,7	8,6	14,4	8,7	16,7
	Displacement	δ_{N0}	[mm]	0,3	0,4	0,6	0,3	0,4	0,7	0,1	0,4
		$\delta_{N\infty}$	[mm]	0,9	0,9	1,2	1,3	1,3	1,5	1,3	1,4
Uncracked concrete C20/25 to C50/60	Tension Load	N	[kN]	6,8	10,8	15,5	7,5	11,7	19,1	11,5	22,9
	Displacement	δ_{N0}	[mm]	0,2	0,3	0,4	0,2	0,3	0,5	0,4	0,3
		$\delta_{N\infty}$	[mm]	0,9	0,9	1,2	1,3	1,3	1,5	1,3	1,4

Table C12: Displacements under tension loads for HUS4 stainless steel

Fastener size HUS		6		8		10		14				
Type		HR, CR	HR, CR	HR, CR	HR	HR	HR	HR	HR			
		h_{nom1}	h_{nom1}	h_{nom2}	h_{nom1}	h_{nom2}	h_{nom1}	h_{nom2}				
Nominal anchorage depth	h_{nom}	[mm]	55	60	80	70	90	70	85	70	110	
Cracked concrete C20/25 to C50/60	Tension load	N	[kN]	1,7	2,4	4,8	3,6	6,3	3,0	4,1	4,8	9,9
	Displacement	δ_{N0}	[mm]	0,4	0,5	0,7	0,3	0,6	0,2	0,3	0,9	1,4
		$\delta_{N\infty}$	[mm]	0,5	0,7	1,1	0,6	1,1	0,3	0,7	1,1	1,4
Uncracked concrete C20/25 to C50/60	Tension load	N	[kN]	3,1	4,8	6,3	6,3	9,9	4,8	6,8	7,5	16,0
		δ_{N0}	[mm]	0,8	0,7	1,6	0,3	1,3	0,2	0,3	0,7	1,0
	Displacement	$\delta_{N\infty}$	[mm]	0,8	0,7	1,6	0,3	1,3	0,3	0,7	0,7	1,0

¹⁾ No performance assessed.

Hilti screw anchor HUS4	Annex C15
Performances Displacement values in case of static and quasi-static loading	

Table C13: Displacements under shear loads for HUS4 carbon steel

Fastener size HUS4			8			10			
Type			H(F), C			H(F), C, A(F)			
			h_{nom}	h_{nom1}	h_{nom2}	h_{nom3}	h_{nom1}	h_{nom2}	h_{nom3}
Nominal embedment depth	h_{nom}	[mm]	40	60	70	55	75	85	
Concrete C20/25 to C50/60	Shear Load	V	[kN]	10,7	10,7	12,5	16,5	16,5	18,3
	Displacement	δ_{v0}	[mm]	1,3	1,1	0,9	1,4	1,3	1,0
		$\delta_{v\infty}$	[mm]	2,0	1,7	1,4	2,1	2,0	1,5

Fastener size HUS4			12			14			16		
Type			H			H(F), A(F)			H(F)		
			h_{nom}	h_{nom1}	h_{nom2}	h_{nom3}	h_{nom1}	h_{nom2}	h_{nom3}	h_{nom1}	h_{nom2}
Nominal embedment depth	h_{nom}	[mm]	60	80	100	65	85	115	85	130	
Concrete C20/25 to C50/60	Shear Load	V	[kN]	22,2	22,2	25,7	31,4	35,4	35,4	37,2	41,8
	Displacement	δ_{v0}	[mm]	1,6	1,6	0,9	5,3	5,3	4,0	2,3	1,8
		$\delta_{v\infty}$	[mm]	2,3	2,4	1,4	7,9	7,9	6,0	3,5	2,7

Table C14: Displacements under shear loads for HUS4 stainless steel

Fastener size HUS4			6		8		10		14	
Type			HR, CR		HR, CR		HR, CR		HR	
			h_{nom}	h_{nom1}	h_{nom2}	h_{nom3}	h_{nom1}	h_{nom2}	h_{nom1}	h_{nom2}
Nominal anchorage depth	h_{nom}	[mm]	55	60	80	70	90	70	110	
Concrete C20/25 to C50/60	Shear load	V	[kN]	7,8	11,0	12,4	13,6	15,7	12,9	27,3
	Displacement	δ_{v0}	[mm]	0,4	2,0	2,3	1,1	1,7	3,5	3,9
		$\delta_{v\infty}$	[mm]	0,5	2,4	2,9	1,5	2,4	3,9	4,3
		$\delta_{v,c1}$	[mm]	1)	1)	4,8	1)	5,3	1)	7,6

¹⁾ No performance assessed.

Hilti screw anchor HUS4

Performances

Displacement values in case of static and quasi-static loading

Annex C16

Table C15: Displacements under tension and shear loads for seismic category 2 for HUS 4 carbon steel

Fastener size HUS4	8	10 H(F), C, A(F)	12 H	14 H(F), A(F)
Type	h_{nom}			
Nominal embedment depth	h_{nom} [mm]	70	85	100
Tension load				
Displacement DLS	$\delta_{N,C2} (DLS)$ [mm]	0,59	0,80	0,77
Displacement ULS	$\delta_{N,C2} (ULS)$ [mm]	1,36	3,66	2,78
Shear load with Hilti filling set (HUS4-H and HUS4-A)				
Displacement DLS	$\delta_{V,C2} (DLS)$ [mm]	1,85	1,72	1,73
Displacement ULS	$\delta_{V,C2} (ULS)$ [mm]	5,44	6,88	5,62
Shear load without Hilti filling set				
Displacement DLS	$\delta_{V,C2} (DLS)$ [mm]	4,64	5,02	4,90
Displacement ULS	$\delta_{V,C2} (ULS)$ [mm]	7,96	8,97	7,00
				9,14