

Approval body for construction products  
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and  
Laender Governments



## European Technical Assessment

**ETA-22/0158**  
**of 31 March 2022**

English translation prepared by DIBt - Original version in German language

### General Part

Technical Assessment Body issuing the  
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Baumit E

Product family  
to which the construction product belongs

Screwed-in plastic anchor for fixing of external thermal  
insulation composite systems with rendering in concrete  
and masonry

Manufacturer

Baumit, spol. s r.o.  
Průmyslová 1841  
250 01 BRANDÝS NAD LABEM  
TSCHECHISCHE REPUBLIK

Manufacturing plant

Baumit

This European Technical Assessment  
contains

12 pages including 3 annexes which form an integral part  
of this assessment

This European Technical Assessment is  
issued in accordance with Regulation (EU)  
No 305/2011, on the basis of

EAD 330196-01-0604, Edition 10/2017

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

## Specific part

### 1 Technical description of the product

The screwed-in anchor Baunit E consist of an anchor sleeve and a screw plate made of polyamide (virgin material) and an accompanying specific screw of galvanised steel.

The product description is given in Annex A.

### 2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 25 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Safety and accessibility in use (BWR 4)

Essential characteristic	Performance
Characteristic load bearing capacity <ul style="list-style-type: none"> <li>- Characteristic resistance under tension load</li> <li>- Minimum edge distance and spacing</li> </ul>	See Annex C1 See Annex B2
Displacements	See Annex C2
Plate stiffness	No performance assessed

#### 3.2 Energy economy and heat retention (BWR 6)

Essential characteristic	Performance
Point thermal transmittance	See Annex C2

### 4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with EAD No. 330196-01-0604, the applicable European legal act is: [97/463/EC].

The system to be applied is: 2+

**5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document**


Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.

Issued in Berlin on 31 March 2022 by Deutsches Institut für Bautechnik

Dipl.-Ing. Beatrix Wittstock  
Head of Section

*beglaubigt:*  
Ziegler

### Installed anchor: Baunit E

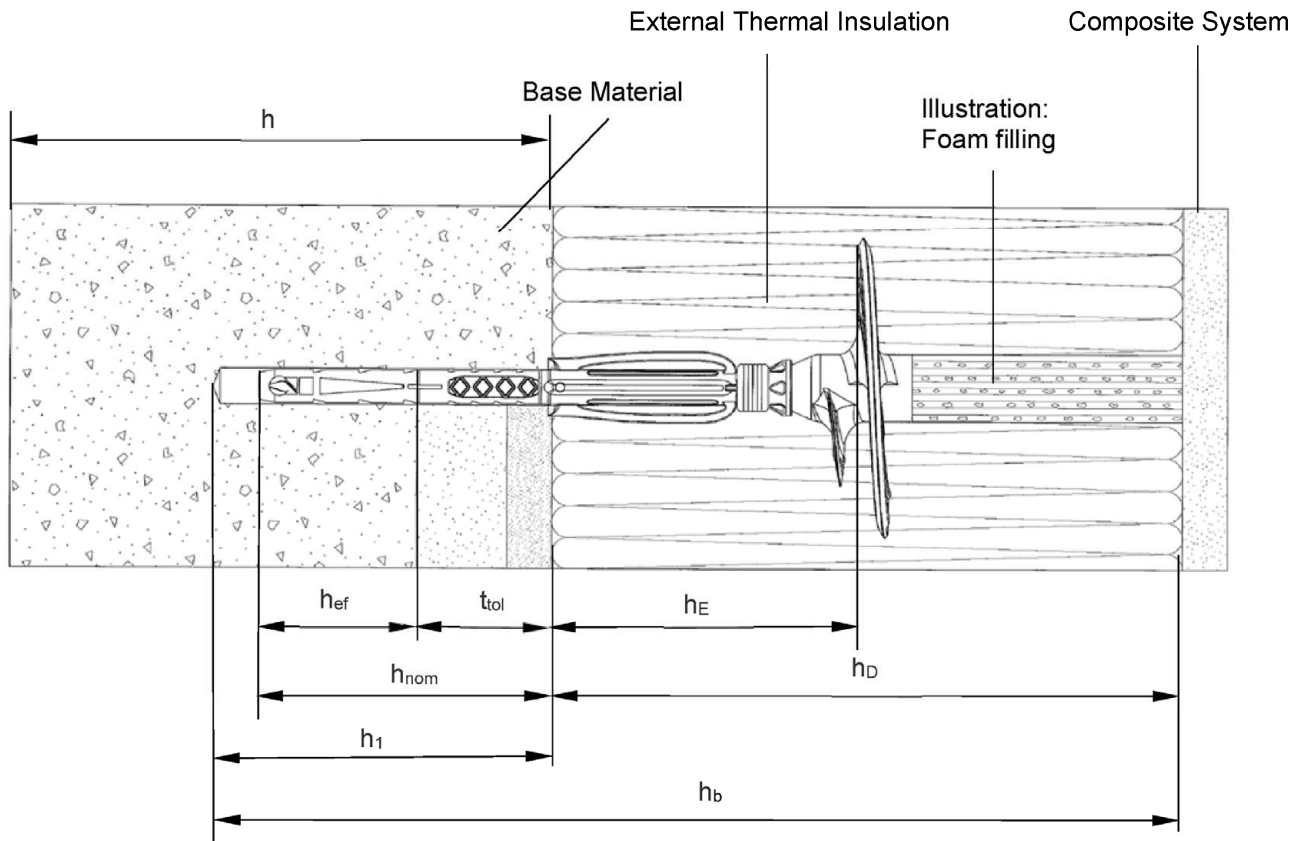

#### Intended use

- Fixing of external thermal insulation composite systems (ETICS) in concrete and masonry
- Fixing of external thermal insulation composite systems (ETICS) in autoclaved aerated concrete and lightweight aggregated concrete

#### Legend

- $h_{nom}$  = Overall plastic anchor embedment depth in the base material with non-load bearing coating ( $t_{tol}$ )
- $h_1$  = Depth of drilled hole to deepest point in the base material
- $h$  = Thickness of base material (wall)
- $h_D$  = Thickness of insulation material
- $t_{tol}$  = Thickness of equalizing layer and / or non-load bearing coating
- $h_E$  = Embedment depth
- $h_b$  = Total bore hole depth
- $h_{ef}$  = Effective anchor embedment depth in the base material

Figures not to scale.


**Baunit E**

**Product description**  
Installed anchor


**Annex A1**

**Parts: Baumit E**


**Anchor sleeve**

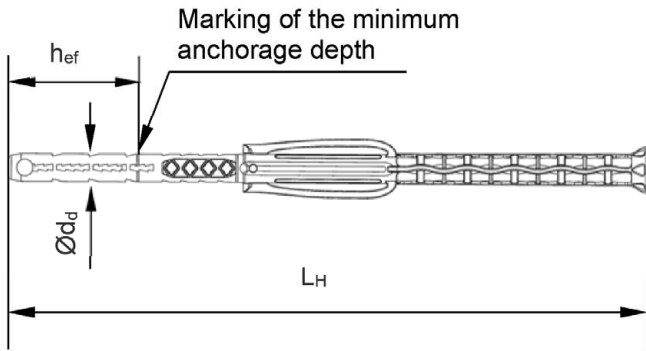

**Screw plate**


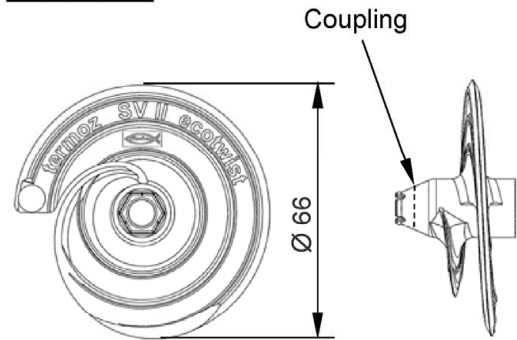


**Special screw**

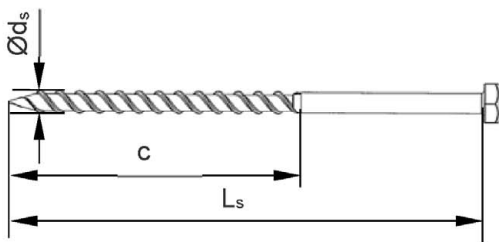


Adjustment of the ring depends of the insulation material thickness, e.g.  $h_D = 180$  mm  
→ adjust value 180 at the setting tool

**Setting tool**



**Anchor complete**

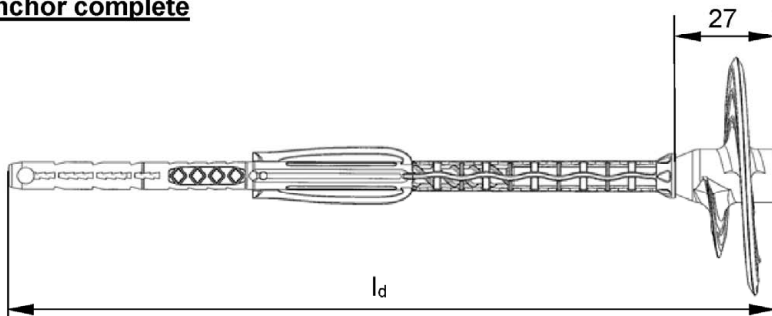

Figures not to scale.

**Baumit E**

**Product description**  
Anchor type and parts


**Annex A2**

**Table A3.1: Dimensions**

Anchor type	Anchor sleeve					Special screw		
	$\varnothing d_d$	$h_{ef}^{1)}$	$h_E^{1)}$	$l_d$	$L_H$	$\varnothing d_s$	$L_s$	$c$
Baunit E	[mm]							
$t_{tol}$ 0-10 mm	8	35	70	162	135	6	100	74
$t_{tol}$ 0-30 mm				202	175		120	
$t_{tol}$ 30-60 mm				232	205		150	

<sup>1)</sup> see Annex A1

**Table A3.2: Marking on the plate**

	Marking
Anchor type	termoz SV II ecotwist
Works symbol	

**Table A3.3: Marking on the anchor sleeve**

	Marking
<b>Baunit E</b> $t_{tol}$ 0-10 mm	$t_{tol}$ 0-10
<b>Baunit E</b> $t_{tol}$ 0-30 mm	$t_{tol}$ 0-30
<b>Baunit E</b> $t_{tol}$ 30-60 mm	$t_{tol}$ 30-60

**Table A3.4: Material**

Designation	Material
Anchor sleeve	PA6 (virgin material), colour: grey
Screw plate	PA6 (virgin material) GF, colour: red
Special screw	Galvanized steel gvz with Zn5/Ag or Zn5/An in accordance with EN ISO 4042:2018

**Baunit E**

**Product description**

Anchor types, marking on the anchor plate/sleeve, dimensions and material

**Annex A3**

## Specifications of intended use

### Anchorage subject to:

- The anchor may only be used for transmission of wind suction loads and shall not be used for the transmission of dead loads of the external thermal insulation composite system (ETICS).

### Base materials:

- Compacted normal weight concrete without fibres (base material group A), according to Annex C1
- Solid masonry (base material group B), according to Annex C1
- Hollow or perforated masonry (base material group C), according to Annex C1
- Lightweight aggregate concrete (base material group D), according to Annex C1
- Autoclaved aerated concrete (base material group E), according to Annex C1
- For other base materials of the base material groups A, B, C, D and E the characteristic resistance of the anchor may be determined by job site tests acc. to EOTA Technical Report TR 051 Edition April 2018.

### Temperature Range:

- 0°C to +40°C (max. short term temperature +40°C and max. long term temperature +24°C )

### Design:

- The anchorages are designed under the responsibility of an engineer experienced in anchorages and masonry work with the partial safety factors  $\gamma_M = 2,0$  and  $\gamma_F = 1,5$  in absence of other national regulations.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchors is indicated on the design drawings.
- Fasteners are only to be used for multiple fixings of ETICS.

### Installation:

- Drill method according to Annex C1
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters on the site
- Installation temperature from 0°C to +40°C
- Exposure to UV due to solar radiation of the anchor not protected by rendering  $\leq 6$  weeks

Baunit E

Intended use  
Specifications

Annex B1



**Table B2.1: Installation parameters**


			Baumit E
Drill hole diameter	$d_o$	=	8
Cutting diameter of drill bit	$d_{cut}$	≤	8,45
Depth of drill hole to deepest point	$h_1$	≥	55/75/105
Total bore hole depth at Baumit E $t_{tol}$ 0-10 mm			$h_D + 55$
Total bore hole depth at Baumit E $t_{tol}$ 0-30 mm	$h_b$	≥	$h_D + 75$
Total bore hole depth at Baumit E $t_{tol}$ 30-60 mm			$h_D + 105$
			[mm]
Overall plastic anchor embedment depth in the base material (see Annex A1) at Baumit E $t_{tol}$ 0-10 mm			45
Overall plastic anchor embedment depth in the base material (see Annex A1) at Baumit E $t_{tol}$ 0-30 mm	$h_{nom}$	=	65
Overall plastic anchor embedment depth in the base material (see Annex A1) at Baumit E $t_{tol}$ 30-60 mm			95

**Table B2.2: Minimum distances and spacings**

			Baumit E
Minimum thickness of member	$h_{min}$		100 <sup>1)</sup>
Minimum spacing	$s_{min}$	=	100
Minimum edge distance	$c_{min}$		100

<sup>1)</sup> For weather resistant external wall panels:  $h_{min}=40$  mm

**Scheme of distances and spacing**




**Baumit E**


**Intended use**  
Installation parameters  
Minimum thickness of member, distances and spacing

**Annex B2**


## Installation instructions




1. Measure insulation thickness  $h_D$  (example: 18 cm = 180 mm).




2. Adjust the setting tool ring corresponding to the insulation material thickness  $h_D$  in mm. Number is legible. Additionally to the setting tool ring a thin plastic plate (maximum 1 mm thickness) can be used as a stop unit for easier mounting.




3. Drill bore hole. Total drill hole depth must be at  
 $t_{tot}$  0-10 mm  $\rightarrow h_D + 55$  mm  
 $t_{tot}$  0-30 mm  $\rightarrow h_D + 75$  mm  
 $t_{tot}$  30-60 mm  $\rightarrow h_D + 105$  mm.  
 Note: bore holes in Hlz and autoclaved aerated concrete only by rotary drilling



4. Press the anchor with the screw plate tight against the surface of the insulation material, then start screwing-in the anchor. Setting is finished when the surface of the ring is flush with the surface of the insulation material.



5. When step 4 is completed, press the adjustment tool tight against the installed anchor. If there is no axial movement of the anchor, remove the setting tool. In case of axial movement, a new anchor has to be set in a new drill hole.




5. The hole in the insulation material must be filled with a suitable foam (illustrated in Annex A1) or must be closed with an appropriate insulation cylinder.

Baumit E

Intended use  
Installation instructions

Annex B3

**Table C1.1: Characteristic resistance under tension load  $N_{Rk}$**

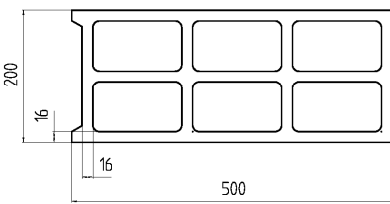Base material	Group <sup>1)</sup>	Bulk density $\rho$ [kg/dm <sup>3</sup> ]	Min. comp. strength $f_b$ [N/mm <sup>2</sup> ]	Remarks	Drill method <sup>2)</sup>	$N_{Rk}$ [kN]
Weather resistant skin of external wall panels, concrete C20/25 – C50/60	-	-	-	Concrete without fibres C20/25 – C50/60 as per EN 206:2013 +A1:2016, Thickness of concrete panels 40 mm $\leq$ h < 100 mm	H	<b>0,9</b>
Weather resistant skin of external wall panels, concrete C20/25 – C50/60	-	-	-	Concrete without fibres C20/25 – C50/60 as per EN 206:2013 +A1:2016, Thickness of concrete panels 40 mm $\leq$ h < 100 mm	R	<b>1,5</b>
Concrete C12/15- C50/60	A	-	-	Concrete without fibres C12/15 - C50/60 as per EN 206:2013+A1:2016	H	<b>1,5</b>
Sand-lime solid bricks, <b>KS</b> as per EN 771-2:2011+A1:2015	B	$\geq 2,0$	20	Vertically perforation <sup>3)</sup> $\leq 15\%$	H	<b>1,5</b>
			12			<b>1,2</b>
Clay bricks, <b>Mz</b> as per EN 771-1:2011+A1:2015	B	$\geq 1,8$	12	Vertically perforation <sup>3)</sup> $\leq 15\%$	H	<b>1,2</b>
Solid concrete block, <b>Vbn</b> as per EN 771-3:2011+A1:2015	B	$\geq 2,0$	20	Vertically perforation <sup>3)</sup> $\leq 10\%$	H	<b>1,5</b>
			12			<b>1,2</b>
Lightweight concrete solid blocks, <b>Vbl</b> as per EN 771-3:2011+A1:2015	B	$\geq 1,4$	8	Vertically perforation <sup>3)</sup> $\leq 15\%$ , exterior web thickness $\geq 35$ mm	H	<b>0,6</b>
Vertically perf. sand-lime bricks, <b>KSL</b> as per EN 771-2:2011+A1:2015	C	$\geq 1,4$	20	Vertically perforation <sup>3)</sup> > 15%, Exterior web thickness $\geq 23$ mm	H	<b>1,2</b>
			12			<b>0,75</b>
Vertically perf. clay bricks, <b>Hlz</b> as per EN 771-1:2011+A1:2015	C	$\geq 1,0$	12	Vertically perforation <sup>3)</sup> > 15% and $\leq 50\%$ , Exterior web $\geq 12$ mm	R	<b>0,75</b>
Lightweight concrete hollow blocks, <b>Hbl</b> as per EN 771-3:2011+A1:2015	C	$\geq 1,2$	10	Vertically perforation <sup>3)</sup> > 15% and $\leq 50\%$ , Exterior web $\geq 38$ mm	H	<b>1,2</b>
			8			<b>0,9</b>
			6			<b>0,75</b>
			4			<b>0,6</b>
Lightweight concrete hollow blocks, <b>Hbl4</b> as per EN 771-3:2011+A1:2015	C	$\geq 0,9$	4		H	<b>0,5</b>
Lightweight aggregate concrete, <b>LAC</b> as per EN 1520:2011 / EN 771-3:2011+A1:2015	D	$\geq 0,9$	6	-	H	<b>0,75</b>
Autoclaved aerated concrete blocks, <b>AAC</b> as per EN 771-4:2011+A1:2015	E	$\geq 0,5$	4	-	R	<b>0,4</b>

<sup>1)</sup> Base material group, see Annex B1    <sup>2)</sup> R = Rotary drilling | H = Hammer drilling

<sup>3)</sup> Cross section reduced by perforation vertically to the resting area

Figures not to scale.

**Baunit E**

**Performance**  
Characteristic resistance

**Annex C1**

**Table C2.1: Point thermal transmittance acc. to EOTA Technical TR 025: 2016-05**

Anchor type	Thickness of insulation material $h_D$ [mm]	Point thermal transmittance $\chi$ [W/K]
Baumit E EPS-plug and air void $t_{tol} = 0 - 10$ mm	100 - 240	0,001
	> 240	0
Baumit E PU-foam filled hole $t_{tol} = 0 - 10$ mm	100 - 150	0,001
	> 150	0
Baumit E EPS-plug and air void $t_{tol} = 0 - 30$ mm	100 - 240	0,001
	> 240	0
Baumit E PU-foam filled hole $t_{tol} = 0 - 30$ mm	100 - 150	0,001
	> 150	0
Baumit E EPS-plug and air void $t_{tol} = 30 - 60$ mm	100	0,002
	120 - 240	0,001
	> 240	0
Baumit E PU-foam filled hole $t_{tol} = 30 - 60$ mm	100	0,002
	120 - 150	0,001
	> 150	0

**Table C2.2: Displacements**

Base material	Minimum compressive strength $f_b$ [N/mm <sup>2</sup> ]	Tension load <b>N</b> [kN]	Displace- ments $\Delta\delta_N$ [mm]
Concrete thin members $\geq$ C20/25 (EN 206:2013+A1:2016, hammer drilling)	-	0,3	< 0,3
Concrete thin members $\geq$ C20/25 (EN 206:2013+A1:2016, rotary drilling)	-	0,5	< 0,3
Concrete C16/20 - C50/60 (EN 206:2013+A1:2016)	-	0,5	< 0,3
Sand-lime solid bricks, <b>KS</b> (EN 771-2:2011+A1:2015)	20	0,5	< 0,3
	12	0,4	
Clay bricks, <b>Mz</b> (EN 771-1:2011+A1:2015)	12	0,4	< 0,3
Solid concrete block, <b>Vbn</b> (EN 771-3:2011+A1:2015)	20	0,5	< 0,3
	12	0,4	
Lightweight concrete solid blocks, <b>Vbl</b> (EN 771-3:2011+A1:2015)	8	0,2	< 0,2
Vertically perforated sand-lime bricks, <b>KSL</b> (EN 771-2:2011+A1:2015)	20	0,4	< 0,2
	12	0,25	
Vertically perforated clay bricks, <b>Hlz</b> (EN 771-1:2011+A1:2015)	12	0,25	< 0,3
Lightweight concrete hollow blocks, <b>Hbl</b> (EN 771-3:2011+A1:2015)	10	0,4	< 0,3
	8	0,3	
	6	0,25	
	4	0,2	
Lightweight concrete hollow blocks, <b>Hbl4</b> (EN 771-3:2011+A1:2015)	4	0,15	< 0,4
Lightweight aggr. concrete, <b>LAC</b> (EN 1520:2011/EN 771-3:2011+A1:2015)	6	0,25	< 0,2
Autoclaved aerated concrete blocks, <b>AAC</b> (EN 771-4:2011+A1:2015)	4	0,15	< 0,1

**Baumit E**

**Performance**

Point thermal transmittance, displacements

**Annex C2**