

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments



European Technical Assessment

ETA-22/0337
of 1 September 2022

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Trade name of the construction product

Product family
to which the construction product belongs

Manufacturer

Manufacturing plant

This European Technical Assessment
contains

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

Deutsches Institut für Bautechnik

Injection system Hybrid PROFIX PIT-H+ for concrete

Bonded fastener for use in concrete

PROFIX AG
Kanalstraße 23
4415 LAUSEN
SCHWEIZ

Plant 11

40 pages including 3 annexes which form an integral part
of this assessment

EAD 330499-01-0601, Edition 04/2020

European Technical Assessment

ETA-22/0337

English translation prepared by DIBt

Page 2 of 40 | 1 September 2022

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The "Injection system Hybrid PROFIX PIT-H+ for concrete" is a bonded fastener consisting of a cartridge with injection mortar Injection mortar PIT-H+ and a steel element according to Annex A3 and A5.

The steel element is placed into a drilled hole filled with injection mortar and is anchored via the bond between metal part, injection mortar and concrete.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the fastener is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the fastener of at least 50 and/or 100 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading)	See Annex B 3, C 1 to C 4, C 6 to C 7, C 9 to C 10
Characteristic resistance to shear load (static and quasi-static loading)	See Annex C 1, C 5, C 8, C 11
Displacements under short-term and long-term loading	See Annex C 12 to C 14
Characteristic resistance and displacements for seismic performance categories C1 and C2	See Annex C 15 to C 23

3.2 Hygiene, health and the environment (BWR 3)

Essential characteristic	Performance
Content, emission and/or release of dangerous substances	No performance assessed

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with the European Assessment Document EAD 330499-01-0601 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.


Issued in Berlin on 1 September 2022 by Deutsches Institut für Bautechnik

Dipl.-Ing. Beatrix Wittstock
Head of Section


beglaubigt:
Baderschneider

Installation threaded rod M8 up to M30


prepositioned installation or
push through installation (annular gap filled with mortar)

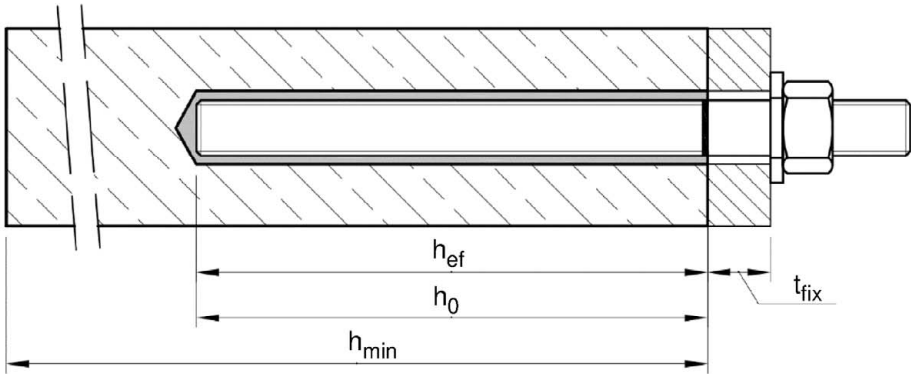

Installation reinforcing bar Ø8 up to Ø32

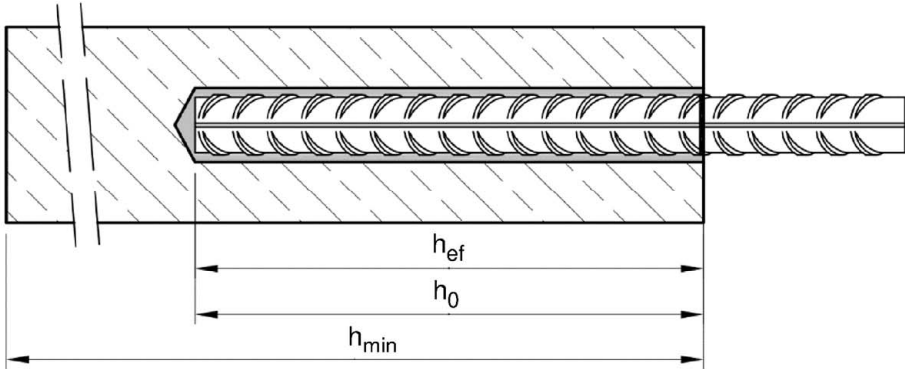

Installation internal threaded anchor rod GH-M6 up to GH-M20

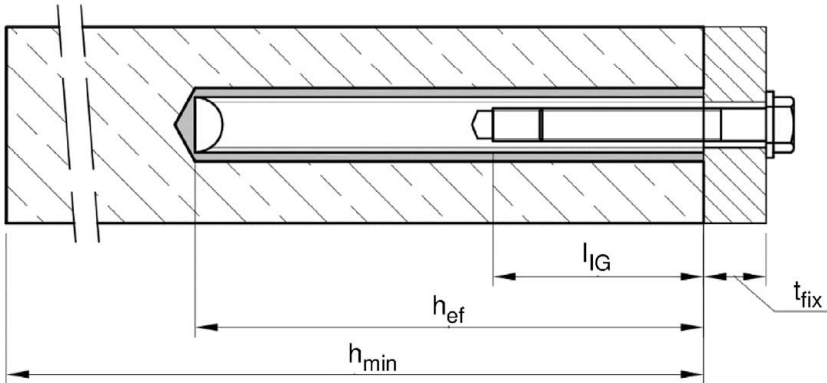

t_{fix} = thickness of fixture
 h_{ef} = effective embedment depth
 h_{min} = minum thickness of member

h_0 = nominal drill hole diameter
 l_{IG} = thread engagement length

Injection system Hybrid PROFIX PIT-H+ for concrete


Product description
Installed condition

Annex A 1

Cartridge system

Coaxial Cartridge:

150 ml, 280 ml, 300 ml up to 333 ml and 380 ml up to 420 ml




Imprint:

PIT-H+

Processing and safety instructions, shelf life, charge number, manufacturer's information, quantity information

Side-by-Side Cartridge:

235 ml, 345 ml up to 360 ml and 825 ml




Imprint:

PIT-H+

Processing and safety instructions, shelf life, charge number, manufacturer's information, quantity information

Static mixer PIT-PSM

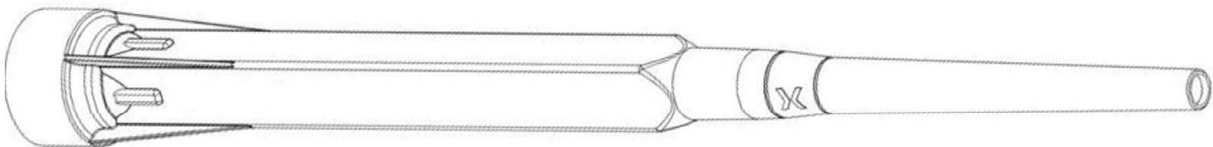

Piston plug FS and mixer extension SMV




Injection system Hybrid PROFIX PIT-H+ for concrete

Product description

Injection system

Annex A 2

Threaded rod M8 up to M30 with washer and hexagon nut


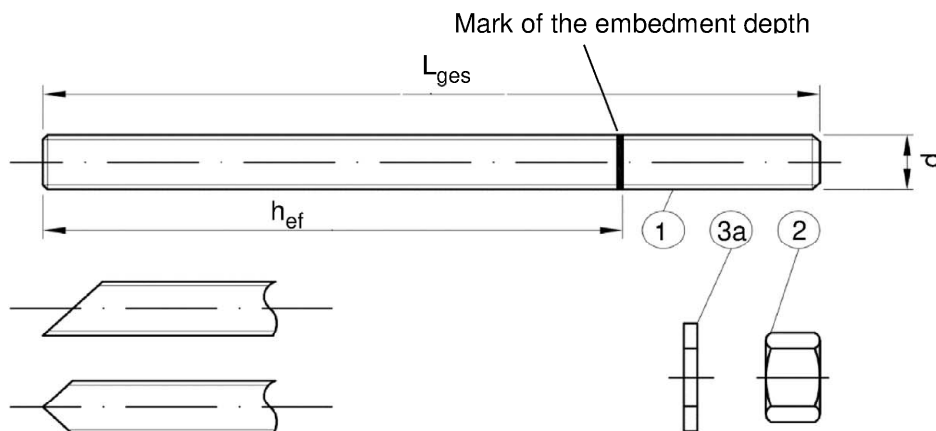


Commercial standard rod with:

- Materials, dimensions and mechanical properties acc. to Table A1
- Inspection certificate 3.1 acc. to EN 10204:2004. The document shall be stored.
- Marking of embedment depth

Internal threaded rod GH-M6 to GH-M20

Threaded rod or screw

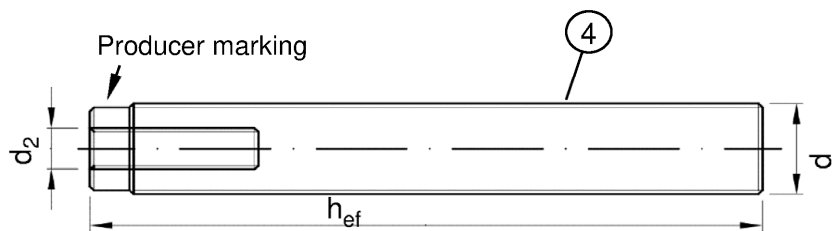

Producer marking: e.g.  M8



Marking Internal thread

Mark

M8

Thread size (Internal thread)


A4

additional mark for stainless steel

HCR

additional mark for high-corrosion resistance steel

Filling washer VS



Mixer reduction nozzle RD



Injection system Hybrid PROFIX PIT-H+ for concrete

Product description


Threaded rod; Internal threaded rod
Filling washer; Mixer reduction nozzle

Annex A 3

Table A1: Materials

Part	Designation	Material			
Steel, zinc plated (Steel acc. to EN ISO 683-4:2018 or EN 10263:2001) - zinc plated $\geq 5 \mu\text{m}$ acc. to EN ISO 4042:2018 or - hot-dip galvanised $\geq 40 \mu\text{m}$ acc. to EN ISO 1461:2009 and EN ISO 10684:2004+AC:2009 or - sherardized $\geq 45 \mu\text{m}$ acc. to EN ISO 17668:2016					
1	Threaded rod	Property class	Characteristic steel ultimate tensile strength	Characteristic steel yield strength	Elongation at fracture
		acc. to EN ISO 898-1:2013	4.6 $f_{uk} = 400 \text{ N/mm}^2$	$f_{yk} = 240 \text{ N/mm}^2$	$A_5 > 8\%$
			4.8 $f_{uk} = 400 \text{ N/mm}^2$	$f_{yk} = 320 \text{ N/mm}^2$	$A_5 > 8\%$
			5.6 $f_{uk} = 500 \text{ N/mm}^2$	$f_{yk} = 300 \text{ N/mm}^2$	$A_5 > 8\%$
			5.8 $f_{uk} = 500 \text{ N/mm}^2$	$f_{yk} = 400 \text{ N/mm}^2$	$A_5 > 8\%$
8.8 $f_{uk} = 800 \text{ N/mm}^2$	$f_{yk} = 640 \text{ N/mm}^2$	$A_5 \geq 12\%$ ³⁾			
2	Hexagon nut	acc. to EN ISO 898-2:2012	4	for anchor rod class 4.6 or 4.8	
			5	for anchor rod class 5.6 or 5.8	
			8	for anchor rod class 8.8	
3a	Washer	Steel, zinc plated, hot-dip galvanised or sherardized (e.g.: EN ISO 887:2006, EN ISO 7089:2000, EN ISO 7093:2000 or EN ISO 7094:2000)			
3b	Filling washer	Steel, zinc plated, hot-dip galvanised or sherardized			
4	Internal threaded anchor rod	Property class	Characteristic steel ultimate tensile strength	Characteristic steel yield strength	Elongation at fracture
		acc. to EN ISO 898-1:2013	5.8 $f_{uk} = 500 \text{ N/mm}^2$	$f_{yk} = 400 \text{ N/mm}^2$	$A_5 > 8\%$
			8.8 $f_{uk} = 800 \text{ N/mm}^2$	$f_{yk} = 640 \text{ N/mm}^2$	$A_5 > 8\%$
Stainless steel A2 (Material 1.4301 / 1.4307 / 1.4311 / 1.4567 or 1.4541, acc. to EN 10088-1:2014) Stainless steel A4 (Material 1.4401 / 1.4404 / 1.4571 / 1.4362 or 1.4578, acc. to EN 10088-1:2014) High corrosion resistance steel (Material 1.4529 or 1.4565, acc. to EN 10088-1: 2014)					
1	Threaded rod ¹⁾⁴⁾	Property class	Characteristic steel ultimate tensile strength	Characteristic steel yield strength	Elongation at fracture
		acc. to EN ISO 3506-1:2020	50 $f_{uk} = 500 \text{ N/mm}^2$	$f_{yk} = 210 \text{ N/mm}^2$	$A_5 \geq 8\%$
			70 $f_{uk} = 700 \text{ N/mm}^2$	$f_{yk} = 450 \text{ N/mm}^2$	$A_5 \geq 12\%$ ³⁾
		80 $f_{uk} = 800 \text{ N/mm}^2$	$f_{yk} = 600 \text{ N/mm}^2$	$A_5 \geq 12\%$ ³⁾	
2	Hexagon nut ¹⁾⁴⁾	acc. to EN ISO 3506-1:2020	50	for anchor rod class 50	
			70	for anchor rod class 70	
			80	for anchor rod class 80	
3a	Washer	A2: Material 1.4301 / 1.4307 / 1.4311 / 1.4567 or 1.4541, acc. to EN 10088-1:2014 A4: Material 1.4401 / 1.4404 / 1.4571 / 1.4362 or 1.4578, acc. to EN 10088-1:2014 HCR: Material 1.4529 or 1.4565, acc. to EN 10088-1: 2014 (e.g.: EN ISO 887:2006, EN ISO 7089:2000, EN ISO 7093:2000 or EN ISO 7094:2000)			
3b	Filling washer	Stainless steel A4, High corrosion resistance steel			
4	Internal threaded anchor rod ¹⁾²⁾	Property class	Characteristic steel ultimate tensile strength	Characteristic steel yield strength	Elongation at fracture
		acc. to EN ISO 3506-1:2020	50 $f_{uk} = 500 \text{ N/mm}^2$	$f_{yk} = 210 \text{ N/mm}^2$	$A_5 > 8\%$
			70 $f_{uk} = 700 \text{ N/mm}^2$	$f_{yk} = 450 \text{ N/mm}^2$	$A_5 > 8\%$
¹⁾ Property class 70 or 80 for anchor rods and hexagon nuts up to M24 and Internal threaded anchor rods up to GH-M16 ²⁾ for GH-M20 only property class 50 ³⁾ $A_5 > 8\%$ fracture elongation if no use for seismic performance category C2 ⁴⁾ Property class 80 only for stainless steel A4 and HCR					
Injection system Hybrid PROFIX PIT-H+ for concrete					Annex A 4
Product description Materials threaded rod and internal threaded rod					

Reinforcing bar: ø8 up to ø32

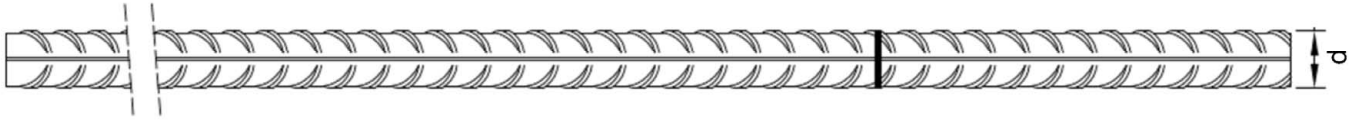

Minimum value of related rip area $f_{R,min}$ according to EN 1992-1-1:2004+AC:2010

Rib height of the bar shall be in the range $0,05d \leq h_{rib} \leq 0,07d$

(d: Nominal diameter of the bar; h_{rib} : Rib height of the bar)

Table A2: Materials Reinforcing bar

Part	Designation	Material
Rebar		
1	Reinforcing steel according to EN 1992 1 1:2004+AC:2010, Annex C	Bars and rebars from ring class B or C f_{yk} and k according to NDP or NCI according to EN 1992-1-1/NA $f_{uk} = f_{tk} = k \cdot f_{yk}$

Injection system Hybrid PROFIX PIT-H+ for concrete

Product description
Materials reinforcing bar

Annex A 5

Specification of the intended use

Fasteners subject to (Static and quasi-static loads):

	Working life 50 years		Working life 100 years	
Base material	uncracked concrete	cracked concrete	uncracked concrete	cracked concrete
HD: Hammer drilling HDB: Hammer drilling with hollow drill bit CD: Compressed air drilling	M8 to M30, Ø8 to Ø32, GH-M6 to GH-M20		M8 to M30, Ø8 to Ø32, GH-M6 to GH-M20	
Temperature Range:	I: - 40 °C to +40 °C ¹⁾ II: - 40 °C to +80 °C ²⁾ III: - 40 °C to +120 °C ³⁾ IV: - 40 °C to +160 °C ⁴⁾		I: - 40 °C to +40 °C ¹⁾ II: - 40 °C to +80 °C ²⁾	

Fasteners subject to (seismic action):

	Performance Category C1	Performance Category C2
Base material	Cracked and uncracked concrete	
HD: Hammer drilling HDB: Hammer drilling with hollow drill bit CD: Compressed air drilling	M8 to M30, Ø8 to Ø32	M12 to M24
Temperature Range:	I: - 40 °C to +40 °C ¹⁾ II: - 40 °C to +80 °C ²⁾ III: - 40 °C to +120 °C ^{3) 5)} IV: - 40 °C to +160 °C ^{4) 5)}	I: - 40 °C to +40 °C ¹⁾ II: - 40 °C to +80 °C ²⁾ III: - 40 °C to +120 °C ^{3) 5)} IV: - 40 °C to +160 °C ^{4) 5)}

- 1) (max. long-term temperature +24°C and max. short-term temperature +40°C)
2) (max. long-term temperature +50°C and max. short-term temperature +80°C)
3) (max. long-term temperature +72°C and max. short-term temperature +120°C)
4) (max. long-term temperature +100°C and max. short-term temperature +160°C)
5) Only for working life of 50 years

Base materials:

- Compacted, reinforced or unreinforced normal weight concrete without fibres according to EN 206:2013 + A1:2016.
- Strength classes C20/25 to C50/60 according to EN 206:2013 + A1:2016.

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (all materials).
- For all other conditions according to EN 1993-1-4:2006+A1:2015 corresponding to corrosion resistance class:
 - Stainless steel Stahl A2 according to Annex A 4, Table A1: CRC II
 - Stainless steel Stahl A4 according to Annex A 4, Table A1: CRC III
 - High corrosion resistance steel HCR according to Annex A 4, Table A1: CRC V

Injection system Hybrid PROFIX PIT-H+ for concrete

Intended Use
Specifications

Annex B 1

Design:

- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the fastener is indicated on the design drawings (e. g. position of the fastener relative to reinforcement or to supports, etc.).
- Fasteners are designed under the responsibility of an engineer experienced in fasteners and concrete work.
- The fasteners are designed in accordance to EN 1992-4:2018 and Technical Report TR 055, Edition February 2018

Installation:

- Dry, wet concrete or flooded bore holes (not sea-water).
- Hole drilling by hammer (HD), hollow (HDB), compressed air (CD) or diamond drill mode (DD).
- Overhead installation allowed.
- Fastener installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- Installation temperature in concrete:
-5°C up to +40°C for the standard variation of temperature after installation.

Injection system Hybrid PROFIX PIT-H+ for concrete

Intended Use
Specifications (Continued)

Annex B 2

Table B1: Installation parameters for threaded rod

Threaded rod			M8	M10	M12	M16	M20	M24	M27	M30
Diameter of element	$d = d_{nom}$	[mm]	8	10	12	16	20	24	27	30
Nominal drill hole diameter	d_0	[mm]	10	12	14	18	22	28	30	35
Effective embedment depth	$h_{ef,min}$	[mm]	60	60	70	80	90	96	108	120
	$h_{ef,max}$	[mm]	160	200	240	320	400	480	540	600
Diameter of clearance hole in the fixture ¹⁾	Prepositioned installation $d_f \leq$	[mm]	9	12	14	18	22	26	30	33
	Push through installation d_f	[mm]	12	14	16	20	24	30	33	40
Maximum installation torque	$\max T_{inst} \leq$	[Nm]	10	20	40 ²⁾	60	100	170	250	300
Minimum thickness of member	h_{min}	[mm]	$h_{ef} + 30 \text{ mm} \geq 100 \text{ mm}$			$h_{ef} + 2d_0$				
Minimum spacing	s_{min}	[mm]	40	50	60	75	95	115	125	140
Minimum edge distance	c_{min}	[mm]	35	40	45	50	60	65	75	80

¹⁾ For application under seismic loading the diameter of clearance hole in the fixture shall be at maximum $d_1 + 1 \text{ mm}$ or alternatively the annular gap between fixture and threaded rod shall be filled force-fit with mortar.

²⁾ Maximum installation torque for M12 with steel Grade 4.6 is 35 Nm

Table B2: Installation parameters for reinforcing bar

Reinforcing bar			$\varnothing 8^1)$	$\varnothing 10^1)$	$\varnothing 12^1)$	$\varnothing 14$	$\varnothing 16$	$\varnothing 20$	$\varnothing 24^1)$	$\varnothing 25^1)$	$\varnothing 28$	$\varnothing 32$
Diameter of element	$d = d_{nom}$	[mm]	8	10	12	14	16	20	24	25	28	32
Nominal drill hole diameter	d_0	[mm]	10 12	12 14	14 16	18	20	25	30 32	30 32	35	40
Effective embedment depth	$h_{ef,min}$	[mm]	60	60	70	75	80	90	96	100	112	128
	$h_{ef,max}$	[mm]	160	200	240	280	320	400	480	500	560	640
Minimum thickness of member	h_{min}	[mm]	$h_{ef} + 30 \text{ mm} \geq 100 \text{ mm}$			$h_{ef} + 2d_0$						
Minimum spacing	s_{min}	[mm]	40	50	60	70	75	95	120	120	130	150
Minimum edge distance	c_{min}	[mm]	35	40	45	50	50	60	70	70	75	85

¹⁾ both nominal drill hole diameter can be used

Table B3: Installation parameters for Internal threaded anchor rod

Internal threaded anchor rod			GH-M6	GH-M8	GH-M10	GH-M12	GH-M16	GH-M20
Internal diameter of anchor rod	d_2	[mm]	6	8	10	12	16	20
Outer diameter of anchor rod ¹⁾	$d = d_{nom}$	[mm]	10	12	16	20	24	30
Nominal drill hole diameter	d_0	[mm]	12	14	18	22	28	35
Effective embedment depth	$h_{ef,min}$	[mm]	60	70	80	90	96	120
	$h_{ef,max}$	[mm]	200	240	320	400	480	600
Diameter of clearance hole in the fixture	$d_f \leq$	[mm]	7	9	12	14	18	22
Maximum installation torque	$\max T_{inst} \leq$	[Nm]	10	10	20	40	60	100
Thread engagement length min/max	l_{IG}	[mm]	8/20	8/20	10/25	12/30	16/32	20/40
Minimum thickness of member	h_{min}	[mm]	$h_{ef} + 30 \text{ mm} \geq 100 \text{ mm}$			$h_{ef} + 2d_0$		
Minimum spacing	s_{min}	[mm]	50	60	75	95	115	140
Minimum edge distance	c_{min}	[mm]	40	45	50	60	65	80



¹⁾ With metric threads according to EN 1993-1-8:2005+AC:2009

Injection system Hybrid PROFIX PIT-H+ for concrete

Intended Use
Installation parameters

Annex B 3

Table B4: Parameter cleaning and installation tools

										
Threaded Rod	Re-inforcing bar	Internal threaded anchor rod	d ₀ Drill bit - Ø HD, HDB, CD	d _b Brush - Ø		d _{b,min} min. Brush - Ø	Piston plug	Installation direction and use of piston plug		
[mm]	[mm]	[mm]	[mm]		[mm]	[mm]				
M8	8		10	BZ10	11,5	10,5	No plug required			
M10	8 / 10	GH-M6	12	BZ12	13,5	12,5				
M12	10 / 12	GH-M8	14	BZ14	15,5	14,5				
	12		16	BZ16	17,5	16,5				
M16	14	GH-M10	18	BZ18	20,0	18,5	FS18	h _{ef} > 250 mm	h _{ef} > 250 mm	all
	16		20	BZ20	22,0	20,5	FS20			
M20		GH-M12	22	BZ22	24,0	22,5	FS22			
	20		25	BZ25	27,0	25,5	FS25			
M24		GH-M16	28	BZ28	30,0	28,5	FS28			
M27	24 / 25		30	BZ30	31,8	30,5	FS30			
	24 / 25		32	BZ32	34,0	32,5	FS32			
M30	28	GH-M20	35	BZ35	37,0	35,5	FS35			
	32		40	BZ40	43,5	40,5	FS40			

Cleaning and installation tools

HDB – Hollow drill bit system



The hollow drill system consists of PIT-ASB and a class M hoover with a minimum negative pressure of 253 hPa and a flow rate of minimum 150 m³/h (42 l/s).

Hand pump

(Volume 750 ml, h₀ ≥ 10 d_s, d₀ ≤ 20mm)



Compressed air tool

(min 6 bar)



Brush BZ



Pistole Plug FS



Brush extension PSW



Injection system Hybrid PROFIX PIT-H+ for concrete

Intended Use

Cleaning and setting tools

Annex B 4

Table B5: Working time and curing time

Temperature in base material			Maximum working time	Minimum curing time ¹⁾
T			t _{work}	t _{cure}
- 5 °C	to	- 1 °C	50 min	5 h
0 °C	to	+ 4 °C	25 min	3,5 h
+ 5 °C	to	+ 9 °C	15 min	2 h
+ 10 °C	to	+ 14 °C	10 min	1 h
+ 15 °C	to	+ 19 °C	6 min	40 h
+ 20 °C	to	+ 29 °C	3 min	30 min
+ 30 °C	to	+ 40 °C	2 min	30 min
Cartridge temperature			+5°C to +40°C	

¹⁾ The minimum curing time is only valid for dry base material.
In wet base material the curing time must be doubled.


Injection system Hybrid PROFIX PIT-H+ for concrete

Intended Use
Working time and curing time

Annex B 5


Installation instructions

Drilling of the bore hole

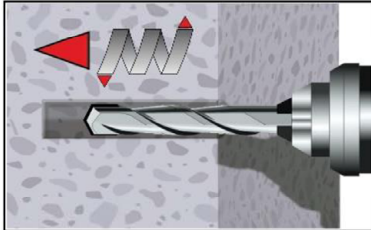

1a. Hammer drilling (HD) / Compressed air drilling (CD)

Drill a hole to the required embedment depth.
Drill bit diameter according to Table B1, B2 or B3.
Aborted drill holes shall be filled with mortar.
Proceed with Step 2 (MAC or CAC).

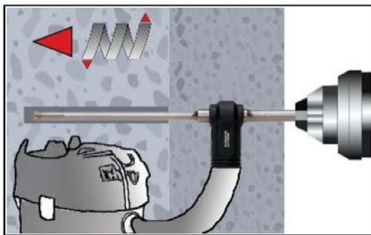


1b. Hollow drill bit system (HDB) (see Annex B 4)

Drill a hole to the required embedment depth.
Drill bit diameter according to Table B1, B2 or B3.
The hollow drilling system removes the dust and cleans the bore hole.
Proceed with Step 3.


Attention! Standing water in the bore hole must be removed before cleaning.

Manual Air Cleaning (MAC)


for bore hole diameter $d_0 \leq 20\text{mm}$ and bore hole depth $h_0 \leq 10d_{\text{nom}}$ (uncracked concrete only)

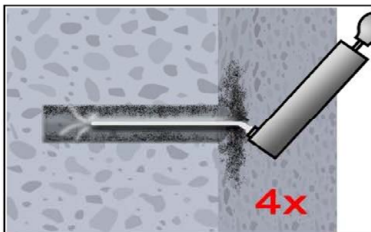

2a. Blow the bore hole clean minimum 4x from the bottom or back by hand pump (Annex B 4).

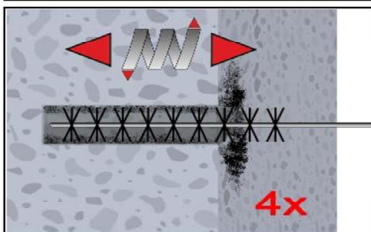


2b. Brush the bore hole minimum 4x with brush BZ according to Table B4 over the entire embedment depth in a twisting motion (if necessary, use a brush extension PSW.)

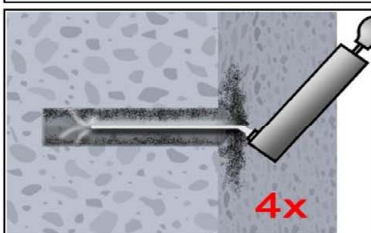

2c. Finally blow the bore hole clean minimum 4x from the bottom or back by hand pump (Annex B 3).

Compressed Air Cleaning (CAC):

All diameter in cracked and uncracked concrete, all drilling methods

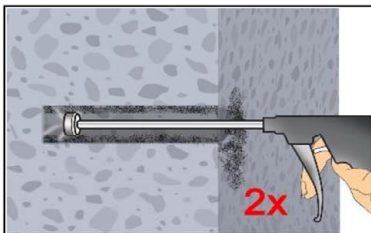

2a. Blow the bore hole clean minimum 2x with compressed air (min. 6 bar) (Annex B 4) over the entire embedment depth until return air stream is free of noticeable dust. (If necessary, an extension shall be used.)


Injection system Hybrid PROFIX PIT-H+ for concrete

Intended Use


Installation instructions

Annex B 6

Installation instructions (continuation)

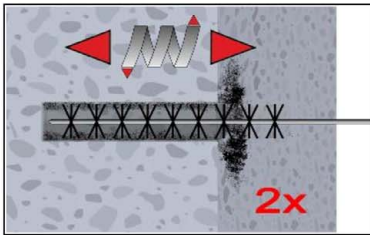


- 2b. Brush the bore hole minimum 2x with brush BZ according to Table B4 over the entire embedment depth in a twisting motion. (If necessary, a brush extension shall be used .PSW)

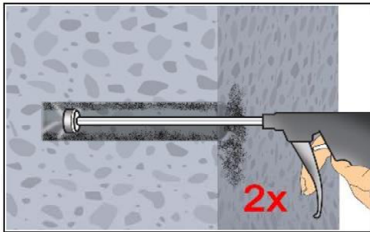


- 2c. Finally blow the bore hole clean minimum 2x with compressed air (min. 6 bar) (Annex B 4) over the entire embedment depth until return air stream is free of noticeable dust. (If necessary, an extension shall be used.)


Cleaned bore hole has to be protected against re-contamination in an appropriate way, If necessary, repeat cleaning process directly before dispensing the mortar. In-flowing water must not contaminate the bore hole again.

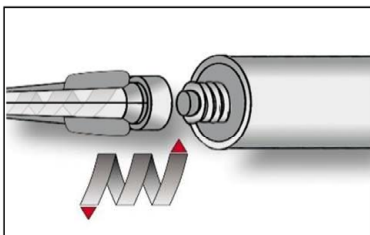


3. Screw on static-mixing nozzle PIT-PSM and load the cartridge into an appropriate dispensing tool. For every working interruption longer than the maximum working time t_{work} (Annex B 5) as well as for new cartridges, a new static-mixer shall be used.

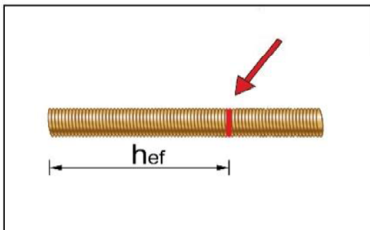

4. Mark embedment depth on the anchor rod. The anchor rod shall be free of dirt, grease, oil or other foreign material.

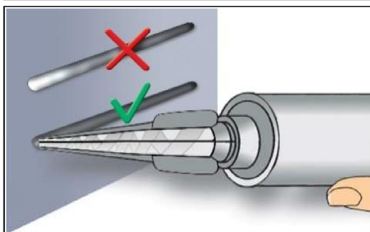

5. Not proper mixed mortar is not sufficient for fastening. Dispense and discard mortar until an uniform grey colour is shown (at least 3 full strokes).

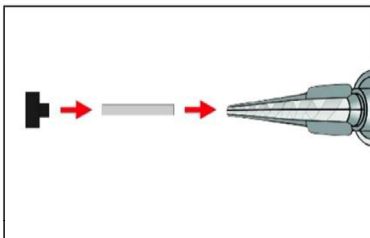

6. Piston plugs VS and mixer nozzle extensions VL shall be used according to Table B4 for the following applications:
- Horizontal and vertical downwards direction: Drill bit- $\varnothing d_0 \geq 18 \text{ mm}$ and embedment depth $h_{ef} > 250 \text{ mm}$
 - Vertical upwards direction: Drill bit- $\varnothing d_0 \geq 18 \text{ mm}$
- Assemble mixing nozzle, mixer extension and piston plug before injecting mortar.


Injection system Hybrid PROFIX PIT-H+ for concrete

Intended Use

Installation instructions (continuation)


Annex B 7

Installation instructions (continuation)

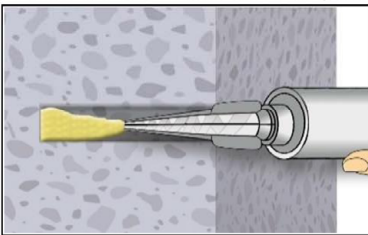

7a. Injecting mortar without piston plug FS

Starting at bottom of the hole and fill the hole up to approximately two-thirds with mortar. (If necessary, a mixer nozzle extension shall be used.)
Slowly withdraw of the static mixing nozzle avoid creating air pockets
Observe the temperature related working time t_{work} (Annex B 5).

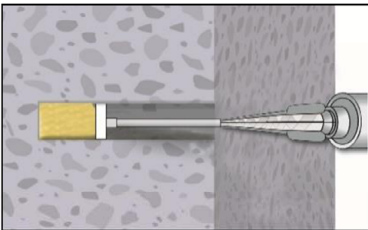


7b. Injecting mortar with piston plug FS


Starting at bottom of the hole and fill the hole up to approximately two-thirds with mortar. (If necessary, a mixer nozzle extension shall be used.)
During injection the piston plug is pushed out of the bore hole by the back pressure of the mortar.
Observe the temperature related working time t_{work} (Annex B 5).




8. Insert the anchor rod while turning slightly up to the embedment mark.

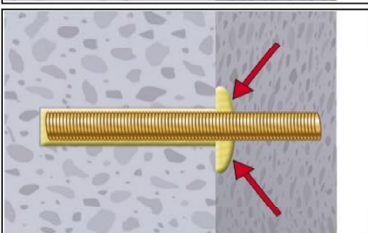


9. Annular gap between anchor rod and base material must be completely filled with mortar. In case of push through installation the annular gap in the fixture must be filled with mortar also.
Otherwise, the installation must be repeated starting from step 7 before the maximum working time t_{work} has expired.

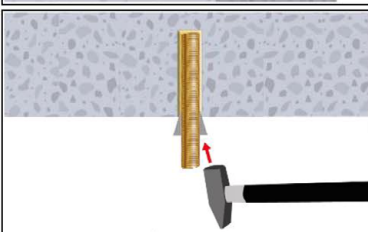

10. For application in vertical upwards direction the anchor rod shall be fixed (e.g. wedges).

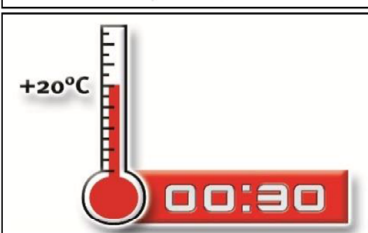

11. Temperature related curing time t_{cure} (Annex B 5) must be observed.
Do not move or load the fastener during curing time.

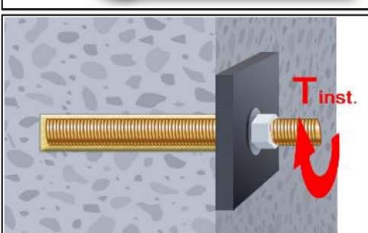

12. Install the fixture by using a calibrated torque wrench. Observe maximum installation torque (Table B1 or B3).
In case of static requirements (e.g. seismic), fill the annular gap in the fixture with mortar (Annex 2). Therefore replace the washer by the filling washer VS and use the mixer reduction nozzle RD.

Injection system Hybrid PROFIX PIT-H+ for concrete

Intended Use

Installation instructions (continuation)

Annex B 8

Table C1: Characteristic values for steel tension resistance and steel shear resistance of threaded rods											
Threaded rod			M8	M10	M12	M16	M20	M24	M27	M30	
Cross section area	A _s	[mm²]	36,6	58	84,3	157	245	353	459	561	
Characteristic tension resistance, Steel failure ¹⁾											
Steel, Property class 4.6 and 4.8	N _{Rk,s}	[kN]	15 (13)	23 (21)	34	63	98	141	184	224	
Steel, Property class 5.6 and 5.8	N _{Rk,s}	[kN]	18 (17)	29 (27)	42	78	122	176	230	280	
Steel, Property class 8.8	N _{Rk,s}	[kN]	29 (27)	46 (43)	67	125	196	282	368	449	
Stainless steel A2, A4 and HCR, class 50	N _{Rk,s}	[kN]	18	29	42	79	123	177	230	281	
Stainless steel A2, A4 and HCR, class 70	N _{Rk,s}	[kN]	26	41	59	110	171	247	..3)	..3)	
Stainless steel A4 and HCR, class 80	N _{Rk,s}	[kN]	29	46	67	126	196	282	..3)	..3)	
Characteristic tension resistance, Partial factor ²⁾											
Steel, Property class 4.6 and 5.6	γ _{Ms,N}	[-]	2,0								
Steel, Property class 4.8, 5.8 and 8.8	γ _{Ms,N}	[-]	1,5								
Stainless steel A2, A4 and HCR, class 50	γ _{Ms,N}	[-]	2,86								
Stainless steel A2, A4 and HCR, class 70	γ _{Ms,N}	[-]	1,87								
Stainless steel A4 and HCR, class 80	γ _{Ms,N}	[-]	1,6								
Characteristic shear resistance, Steel failure ¹⁾											
Without lever arm	Steel, Property class 4.6 and 4.8	V ⁰ _{Rk,s}	[kN]	9 (8)	14 (13)	20	38	59	85	110	135
	Steel, Property class 5.6 and 5.8	V ⁰ _{Rk,s}	[kN]	11 (10)	17 (16)	25	47	74	106	138	168
	Steel, Property class 8.8	V ⁰ _{Rk,s}	[kN]	15 (13)	23 (21)	34	63	98	141	184	224
	Stainless steel A2, A4 and HCR, class 50	V ⁰ _{Rk,s}	[kN]	9	15	21	39	61	88	115	140
	Stainless steel A2, A4 and HCR, class 70	V ⁰ _{Rk,s}	[kN]	13	20	30	55	86	124	..3)	..3)
	Stainless steel A4 and HCR, class 80	V ⁰ _{Rk,s}	[kN]	15	23	34	63	98	141	..3)	..3)
With lever arm	Steel, Property class 4.6 and 4.8	M ⁰ _{Rk,s}	[Nm]	15 (13)	30 (27)	52	133	260	449	666	900
	Steel, Property class 5.6 and 5.8	M ⁰ _{Rk,s}	[Nm]	19 (16)	37 (33)	65	166	324	560	833	1123
	Steel, Property class 8.8	M ⁰ _{Rk,s}	[Nm]	30 (26)	60 (53)	105	266	519	896	1333	1797
	Stainless steel A2, A4 and HCR, class 50	M ⁰ _{Rk,s}	[Nm]	19	37	66	167	325	561	832	1125
	Stainless steel A2, A4 and HCR, class 70	M ⁰ _{Rk,s}	[Nm]	26	52	92	232	454	784	..3)	..3)
	Stainless steel A4 and HCR, class 80	M ⁰ _{Rk,s}	[Nm]	30	59	105	266	519	896	..3)	..3)
Characteristic shear resistance, Partial factor ²⁾											
Steel, Property class 4.6 and 5.6	γ _{Ms,V}	[-]	1,67								
Steel, Property class 4.8, 5.8 and 8.8	γ _{Ms,V}	[-]	1,25								
Stainless steel A2, A4 and HCR, class 50	γ _{Ms,V}	[-]	2,38								
Stainless steel A2, A4 and HCR, class 70	γ _{Ms,V}	[-]	1,56								
Stainless steel A4 and HCR, class 80	γ _{Ms,V}	[-]	1,33								
1) Values are only valid for the given stress area A_s. Values in brackets are valid for undersized threaded rods with smaller stress area A_s for hot-dip galvanised threaded rods according to EN ISO 10684:2004+AC:2009. 2) in absence of national regulation 3) Fastener type not part of the ETA											
Injection system Hybrid PROFIX PIT-H+ for concrete								Annex C 1			
Performances Characteristic values for steel tension resistance and steel shear resistance of threaded rods											

Table C2: Characteristic values of tension loads under static and quasi-static action for a working life of 50 and 100 years

Fastener			All Anchor types and sizes	
Concrete cone failure				
Uncracked concrete		$k_{ucr,N}$	[-]	11,0
Cracked concrete		$k_{cr,N}$	[-]	7,7
Edge distance		$c_{cr,N}$	[mm]	1,5 h_{ef}
Axial distance		$s_{cr,N}$	[mm]	2 $c_{cr,N}$
Splitting				
Edge distance	$h/h_{ef} \geq 2,0$	$c_{cr,sp}$	[mm]	1,0 h_{ef}
	$2,0 > h/h_{ef} > 1,3$			$2 \cdot h_{ef} \left(2,5 - \frac{h}{h_{ef}} \right)$
	$h/h_{ef} \leq 1,3$			2,4 h_{ef}
Axial distance		$s_{cr,sp}$	[mm]	2 $c_{cr,sp}$

Injection system Hybrid PROFIX PIT-H+ for concrete

Performances

Characteristic values of tension loads under static and quasi-static action for a working life of 50 and 100 years

Annex C 2

Table C3: Characteristic values of tension loads under static and quasi-static action for a working life of 50 years												
Threaded rod				M8	M10	M12	M16	M20	M24	M27	M30	
Steel failure												
Characteristic tension resistance			N _{Rk,s}	[kN]	A _s · f _{uk} (or see Table C1)							
Partial factor			γ _{Ms,N}	[-]	see Table C1							
Combined pull-out and concrete failure												
Characteristic bond resistance in uncracked concrete C20/25												
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	τ _{Rk,ucr}	[N/mm²]	17	17	16	15	14	13	13	13
	II: 80°C/50°C		τ _{Rk,ucr}	[N/mm²]	17	17	16	15	14	13	13	13
	III: 120°C/72°C		τ _{Rk,ucr}	[N/mm²]	15	14	14	13	12	12	11	11
	IV: 160°C/100°C		τ _{Rk,ucr}	[N/mm²]	12	11	11	10	9,5	9,0	9,0	9,0
Characteristic bond resistance in cracked concrete C20/25												
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	τ _{Rk,cr}	[N/mm²]	7,0	7,5	8,0	9,0	8,5	7,0	7,0	7,0
	II: 80°C/50°C		τ _{Rk,cr}	[N/mm²]	7,0	7,5	8,0	9,0	8,5	7,0	7,0	7,0
	III: 120°C/72°C		τ _{Rk,cr}	[N/mm²]	6,0	6,5	7,0	7,5	7,0	6,0	6,0	6,0
	IV: 160°C/100°C		τ _{Rk,cr}	[N/mm²]	5,5	5,5	6,0	6,5	6,0	5,5	5,5	5,5
Reduktion factor ψ ⁰ _{sus} in cracked and uncracked concrete C20/25												
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	ψ ⁰ _{sus}	[-]	0,90							
	II: 80°C/50°C				0,87							
	III: 120°C/72°C				0,75							
	IV: 160°C/100°C				0,66							
Increasing factors for concrete			ψ _c	[-]	(f _{ck} / 20) ^{0,1}							
Characteristic bond resistance depending on the concrete strength class			τ _{Rk,ucr} =		ψ _c · τ _{Rk,ucr,(C20/25)}							
			τ _{Rk,cr} =		ψ _c · τ _{Rk,cr,(C20/25)}							
Concrete cone failure												
Relevant parameter				see Table C2								
Splitting												
Relevant parameter				see Table C2								
Installation factor												
for dry and wet concrete	MAC	γ _{inst}	[-]	1,2					No Performance assessed			
	CAC			1,0								
	HDB			1,2								
for flooded bore hole	CAC			1,4								
Injection system Hybrid PROFIX PIT-H+ for concrete									Annex C 3			
Performances Characteristic values of tension loads under static and quasi-static action for a working life of 50 years (threaded rod)												

Table C4: Characteristic values of tension loads under static and quasi-static action for a working life of 100 years												
Threaded rod				M8	M10	M12	M16	M20	M24	M27	M30	
Steel failure												
Characteristic tension resistance		$N_{Rk,s}$	[kN]	$A_s \cdot f_{uk}$ (or see Table C1)								
Partial factor		$\gamma_{Ms,N}$	[-]	see Table C1								
Combined pull-out and concrete failure												
Characteristic bond resistance in uncracked concrete C20/25												
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	$\tau_{Rk,ucr,100}$	[N/mm²]	17	17	16	15	14	13	13	13
	II: 80°C/50°C		$\tau_{Rk,ucr,100}$	[N/mm²]	17	17	16	15	14	13	13	13
Characteristic bond resistance in cracked concrete C20/25												
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	$\tau_{Rk,cr,100}$	[N/mm²]	5,5	6,0	6,5	6,5	6,5	6,5	6,5	6,5
	II: 80°C/50°C		$\tau_{Rk,cr,100}$	[N/mm²]	5,5	6,0	6,5	6,5	6,5	6,5	6,5	6,5
Increasing factors for concrete			ψ_c	[-]	$(f_{ck} / 20)^{0,1}$							
Characteristic bond resistance depending on the concrete strength class			$\tau_{Rk,ucr,100} =$		$\psi_c \cdot \tau_{Rk,ucr,100,(C20/25)}$							
			$\tau_{Rk,cr,100} =$		$\psi_c \cdot \tau_{Rk,cr,100,(C20/25)}$							
Concrete cone failure												
Relevant parameter				see Table C2								
Splitting												
Relevant parameter				see Table C2								
Installation factor												
for dry and wet concrete	MAC	γ_{inst}	[-]	1,2					No Performance assessed			
	CAC			1,0								
	HDB			1,2								
for flooded bore hole	CAC			1,4								

Table C5: Characteristic values of shear loads under static and quasi-static action for a working life of 50 and 100 years

Threaded rod			M8	M10	M12	M16	M20	M24	M27	M30
Steel failure without lever arm										
Characteristic shear resistance Steel, strength class 4.6, 4.8 and 5.6, 5.8	$V_{Rk,s}^0$	[kN]	0,6 · A _s · f _{uk} (or see Table C1)							
Characteristic shear resistance Steel, strength class 8.8 Stainless Steel A2, A4 and HCR, all strength classes	$V_{Rk,s}^0$	[kN]	0,5 · A _s · f _{uk} (or see Table C1)							
Partial factor	γ _{Ms,V}	[-]	see Table C1							
Ductility factor	k ₇	[-]	1,0							
Steel failure with lever arm										
Characteristic bending moment	$M_{Rk,s}^0$	[Nm]	1,2 · W _{el} · f _{uk} (or see Table C1)							
Elastic section modulus	W _{el}	[mm³]	31	62	109	277	541	935	1387	1874
Partial factor	γ _{Ms,V}	[-]	see Table C1							
Concrete pry-out failure										
Factor	k ₈	[-]	2,0							
Installation factor	γ _{inst}	[-]	1,0							
Concrete edge failure										
Effective length of fastener	l _f	[mm]	min(h _{ef} ; 12 · d _{nom})						min(h _{ef} ; 300mm)	
Outside diameter of fastener	d _{nom}	[mm]	8	10	12	16	20	24	27	30
Installation factor	γ _{inst}	[-]	1,0							

Table C6: Characteristic values of tension loads under static and quasi-static action for a working life of 50 years									
Internal threaded anchor rods				GH-M6	GH-M8	GH-M10	GH-M12	GH-M16	GH-M20
Steel failure ¹⁾									
Characteristic tension resistance,	5.8	N _{Rk,s}	[kN]	10	17	29	42	76	123
Steel, strength class	8.8	N _{Rk,s}	[kN]	16	27	46	67	121	196
Partial factor, strength class 5.8 and 8.8		γ _{Ms,N}	[-]	1,5					
Characteristic tension resistance, Stainless Steel A4 and HCR, Strength class 70 ²⁾		N _{Rk,s}	[kN]	14	26	41	59	110	124
Partial factor		γ _{Ms,N}	[-]	1,87					
Combined pull-out and concrete cone failure									
Characteristic bond resistance in uncracked concrete C20/25									
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	τ _{Rk,ucr}	[N/mm ²]	17	16	15	14	13
	II: 80°C/50°C		τ _{Rk,ucr}	[N/mm ²]	17	16	15	14	13
	III: 120°C/72°C		τ _{Rk,ucr}	[N/mm ²]	14	14	13	12	12
	IV: 160°C/100°C		τ _{Rk,ucr}	[N/mm ²]	11	11	10	9,5	9,0
Characteristic bond resistance in cracked concrete C20/25									
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	τ _{Rk,cr}	[N/mm ²]	7,5	8,0	9,0	8,5	7,0
	II: 80°C/50°C		τ _{Rk,cr}	[N/mm ²]	7,5	8,0	9,0	8,5	7,0
	III: 120°C/72°C		τ _{Rk,cr}	[N/mm ²]	6,5	7,0	7,5	7,0	6,0
	IV: 160°C/100°C		τ _{Rk,cr}	[N/mm ²]	5,5	6,0	6,5	6,0	5,5
Reduktion factor ψ ⁰ _{sus} in cracked and uncracked concrete C20/25									
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	ψ ⁰ _{sus}	[-]	0,90				
	0,87								
	0,75								
	0,66								
Increasing factors for concrete			ψ _c	[-]	(f _{ck} / 20) ^{0,1}				
Characteristic bond resistance depending on the concrete strength class			τ _{Rk,ucr} =		ψ _c * τ _{Rk,ucr,(C20/25)}				
			τ _{Rk,cr} =		ψ _c * τ _{Rk,cr,(C20/25)}				
Concrete cone failure									
Relevant parameter				see Table C2					
Splitting failure									
Relevant parameter				see Table C2					
Installation factor									
for dry and wet concrete	MAC	γ _{inst}	[-]	1,2			No Performance assessed		
	CAC			1,0					
	HDB			1,2					
for flooded bore hole	CAC			1,4					
1) Fastenings (incl. nut and washer) must comply with the appropriate material and property class of the internal threaded rod. The characteristic tension resistance for steel failure is valid for the internal threaded rod and the fastening element. 2) For GH-M20 strength class 50 is valid									
Injection system Hybrid PROFIX PIT-H+ for concrete								Annex C 6	
Performances Characteristic values of tension loads under static and quasi-static action for a working life of 50 years (internal threaded anchor rod)									

Table C7: Characteristic values of tension loads under static and quasi-static action for a working life of 100 years									
Internal threaded anchor rods				GH-M6	GH-M8	GH-M10	GH-M12	GH-M16	GH-M20
Steel failure ¹⁾									
Characteristic tension resistance, Steel, strength class	5.8	N _{Rk,s}	[kN]	10	17	29	42	76	123
	8.8	N _{Rk,s}	[kN]	16	27	46	67	121	196
Partial factor, strength class 5.8 and 8.8		γ _{Ms,N}	[-]	1,5					
Characteristic tension resistance, Stainless Steel A4 and HCR, Strength class 70 ²⁾		N _{Rk,s}	[kN]	14	26	41	59	110	124
Partial factor		γ _{Ms,N}	[-]	1,87					
Combined pull-out and concrete cone failure									
Characteristic bond resistance in uncracked concrete C20/25									
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	τ _{Rk,ucr,100}	[N/mm²]	17	16	15	14	13
	II: 80°C/50°C		τ _{Rk,ucr,100}	[N/mm²]	17	16	15	14	13
Characteristic bond resistance in cracked concrete C20/25									
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	τ _{Rk,cr,100}	[N/mm²]	6,0	6,5	6,5	6,5	6,5
	II: 80°C/50°C		τ _{Rk,cr,100}	[N/mm²]	6,0	6,5	6,5	6,5	6,5
Increasing factors for concrete		ψ _c	[-]	(f _{ck} / 20) ^{0,1}					
Characteristic bond resistance depending on the concrete strength class		τ _{Rk,ucr,100} =			ψ _c • τ _{Rk,ucr,100,(C20/25)}				
		τ _{Rk,cr,100} =			ψ _c • τ _{Rk,cr,100,(C20/25)}				
Concrete cone failure									
Relevant parameter				see Table C2					
Splitting failure									
Relevant parameter				see Table C2					
Installation factor									
for dry and wet concrete	MAC	γ _{inst}	[-]	1,2			No Performance assessed		
	CAC			1,0					
	HDB			1,2					
for flooded bore hole	CAC			1,4					
1) Fastenings (incl. nut and washer) must comply with the appropriate material and property class of the internal threaded rod. The characteristic tension resistance for steel failure is valid for the internal threaded rod and the fastening element. 2) For GH-M20 strength class 50 is valid									
Injection system Hybrid PROFIX PIT-H+ for concrete								Annex C 7	
Performances Characteristic values of tension loads under static and quasi-static action for a working life of 100 years (internal threaded anchor rod)									

Table C8: Characteristic values of shear loads under static and quasi-static action for a working life of 50 and 100 years

Internal threaded anchor rods				GH-M6	GH-M8	GH-M10	GH-M12	GH-M16	GH-M20
Steel failure without lever arm ¹⁾									
Characteristic shear resistance, Steel, strength class	5.8	$V^0_{Rk,s}$	[kN]	5	9	15	21	38	61
	8.8	$V^0_{Rk,s}$	[kN]	8	14	23	34	60	98
Partial factor, strength class 5.8 and 8.8		$\gamma_{Ms,V}$	[-]	1,25					
Characteristic shear resistance, Stainless Steel A4 and HCR, Strength class 70 ²⁾		$V^0_{Rk,s}$	[kN]	7	13	20	30	55	40
Partial factor		$\gamma_{Ms,V}$	[-]	1,56					2,38
Ductility factor		k_7	[-]	1,0					
Steel failure with lever arm ¹⁾									
Characteristic bending moment, Steel, strength class	5.8	$M^0_{Rk,s}$	[Nm]	8	19	37	66	167	325
	8.8	$M^0_{Rk,s}$	[Nm]	12	30	60	105	267	519
Partial factor, strength class 5.8 and 8.8		$\gamma_{Ms,V}$	[-]	1,25					
Characteristic bending moment, Stainless Steel A4 and HCR, Strength class 70 ²⁾		$M^0_{Rk,s}$	[Nm]	11	26	52	92	233	456
Partial factor		$\gamma_{Ms,V}$	[-]	1,56					2,38
Concrete pry-out failure									
Factor		k_8	[-]	2,0					
Installation factor		γ_{inst}	[-]	1,0					
Concrete edge failure									
Effective length of fastener		l_f	[mm]	$\min(h_{ef}; 12 \cdot d_{nom})$					$\min(h_{ef}; 300\text{mm})$
Outside diameter of fastener		d_{nom}	[mm]	10	12	16	20	24	30
Installation factor		γ_{inst}	[-]	1,0					
1) Fastenings (incl. nut and washer) must comply with the appropriate material and property class of the internal threaded rod. The characteristic tension resistance for steel failure is valid for the internal threaded rod and the fastening element. 2) For GH-M20 strength class 50 is valid									
Injection system Hybrid PROFIX PIT-H+ for concrete								Annex C 8	
Performances Characteristic values of shear loads under static and quasi-static action (internal threaded anchor rod)									

Table C9: Characteristic values of tension loads under static and quasi-static action for a working life of 50 years														
Reinforcing bar				Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 24	Ø 25	Ø 28	Ø 32	
Steel failure														
Characteristic tension resistance		N _{Rk,s}	[kN]	A _s · f _{uk} ¹⁾										
Cross section area		A _s	[mm²]	50	79	113	154	201	314	452	491	616	804	
Partial factor		γ _{Ms,N}	[-]	1,4 ²⁾										
Combined pull-out and concrete failure														
Characteristic bond resistance in uncracked concrete C20/25														
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	τ _{Rk,ucr}	[N/mm²]	14	14	14	14	13	13	13	13	13	13
	II: 80°C/50°C		τ _{Rk,ucr}	[N/mm²]	14	14	14	14	13	13	13	13	13	13
	III: 120°C/72°C		τ _{Rk,ucr}	[N/mm²]	13	12	12	12	12	11	11	11	11	11
	IV: 160°C/100°C		τ _{Rk,ucr}	[N/mm²]	9,5	9,5	9,5	9,0	9,0	9,0	9,0	9,0	8,5	8,5
Characteristic bond resistance in cracked concrete C20/25														
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	τ _{Rk,cr}	[N/mm²]	5,5	5,5	6,0	6,5	6,5	6,5	6,5	7,0	7,0	7,0
	II: 80°C/50°C		τ _{Rk,cr}	[N/mm²]	5,5	5,5	6,0	6,5	6,5	6,5	6,5	7,0	7,0	7,0
	III: 120°C/72°C		τ _{Rk,cr}	[N/mm²]	4,5	5,0	5,0	5,5	5,5	5,5	5,5	6,0	6,0	6,0
	IV: 160°C/100°C		τ _{Rk,cr}	[N/mm²]	4,0	4,5	4,5	5,0	5,0	5,0	5,0	5,0	5,0	5,0
Reduktion factor ψ ⁰ _{SUS} in cracked and uncracked concrete C20/25														
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	ψ ⁰ _{SUS}	[-]	0,90									
	0,87													
	0,75													
	0,66													
Increasing factors for concrete			ψ _c	[-]	(f _{ck} / 20) ^{0,1}									
Characteristic bond resistance depending on the concrete strength class			τ _{Rk,ucr} =		ψ _c · τ _{Rk,ucr,(C20/25)}									
			τ _{Rk,cr} =		ψ _c · τ _{Rk,cr,(C20/25)}									
Concrete cone failure														
Relevant parameter				see Table C2										
Splitting														
Relevant parameter				see Table C2										
Installation factor														
for dry and wet concrete	MAC	γ _{inst}	[-]	1,2					No Performance assessed					
	CAC			1,0										
	HDB			1,2										
for flooded bore hole	CAC			1,4										
1) f _{uk} shall be taken from the specifications of reinforcing bars 2) in absence of national regulation														
Injection system Hybrid PROFIX PIT-H+ for concrete											Annex C 9			
Performances Characteristic values of tension loads under static and quasi-static action for a working life of 50 years (rebar)														

Table C10: Characteristic values of tension loads under static and quasi-static action for a working life of 100 years

Reinforcing bar				Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 24	Ø 25	Ø 28	Ø 32
Steel failure													
Characteristic tension resistance		N _{Rk,s}	[kN]	A _s • f _{uk} ¹⁾									
Cross section area		A _s	[mm²]	50	79	113	154	201	314	452	491	616	804
Partial factor		γ _{Ms,N}	[-]	1,4 ²⁾									
Combined pull-out and concrete failure													
Characteristic bond resistance in uncracked concrete C20/25													
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	τ _{Rk,ucr,100}	[N/mm²]	14	14	14	14	13	13	13	13	13
	II: 80°C/50°C		τ _{Rk,ucr,100}	[N/mm²]	14	14	14	14	13	13	13	13	13
Characteristic bond resistance in cracked concrete C20/25													
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	τ _{Rk,cr,100}	[N/mm²]	4,5	4,5	4,5	4,5	4,5	4,0	4,0	4,0	4,0
	II: 80°C/50°C		τ _{Rk,cr,100}	[N/mm²]	4,5	4,5	4,5	4,5	4,5	4,0	4,0	4,0	4,0
Increasing factors for concrete		ψ _c	[-]	(f _{ck} / 20) ^{0,1}									
Characteristic bond resistance depending on the concrete strength class		τ _{Rk,ucr,100} =		ψ _c • τ _{Rk,ucr,100,(C20/25)}									
		τ _{Rk,cr,100} =		ψ _c • τ _{Rk,cr,100,(C20/25)}									
Concrete cone failure													
Relevant parameter				see Table C2									
Splitting													
Relevant parameter				see Table C2									
Installation factor													
for dry and wet concrete	MAC	γ _{inst}	[-]	1,2					No Performance assessed				
	CAC			1,0									
	HDB			1,2									
for flooded bore hole	CAC			1,4									
1) f _{uk} shall be taken from the specifications of reinforcing bars 2) in absence of national regulation													
Injection system Hybrid PROFIX PIT-H+ for concrete										Annex C 10			
Performances Characteristic values of tension loads under static and quasi-static action for a working life of 100 years (rebar)													

Table C11: Characteristic values of shear loads under static and quasi-static action for a working life of 50 and 100 years

Reinforcing bar			Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 24	Ø 25	Ø 28	Ø 32
Steel failure without lever arm												
Characteristic shear resistance	$V^0_{Rk,s}$	[kN]	$0,50 \cdot A_s \cdot f_{uk}^{1)}$									
Cross section area	A_s	[mm²]	50	79	113	154	201	314	452	491	616	804
Partial factor	$\gamma_{Ms,V}$	[-]	$1,5^{2)}$									
Ductility factor	k_7	[-]	1,0									
Steel failure with lever arm												
Characteristic bending moment	$M^0_{Rk,s}$	[Nm]	$1.2 \cdot W_{el} \cdot f_{uk}^{1)}$									
Elastic section modulus	W_{el}	[mm³]	50	98	170	269	402	785	1357	1534	2155	3217
Partial factor	$\gamma_{Ms,V}$	[-]	$1,5^{2)}$									
Concrete pry-out failure												
Factor	k_8	[-]	2,0									
Installation factor	γ_{inst}	[-]	1,0									
Concrete edge failure												
Effective length of fastener	l_f	[mm]	$\min(h_{ef}; 12 \cdot d_{nom})$							$\min(h_{ef}; 300mm)$		
Outside diameter of fastener	d_{nom}	[mm]	8	10	12	14	16	20	24	25	28	32
Installation factor	γ_{inst}	[-]	1,0									
1) f_{uk} shall be taken from the specifications of reinforcing bars 2) in absence of national regulation												
Injection system Hybrid PROFIX PIT-H+ for concrete									Annex C 11			
Performances Characteristic values of shear loads under static and quasi-static action (rebar)												

Table C12: Displacements under tension load¹⁾

Threaded rod			M8	M10	M12	M16	M20	M24	M27	M30
Uncracked concrete C20/25 under static and quasi-static action for a working life of 50 and 100 years										
Temperature range I: 40°C/24°C II: 80°C/50°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,031	0,032	0,034	0,037	0,039	0,042	0,044	0,046
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,040	0,042	0,044	0,047	0,051	0,054	0,057	0,060
Temperature range III: 120°C/72°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,032	0,034	0,035	0,038	0,041	0,044	0,046	0,048
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,042	0,044	0,045	0,049	0,053	0,056	0,059	0,062
Temperature range IV: 160°C/100°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,121	0,126	0,131	0,142	0,153	0,163	0,171	0,179
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,124	0,129	0,135	0,146	0,157	0,168	0,176	0,184
Cracked concrete under static and quasi-static action for a working life of 50 and 100 years										
Temperature range I: 40°C/24°C II: 80°C/50°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,081	0,083	0,085	0,090	0,095	0,099	0,103	0,106
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,104	0,107	0,110	0,116	0,122	0,128	0,133	0,137
Temperature range III: 120°C/72°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,084	0,086	0,088	0,093	0,098	0,103	0,107	0,110
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,108	0,111	0,114	0,121	0,127	0,133	0,138	0,143
Temperature range IV: 160°C/100°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,312	0,321	0,330	0,349	0,367	0,385	0,399	0,412
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,321	0,330	0,340	0,358	0,377	0,396	0,410	0,424

1) Calculation of the displacement

$$\delta_{N0} = \delta_{N0}\text{-factor} \cdot \tau; \quad \tau: \text{action bond stress for tension}$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-factor} \cdot \tau;$$

Table C13: Displacements under shear load¹⁾

Threaded rod			M8	M10	M12	M16	M20	M24	M27	M30
Uncracked and cracked concrete under static and quasi-static action for a working life of 50 and 100 years										
All temperature ranges	δ_{V0} -factor	[mm/kN]	0,06	0,06	0,05	0,04	0,04	0,03	0,03	0,03
	$\delta_{V\infty}$ -factor	[mm/kN]	0,09	0,08	0,08	0,06	0,06	0,05	0,05	0,05

1) Calculation of the displacement

$$\delta_{V0} = \delta_{V0}\text{-factor} \cdot V; \quad V: \text{action shear load}$$

$$\delta_{V\infty} = \delta_{V\infty}\text{-factor} \cdot V;$$

Injection system Hybrid PROFIX PIT-H+ for concrete

Performances

Displacements under static and quasi-static action
for a working life of 50 and 100 years (threaded rod)

Annex C 12

Table C14: Displacements under tension load¹⁾

Internal threaded anchor rods			GH-M6	GH-M8	GH-M10	GH-M12	GH-M16	GH-M20
Uncracked concrete under static and quasi-static action for a working life of 50 and 100 years								
Temperature range I: 40°C/24°C II: 80°C/50°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,032	0,034	0,037	0,039	0,042	0,046
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,042	0,044	0,047	0,051	0,054	0,060
Temperature range III: 120°C/72°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,034	0,035	0,038	0,041	0,044	0,048
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,044	0,045	0,049	0,053	0,056	0,062
Temperature range IV: 160°C/100°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,126	0,131	0,142	0,153	0,163	0,179
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,129	0,135	0,146	0,157	0,168	0,184
Cracked concrete under static and quasi-static action for a working life of 50 and 100 years								
Temperature range I: 40°C/24°C II: 80°C/50°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,083	0,085	0,090	0,095	0,099	0,106
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,170	0,110	0,116	0,122	0,128	0,137
Temperature range III: 120°C/72°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,086	0,088	0,093	0,098	0,103	0,110
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,111	0,114	0,121	0,127	0,133	0,143
Temperature range IV: 160°C/100°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,321	0,330	0,349	0,367	0,385	0,412
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,330	0,340	0,358	0,377	0,396	0,424

¹⁾ Calculation of the displacement

$$\delta_{N0} = \delta_{N0}\text{-factor} \cdot \tau; \quad \tau: \text{action bond stress for tension}$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-factor} \cdot \tau;$$

Table C15: Displacements under shear load¹⁾

Internal threaded anchor rods			GH-M6	GH-M8	GH-M10	GH-M12	GH-M16	GH-M20
Uncracked and cracked concrete under static and quasi-static action for a working life of 50 and 100 years								
All temperature ranges	δ_{V0} -factor	[mm/kN]	0,07	0,06	0,06	0,05	0,04	0,04
	$\delta_{V\infty}$ -factor	[mm/kN]	0,10	0,09	0,08	0,08	0,06	0,06

¹⁾ Calculation of the displacement

$$\delta_{V0} = \delta_{V0}\text{-factor} \cdot V; \quad V: \text{action shear load}$$

$$\delta_{V\infty} = \delta_{V\infty}\text{-factor} \cdot V;$$

Injection system Hybrid PROFIX PIT-H+ for concrete

Performances

Displacements under static and quasi-static action
for a working life of 50 and 100 years (internal threaded anchor rod)

Annex C 13

Table C16: Displacements under tension load¹⁾

Reinforcing bar			Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 24	Ø 25	Ø 28	Ø 32
Uncracked concrete under static and quasi-static action for a working life of 50 and 100 years												
Temperature range I: 40°C/24°C II: 80°C/50°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,031	0,032	0,034	0,035	0,037	0,039	0,042	0,043	0,045	0,048
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,040	0,042	0,044	0,045	0,047	0,051	0,054	0,055	0,058	0,063
Temperature range III: 120°C/72°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,032	0,034	0,035	0,036	0,038	0,041	0,044	0,045	0,047	0,050
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,042	0,044	0,045	0,047	0,049	0,053	0,056	0,057	0,060	0,065
Temperature range IV: 160°C/100°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,121	0,126	0,131	0,137	0,142	0,153	0,163	0,164	0,172	0,186
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,124	0,129	0,135	0,141	0,146	0,157	0,168	0,169	0,177	0,192
Cracked concrete under static and quasi-static action for a working life of 50 and 100 years												
Temperature range I: 40°C/24°C II: 80°C/50°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,081	0,083	0,085	0,087	0,090	0,095	0,099	0,099	0,103	0,108
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,104	0,107	0,110	0,113	0,116	0,122	0,128	0,128	0,133	0,141
Temperature range III: 120°C/72°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,084	0,086	0,088	0,090	0,093	0,098	0,103	0,103	0,107	0,113
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,108	0,111	0,114	0,118	0,121	0,127	0,133	0,133	0,138	0,148
Temperature range IV: 160°C/100°C	δ_{N0} -factor	[mm/(N/mm ²)]	0,312	0,321	0,330	0,340	0,349	0,367	0,385	0,385	0,399	0,425
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,321	0,330	0,340	0,349	0,358	0,377	0,396	0,396	0,410	0,449

¹⁾ Calculation of the displacement

$$\delta_{N0} = \delta_{N0}\text{-factor} \cdot \tau; \quad \tau: \text{action bond stress for tension}$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-factor} \cdot \tau;$$

Table C17: Displacements under shear load¹⁾

Reinforcing bar			Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 24	Ø 25	Ø 28	Ø 32
Uncracked and cracked concrete under static and quasi-static action for a working life of 50 and 100 years												
All temperature ranges	δ_{V0} -factor	[mm/kN]	0,06	0,05	0,05	0,04	0,04	0,04	0,03	0,03	0,03	0,03
	$\delta_{V\infty}$ -factor	[mm/kN]	0,09	0,08	0,08	0,06	0,06	0,05	0,05	0,05	0,04	0,04

¹⁾ Calculation of the displacement

$$\delta_{V0} = \delta_{V0}\text{-factor} \cdot V; \quad V: \text{action shear load}$$

$$\delta_{V\infty} = \delta_{V\infty}\text{-factor} \cdot V;$$

Injection system Hybrid PROFIX PIT-H+ for concrete

Performances

Displacements under static and quasi-static action
for a working life of 50 and 100 years (rebar)

Annex C 14

Table C18: Characteristic values of tension loads under seismic action (performance category C1) for a working life of 50 and 100 years												
Threaded rod					M8	M10	M12	M16	M20	M24	M27	M30
Steel failure												
Characteristic tension resistance			$N_{Rk,s,eq,C1}$	[kN]	$1,0 \cdot N_{Rk,s}$							
Partial factor			$\gamma_{Ms,N}$	[-]	see Table C1							
Combined pull-out and concrete failure												
Characteristic bond resistance in cracked and uncracked concrete C20/25												
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	$\tau_{Rk,eq,C1}$	[N/mm²]	7,0	7,5	8,0	9,0	8,5	7,0	7,0	7,0
	II: 80°C/50°C		$\tau_{Rk,eq,C1}$	[N/mm²]	7,0	7,5	8,0	9,0	8,5	7,0	7,0	7,0
	III: 120°C/72°C		$\tau_{Rk,eq,C1}$	[N/mm²]	6,0	6,5	7,0	7,5	7,0	6,0	6,0	6,0
	IV: 160°C/100°C		$\tau_{Rk,eq,C1}$	[N/mm²]	5,5	5,5	6,0	6,5	6,0	5,5	5,5	5,5
Increasing factors for concrete			ψ_c	1,0	1,0							
Characteristic bond resistance depending on the concrete strength class			$\tau_{Rk,eq,C1} =$		$\psi_c \cdot \tau_{Rk,eq,C1,(C20/25)}$							
Installation factor												
for dry and wet concrete	CAC	γ_{inst}	[-]	1,0								
	HDB			1,2								
for flooded bore hole	CAC			1,4								

Table C19: Characteristic values of tension loads under seismic action (performance category C1) for a working life of 100 years												
Threaded rod				M8	M10	M12	M16	M20	M24	M27	M30	
Steel failure												
Characteristic tension resistance		$N_{Rk,s,eq,C1}$	[kN]	$1,0 \cdot N_{Rk,s}$								
Partial factor		$\gamma_{Ms,N}$	[-]	see Table C1								
Combined pull-out and concrete failure												
Characteristic bond resistance in cracked and uncracked concrete C20/25												
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	$\tau_{Rk,eq,C1}$	[N/mm²]	7,0	7,5	8,0	9,0	8,5	7,0	7,0	7,0
	II: 80°C/50°C		$\tau_{Rk,eq,C1}$	[N/mm²]	7,0	7,5	8,0	9,0	8,5	7,0	7,0	7,0
Increasing factors for concrete		ψ_C	1,0	1,0								
Characteristic bond resistance depending on the concrete strength class		$\tau_{Rk,eq,C1} =$		$\psi_C \cdot \tau_{Rk,eq,C1,(C20/25)}$								
Installation factor												
for dry and wet concrete	CAC	γ_{inst}	[-]	1,0								
	HDB			1,2								
for flooded bore hole	CAC			1,4								

**Table C20: Characteristic values of shear loads under seismic action
(performance category C1) for a working life of 50 and 100 years**

Threaded rod			M8	M10	M12	M16	M20	M24	M27	M30
Steel failure										
Characteristic shear resistance (Seismic C1)	$V_{Rk,s,eq,C1}$	[kN]	$0,70 \cdot V_{Rk,s}^0$							
Partial factor	$\gamma_{Ms,V}$	[-]	see Table C1							
Factor for annular gap	α_{gap}	[-]	0,5 (1,0) ¹⁾							

¹⁾ Value in brackets valid for filled annular gap between fastener and clearance hole in the fixture. Use of special filling washer Annex A 3 is recommended

Injection system Hybrid PROFIX PIT-H+ for concrete

Performances

Characteristic values of shear loads under seismic action (performance category C1)
(threaded rod)

Annex C 17

Table C21: Characteristic values of tension loads under seismic action (performance category C1) for a working life of 50 years

Reinforcing bar				Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 24	Ø 25	Ø 28	Ø 32	
Steel failure														
Characteristic tension resistance		N _{Rk,s,eq,C1}	[kN]	1,0 · A _s · f _{uk} ¹⁾										
Cross section area		A _s	[mm²]	50	79	113	154	201	314	452	491	616	804	
Partial factor		γ _{Ms,N}	[-]	1,4 ²⁾										
Combined pull-out and concrete failure														
Characteristic bond resistance in cracked and uncracked concrete C20/25														
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	τ _{Rk,eq,C1}	[N/mm²]	5,5	5,5	6,0	6,5	6,5	6,5	6,5	7,0	7,0	7,0
	II: 80°C/50°C		τ _{Rk,eq,C1}	[N/mm²]	5,5	5,5	6,0	6,5	6,5	6,5	6,5	7,0	7,0	7,0
	III: 120°C/72°C		τ _{Rk,eq,C1}	[N/mm²]	4,5	5,0	5,0	5,5	5,5	5,5	5,5	6,0	6,0	6,0
	IV: 160°C/100°C		τ _{Rk,eq,C1}	[N/mm²]	4,0	4,5	4,5	5,0	5,0	5,0	5,0	5,0	5,0	5,0
Increasing factors for concrete		ψ _C	1,0	1,0										
Characteristic bond resistance depending on the concrete strength class		τ _{Rk,eq,C1} =		ψ _C · τ _{Rk,eq,C1,(C20/25)}										
Installation factor														
for dry and wet concrete		CAC	γ _{inst}	[-]	1,0									
		HDB			1,2									
for flooded bore hole		CAC			1,4									

¹⁾ f_{uk} shall be taken from the specifications of reinforcing bars

²⁾ in absence of national regulation

Injection system Hybrid PROFIX PIT-H+ for concrete

Performances

Characteristic values of tension loads under seismic action (performance category C1) for a working life of 50 years (rebar)

Annex C 18

Table C22: Characteristic values of tension loads under seismic action (performance category C1) for a working life of 100 years

Reinforcing bar				Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 24	Ø 25	Ø 28	Ø 32	
Steel failure														
Characteristic tension resistance		N _{Rk,s,eq,C1}	[kN]	1,0 · A _s · f _{uk} ¹⁾										
Cross section area		A _s	[mm²]	50	79	113	154	201	314	452	491	616	804	
Partial factor		γ _{Ms,N}	[-]	1,4 ²⁾										
Combined pull-out and concrete failure														
Characteristic bond resistance in cracked and uncracked concrete C20/25														
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	τ _{Rk,eq,C1}	[N/mm²]	5,5	5,5	6,0	6,5	6,5	6,5	6,5	7,0	7,0	7,0
	II: 80°C/50°C		τ _{Rk,eq,C1}	[N/mm²]	5,5	5,5	6,0	6,5	6,5	6,5	6,5	7,0	7,0	7,0
Increasing factors for concrete		ψ _C	1,0	1,0										
Characteristic bond resistance depending on the concrete strength class		τ _{Rk,eq,C1} =		ψ _C · τ _{Rk,eq,C1,(C20/25)}										
Installation factor														
for dry and wet concrete	CAC	γ _{inst}	[-]	1,0										
	HDB			1,2										
for flooded bore hole	CAC			1,4										

1) f_{uk} shall be taken from the specifications of reinforcing bars

2) in absence of national regulation

Injection system Hybrid PROFIX PIT-H+ for concrete

Performances

Characteristic values of tension loads under seismic action (performance category C1) for a working life of 100 years (rebar)

Annex C 19

**Table C23: Characteristic values of shear loads under seismic action
(performance category C1) for a working life of 50 and 100 years**

Reinforcing bar			Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 24	Ø 25	Ø 28	Ø 32
Steel failure												
Characteristic shear resistance	$V_{Rk,s,eq}$	[kN]	$0,35 \cdot A_s \cdot f_{uk}^{1)}$									
Cross section area	A_s	[mm²]	50	79	113	154	201	314	452	491	616	804
Partial factor	$\gamma_{Ms,V}$	[-]	$1,5^{2)}$									
Factor for annular gap	α_{gap}	[-]	$0,5 (1,0)^{3)}$									
1) f_{uk} shall be taken from the specifications of reinforcing bars 2) in absence of national regulation 3) Value in brackets valid for filled annular gab between fastener and clearance hole in the fixture. Use of special filling washer Annex A 3 is recommended												
Injection system Hybrid PROFIX PIT-H+ for concrete										Annex C 20		
Performances Characteristic values of shear loads under seismic action (performance category C1) (rebar)												

Table C24: Characteristic values of tension loads under seismic action (performance category C2) for a working life of 50 years								
Threaded rod				M12	M16	M20	M24	
Steel failure								
Characteristic tension resistance, Steel, strength class 8.8 Stainless Steel A4 and HCR, Strength class ≥70			N _{Rk,s,eq,C2}	[kN]	1,0 · N _{Rk,s}			
Partial factor			γ _{Ms,N}	[-]	see Table C1			
Combined pull-out and concrete failure								
Characteristic bond resistance in cracked and uncracked concrete C20/25								
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	τ _{Rk,eq,C2}	[N/mm²]	3,6	3,5	3,3	2,3
	II: 80°C/50°C		τ _{Rk,eq,C2}	[N/mm²]	3,6	3,5	3,3	2,3
	III: 120°C/72°C		τ _{Rk,eq,C2}	[N/mm²]	3,1	3,0	2,8	2,0
	IV: 160°C/100°C		τ _{Rk,eq,C2}	[N/mm²]	2,5	2,7	2,5	1,8
Increasing factors for concrete			ψ _c	1,0	1,0			
Characteristic bond resistance depending on the concrete strength class			τ _{Rk,eq,C2} =		ψ _c · τ _{Rk,eq,C2,(C20/25)}			
Installation factor								
for dry and wet concrete	CAC	γ _{inst}	[-]	1,0				
	HDB			1,2				
for flooded bore hole	CAC			1,4				

Threaded rod				M12	M16	M20	M24
Steel failure							
Characteristic tension resistance, Steel, strength class 8.8 Stainless Steel A4 and HCR, Strength class ≥70		N _{Rk,s,eq,C2}	[kN]	1,0 · N _{Rk,s}			
Partial factor		γ _{Ms,N}	[-]	see Table C1			
Combined pull-out and concrete failure							
Characteristic bond resistance in cracked and uncracked concrete C20/25							
Temperature range I: 40°C/24°C II: 80°C/50°C	Dry, wet concrete and flooded bore hole	τ _{Rk,eq,C2}	[N/mm²]	3,6	3,5	3,3	2,3
		τ _{Rk,eq,C2}	[N/mm²]	3,6	3,5	3,3	2,3
Increasing factors for concrete		ψ _C	1,0	1,0			
Characteristic bond resistance depending on the concrete strength class		τ _{Rk,eq,C2} =		ψ _C · τ _{Rk,eq,C2,(C20/25)}			
Installation factor							
for dry and wet concrete	CAC	γ _{inst}	[-]	1,0			
	HDB			1,2			
for flooded bore hole	CAC			1,4			

Table C26: Characteristic values of shear loads under seismic action (performance category C2) for a working life of 50 and 100 years

Threaded rod		M12	M16	M20	M24
Steel failure					
Characteristic shear resistance Steel, strength class 8.8 Stainless Steel A4 and HCR, Strength class ≥ 70	$V_{Rk,s,eq,C2}$	[kN]	$0,70 \cdot V_{Rk,s}^0$		
Partial factor	$\gamma_{Ms,V}$	[-]	see Table C1		
Factor for annular gap	α_{gap}	[-]	0,5 (1,0) ¹⁾		

¹⁾ Value in brackets valid for filled annular gap between fastener and clearance hole in the fixture. Use of special filling washer Annex A 3 is recommended

Table C27: Displacements under tension load

Threaded rod			M12	M16	M20	M24
Cracked concrete under seismic action (performance category C2) for a working life of 50 and 100 years						
All temperature ranges	δ _{N,eq,C2(DLS)}	[mm]	0,24	0,27	0,29	0,27
	δ _{N,eq,C2(ULS)}	[mm]	0,55	0,51	0,50	0,58

Table C28: Displacements under shear load

Threaded rod			M12	M16	M20	M24
Cracked concrete under seismic action (performance category C2) for a working life of 50 and 100 years						
All temperature ranges	δ _{V,eq,C2(DLS)}	[mm]	3,6	3,0	3,1	3,5
	δ _{V,eq,C2(ULS)}	[mm]	7,0	6,6	7,0	9,3

Injection system Hybrid PROFIX PIT-H+ for concrete

Performances

Characteristic values of shear loads Displacements under seismic action (performance category C2) for a working life of 50 and 100 years (threaded rod)

Annex C 23