

Approval body for construction products  
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and  
Laender Governments



## European Technical Assessment

**ETA-22/0620**  
**of 26 October 2022**

English translation prepared by DIBt - Original version in German language

### General Part

Technical Assessment Body issuing the  
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Kalz Injection system UM-H+ for concrete

Product family  
to which the construction product belongs

Bonded fastener for use in concrete

Manufacturer

Shanghai Kalz Construction Technology Co., Ltd.  
Room 2G, Building 5, No. 423, Wu Ning Rd  
SHANGHAI  
VOLKSREPUBLIK CHINA

Manufacturing plant

Shanghai Kalz Construction Technology Co., Ltd., Plant 1,  
Germany

This European Technical Assessment  
contains

40 pages including 3 annexes which form an integral part  
of this assessment

This European Technical Assessment is  
issued in accordance with Regulation (EU)  
No 305/2011, on the basis of

EAD 330499-01-0601, Edition 04/2020

**European Technical Assessment**

**ETA-22/0620**

English translation prepared by DIBt

**Page 2 of 40 | 26 October 2022**

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

## Specific Part

### 1 Technical description of the product

The "Kalz Injection system UM-H+ for concrete" is a bonded fastener consisting of a cartridge with injection mortar Injection mortar UM-H+ and a steel element according to Annex A3 and A5.

The steel element is placed into a drilled hole filled with injection mortar and is anchored via the bond between metal part, injection mortar and concrete.

The product description is given in Annex A.

### 2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the fastener is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the fastener of at least 50 and/or 100 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading)	See Annex B 3, C 1 to C 4, C 6 to C 7, C 9 to C 10
Characteristic resistance to shear load (static and quasi-static loading)	See Annex C 1, C 5, C 8, C 11
Displacements under short-term and long-term loading	See Annex C 12 to C 14
Characteristic resistance and displacements for seismic performance categories C1 and C2	See Annex C 15 to C 23

#### 3.2 Hygiene, health and the environment (BWR 3)

Essential characteristic	Performance
Content, emission and/or release of dangerous substances	No performance assessed

**4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base**

In accordance with the European Assessment Document EAD 330499-01-0601 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

**5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document**

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.

Issued in Berlin on 26 October 2022 by Deutsches Institut für Bautechnik


Dipl.-Ing. Beatrix Wittstock  
Head of Section

*beglaubigt:*  
Baderschneider




Installation threaded rod M8 up to M30


prepositioned installation or  
push through installation (annular gap filled with mortar)

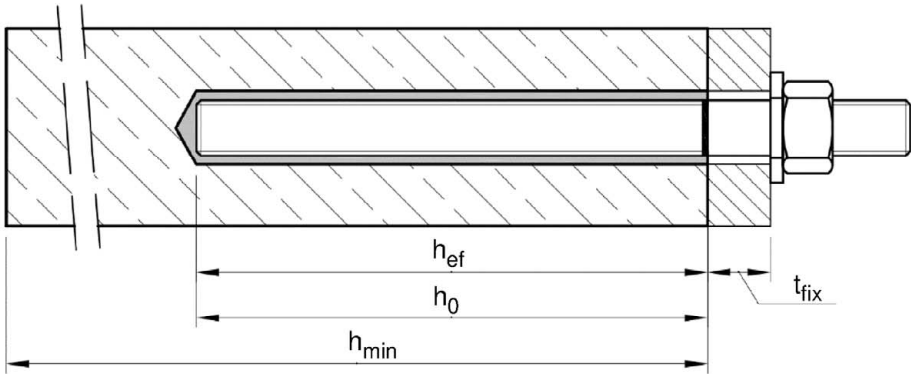

Installation reinforcing bar Ø8 up to Ø32

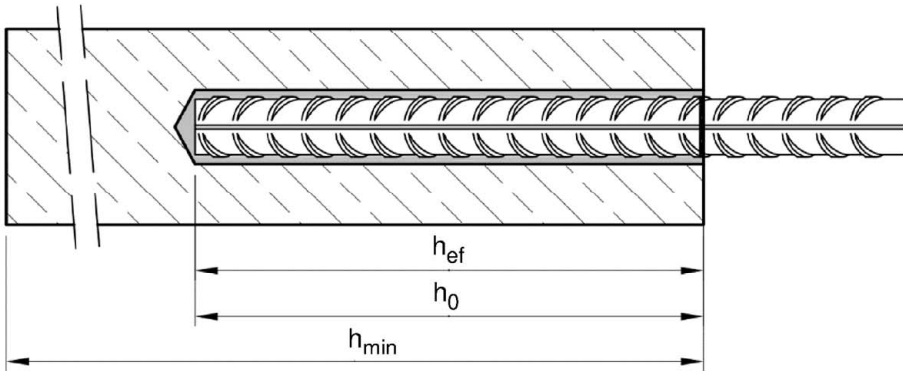

Installation internal threaded anchor rod IG-M6 up to IG-M20

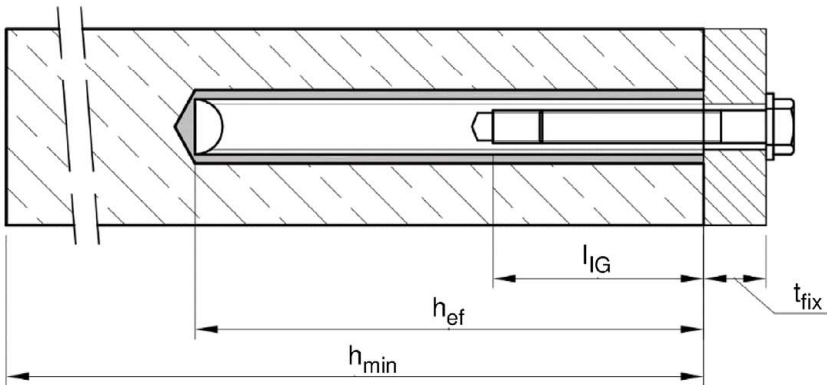

$t_{fix}$  = thickness of fixture  
 $h_{ef}$  = effective embedment depth  
 $h_{min}$  = minum thickness of member

$h_0$  = nominal drill hole diameter  
 $l_{IG}$  = thread engagement length

Kalz Injection system UM-H+ for concrete


Product description  
Installed condition

Annex A 1

## Cartridge system

### Coaxial Cartridge:

150 ml, 280 ml, 300 ml up to 333 ml and 380 ml up to 420 ml




#### Imprint:

##### UM-H+

Processing and safety instructions, shelf life, charge number, manufacturer's information, quantity information

### Side-by-Side Cartridge:

235 ml, 345 ml up to 360 ml and 825 ml




#### Imprint:


##### UM-H+

Processing and safety instructions, shelf life, charge number, manufacturer's information, quantity information

## Static mixer PM-19E

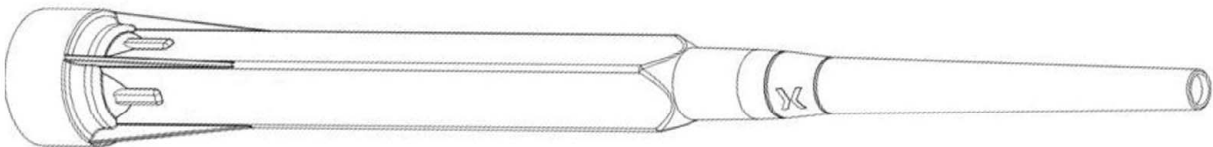

## Piston plug VS and mixer extension VL

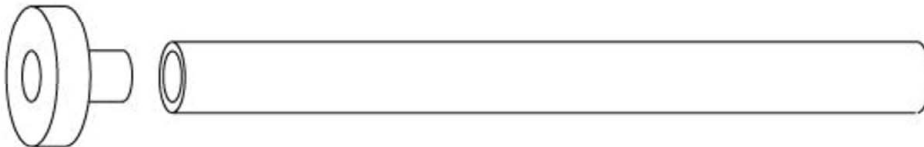


Kalz Injection system UM-H+ for concrete

### Product description

Injection system

Annex A 2

## Threaded rod M8 up to M30 with washer and hexagon nut


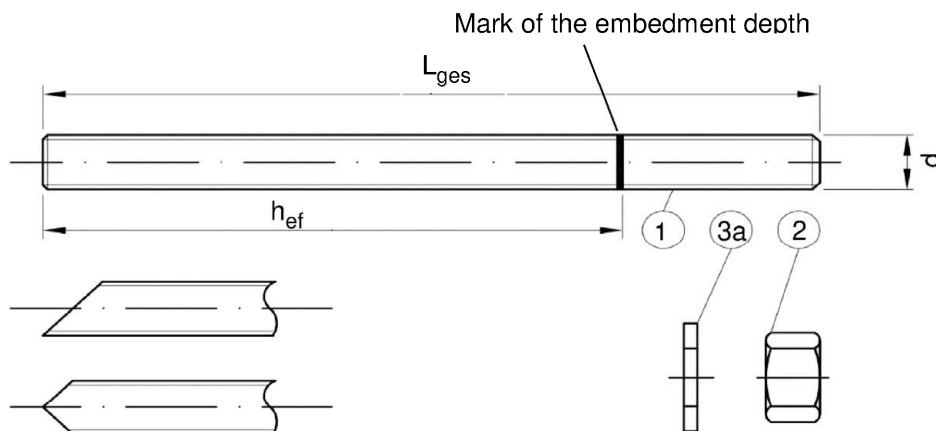



Commercial standard rod with:

- Materials, dimensions and mechanical properties acc. to Table A1
- Inspection certificate 3.1 acc. to EN 10204:2004. The document shall be stored.
- Marking of embedment depth

## Internal threaded rod IG-M6 to IG-M20

Threaded rod or screw

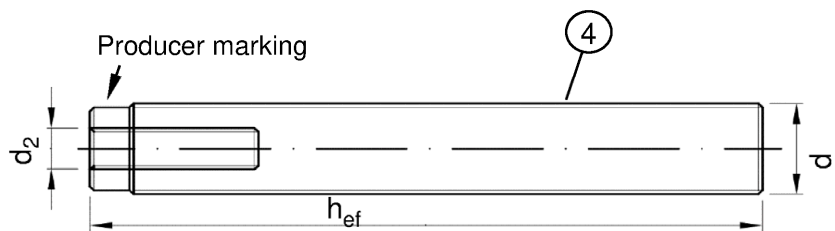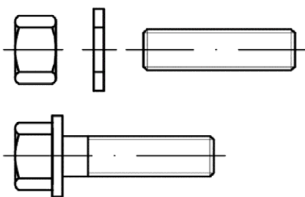

Producer marking: e.g.  M8



Marking Internal thread

Mark

M8

Thread size (Internal thread)


A4

additional mark for stainless steel

HCR

additional mark for high-corrosion resistance steel

## Filling washer VFS

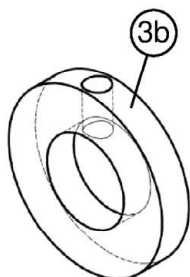

## Mixer reduction nozzle MR



## Kalz Injection system UM-H+ for concrete

### Product description


Threaded rod; Internal threaded rod  
Filling washer; Mixer reduction nozzle

## Annex A 3

**Table A1: Materials**

Part	Designation	Material				
<b>Steel, zinc plated</b> (Steel acc. to EN ISO 683-4:2018 or EN 10263:2001)						
- zinc plated                    ≥ 5 µm    acc. to EN ISO 4042:2018 or						
- hot-dip galvanised        ≥ 40 µm    acc. to EN ISO 1461:2009 and EN ISO 10684:2004+AC:2009 or						
- sherardized                ≥ 45 µm    acc. to EN ISO 17668:2016						
1	Threaded rod	Property class	Characteristic steel ultimate tensile strength	Characteristic steel yield strength	Elongation at fracture	
		acc. to EN ISO 898-1:2013	4.6	$f_{uk} = 400 \text{ N/mm}^2$	$f_{yk} = 240 \text{ N/mm}^2$	$A_5 > 8\%$
			4.8	$f_{uk} = 400 \text{ N/mm}^2$	$f_{yk} = 320 \text{ N/mm}^2$	$A_5 > 8\%$
			5.6	$f_{uk} = 500 \text{ N/mm}^2$	$f_{yk} = 300 \text{ N/mm}^2$	$A_5 > 8\%$
			5.8	$f_{uk} = 500 \text{ N/mm}^2$	$f_{yk} = 400 \text{ N/mm}^2$	$A_5 > 8\%$
			8.8	$f_{uk} = 800 \text{ N/mm}^2$	$f_{yk} = 640 \text{ N/mm}^2$	$A_5 \geq 12\%$ <sup>3)</sup>
2	Hexagon nut	acc. to EN ISO 898-2:2012	4	for anchor rod class 4.6 or 4.8		
			5	for anchor rod class 5.6 or 5.8		
			8	for anchor rod class 8.8		
3a	Washer	Steel, zinc plated, hot-dip galvanised or sherardized (e.g.: EN ISO 887:2006, EN ISO 7089:2000, EN ISO 7093:2000 or EN ISO 7094:2000)				
3b	Filling washer	Steel, zinc plated, hot-dip galvanised or sherardized				
4	Internal threaded anchor rod	Property class	Characteristic steel ultimate tensile strength	Characteristic steel yield strength	Elongation at fracture	
		acc. to EN ISO 898-1:2013	5.8	$f_{uk} = 500 \text{ N/mm}^2$	$f_{yk} = 400 \text{ N/mm}^2$	$A_5 > 8\%$
			8.8	$f_{uk} = 800 \text{ N/mm}^2$	$f_{yk} = 640 \text{ N/mm}^2$	$A_5 > 8\%$
<b>Stainless steel A2</b> (Material 1.4301 / 1.4307 / 1.4311 / 1.4567 or 1.4541, acc. to EN 10088-1:2014)						
<b>Stainless steel A4</b> (Material 1.4401 / 1.4404 / 1.4571 / 1.4362 or 1.4578, acc. to EN 10088-1:2014)						
<b>High corrosion resistance steel</b> (Material 1.4529 or 1.4565, acc. to EN 10088-1: 2014)						
1	Threaded rod <sup>1)4)</sup>	Property class	Characteristic steel ultimate tensile strength	Characteristic steel yield strength	Elongation at fracture	
		acc. to EN ISO 3506-1:2020	50	$f_{uk} = 500 \text{ N/mm}^2$	$f_{yk} = 210 \text{ N/mm}^2$	$A_5 \geq 8\%$
			70	$f_{uk} = 700 \text{ N/mm}^2$	$f_{yk} = 450 \text{ N/mm}^2$	$A_5 \geq 12\%$ <sup>3)</sup>
			80	$f_{uk} = 800 \text{ N/mm}^2$	$f_{yk} = 600 \text{ N/mm}^2$	$A_5 \geq 12\%$ <sup>3)</sup>
2	Hexagon nut <sup>1)4)</sup>	acc. to EN ISO 3506-1:2020	50	for anchor rod class 50		
			70	for anchor rod class 70		
			80	for anchor rod class 80		
3a	Washer	A2: Material 1.4301 / 1.4307 / 1.4311 / 1.4567 or 1.4541, acc. to EN 10088-1:2014 A4: Material 1.4401 / 1.4404 / 1.4571 / 1.4362 or 1.4578, acc. to EN 10088-1:2014 HCR: Material 1.4529 or 1.4565, acc. to EN 10088-1: 2014 (e.g.: EN ISO 887:2006, EN ISO 7089:2000, EN ISO 7093:2000 or EN ISO 7094:2000)				
3b	Filling washer	Stainless steel A4, High corrosion resistance steel				
4	Internal threaded anchor rod <sup>1)2)</sup>	Property class	Characteristic steel ultimate tensile strength	Characteristic steel yield strength	Elongation at fracture	
		acc. to EN ISO 3506-1:2020	50	$f_{uk} = 500 \text{ N/mm}^2$	$f_{yk} = 210 \text{ N/mm}^2$	$A_5 > 8\%$
			70	$f_{uk} = 700 \text{ N/mm}^2$	$f_{yk} = 450 \text{ N/mm}^2$	$A_5 > 8\%$
<sup>1)</sup> Property class 70 or 80 for anchor rods and hexagon nuts up to M24 and Internal threaded anchor rods up to IG-M16 <sup>2)</sup> for IG-M20 only property class 50 <sup>3)</sup> $A_5 > 8\%$ fracture elongation if no use for seismic performance category C2 <sup>4)</sup> Property class 80 only for stainless steel A4 and HCR						
Kalz Injection system UM-H+ for concrete					Annex A 4	
Product description Materials threaded rod and internal threaded rod						

## Reinforcing bar: ø8 up to ø32



Minimum value of related rip area  $f_{R,min}$  according to EN 1992-1-1:2004+AC:2010

Rib height of the bar shall be in the range  $0,05d \leq h_{rib} \leq 0,07d$

(d: Nominal diameter of the bar;  $h_{rib}$ : Rib height of the bar)

**Table A2: Materials Reinforcing bar**

Part	Designation	Material
<b>Rebar</b>		
1	Reinforcing steel according to EN 1992 1 1:2004+AC:2010, Annex C	Bars and rebars from ring class B or C $f_{yk}$ and $k$ according to NDP or NCI according to EN 1992-1-1/NA $f_{uk} = f_{tk} = k \cdot f_{yk}$

**Kalz Injection system UM-H+ for concrete**

**Product description**  
Materials reinforcing bar

**Annex A 5**

Specification of the intended use				
Fasteners subject to (Static and quasi-static loads):				
	Working life 50 years		Working life 100 years	
Base material	uncracked concrete	cracked concrete	uncracked concrete	cracked concrete
HD: Hammer drilling HDB: Hammer drilling with hollow drill bit CD: Compressed air drilling	M8 to M30, Ø8 to Ø32, IG-M6 to IG-M20		M8 to M30, Ø8 to Ø32, IG-M6 to IG-M20	
Temperature Range:	I: - 40 °C to +40 °C <sup>1)</sup> II: - 40 °C to +80 °C <sup>2)</sup> III: - 40 °C to +120 °C <sup>3)</sup> IV: - 40 °C to +160 °C <sup>4)</sup>		I: - 40 °C to +40 °C <sup>1)</sup> II: - 40 °C to +80 °C <sup>2)</sup>	
Fasteners subject to (seismic action):				
	Performance Category C1		Performance Category C2	
Base material	Cracked and uncracked concrete			
HD: Hammer drilling HDB: Hammer drilling with hollow drill bit CD: Compressed air drilling	M8 to M30, Ø8 to Ø32		M12 to M24	
Temperature Range:	I: - 40 °C to +40 °C <sup>1)</sup> II: - 40 °C to +80 °C <sup>2)</sup> III: - 40 °C to+120 °C <sup>3) 5)</sup> IV: - 40 °C to+160 °C <sup>4) 5)</sup>		I: - 40 °C to +40 °C <sup>1)</sup> II: - 40 °C to +80 °C <sup>2)</sup> III: - 40 °C to+120 ° C <sup>3) 5)</sup> IV: - 40 °C to+160 ° C <sup>4) 5)</sup>	
<div>1) (max. long-term temperature +24°C and max. short-term temperature +40°C)</div> <div>2) (max. long-term temperature +50°C and max. short-term temperature +80°C)</div> <div>3) (max. long-term temperature +72°C and max. short-term temperature +120°C)</div> <div>4) (max. long-term temperature +100°C and max. short-term temperature +160°C)</div> <div>5) Only for working life of 50 years</div> <div>Base materials:</div> <div><div>- Compacted, reinforced or unreinforced normal weight concrete without fibres according to EN 206:2013 + A1:2016.</div><div>- Strength classes C20/25 to C50/60 according to EN 206:2013 + A1:2016.</div></div> <div>Use conditions (Environmental conditions):</div> <div><div>- Structures subject to dry internal conditions (all materials).</div><div>- For all other conditions according to EN 1993-1-4:2006+A1:2015 corresponding to corrosion resistance class:<div><div>• Stainless steel Stahl A2 according to Annex A 4, Table A1: CRC II</div><div>• Stainless steel Stahl A4 according to Annex A 4, Table A1: CRC III</div><div>• High corrosion resistance steel HCR according to Annex A 4, Table A1: CRC V</div></div></div></div>				
Kalz Injection system UM-H+ for concrete				Annex B 1
Intended Use Specifications				



#### Design:

- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the fastener is indicated on the design drawings (e. g. position of the fastener relative to reinforcement or to supports, etc.).
- Fasteners are designed under the responsibility of an engineer experienced in fasteners and concrete work.
- The fasteners are designed in accordance to EN 1992-4:2018 and Technical Report TR 055, Edition February 2018

#### Installation:

- Dry, wet concrete or flooded bore holes (not sea-water).
- Hole drilling by hammer (HD), hollow (HDB), compressed air (CD) or diamond drill mode (DD).
- Overhead installation allowed.
- Fastener installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- Installation temperature in concrete:  
-5°C up to +40°C for the standard variation of temperature after installation.

**Kalz Injection system UM-H+ for concrete**

**Intended Use**  
Specifications (Continued)

**Annex B 2**

**Table B1: Installation parameters for threaded rod**

Threaded rod			M8	M10	M12	M16	M20	M24	M27	M30
Diameter of element	$d = d_{nom}$	[mm]	8	10	12	16	20	24	27	30
Nominal drill hole diameter	$d_0$	[mm]	10	12	14	18	22	28	30	35
Effective embedment depth	$h_{ef,min}$	[mm]	60	60	70	80	90	96	108	120
	$h_{ef,max}$	[mm]	160	200	240	320	400	480	540	600
Diameter of clearance hole in the fixture <sup>1)</sup>	Prepositioned installation $d_f \leq$	[mm]	9	12	14	18	22	26	30	33
	Push through installation $d_f$	[mm]	12	14	16	20	24	30	33	40
Maximum installation torque	$\max T_{inst}$	[Nm]	10	20	40 <sup>2)</sup>	60	100	170	250	300
Minimum thickness of member	$h_{min}$	[mm]	$h_{ef} + 30 \text{ mm} \geq 100 \text{ mm}$			$h_{ef} + 2d_0$				
Minimum spacing	$s_{min}$	[mm]	40	50	60	75	95	115	125	140
Minimum edge distance	$c_{min}$	[mm]	35	40	45	50	60	65	75	80

<sup>1)</sup> For application under seismic loading the diameter of clearance hole in the fixture shall be at maximum  $d_1 + 1 \text{ mm}$  or alternatively the annular gap between fixture and threaded rod shall be filled force-fit with mortar.

<sup>2)</sup> Maximum installation torque for M12 with steel Grade 4.6 is 35 Nm

**Table B2: Installation parameters for reinforcing bar**

Reinforcing bar			$\varnothing 8^1)$	$\varnothing 10^1)$	$\varnothing 12^1)$	$\varnothing 14$	$\varnothing 16$	$\varnothing 20$	$\varnothing 24^1)$	$\varnothing 25^1)$	$\varnothing 28$	$\varnothing 32$
Diameter of element	$d = d_{nom}$	[mm]	8	10	12	14	16	20	24	25	28	32
Nominal drill hole diameter	$d_0$	[mm]	10   12	12   14	14   16	18	20	25	30   32	30   32	35	40
Effective embedment depth	$h_{ef,min}$	[mm]	60	60	70	75	80	90	96	100	112	128
	$h_{ef,max}$	[mm]	160	200	240	280	320	400	480	500	560	640
Minimum thickness of member	$h_{min}$	[mm]	$h_{ef} + 30 \text{ mm} \geq 100 \text{ mm}$			$h_{ef} + 2d_0$						
Minimum spacing	$s_{min}$	[mm]	40	50	60	70	75	95	120	120	130	150
Minimum edge distance	$c_{min}$	[mm]	35	40	45	50	50	60	70	70	75	85

<sup>1)</sup> both nominal drill hole diameter can be used

**Table B3: Installation parameters for Internal threaded anchor rod**

Internal threaded anchor rod			IG-M6	IG-M8	IG-M10	IG-M12	IG-M16	IG-M20
Internal diameter of anchor rod	$d_2$	[mm]	6	8	10	12	16	20
Outer diameter of anchor rod <sup>1)</sup>	$d = d_{nom}$	[mm]	10	12	16	20	24	30
Nominal drill hole diameter	$d_0$	[mm]	12	14	18	22	28	35
Effective embedment depth	$h_{ef,min}$	[mm]	60	70	80	90	96	120
	$h_{ef,max}$	[mm]	200	240	320	400	480	600
Diameter of clearance hole in the fixture	$d_f \leq$	[mm]	7	9	12	14	18	22
Maximum installation torque	$\max T_{inst}$	[Nm]	10	10	20	40	60	100
Thread engagement length min/max	$l_{IG}$	[mm]	8/20	8/20	10/25	12/30	16/32	20/40
Minimum thickness of member	$h_{min}$	[mm]	$h_{ef} + 30 \text{ mm} \geq 100 \text{ mm}$			$h_{ef} + 2d_0$		
Minimum spacing	$s_{min}$	[mm]	50	60	75	95	115	140
Minimum edge distance	$c_{min}$	[mm]	40	45	50	60	65	80

<sup>1)</sup> With metric threads according to EN 1993-1-8:2005+AC:2009










**Kalz Injection system UM-H+ for concrete**

**Intended Use**  
Installation parameters

**Annex B 3**



**Table B4: Parameter cleaning and installation tools**

										
Threaded Rod	Re-inforcing bar	Internal threaded anchor rod	d <sub>0</sub> Drill bit - Ø HD, HDB, CD	d <sub>b</sub> Brush - Ø		d <sub>b,min</sub> min. Brush - Ø	Piston plug	Installation direction and use of piston plug		
[mm]	[mm]	[mm]	[mm]		[mm]	[mm]				
M8	8		10	RB10	11,5	10,5	No plug required			
M10	8 / 10	IG-M6	12	RB12	13,5	12,5				
M12	10 / 12	IG-M8	14	RB14	15,5	14,5				
	12		16	RB16	17,5	16,5				
M16	14	IG-M10	18	RB18	20,0	18,5	VS18	h <sub>ef</sub> > 250 mm	h <sub>ef</sub> > 250 mm	all
	16		20	RB20	22,0	20,5	VS20			
M20		IG-M12	22	RB22	24,0	22,5	VS22			
	20		25	RB25	27,0	25,5	VS25			
M24		IG-M16	28	RB28	30,0	28,5	VS28			
M27	24 / 25		30	RB30	31,8	30,5	VS30			
	24 / 25		32	RB32	34,0	32,5	VS32			
M30	28	IG-M20	35	RB35	37,0	35,5	VS35			
	32		40	RB40	43,5	40,5	VS40			

## Cleaning and installation tools

### HDB – Hollow drill bit system



The hollow drill system consists of Heller Duster Expert hollow drill bit and a class M Hoover with a minimum negative pressure of 253 hPa and a flow rate of minimum 150 m³/h (42 l/s).

### Hand pump

(Volume 750 ml, h<sub>0</sub> ≥ 10 d<sub>s</sub>, d<sub>0</sub> ≤ 20mm)



### Compressed air tool

(min 6 bar)



### Brush RB



### Piston Plug VS



### Brush extension RBL



### Kalz Injection system UM-H+ for concrete

#### Intended Use

Cleaning and setting tools

## Annex B 4

**Table B5: Working time and curing time**

Temperature in base material			Maximum working time	Minimum curing time <sup>1)</sup>
T			t <sub>work</sub>	t <sub>cure</sub>
- 5 °C	to	- 1 °C	50 min	5 h
0 °C	to	+ 4 °C	25 min	3,5 h
+ 5 °C	to	+ 9 °C	15 min	2 h
+ 10 °C	to	+ 14 °C	10 min	1 h
+ 15 °C	to	+ 19 °C	6 min	40 min
+ 20 °C	to	+ 29 °C	3 min	30 min
+ 30 °C	to	+ 40 °C	2 min	30 min
Cartridge temperature			+5°C to +40°C	

<sup>1)</sup> The minimum curing time is only valid for dry base material.  
In wet base material the curing time must be doubled.


**Kalz Injection system UM-H+ for concrete**

**Intended Use**  
Working time and curing time

**Annex B 5**


## Installation instructions

### Drilling of the bore hole

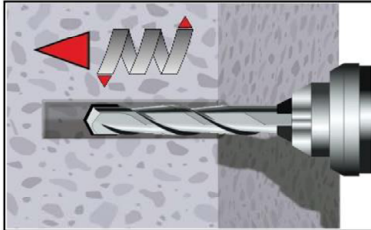

#### 1a. Hammer drilling (HD) / Compressed air drilling (CD)

Drill a hole to the required embedment depth.  
Drill bit diameter according to Table B1, B2 or B3.  
Aborted drill holes shall be filled with mortar.  
Proceed with Step 2 (MAC or CAC).

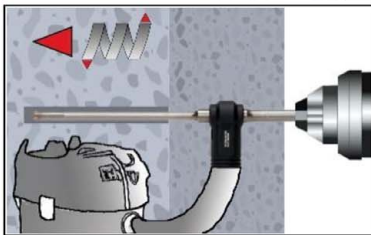


#### 1b. Hollow drill bit system (HDB) (see Annex B 4)

Drill a hole to the required embedment depth.  
Drill bit diameter according to Table B1, B2 or B3.  
The hollow drilling system removes the dust and cleans the bore hole.  
Proceed with Step 3.


**Attention! Standing water in the bore hole must be removed before cleaning.**

### Manual Air Cleaning (MAC)


for bore hole diameter  $d_0 \leq 20\text{mm}$  and bore hole depth  $h_0 \leq 10d_{\text{nom}}$  (uncracked concrete only)

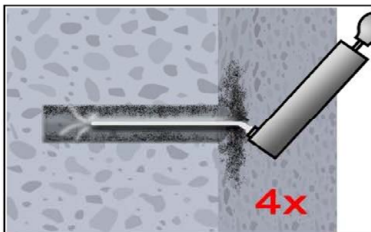

#### 2a. Blow the bore hole clean minimum 4x from the bottom or back by hand pump (Annex B 4).

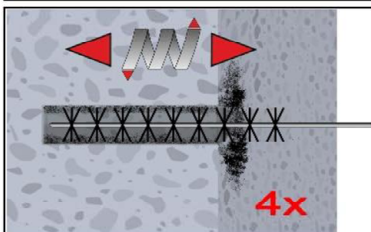


#### 2b. Brush the bore hole minimum 4x with brush RB according to Table B4 over the entire embedment depth in a twisting motion (if necessary, use a brush extension RBL.)

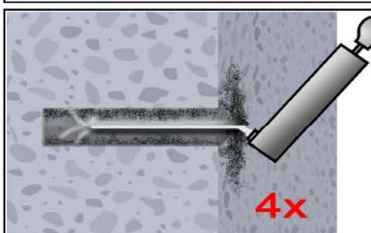

#### 2c. Finally blow the bore hole clean minimum 4x from the bottom or back by hand pump (Annex B 3).

### Compressed Air Cleaning (CAC):

All diameter in cracked and uncracked concrete, all drilling methods

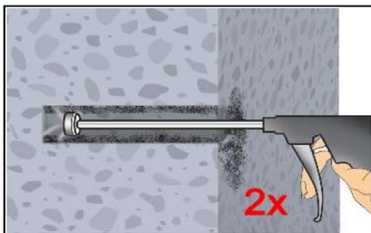

#### 2a. Blow the bore hole clean minimum 2x with compressed air (min. 6 bar) (Annex B 4) over the entire embedment depth until return air stream is free of noticeable dust. (If necessary, an extension shall be used.)


### Kalz Injection system UM-H+ for concrete

#### Intended Use


Installation instructions

### Annex B 6

### Installation instructions (continuation)

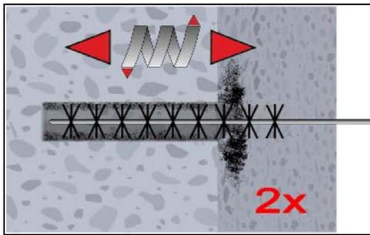


2b. Brush the bore hole minimum 2x with brush RB according to Table B4 over the entire embedment depth in a twisting motion. (If necessary, a brush extension shall be used .RBL)

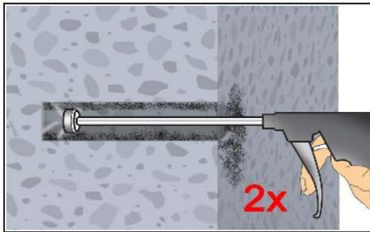


2c. Finally blow the bore hole clean minimum 2x with compressed air (min. 6 bar) (Annex B 4) over the entire embedment depth until return air stream is free of noticeable dust. (If necessary, an extension shall be used.)


**Cleaned bore hole has to be protected against re-contamination in an appropriate way, If necessary, repeat cleaning process directly before dispensing the mortar. In-flowing water must not contaminate the bore hole again.**

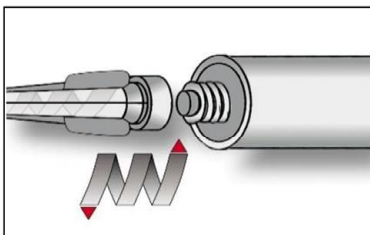


3. Screw on static-mixing nozzle PM-19E and load the cartridge into an appropriate dispensing tool.  
For every working interruption longer than the maximum working time  $t_{work}$  (Annex B 5) as well as for new cartridges, a new static-mixer shall be used.

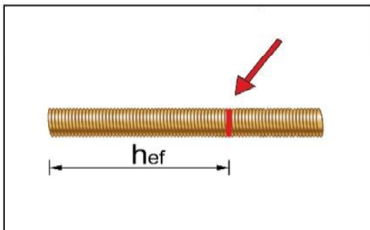

4. Mark embedment depth on the anchor rod.  
The anchor rod shall be free of dirt, grease, oil or other foreign material.

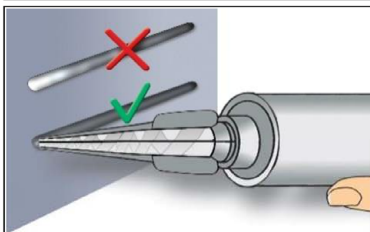

5. Not proper mixed mortar is not sufficient for fastening.  
Dispense and discard mortar until an uniform grey colour is shown (at least 3 full strokes).

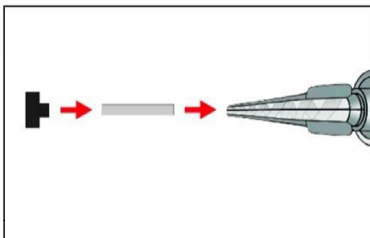

6. Piston plugs VS and mixer nozzle extensions VL shall be used according to Table B4 for the following applications:

- Horizontal and vertical downwards direction: Drill bit- $\varnothing d_0 \geq 18$  mm and embedment depth  $h_{ef} > 250$ mm
- Vertical upwards direction: Drill bit- $\varnothing d_0 \geq 18$  mm

Assemble mixing nozzle, mixer extension and piston plug before injecting mortar.

**Kalz Injection system UM-H+ for concrete**


**Intended Use**

Installation instructions (continuation)

**Annex B 7**




## Installation instructions (continuation)

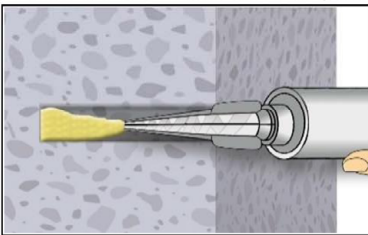

### 7a. Injecting mortar without piston plug VS

Starting at bottom of the hole and fill the hole up to approximately two-thirds with mortar. (If necessary, a mixer nozzle extension shall be used.)  
Slowly withdraw of the static mixing nozzle avoid creating air pockets  
Observe the temperature related working time  $t_{work}$  (Annex B 5).

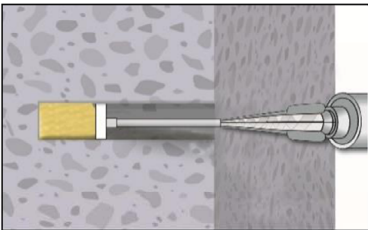


### 7b. Injecting mortar with piston plug VS


Starting at bottom of the hole and fill the hole up to approximately two-thirds with mortar. (If necessary, a mixer nozzle extension shall be used.)  
During injection the piston plug is pushed out of the bore hole by the back pressure of the mortar.  
Observe the temperature related working time  $t_{work}$  (Annex B 5).




### 8. Insert the anchor rod while turning slightly up to the embedment mark.

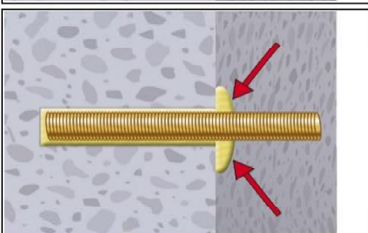


### 9. Annular gap between anchor rod and base material must be completely filled with mortar. In case of push through installation the annular gap in the fixture must be filled with mortar also. Otherwise, the installation must be repeated starting from step 7 before the maximum working time $t_{work}$ has expired.

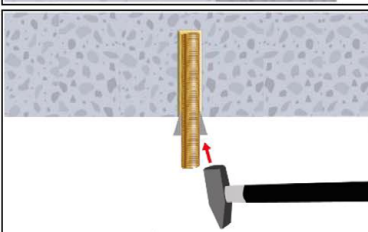

### 10. For application in vertical upwards direction the anchor rod shall be fixed (e.g. wedges).

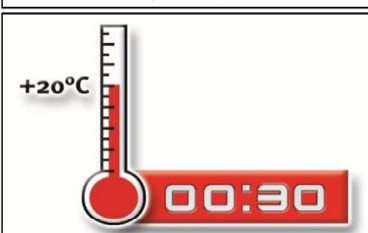

### 11. Temperature related curing time $t_{cure}$ (Annex B 5) must be observed. Do not move or load the fastener during curing time.

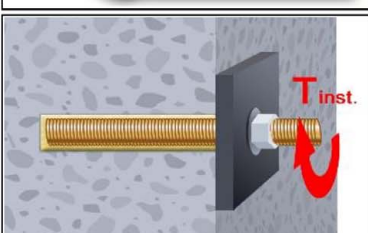

### 12. Install the fixture by using a calibrated torque wrench. Observe maximum installation torque (Table B1 or B3). In case of static requirements (e.g. seismic), fill the annular gap in the fixture with mortar (Annex 2). Therefore replace the washer by the filling washer VFS and use the mixer reduction nozzle MR.

Kalz Injection system UM-H+ for concrete

Intended Use

Installation instructions (continuation)

Annex B 8

**Table C1: Characteristic values for steel tension resistance and steel shear resistance of threaded rods**

Threaded rod			M8	M10	M12	M16	M20	M24	M27	M30	
Cross section area	A <sub>S</sub>	[mm²]	36,6	58	84,3	157	245	353	459	561	
Characteristic tension resistance, Steel failure <sup>1)</sup>											
Steel, Property class 4.6 and 4.8	N <sub>Rk,s</sub>	[kN]	15 (13)	23 (21)	34	63	98	141	184	224	
Steel, Property class 5.6 and 5.8	N <sub>Rk,s</sub>	[kN]	18 (17)	29 (27)	42	78	122	176	230	280	
Steel, Property class 8.8	N <sub>Rk,s</sub>	[kN]	29 (27)	46 (43)	67	125	196	282	368	449	
Stainless steel A2, A4 and HCR, class 50	N <sub>Rk,s</sub>	[kN]	18	29	42	79	123	177	230	281	
Stainless steel A2, A4 and HCR, class 70	N <sub>Rk,s</sub>	[kN]	26	41	59	110	171	247	..3)	..3)	
Stainless steel A4 and HCR, class 80	N <sub>Rk,s</sub>	[kN]	29	46	67	126	196	282	..3)	..3)	
Characteristic tension resistance, Partial factor <sup>2)</sup>											
Steel, Property class 4.6 and 5.6	γ <sub>Ms,N</sub>	[-]	2,0								
Steel, Property class 4.8, 5.8 and 8.8	γ <sub>Ms,N</sub>	[-]	1,5								
Stainless steel A2, A4 and HCR, class 50	γ <sub>Ms,N</sub>	[-]	2,86								
Stainless steel A2, A4 and HCR, class 70	γ <sub>Ms,N</sub>	[-]	1,87								
Stainless steel A4 and HCR, class 80	γ <sub>Ms,N</sub>	[-]	1,6								
Characteristic shear resistance, Steel failure <sup>1)</sup>											
Without lever arm	Steel, Property class 4.6 and 4.8	V <sup>0</sup> <sub>Rk,s</sub>	[kN]	9 (8)	14 (13)	20	38	59	85	110	135
	Steel, Property class 5.6 and 5.8	V <sup>0</sup> <sub>Rk,s</sub>	[kN]	11 (10)	17 (16)	25	47	74	106	138	168
	Steel, Property class 8.8	V <sup>0</sup> <sub>Rk,s</sub>	[kN]	15 (13)	23 (21)	34	63	98	141	184	224
	Stainless steel A2, A4 and HCR, class 50	V <sup>0</sup> <sub>Rk,s</sub>	[kN]	9	15	21	39	61	88	115	140
	Stainless steel A2, A4 and HCR, class 70	V <sup>0</sup> <sub>Rk,s</sub>	[kN]	13	20	30	55	86	124	..3)	..3)
	Stainless steel A4 and HCR, class 80	V <sup>0</sup> <sub>Rk,s</sub>	[kN]	15	23	34	63	98	141	..3)	..3)
With lever arm	Steel, Property class 4.6 and 4.8	M <sup>0</sup> <sub>Rk,s</sub>	[Nm]	15 (13)	30 (27)	52	133	260	449	666	900
	Steel, Property class 5.6 and 5.8	M <sup>0</sup> <sub>Rk,s</sub>	[Nm]	19 (16)	37 (33)	65	166	324	560	833	1123
	Steel, Property class 8.8	M <sup>0</sup> <sub>Rk,s</sub>	[Nm]	30 (26)	60 (53)	105	266	519	896	1333	1797
	Stainless steel A2, A4 and HCR, class 50	M <sup>0</sup> <sub>Rk,s</sub>	[Nm]	19	37	66	167	325	561	832	1125
	Stainless steel A2, A4 and HCR, class 70	M <sup>0</sup> <sub>Rk,s</sub>	[Nm]	26	52	92	232	454	784	..3)	..3)
	Stainless steel A4 and HCR, class 80	M <sup>0</sup> <sub>Rk,s</sub>	[Nm]	30	59	105	266	519	896	..3)	..3)
Characteristic shear resistance, Partial factor <sup>2)</sup>											
Steel, Property class 4.6 and 5.6	γ <sub>Ms,V</sub>	[-]	1,67								
Steel, Property class 4.8, 5.8 and 8.8	γ <sub>Ms,V</sub>	[-]	1,25								
Stainless steel A2, A4 and HCR, class 50	γ <sub>Ms,V</sub>	[-]	2,38								
Stainless steel A2, A4 and HCR, class 70	γ <sub>Ms,V</sub>	[-]	1,56								
Stainless steel A4 and HCR, class 80	γ <sub>Ms,V</sub>	[-]	1,33								
<div>1) Values are only valid for the given stress area A<sub>s</sub>. Values in brackets are valid for undersized threaded rods with smaller stress area A<sub>s</sub> for hot-dip galvanised threaded rods according to EN ISO 10684:2004+AC:2009.</div> <div>2) in absence of national regulation</div> <div>3) Fastener type not part of the ETA</div>											
Kalz Injection system UM-H+ for concrete							Annex C 1				
Performances Characteristic values for steel tension resistance and steel shear resistance of threaded rods											

*English translation prepared by DIBt*

**Table C2: Characteristic values of tension loads under static and quasi-static action for a working life of 50 and 100 years**

Fastener			All Anchor types and sizes	
<b>Concrete cone failure</b>				
Uncracked concrete	$k_{ucr,N}$	[-]	11,0	
Cracked concrete	$k_{cr,N}$	[-]	7,7	
Edge distance	$c_{cr,N}$	[mm]	1,5 $h_{ef}$	
Axial distance	$s_{cr,N}$	[mm]	2 $c_{cr,N}$	
<b>Splitting</b>				
Edge distance	$h/h_{ef} \geq 2,0$	$c_{cr,sp}$	[mm]	1,0 $h_{ef}$
	$2,0 > h/h_{ef} > 1,3$			$2 \cdot h_{ef} \left( 2,5 - \frac{h}{h_{ef}} \right)$
	$h/h_{ef} \leq 1,3$			2,4 $h_{ef}$
Axial distance	$s_{cr,sp}$	[mm]	2 $c_{cr,sp}$	

## Kalz Injection system UM-H+ for concrete

## Performances

Characteristic values of tension loads under static and quasi-static action  
for a working life of 50 and 100 years

## Annex C 2

Table C3: Characteristic values of tension loads under static and quasi-static action for a working life of 50 years												
Threaded rod					M8	M10	M12	M16	M20	M24	M27	M30
Steel failure												
Characteristic tension resistance			N <sub>Rk,s</sub>	[kN]	A <sub>s</sub> · f <sub>uk</sub> (or see Table C1)							
Partial factor			γ <sub>Ms,N</sub>	[-]	see Table C1							
Combined pull-out and concrete failure												
Characteristic bond resistance in uncracked concrete C20/25												
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	τ <sub>Rk,ucr</sub>	[N/mm²]	17	17	16	15	14	13	13	13
	II: 80°C/50°C		τ <sub>Rk,ucr</sub>	[N/mm²]	17	17	16	15	14	13	13	13
	III: 120°C/72°C		τ <sub>Rk,ucr</sub>	[N/mm²]	15	14	14	13	12	12	11	11
	IV: 160°C/100°C		τ <sub>Rk,ucr</sub>	[N/mm²]	12	11	11	10	9,5	9,0	9,0	9,0
Characteristic bond resistance in cracked concrete C20/25												
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	τ <sub>Rk,cr</sub>	[N/mm²]	7,0	7,5	8,0	9,0	8,5	7,0	7,0	7,0
	II: 80°C/50°C		τ <sub>Rk,cr</sub>	[N/mm²]	7,0	7,5	8,0	9,0	8,5	7,0	7,0	7,0
	III: 120°C/72°C		τ <sub>Rk,cr</sub>	[N/mm²]	6,0	6,5	7,0	7,5	7,0	6,0	6,0	6,0
	IV: 160°C/100°C		τ <sub>Rk,cr</sub>	[N/mm²]	5,5	5,5	6,0	6,5	6,0	5,5	5,5	5,5
Reduktion factor ψ <sup>0</sup> <sub>sus</sub> in cracked and uncracked concrete C20/25												
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	ψ <sup>0</sup> <sub>sus</sub>	[-]	0,90							
	0,87											
	0,75											
	0,66											
Increasing factors for concrete			ψ <sub>c</sub>	[-]	(f <sub>ck</sub> / 20) <sup>0,1</sup>							
Characteristic bond resistance depending on the concrete strength class			τ <sub>Rk,ucr</sub> =		ψ <sub>c</sub> · τ <sub>Rk,ucr</sub> , (C20/25)							
			τ <sub>Rk,cr</sub> =		ψ <sub>c</sub> · τ <sub>Rk,cr</sub> , (C20/25)							
Concrete cone failure												
Relevant parameter					see Table C2							
Splitting												
Relevant parameter					see Table C2							
Installation factor												
for dry and wet concrete	MAC	γ <sub>inst</sub>	[-]	1,2					No Performance assessed			
	CAC			1,0								
	HDB			1,2								
for flooded bore hole	CAC			1,4								
Kalz Injection system UM-H+ for concrete									Annex C 3			
Performances Characteristic values of tension loads under static and quasi-static action for a working life of 50 years (threaded rod)												



Table C4: Characteristic values of tension loads under static and quasi-static action for a working life of 100 years												
Threaded rod				M8	M10	M12	M16	M20	M24	M27	M30	
Steel failure												
Characteristic tension resistance		$N_{Rk,s}$	[kN]	$A_s \cdot f_{uk}$ (or see Table C1)								
Partial factor		$\gamma_{Ms,N}$	[-]	see Table C1								
Combined pull-out and concrete failure												
Characteristic bond resistance in uncracked concrete C20/25												
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	$\tau_{Rk,ucr,100}$	[N/mm²]	17	17	16	15	14	13	13	13
	II: 80°C/50°C		$\tau_{Rk,ucr,100}$	[N/mm²]	17	17	16	15	14	13	13	13
Characteristic bond resistance in cracked concrete C20/25												
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	$\tau_{Rk,cr,100}$	[N/mm²]	5,5	6,0	6,5	6,5	6,5	6,5	6,5	6,5
	II: 80°C/50°C		$\tau_{Rk,cr,100}$	[N/mm²]	5,5	6,0	6,5	6,5	6,5	6,5	6,5	6,5
Increasing factors for concrete		$\psi_c$	[-]	$(f_{ck} / 20)^{0,1}$								
Characteristic bond resistance depending on the concrete strength class		$\tau_{Rk,ucr,100} =$		$\psi_c \cdot \tau_{Rk,ucr,100,(C20/25)}$								
		$\tau_{Rk,cr,100} =$		$\psi_c \cdot \tau_{Rk,cr,100,(C20/25)}$								
Concrete cone failure												
Relevant parameter				see Table C2								
Splitting												
Relevant parameter				see Table C2								
Installation factor												
for dry and wet concrete	MAC	$\gamma_{inst}$	[-]	1,2					No Performance assessed			
	CAC			1,0								
	HDB			1,2								
for flooded bore hole	CAC			1,4								

**Table C5: Characteristic values of shear loads under static and quasi-static action for a working life of 50 and 100 years**

Threaded rod			M8	M10	M12	M16	M20	M24	M27	M30	
Steel failure without lever arm											
Characteristic shear resistance Steel, strength class 4.6, 4.8 and 5.6, 5.8	$V_{Rk,s}^0$	[kN]	$0,6 \cdot A_s \cdot f_{uk}$ (or see Table C1)								
Characteristic shear resistance Steel, strength class 8.8 Stainless Steel A2, A4 and HCR, all strength classes	$V_{Rk,s}^0$	[kN]	$0,5 \cdot A_s \cdot f_{uk}$ (or see Table C1)								
Partial factor	$\gamma_{Ms,V}$	[-]	see Table C1								
Ductility factor	$k_7$	[-]	1,0								
Steel failure with lever arm											
Characteristic bending moment	$M_{Rk,s}^0$	[Nm]	$1,2 \cdot W_{el} \cdot f_{uk}$ (or see Table C1)								
Elastic section modulus	$W_{el}$	[mm³]	31	62	109	277	541	935	1387	1874	
Partial factor	$\gamma_{Ms,V}$	[-]	see Table C1								
Concrete pry-out failure											
Factor	$k_8$	[-]	2,0								
Installation factor	$\gamma_{inst}$	[-]	1,0								
Concrete edge failure											
Effective length of fastener	$l_f$	[mm]	$\min(h_{ef}; 12 \cdot d_{nom})$						$\min(h_{ef}; 300\text{mm})$		
Outside diameter of fastener	$d_{nom}$	[mm]	8	10	12	16	20	24	27	30	
Installation factor	$\gamma_{inst}$	[-]	1,0								
Kalz Injection system UM-H+ for concrete								Annex C 5			
Performances Characteristic values of shear loads under static and quasi-static action (threaded rod)											

Table C6: Characteristic values of tension loads under static and quasi-static action for a working life of 50 years									
Internal threaded anchor rods				IG-M6	IG-M8	IG-M10	IG-M12	IG-M16	IG-M20
Steel failure <sup>1)</sup>									
Characteristic tension resistance,	5.8	N <sub>Rk,s</sub>	[kN]	10	17	29	42	76	123
Steel, strength class	8.8	N <sub>Rk,s</sub>	[kN]	16	27	46	67	121	196
Partial factor, strength class 5.8 and 8.8		γ <sub>Ms,N</sub>	[-]	1,5					
Characteristic tension resistance, Stainless Steel A4 and HCR, Strength class 70 <sup>2)</sup>		N <sub>Rk,s</sub>	[kN]	14	26	41	59	110	124
Partial factor		γ <sub>Ms,N</sub>	[-]	1,87					
Combined pull-out and concrete cone failure									
Characteristic bond resistance in uncracked concrete C20/25									
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	τ <sub>Rk,ucr</sub>	[N/mm <sup>2</sup> ]	17	16	15	14	13
	II: 80°C/50°C		τ <sub>Rk,ucr</sub>	[N/mm <sup>2</sup> ]	17	16	15	14	13
	III: 120°C/72°C		τ <sub>Rk,ucr</sub>	[N/mm <sup>2</sup> ]	14	14	13	12	12
	IV: 160°C/100°C		τ <sub>Rk,ucr</sub>	[N/mm <sup>2</sup> ]	11	11	10	9,5	9,0
Characteristic bond resistance in cracked concrete C20/25									
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	τ <sub>Rk,cr</sub>	[N/mm <sup>2</sup> ]	7,5	8,0	9,0	8,5	7,0
	II: 80°C/50°C		τ <sub>Rk,cr</sub>	[N/mm <sup>2</sup> ]	7,5	8,0	9,0	8,5	7,0
	III: 120°C/72°C		τ <sub>Rk,cr</sub>	[N/mm <sup>2</sup> ]	6,5	7,0	7,5	7,0	6,0
	IV: 160°C/100°C		τ <sub>Rk,cr</sub>	[N/mm <sup>2</sup> ]	5,5	6,0	6,5	6,0	5,5
Reduktion factor ψ <sup>0</sup> <sub>sus</sub> in cracked and uncracked concrete C20/25									
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	ψ <sup>0</sup> <sub>sus</sub>	[-]	0,90				
	0,87								
	0,75								
	0,66								
Increasing factors for concrete			ψ <sub>c</sub>	[-]	(f <sub>ck</sub> / 20) <sup>0,1</sup>				
Characteristic bond resistance depending on the concrete strength class			τ <sub>Rk,ucr</sub> =		ψ <sub>c</sub> • τ <sub>Rk,ucr,(C20/25)</sub>				
			τ <sub>Rk,cr</sub> =		ψ <sub>c</sub> • τ <sub>Rk,cr,(C20/25)</sub>				
Concrete cone failure									
Relevant parameter				see Table C2					
Splitting failure									
Relevant parameter				see Table C2					
Installation factor									
for dry and wet concrete	MAC	γ <sub>inst</sub>	[-]	1,2			No Performance assessed		
	CAC			1,0					
	HDB			1,2					
for flooded bore hole	CAC			1,4					
<div>1) Fastenings (incl. nut and washer) must comply with the appropriate material and property class of the internal threaded rod. The characteristic tension resistance for steel failure is valid for the internal threaded rod and the fastening element.</div> <div>2) For IG-M20 strength class 50 is valid</div>									
Kalz Injection system UM-H+ for concrete								Annex C 6	
Performances									
Characteristic values of tension loads under static and quasi-static action for a working life of 50 years (internal threaded anchor rod)									

Table C7: Characteristic values of tension loads under static and quasi-static action for a working life of 100 years									
Internal threaded anchor rods				IG-M6	IG-M8	IG-M10	IG-M12	IG-M16	IG-M20
Steel failure <sup>1)</sup>									
Characteristic tension resistance, Steel, strength class	5.8	N <sub>Rk,s</sub>	[kN]	10	17	29	42	76	123
	8.8	N <sub>Rk,s</sub>	[kN]	16	27	46	67	121	196
Partial factor, strength class 5.8 and 8.8		γ <sub>Ms,N</sub>	[-]	1,5					
Characteristic tension resistance, Stainless Steel A4 and HCR, Strength class 70 <sup>2)</sup>		N <sub>Rk,s</sub>	[kN]	14	26	41	59	110	124
Partial factor		γ <sub>Ms,N</sub>	[-]	1,87					
Combined pull-out and concrete cone failure									
Characteristic bond resistance in uncracked concrete C20/25									
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	τ <sub>Rk,ucr,100</sub>	[N/mm²]	17	16	15	14	13
	II: 80°C/50°C		τ <sub>Rk,ucr,100</sub>	[N/mm²]	17	16	15	14	13
Characteristic bond resistance in cracked concrete C20/25									
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	τ <sub>Rk,cr,100</sub>	[N/mm²]	6,0	6,5	6,5	6,5	6,5
	II: 80°C/50°C		τ <sub>Rk,cr,100</sub>	[N/mm²]	6,0	6,5	6,5	6,5	6,5
Increasing factors for concrete		ψ <sub>c</sub>	[-]	(f <sub>ck</sub> / 20) <sup>0,1</sup>					
Characteristic bond resistance depending on the concrete strength class		τ <sub>Rk,ucr,100</sub> =			ψ <sub>c</sub> • τ <sub>Rk,ucr,100,(C20/25)</sub>				
		τ <sub>Rk,cr,100</sub> =			ψ <sub>c</sub> • τ <sub>Rk,cr,100,(C20/25)</sub>				
Concrete cone failure									
Relevant parameter				see Table C2					
Splitting failure									
Relevant parameter				see Table C2					
Installation factor									
for dry and wet concrete	MAC	γ <sub>inst</sub>	[-]	1,2			No Performance assessed		
	CAC			1,0					
	HDB			1,2					
for flooded bore hole	CAC			1,4					
<div>1) Fastenings (incl. nut and washer) must comply with the appropriate material and property class of the internal threaded rod. The characteristic tension resistance for steel failure is valid for the internal threaded rod and the fastening element.</div> <div>2) For IG-M20 strength class 50 is valid</div>									
Kalz Injection system UM-H+ for concrete								Annex C 7	
<div>Performances</div> <div>Characteristic values of tension loads under static and quasi-static action for a working life of 100 years (internal threaded anchor rod)</div>									

**Table C8: Characteristic values of shear loads under static and quasi-static action for a working life of 50 and 100 years**

Internal threaded anchor rods				IG-M6	IG-M8	IG-M10	IG-M12	IG-M16	IG-M20
Steel failure without lever arm <sup>1)</sup>									
Characteristic shear resistance, Steel, strength class	5.8	$V_{Rk,s}^0$	[kN]	5	9	15	21	38	61
	8.8	$V_{Rk,s}^0$	[kN]	8	14	23	34	60	98
Partial factor, strength class 5.8 and 8.8		$\gamma_{Ms,V}$	[-]	1,25					
Characteristic shear resistance, Stainless Steel A4 and HCR, Strength class 70 <sup>2)</sup>		$V_{Rk,s}^0$	[kN]	7	13	20	30	55	40
Partial factor		$\gamma_{Ms,V}$	[-]	1,56					2,38
Ductility factor		$k_7$	[-]	1,0					
Steel failure with lever arm <sup>1)</sup>									
Characteristic bending moment, Steel, strength class	5.8	$M_{Rk,s}^0$	[Nm]	8	19	37	66	167	325
	8.8	$M_{Rk,s}^0$	[Nm]	12	30	60	105	267	519
Partial factor, strength class 5.8 and 8.8		$\gamma_{Ms,V}$	[-]	1,25					
Characteristic bending moment, Stainless Steel A4 and HCR, Strength class 70 <sup>2)</sup>		$M_{Rk,s}^0$	[Nm]	11	26	52	92	233	456
Partial factor		$\gamma_{Ms,V}$	[-]	1,56					2,38
Concrete pry-out failure									
Factor		$k_8$	[-]	2,0					
Installation factor		$\gamma_{inst}$	[-]	1,0					
Concrete edge failure									
Effective length of fastener		$l_f$	[mm]	$\min(h_{ef}; 12 \cdot d_{nom})$					$\min(h_{ef}; 300\text{mm})$
Outside diameter of fastener		$d_{nom}$	[mm]	10	12	16	20	24	30
Installation factor		$\gamma_{inst}$	[-]	1,0					
<div>1) Fastenings (incl. nut and washer) must comply with the appropriate material and property class of the internal threaded rod. The characteristic tension resistance for steel failure is valid for the internal threaded rod and the fastening element.</div> <div>2) For IG-M20 strength class 50 is valid</div>									
Kalz Injection system UM-H+ for concrete								Annex C 8	
<b>Performances</b> Characteristic values of shear loads under static and quasi-static action (internal threaded anchor rod)									



Table C9: Characteristic values of tension loads under static and quasi-static action for a working life of 50 years														
Reinforcing bar				Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 24	Ø 25	Ø 28	Ø 32	
Steel failure														
Characteristic tension resistance		N <sub>Rk,s</sub>	[kN]	A <sub>s</sub> • f <sub>uk</sub> <sup>1)</sup>										
Cross section area		A <sub>s</sub>	[mm²]	50	79	113	154	201	314	452	491	616	804	
Partial factor		γ <sub>Ms,N</sub>	[-]	1,4 <sup>2)</sup>										
Combined pull-out and concrete failure														
Characteristic bond resistance in uncracked concrete C20/25														
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	τ <sub>Rk,ucr</sub>	[N/mm²]	14	14	14	14	13	13	13	13	13	13
	II: 80°C/50°C		τ <sub>Rk,ucr</sub>	[N/mm²]	14	14	14	14	13	13	13	13	13	13
	III: 120°C/72°C		τ <sub>Rk,ucr</sub>	[N/mm²]	13	12	12	12	12	11	11	11	11	11
	IV: 160°C/100°C		τ <sub>Rk,ucr</sub>	[N/mm²]	9,5	9,5	9,5	9,0	9,0	9,0	9,0	9,0	8,5	8,5
Characteristic bond resistance in cracked concrete C20/25														
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	τ <sub>Rk,cr</sub>	[N/mm²]	5,5	5,5	6,0	6,5	6,5	6,5	6,5	7,0	7,0	7,0
	II: 80°C/50°C		τ <sub>Rk,cr</sub>	[N/mm²]	5,5	5,5	6,0	6,5	6,5	6,5	6,5	7,0	7,0	7,0
	III: 120°C/72°C		τ <sub>Rk,cr</sub>	[N/mm²]	4,5	5,0	5,0	5,5	5,5	5,5	5,5	6,0	6,0	6,0
	IV: 160°C/100°C		τ <sub>Rk,cr</sub>	[N/mm²]	4,0	4,5	4,5	5,0	5,0	5,0	5,0	5,0	5,0	5,0
Reduktion factor ψ <sup>0</sup> <sub>sus</sub> in cracked and uncracked concrete C20/25														
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	ψ <sup>0</sup> <sub>sus</sub>	[-]	0,90									
	0,87													
	0,75													
	0,66													
Increasing factors for concrete			ψ <sub>c</sub>	[-]	(f <sub>ck</sub> / 20) <sup>0,1</sup>									
Characteristic bond resistance depending on the concrete strength class			τ <sub>Rk,ucr</sub> =		ψ <sub>c</sub> • τ <sub>Rk,ucr,(C20/25)</sub>									
			τ <sub>Rk,cr</sub> =		ψ <sub>c</sub> • τ <sub>Rk,cr,(C20/25)</sub>									
Concrete cone failure														
Relevant parameter				see Table C2										
Splitting														
Relevant parameter				see Table C2										
Installation factor														
for dry and wet concrete	MAC	γ <sub>inst</sub>	[-]	1,2					No Performance assessed					
	CAC			1,0										
	HDB			1,2										
for flooded bore hole	CAC			1,4										
1) f <sub>uk</sub> shall be taken from the specifications of reinforcing bars 2) in absence of national regulation														
Kalz Injection system UM-H+ for concrete											Annex C 9			
Performances Characteristic values of tension loads under static and quasi-static action for a working life of 50 years (rebar)														

**Table C10: Characteristic values of tension loads under static and quasi-static action for a working life of 100 years**

Reinforcing bar			Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 24	Ø 25	Ø 28	Ø 32	
Steel failure													
Characteristic tension resistance		N <sub>Rk,s</sub>	[kN]	A <sub>s</sub> • f <sub>uk</sub> <sup>1)</sup>									
Cross section area		A <sub>s</sub>	[mm <sup>2</sup> ]	50	79	113	154	201	314	452	491	616	804
Partial factor		γ <sub>Ms,N</sub>	[-]	1,4 <sup>2)</sup>									
Combined pull-out and concrete failure													
Characteristic bond resistance in uncracked concrete C20/25													
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	τ <sub>Rk,ucr,100</sub>	[N/mm <sup>2</sup> ]	14	14	14	14	13	13	13	13	13
	II: 80°C/50°C		τ <sub>Rk,ucr,100</sub>	[N/mm <sup>2</sup> ]	14	14	14	14	13	13	13	13	13
Characteristic bond resistance in cracked concrete C20/25													
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	τ <sub>Rk,cr,100</sub>	[N/mm <sup>2</sup> ]	4,5	4,5	4,5	4,5	4,5	4,0	4,0	4,0	4,0
	II: 80°C/50°C		τ <sub>Rk,cr,100</sub>	[N/mm <sup>2</sup> ]	4,5	4,5	4,5	4,5	4,5	4,0	4,0	4,0	4,0
Increasing factors for concrete		ψ <sub>c</sub>	[-]	(f <sub>ck</sub> / 20) <sup>0,1</sup>									
Characteristic bond resistance depending on the concrete strength class		τ <sub>Rk,ucr,100</sub> =		ψ <sub>c</sub> • τ <sub>Rk,ucr,100,(C20/25)</sub>									
		τ <sub>Rk,cr,100</sub> =		ψ <sub>c</sub> • τ <sub>Rk,cr,100,(C20/25)</sub>									
Concrete cone failure													
Relevant parameter				see Table C2									
Splitting													
Relevant parameter				see Table C2									
Installation factor													
for dry and wet concrete	MAC	γ <sub>inst</sub>	[-]	1,2					No Performance assessed				
	CAC			1,0									
	HDB			1,2									
for flooded bore hole	CAC			1,4									

1)  $f_{uk}$  shall be taken from the specifications of reinforcing bars

2) in absence of national regulation

**Kalz Injection system UM-H+ for concrete**

**Performances**

Characteristic values of tension loads under static and quasi-static action for a working life of 100 years (rebar)

**Annex C 10**

**Table C11: Characteristic values of shear loads under static and quasi-static action for a working life of 50 and 100 years**

Reinforcing bar			Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 24	Ø 25	Ø 28	Ø 32
Steel failure without lever arm												
Characteristic shear resistance	V <sup>0</sup> <sub>Rk,s</sub>	[kN]	0,50 · A <sub>s</sub> · f <sub>uk</sub> <sup>1)</sup>									
Cross section area	A <sub>s</sub>	[mm²]	50	79	113	154	201	314	452	491	616	804
Partial factor	γ <sub>Ms,V</sub>	[-]	1,5 <sup>2)</sup>									
Ductility factor	k <sub>7</sub>	[-]	1,0									
Steel failure with lever arm												
Characteristic bending moment	M <sup>0</sup> <sub>Rk,s</sub>	[Nm]	1.2 · W <sub>el</sub> · f <sub>uk</sub> <sup>1)</sup>									
Elastic section modulus	W <sub>el</sub>	[mm³]	50	98	170	269	402	785	1357	1534	2155	3217
Partial factor	γ <sub>Ms,V</sub>	[-]	1,5 <sup>2)</sup>									
Concrete pry-out failure												
Factor	k <sub>8</sub>	[-]	2,0									
Installation factor	γ <sub>inst</sub>	[-]	1,0									
Concrete edge failure												
Effective length of fastener	l <sub>f</sub>	[mm]	min(h <sub>ef</sub> ; 12 · d <sub>nom</sub> )							min(h <sub>ef</sub> ; 300mm)		
Outside diameter of fastener	d <sub>nom</sub>	[mm]	8	10	12	14	16	20	24	25	28	32
Installation factor	γ <sub>inst</sub>	[-]	1,0									
<div>1) f<sub>uk</sub> shall be taken from the specifications of reinforcing bars</div> <div>2) in absence of national regulation</div>												
Kalz Injection system UM-H+ for concrete									Annex C 11			
Performances Characteristic values of shear loads under static and quasi-static action (rebar)												



**Table C12: Displacements under tension load<sup>1)</sup>**

Threaded rod			M8	M10	M12	M16	M20	M24	M27	M30
<b>Uncracked concrete C20/25 under static and quasi-static action for a working life of 50 and 100 years</b>										
Temperature range I: 40°C/24°C II: 80°C/50°C	$\delta_{N0}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,031	0,032	0,034	0,037	0,039	0,042	0,044	0,046
	$\delta_{N\infty}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,040	0,042	0,044	0,047	0,051	0,054	0,057	0,060
Temperature range III: 120°C/72°C	$\delta_{N0}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,032	0,034	0,035	0,038	0,041	0,044	0,046	0,048
	$\delta_{N\infty}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,042	0,044	0,045	0,049	0,053	0,056	0,059	0,062
Temperature range IV: 160°C/100°C	$\delta_{N0}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,121	0,126	0,131	0,142	0,153	0,163	0,171	0,179
	$\delta_{N\infty}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,124	0,129	0,135	0,146	0,157	0,168	0,176	0,184
<b>Cracked concrete under static and quasi-static action for a working life of 50 and 100 years</b>										
Temperature range I: 40°C/24°C II: 80°C/50°C	$\delta_{N0}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,081	0,083	0,085	0,090	0,095	0,099	0,103	0,106
	$\delta_{N\infty}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,104	0,107	0,110	0,116	0,122	0,128	0,133	0,137
Temperature range III: 120°C/72°C	$\delta_{N0}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,084	0,086	0,088	0,093	0,098	0,103	0,107	0,110
	$\delta_{N\infty}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,108	0,111	0,114	0,121	0,127	0,133	0,138	0,143
Temperature range IV: 160°C/100°C	$\delta_{N0}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,312	0,321	0,330	0,349	0,367	0,385	0,399	0,412
	$\delta_{N\infty}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,321	0,330	0,340	0,358	0,377	0,396	0,410	0,424

1) Calculation of the displacement

$$\delta_{N0} = \delta_{N0}\text{-factor} \cdot \tau; \quad \tau: \text{action bond stress for tension}$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-factor} \cdot \tau;$$

**Table C13: Displacements under shear load<sup>1)</sup>**

Threaded rod			M8	M10	M12	M16	M20	M24	M27	M30
<b>Uncracked and cracked concrete under static and quasi-static action for a working life of 50 and 100 years</b>										
All temperature ranges	$\delta_{V0}$ -factor	[mm/kN]	0,06	0,06	0,05	0,04	0,04	0,03	0,03	0,03
	$\delta_{V\infty}$ -factor	[mm/kN]	0,09	0,08	0,08	0,06	0,06	0,05	0,05	0,05

1) Calculation of the displacement

$$\delta_{V0} = \delta_{V0}\text{-factor} \cdot V; \quad V: \text{action shear load}$$

$$\delta_{V\infty} = \delta_{V\infty}\text{-factor} \cdot V;$$

**Kalz Injection system UM-H+ for concrete**

**Performances**

Displacements under static and quasi-static action  
for a working life of 50 and 100 years (threaded rod)

**Annex C 12**

**Table C14: Displacements under tension load<sup>1)</sup>**

Internal threaded anchor rods			IG-M6	IG-M8	IG-M10	IG-M12	IG-M16	IG-M20
<b>Uncracked concrete under static and quasi-static action for a working life of 50 and 100 years</b>								
Temperature range I: 40°C/24°C II: 80°C/50°C	$\delta_{N0}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,032	0,034	0,037	0,039	0,042	0,046
	$\delta_{N\infty}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,042	0,044	0,047	0,051	0,054	0,060
Temperature range III: 120°C/72°C	$\delta_{N0}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,034	0,035	0,038	0,041	0,044	0,048
	$\delta_{N\infty}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,044	0,045	0,049	0,053	0,056	0,062
Temperature range IV: 160°C/100°C	$\delta_{N0}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,126	0,131	0,142	0,153	0,163	0,179
	$\delta_{N\infty}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,129	0,135	0,146	0,157	0,168	0,184
<b>Cracked concrete under static and quasi-static action for a working life of 50 and 100 years</b>								
Temperature range I: 40°C/24°C II: 80°C/50°C	$\delta_{N0}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,083	0,085	0,090	0,095	0,099	0,106
	$\delta_{N\infty}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,170	0,110	0,116	0,122	0,128	0,137
Temperature range III: 120°C/72°C	$\delta_{N0}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,086	0,088	0,093	0,098	0,103	0,110
	$\delta_{N\infty}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,111	0,114	0,121	0,127	0,133	0,143
Temperature range IV: 160°C/100°C	$\delta_{N0}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,321	0,330	0,349	0,367	0,385	0,412
	$\delta_{N\infty}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,330	0,340	0,358	0,377	0,396	0,424

<sup>1)</sup> Calculation of the displacement

$$\delta_{N0} = \delta_{N0}\text{-factor} \cdot \tau; \quad \tau: \text{action bond stress for tension}$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-factor} \cdot \tau;$$

**Table C15: Displacements under shear load<sup>1)</sup>**

Internal threaded anchor rods			IG-M6	IG-M8	IG-M10	IG-M12	IG-M16	IG-M20
<b>Uncracked and cracked concrete under static and quasi-static action for a working life of 50 and 100 years</b>								
All temperature ranges	$\delta_{V0}$ -factor	[mm/kN]	0,07	0,06	0,06	0,05	0,04	0,04
	$\delta_{V\infty}$ -factor	[mm/kN]	0,10	0,09	0,08	0,08	0,06	0,06

<sup>1)</sup> Calculation of the displacement

$$\delta_{V0} = \delta_{V0}\text{-factor} \cdot V; \quad V: \text{action shear load}$$

$$\delta_{V\infty} = \delta_{V\infty}\text{-factor} \cdot V;$$

**Kalz Injection system UM-H+ for concrete**

**Performances**

Displacements under static and quasi-static action  
for a working life of 50 and 100 years (internal threaded anchor rod)

**Annex C 13**

**Table C16: Displacements under tension load<sup>1)</sup>**

Reinforcing bar			Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 24	Ø 25	Ø 28	Ø 32
<b>Uncracked concrete under static and quasi-static action for a working life of 50 and 100 years</b>												
Temperature range I: 40°C/24°C II: 80°C/50°C	$\delta_{N0}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,031	0,032	0,034	0,035	0,037	0,039	0,042	0,043	0,045	0,048
	$\delta_{N\infty}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,040	0,042	0,044	0,045	0,047	0,051	0,054	0,055	0,058	0,063
Temperature range III: 120°C/72°C	$\delta_{N0}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,032	0,034	0,035	0,036	0,038	0,041	0,044	0,045	0,047	0,050
	$\delta_{N\infty}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,042	0,044	0,045	0,047	0,049	0,053	0,056	0,057	0,060	0,065
Temperature range IV: 160°C/100°C	$\delta_{N0}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,121	0,126	0,131	0,137	0,142	0,153	0,163	0,164	0,172	0,186
	$\delta_{N\infty}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,124	0,129	0,135	0,141	0,146	0,157	0,168	0,169	0,177	0,192
<b>Cracked concrete under static and quasi-static action for a working life of 50 and 100 years</b>												
Temperature range I: 40°C/24°C II: 80°C/50°C	$\delta_{N0}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,081	0,083	0,085	0,087	0,090	0,095	0,099	0,099	0,103	0,108
	$\delta_{N\infty}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,104	0,107	0,110	0,113	0,116	0,122	0,128	0,128	0,133	0,141
Temperature range III: 120°C/72°C	$\delta_{N0}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,084	0,086	0,088	0,090	0,093	0,098	0,103	0,103	0,107	0,113
	$\delta_{N\infty}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,108	0,111	0,114	0,118	0,121	0,127	0,133	0,133	0,138	0,148
Temperature range IV: 160°C/100°C	$\delta_{N0}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,312	0,321	0,330	0,340	0,349	0,367	0,385	0,385	0,399	0,425
	$\delta_{N\infty}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,321	0,330	0,340	0,349	0,358	0,377	0,396	0,396	0,410	0,449

<sup>1)</sup> Calculation of the displacement

$$\delta_{N0} = \delta_{N0}\text{-factor} \cdot \tau; \quad \tau: \text{action bond stress for tension}$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-factor} \cdot \tau;$$

**Table C17: Displacements under shear load<sup>1)</sup>**

Reinforcing bar			Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 24	Ø 25	Ø 28	Ø 32
<b>Uncracked and cracked concrete under static and quasi-static action for a working life of 50 and 100 years</b>												
All temperature ranges	$\delta_{V0}$ -factor	[mm/kN]	0,06	0,05	0,05	0,04	0,04	0,04	0,03	0,03	0,03	0,03
	$\delta_{V\infty}$ -factor	[mm/kN]	0,09	0,08	0,08	0,06	0,06	0,05	0,05	0,05	0,04	0,04

<sup>1)</sup> Calculation of the displacement

$$\delta_{V0} = \delta_{V0}\text{-factor} \cdot V; \quad V: \text{action shear load}$$

$$\delta_{V\infty} = \delta_{V\infty}\text{-factor} \cdot V;$$

**Kalz Injection system UM-H+ for concrete**

**Performances**

Displacements under static and quasi-static action  
for a working life of 50 and 100 years (rebar)

**Annex C 14**

Table C18: Characteristic values of tension loads under seismic action (performance category C1) for a working life of 50 years												
Threaded rod					M8	M10	M12	M16	M20	M24	M27	M30
Steel failure												
Characteristic tension resistance			$N_{Rk,s,eq,C1}$	[kN]	$1,0 \cdot N_{Rk,s}$							
Partial factor			$\gamma_{Ms,N}$	[-]	see Table C1							
Combined pull-out and concrete failure												
Characteristic bond resistance in cracked and uncracked concrete C20/25												
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	$\tau_{Rk,eq,C1}$	[N/mm²]	7,0	7,5	8,0	9,0	8,5	7,0	7,0	7,0
	II: 80°C/50°C		$\tau_{Rk,eq,C1}$	[N/mm²]	7,0	7,5	8,0	9,0	8,5	7,0	7,0	7,0
	III: 120°C/72°C		$\tau_{Rk,eq,C1}$	[N/mm²]	6,0	6,5	7,0	7,5	7,0	6,0	6,0	6,0
	IV: 160°C/100°C		$\tau_{Rk,eq,C1}$	[N/mm²]	5,5	5,5	6,0	6,5	6,0	5,5	5,5	5,5
Increasing factors for concrete			$\psi_c$	1,0	1,0							
Characteristic bond resistance depending on the concrete strength class			$\tau_{Rk,eq,C1} =$		$\psi_c \cdot \tau_{Rk,eq,C1,(C20/25)}$							
Installation factor												
for dry and wet concrete	CAC	$\gamma_{inst}$	[-]	1,0								
	HDB			1,2								
for flooded bore hole	CAC			1,4								



Table C19: Characteristic values of tension loads under seismic action (performance category C1) for a working life of 100 years												
Threaded rod				M8	M10	M12	M16	M20	M24	M27	M30	
Steel failure												
Characteristic tension resistance		$N_{Rk,s,eq,C1}$	[kN]	$1,0 \cdot N_{Rk,s}$								
Partial factor		$\gamma_{Ms,N}$	[-]	see Table C1								
Combined pull-out and concrete failure												
Characteristic bond resistance in cracked and uncracked concrete C20/25												
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	$\tau_{Rk,eq,C1}$	[N/mm²]	5,5	6	6,5	6,5	6,5	6,5	6,5	6,5
	II: 80°C/50°C		$\tau_{Rk,eq,C1}$	[N/mm²]	5,5	6	6,5	6,5	6,5	6,5	6,5	6,5
Increasing factors for concrete		$\psi_C$	1,0	1,0								
Characteristic bond resistance depending on the concrete strength class		$\tau_{Rk,eq,C1} =$		$\psi_C \cdot \tau_{Rk,eq,C1,(C20/25)}$								
Installation factor												
for dry and wet concrete	CAC	$\gamma_{inst}$	[-]	1,0								
	HDB			1,2								
for flooded bore hole	CAC			1,4								

**Table C20: Characteristic values of shear loads under seismic action  
(performance category C1) for a working life of 50 and 100 years**

Threaded rod			M8	M10	M12	M16	M20	M24	M27	M30
Steel failure										
Characteristic shear resistance (Seismic C1)	$V_{Rk,s,eq,C1}$	[kN]	$0,70 \cdot V_{Rk,s}^0$							
Partial factor	$\gamma_{Ms,V}$	[-]	see Table C1							
Factor for annular gap	$\alpha_{gap}$	[-]	$0,5 (1,0)^{1)}$							
1) Value in brackets valid for filled annular gab between fastener and clearance hole in the fixture. Use of special filling washer Annex A 3 is recommended										

**Table C21: Characteristic values of tension loads under seismic action (performance category C1) for a working life of 50 years**

Reinforcing bar				Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 24	Ø 25	Ø 28	Ø 32	
Steel failure														
Characteristic tension resistance		N <sub>Rk,s,eq,C1</sub>	[kN]	1,0 · A <sub>s</sub> · f <sub>uk</sub> <sup>1)</sup>										
Cross section area		A <sub>s</sub>	[mm²]	50	79	113	154	201	314	452	491	616	804	
Partial factor		γ <sub>Ms,N</sub>	[-]	1,4 <sup>2)</sup>										
Combined pull-out and concrete failure														
Characteristic bond resistance in cracked and uncracked concrete C20/25														
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	τ <sub>Rk,eq,C1</sub>	[N/mm²]	5,5	5,5	6,0	6,5	6,5	6,5	6,5	7,0	7,0	7,0
	II: 80°C/50°C		τ <sub>Rk,eq,C1</sub>	[N/mm²]	5,5	5,5	6,0	6,5	6,5	6,5	6,5	7,0	7,0	7,0
	III: 120°C/72°C		τ <sub>Rk,eq,C1</sub>	[N/mm²]	4,5	5,0	5,0	5,5	5,5	5,5	5,5	6,0	6,0	6,0
	IV: 160°C/100°C		τ <sub>Rk,eq,C1</sub>	[N/mm²]	4,0	4,5	4,5	5,0	5,0	5,0	5,0	5,0	5,0	5,0
Increasing factors for concrete		ψ <sub>C</sub>	1,0	1,0										
Characteristic bond resistance depending on the concrete strength class		τ <sub>Rk,eq,C1</sub> =		ψ <sub>C</sub> · τ <sub>Rk,eq,C1,(C20/25)</sub>										
Installation factor														
for dry and wet concrete		CAC	γ <sub>inst</sub>	[-]	1,0									
		HDB			1,2									
for flooded bore hole		CAC			1,4									

<sup>1)</sup>  $f_{uk}$  shall be taken from the specifications of reinforcing bars

<sup>2)</sup> in absence of national regulation

**Kalz Injection system UM-H+ for concrete**

**Performances**

Characteristic values of tension loads under seismic action (performance category C1) for a working life of 50 years (rebar)

**Annex C 18**

**Table C22: Characteristic values of tension loads under seismic action (performance category C1) for a working life of 100 years**

Reinforcing bar				Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 24	Ø 25	Ø 28	Ø 32	
Steel failure														
Characteristic tension resistance		N <sub>Rk,s,eq,C1</sub>	[kN]	1,0 · A <sub>s</sub> · f <sub>uk</sub> <sup>1)</sup>										
Cross section area		A <sub>s</sub>	[mm²]	50	79	113	154	201	314	452	491	616	804	
Partial factor		γ <sub>Ms,N</sub>	[-]	1,4 <sup>2)</sup>										
Combined pull-out and concrete failure														
Characteristic bond resistance in cracked and uncracked concrete C20/25														
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	τ <sub>Rk,eq,C1</sub>	[N/mm²]	4,5	4,5	4,5	4,5	4,5	4,0	4,0	4,0	4,0	4,0
	II: 80°C/50°C		τ <sub>Rk,eq,C1</sub>	[N/mm²]	4,5	4,5	4,5	4,5	4,5	4,0	4,0	4,0	4,0	4,0
Increasing factors for concrete		ψ <sub>C</sub>	1,0	1,0										
Characteristic bond resistance depending on the concrete strength class		τ <sub>Rk,eq,C1</sub> =		ψ <sub>C</sub> · τ <sub>Rk,eq,C1,(C20/25)</sub>										
Installation factor														
for dry and wet concrete	CAC	γ <sub>inst</sub>	[-]	1,0										
	HDB			1,2										
for flooded bore hole	CAC			1,4										

1)  $f_{uk}$  shall be taken from the specifications of reinforcing bars

2) in absence of national regulation

**Kalz Injection system UM-H+ for concrete**

**Performances**

Characteristic values of tension loads under seismic action (performance category C1) for a working life of 100 years (rebar)

**Annex C 19**



**Table C23: Characteristic values of shear loads under seismic action  
(performance category C1) for a working life of 50 and 100 years**

Reinforcing bar			Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 24	Ø 25	Ø 28	Ø 32
Steel failure												
Characteristic shear resistance	$V_{Rk,s,eq}$	[kN]	$0,35 \cdot A_s \cdot f_{uk}^{1)}$									
Cross section area	$A_s$	[mm²]	50	79	113	154	201	314	452	491	616	804
Partial factor	$\gamma_{Ms,V}$	[-]	$1,5^{2)}$									
Factor for annular gap	$\alpha_{gap}$	[-]	$0,5 (1,0)^{3)}$									
<div>1) <math>f_{uk}</math> shall be taken from the specifications of reinforcing bars</div> <div>2) in absence of national regulation</div> <div>3) Value in brackets valid for filled annular gab between fastener and clearance hole in the fixture. Use of special filling washer Annex A 3 is recommended</div>												
Kalz Injection system UM-H+ for concrete										Annex C 20		
<div>Performances</div> <div>Characteristic values of shear loads under seismic action (performance category C1) (rebar)</div>												

Table C24: Characteristic values of tension loads under seismic action (performance category C2) for a working life of 50 years								
Threaded rod				M12	M16	M20	M24	
Steel failure								
Characteristic tension resistance, Steel, strength class 8.8 Stainless Steel A4 and HCR, Strength class ≥70			N <sub>Rk,s,eq,C2</sub>	[kN]	1,0 · N <sub>Rk,s</sub>			
Partial factor			γ <sub>Ms,N</sub>	[-]	see Table C1			
Combined pull-out and concrete failure								
Characteristic bond resistance in cracked and uncracked concrete C20/25								
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	τ <sub>Rk,eq,C2</sub>	[N/mm²]	3,6	3,5	3,3	2,3
	II: 80°C/50°C		τ <sub>Rk,eq,C2</sub>	[N/mm²]	3,6	3,5	3,3	2,3
	III: 120°C/72°C		τ <sub>Rk,eq,C2</sub>	[N/mm²]	3,1	3,0	2,8	2,0
	IV: 160°C/100°C		τ <sub>Rk,eq,C2</sub>	[N/mm²]	2,5	2,7	2,5	1,8
Increasing factors for concrete			ψ <sub>c</sub>	1,0	1,0			
Characteristic bond resistance depending on the concrete strength class			τ <sub>Rk,eq,C2</sub> =		ψ <sub>c</sub> · τ <sub>Rk,eq,C2,(C20/25)</sub>			
Installation factor								
for dry and wet concrete	CAC	γ <sub>inst</sub>	[-]	1,0				
	HDB			1,2				
for flooded bore hole	CAC			1,4				

Table C25: Characteristic values of tension loads under seismic action (performance category C2) for a working life of 100 years								
Threaded rod			M12	M16	M20	M24		
Steel failure								
Characteristic tension resistance, Steel, strength class 8.8 Stainless Steel A4 and HCR, Strength class ≥70		N <sub>Rk,s,eq,C2</sub>	[kN]	1,0 · N <sub>Rk,s</sub>				
Partial factor		γ <sub>Ms,N</sub>	[-]	see Table C1				
Combined pull-out and concrete failure								
Characteristic bond resistance in cracked and uncracked concrete C20/25								
Temperature range	I: 40°C/24°C	Dry, wet concrete and flooded bore hole	τ <sub>Rk,eq,C2</sub>	[N/mm²]	3,6	3,5	3,3	2,3
	II: 80°C/50°C		τ <sub>Rk,eq,C2</sub>	[N/mm²]	3,6	3,5	3,3	2,3
Increasing factors for concrete		ψ <sub>C</sub>	1,0	1,0				
Characteristic bond resistance depending on the concrete strength class		τ <sub>Rk,eq,C2</sub> =		ψ <sub>C</sub> · τ <sub>Rk,eq,C2,(C20/25)</sub>				
Installation factor								
for dry and wet concrete	CAC	γ <sub>inst</sub>	[-]	1,0				
	HDB			1,2				
for flooded bore hole	CAC			1,4				

**Table C26: Characteristic values of shear loads under seismic action (performance category C2) for a working life of 50 and 100 years**

Threaded rod		M12	M16	M20	M24
<b>Steel failure</b>					
Characteristic shear resistance Steel, strength class 8.8 Stainless Steel A4 and HCR, Strength class $\geq 70$	$V_{Rk,s,eq,C2}$	[kN]	$0,70 \cdot V_{Rk,s}^0$		
Partial factor	$\gamma_{Ms,V}$	[-]	see Table C1		
<b>Factor for annular gap</b>	$\alpha_{gap}$	[-]	0,5 (1,0) <sup>1)</sup>		

<sup>1)</sup> Value in brackets valid for filled annular gap between fastener and clearance hole in the fixture. Use of special filling washer Annex A 3 is recommended

**Table C27: Displacements under tension load**

Threaded rod			M12	M16	M20	M24
Cracked concrete under seismic action (performance category C2) for a working life of 50 and 100 years						
All temperature ranges	δ <sub>N,eq,C2(DLS)</sub>	[mm]	0,24	0,27	0,29	0,27
	δ <sub>N,eq,C2(ULS)</sub>	[mm]	0,55	0,51	0,50	0,58

**Table C28: Displacements under shear load**

Threaded rod			M12	M16	M20	M24
Cracked concrete under seismic action (performance category C2) for a working life of 50 and 100 years						
All temperature ranges	δ <sub>V,eq,C2(DLS)</sub>	[mm]	3,6	3,0	3,1	3,5
	δ <sub>V,eq,C2(ULS)</sub>	[mm]	7,0	6,6	7,0	9,3

**Kalz Injection system UM-H+ for concrete**

**Performances**

Characteristic values of shear loads Displacements under seismic action (performance category C2) for a working life of 50 and 100 years (threaded rod)

**Annex C 23**