

Public-law institution jointly founded by the
federal states and the Federation

**European Technical Assessment Body
for construction products**



European Technical Assessment

**ETA-04/0043
of 15 July 2025**

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Hilti Ceiling anchor HK

Product family
to which the construction product belongs

Fastener for use in concrete , for redundant non-structural
systems

Manufacturer

Hilti Aktiengesellschaft
9494 SCHAAN
FÜRSTENTUM LIECHTENSTEIN

Manufacturing plant

Hilti Werke

This European Technical Assessment
contains

13 pages including 3 annexes which form an integral part
of this assessment

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

EAD 330747-00-0601, Edition 06/2018

This version replaces

ETA-04/0043 issued on 25 April 2018

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The Hilti Ceiling anchor HK is an anchor made of galvanised steel, stainless or high corrosion resistant steel which is placed into a drilled hole and anchored by deformation-controlled expansion.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	See Annex C 1

3.2 Safety in use (BWR 4)

Essential characteristic	Performance
Characteristic resistance for all load directions and modes of failure for simplified design	See Annex C 1
Durability	See Annex B1

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with European Assessment Document EAD No. 330747-00-0601, the applicable European legal act is: [97/161/EC].

The system to be applied is: 2+

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.

Issued in Berlin on 15 July 2025 by Deutsches Institut für Bautechnik

Dipl.-Ing. Beatrix Wittstock
Head of Section

beglaubigt:
Baderschneider

Product description: Hilti Ceiling Anchor HK
Only for statically indeterminate non-structural systems (multiple use)

Installed condition

Figure A1:
Hilti Ceiling Anchor HK with pre-set and though-set installation


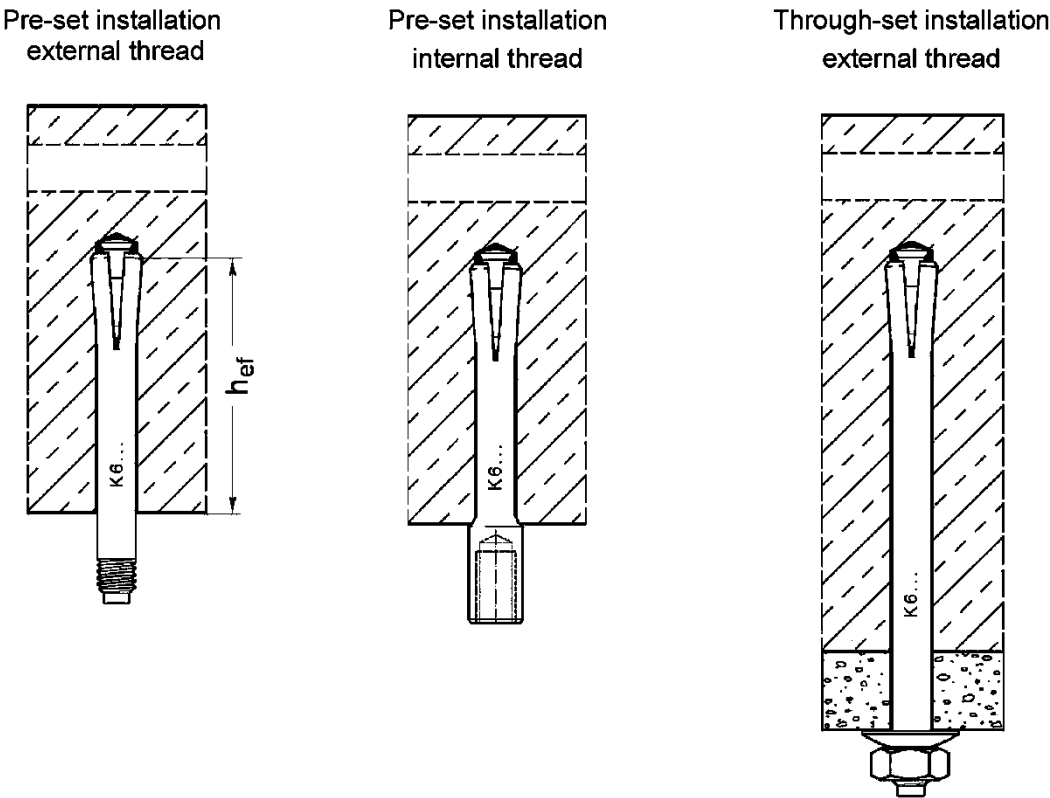


Figure A2:
marking and identification of the Hilti Ceiling Anchor HK

Marking: e.g. K6L

either on the shaft or
outside the internal
threaded sleeve

Different head forms and thread
sizes are admissible



The anchor may only be set with appropriate stop drill bits and setting tools


Hilti Ceiling anchor HK		Annex A1
Product description Installed condition, marking and identification		

Product description: HK6, HK6-R and HK6-HCR


Table A1: Pre-set installation HK6, HK6-R and HK6-HCR

Anchor type		HK6 M6/t _{fix}	HK6 M8/t _{fix}
Thread size		external thread M6	external thread M8
Stop drill bit		TE-C/SDS 1	TE-C/SDS 1
Setting tool		HSM 6/t _{fix}	HSM 8/t _{fix}
Length of thread	ℓ _{th} [mm]	5 ≤ ℓ _{th} ≤ 50	
Max. thickness of fixture	t _{fix} [mm]	t _{fix} = ℓ _p - 7	


Stop drill bit SDS 1

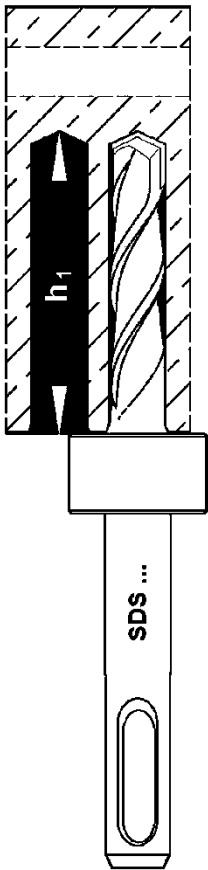

HK6 M6/t_{fix}

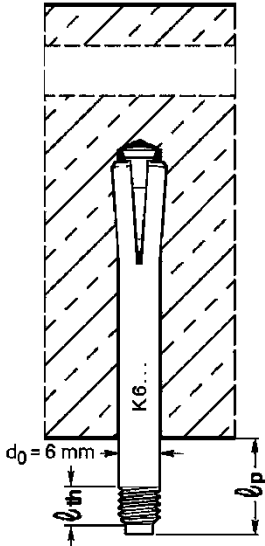

HK6 M8/t_{fix}

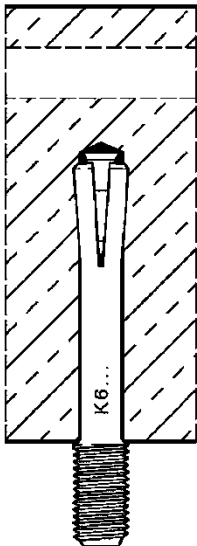

Setting tool
with marking

Hilti Ceiling anchor HK


Product description
HK6, HK6-R and HK6-HCR

Annex A2

Product description: HK6 L, HK6 L-R and HK6 L-HCR

Table A2: Through-set installation HK6 L, HK6 L-R and HK6 L-HCR

Anchor type	HK M6/4L with washer and hexagon nut	HK6 M6/t _{fix} L	HK6 M8/t _{fix} L	HK6-I M6 L	HK6-I M8 L
Thread size	external thread M6	external thread M6	external thread M8	internal thread M6	internal thread M8
Stop drill bit	TE-C/SDS 2				
Setting tool	HSM 6/t _{fix}	HSM 6/t _{fix}	HSM 8/t _{fix}	HSM I M6	HSM I M8
Length of thread ℓ_{th} [mm]	≥ 5	≥ 5	≥ 5	--	--
Max. thickness of fixture t_{fix} [mm]	4	$t_{fix} \leq 300$	$t_{fix} \leq 300$	--	--
Available thread length [mm]	--	--	--	6 to 12	8 to 12

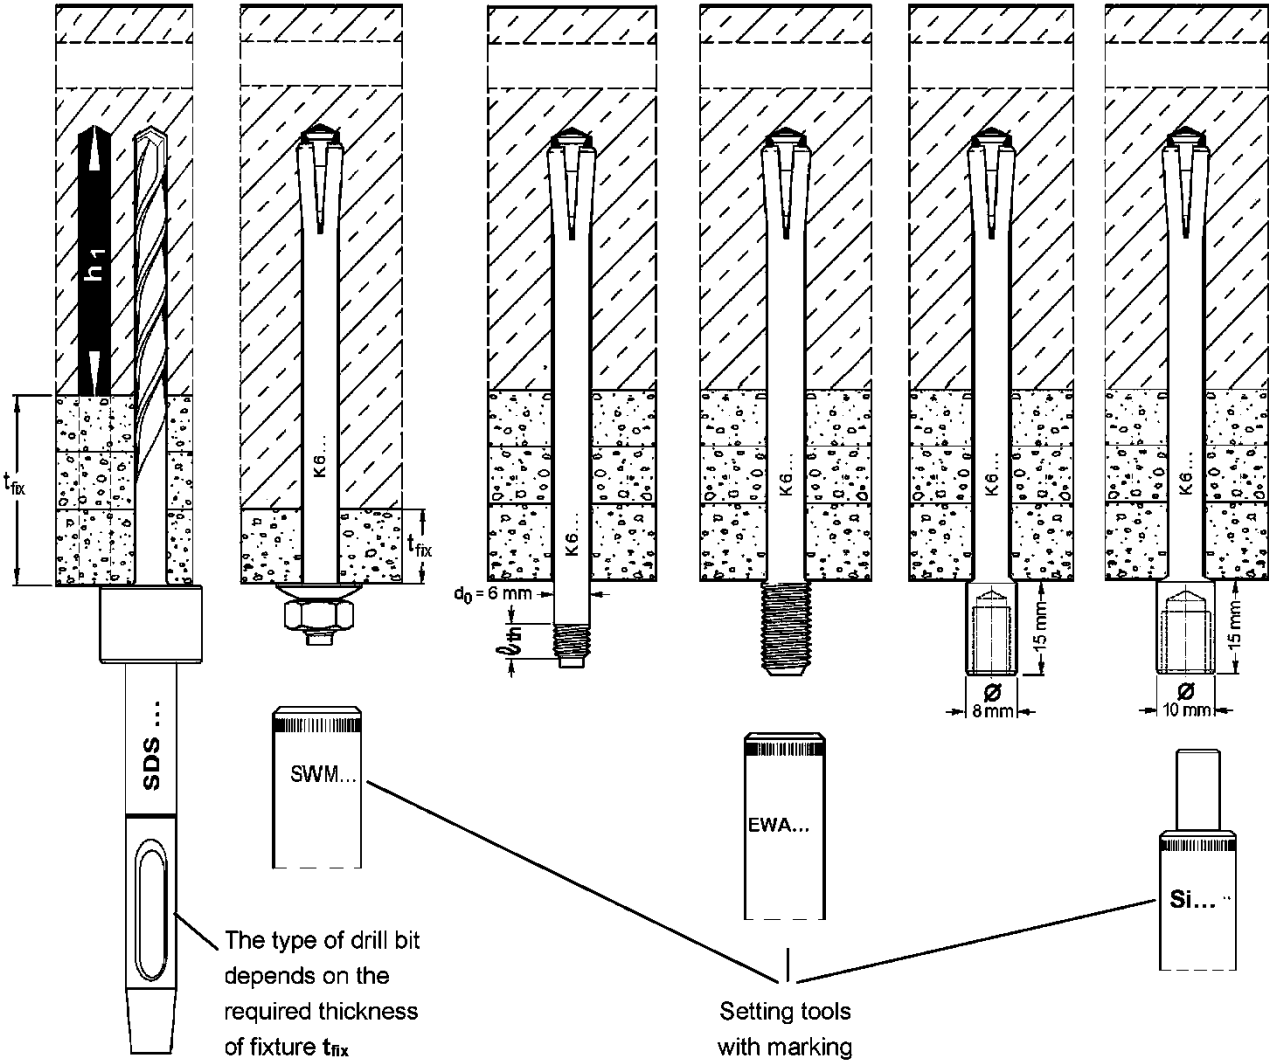

Hilti Ceiling anchor HK


Product description
HK6 L, HK6 L-R and HK6 L-HCR

Annex A3

Product description: HK 8-I, HK8-I-R and HK8-I-HCR

Table A3: Pre-set installation HK 8-I, HK8-I-R and HK8-I-HCR

Anchor type				
Thread size	internal thread M8	internal thread M10	internal thread M12	internal thread M8/M10
Stop drill bit	TE-C/SDS 3			
Setting tool	HSM 6/t _{fix}		HSM 8/t _{fix}	
Available thread length [mm]	8 to 10	10 to 15	12 to 15	M8: 8 to 10 M10: 10

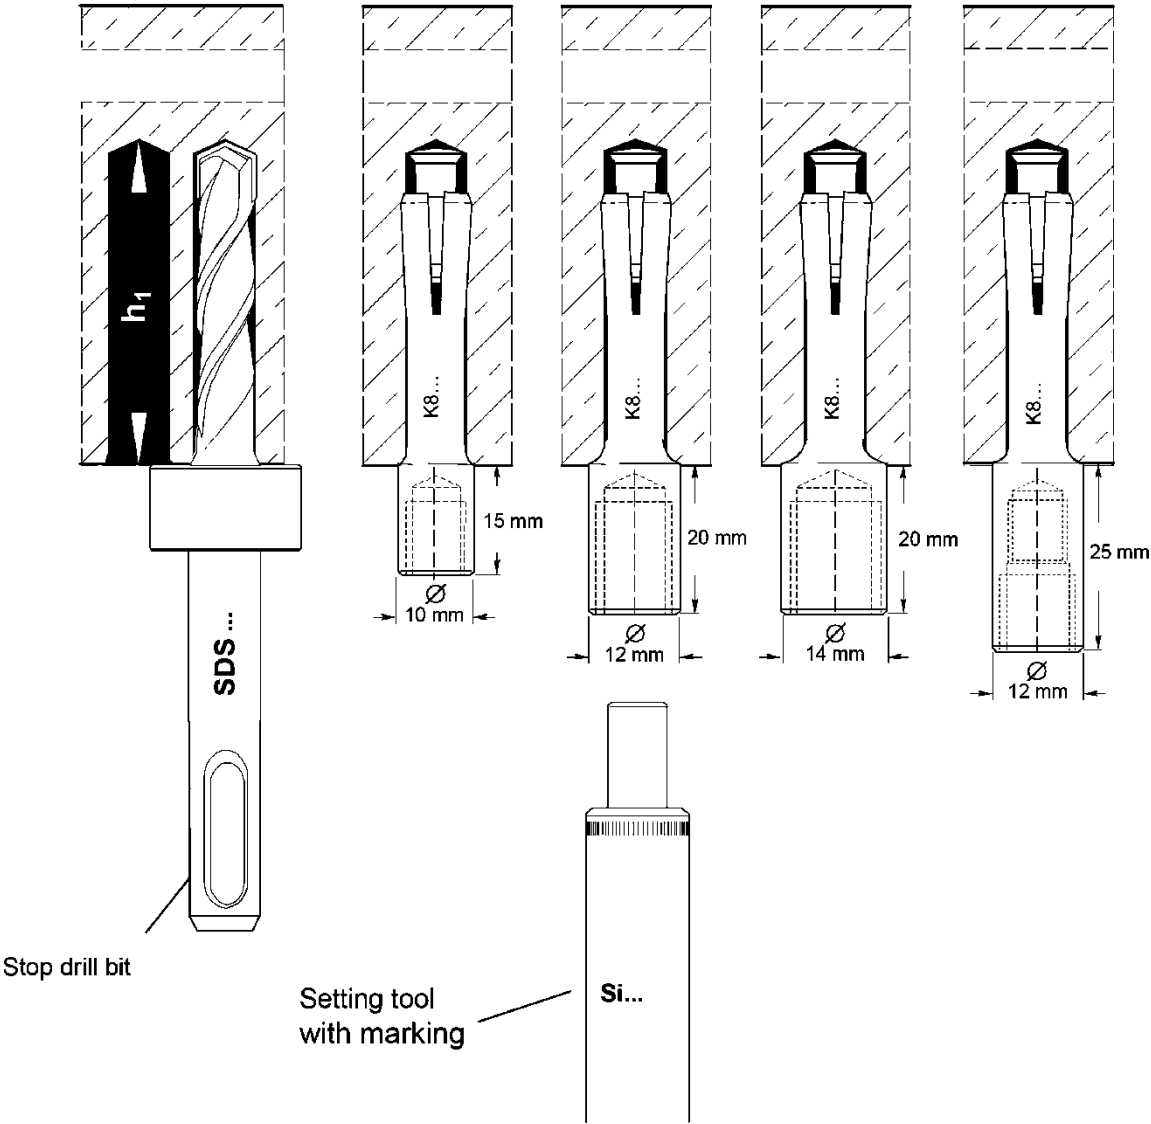

Hilti Ceiling anchor HK

Product description
HK6, HK6-R and HK6-HCR

Annex A4

Table A4: Naming, material and marking

Anchor type	HK6, HK6-R, HK6-HCR	HK6 L, HK6 L-R, HK6 L-HCR	HK8-I..., HK8-I-R, HK8-I-HCR
Material	Steel galvanised		
Marking	K6	K6L	K8
Description of type	HK6 M6/t _{fix}	HK6 M6/t _{fix} L HK6/4 L HK6-I M6L HK6-I M8L HK6 M8L	HK8-I M8 HK8-I M8/M10 HK8-I M10 HK8-I M12
Material	Stainless steel 1.4401 or 1.4404		
Marking	K6E	K6LE	K8E
Description of type	HK6 M6/t _{fix} -R	HK6 M6/t _{fix} L-R	HK8-I M8-R
Material	Stainless steel 1.4571		
Marking	K6X	K6LX	K8X
Description of type	HK6 M6/t _{fix} -R	HK6 M6/t _{fix} L-R	HK8-I M8-R
Material	High corrosion resistant steel 1.4529 or 1.4565		
Marking	K6C	K6LC	K8C
Description of type	HK6 M6/t _{fix} -HCR	HK6 M6/t _{fix} L-HCR	HK8-I M8-HCR

Hilti Ceiling anchor HK

Product description
Materials

Annex A5

Specifications of intended use

Anchorage subject to:

- Static and quasi static loading
- Only for statically indeterminate non-structural systems (multiple use) according to EN 1992-4:2018
- Fire exposure: R30 to R120

Base material:

- Compacted, reinforced or unreinforced normal weight concrete (without fibres) according to EN 206:2013+A1:2016
- Strength classes C20/25 to C50/60 according to EN 206:2013+A1:2016.
- Cracked and non-cracked concrete.

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions.
(zinc coated steel, stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal conditions, if no particular aggressive conditions exist.
(stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure and to permanently damp internal conditions, if other particular aggressive conditions (high corrosion resistant steel).

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e. g. in desulphurization plants or road tunnels where de-icing products are used).

Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e. g. position of the anchor relative to reinforcement or to supports, etc.).
- The strength class and the length of the fastening screw or threaded rod shall be defined by the designing engineer
- Anchorages are designed according to EN 1992-4:2018, Annex G: design method C
- In case of requirements to resistance to fire local spalling of the concrete cover must be avoided.

Installation:

- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- Anchor installation such that the effective setting depth is complied with. This compliance is ensured, if the drill hole is made with the appropriate depth guided stop drills.
- Anchor expansion by impact using the setting tools. The anchor with external thread for pre-set installation or anchor internal thread is properly expanded if the setting tool rests on the concrete surface. The anchor for through-set installation is properly expanded if the setting tool rests on the surface of the fixture.
- The screw-in depth of fastening screw or threaded rod for anchors with internal thread must be at least the nominal thread size.

Hilti Ceiling anchor HK

Intended Use
Specifications


Annex B1

Table B1: Installation parameters for HK

Anchor type		HK6 HK6-R, HK6-HCR	HK6L HK6L-R, HK6L-HCR	HK8 HK8-R, HK8-HCR
Diameter of drill hole	d_0 [mm]	6	6	8
Depth of drill hole	h_1 [mm]	32	42	43
Effective anchorage depth	$h_{ef} \geq$ [mm]	26 ¹⁾	36	36
Maximum torque moment	T_{max} [Nm]	5	5	10
Minimum thickness of member	h_{min} [mm]	80		
Spacing	s_{cr} [mm]	200		
Edge distance	c_{cr} [mm]	150		

¹⁾ Use in dry internal conditions

Edge distance and spacing

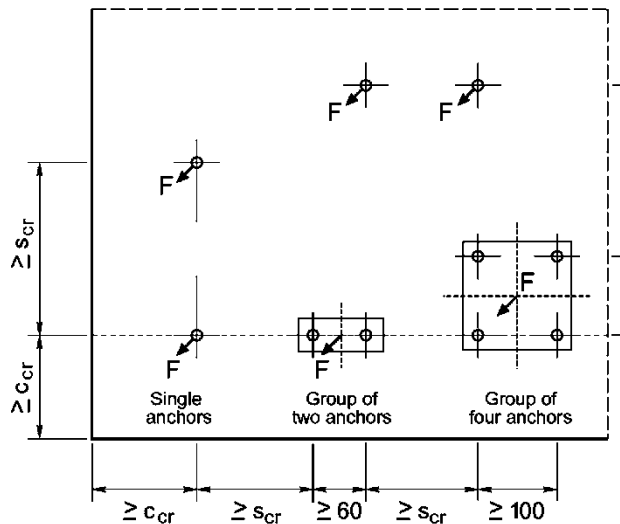

The values given in Table C1 and C2 are valid for one fixing point.

Fixing points can be:


- single anchors,
groups of 2 anchors
with $s_1 \geq 60$ mm
or
- groups of 4 anchors
with $s_1 = s_2 \geq 100$ mm

Hilti Ceiling anchor HK

Intended Use
Installation parameters

Annex B2

Installation instruction

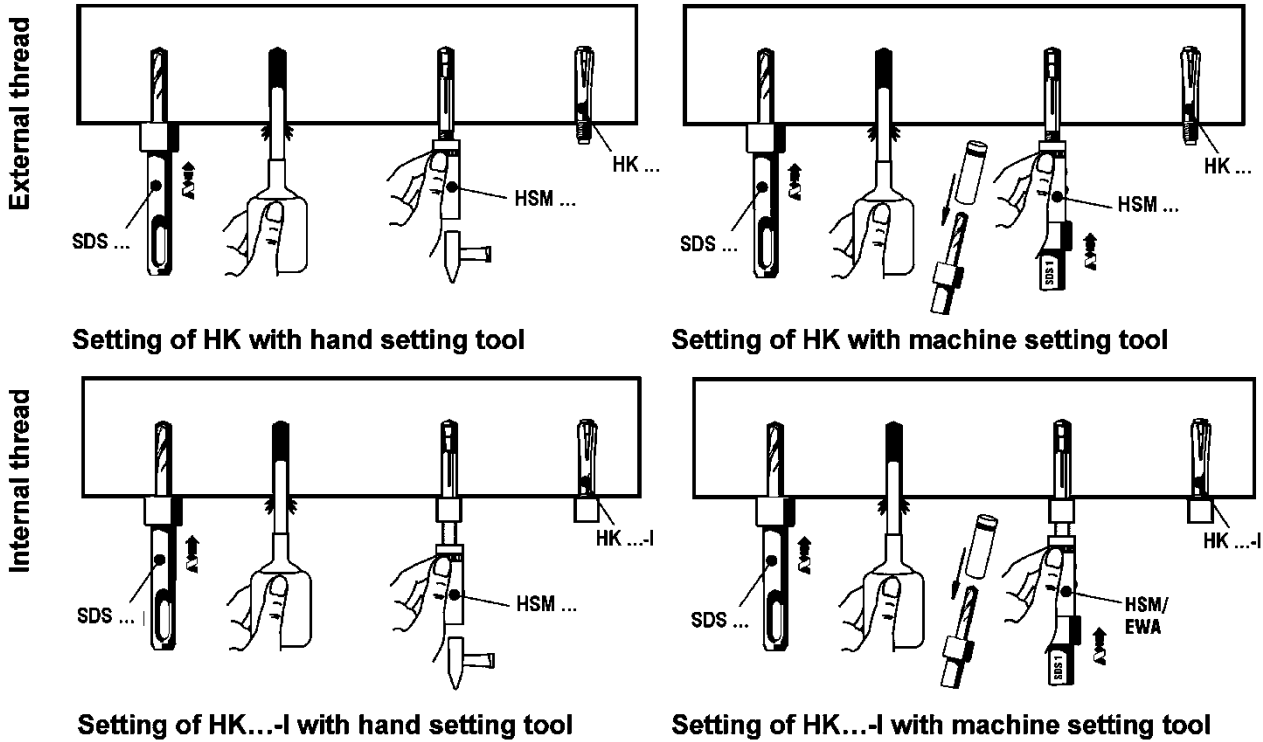

Hilti Ceiling anchor HK

Intended Use
Installation instructions

Annex B3

Table C1: Characteristic resistance for HK

Anchor type		HK6	HK6L	HK8
Any load direction				
Characteristic resistance C20/25 to C50/60	F_{Rk} [kN]	2	5	5
Partial factor	$\gamma_M^{1)}$ [-]	1,5	2,1	
Shear load with lever arm				
Characteristic resistance	$M^0_{Rk,s}$ [Nm]	3,6	5	10
Partial factor	$\gamma_{Ms}^{2)}$ [N/mm ²]	1,25		

¹⁾ The installation factor γ_{inst} is included

²⁾ In absence of other national regulations.

Table C2: Characteristic resistance for HK-R and HK-HCR

Anchor type		HK6-R, HK6-HCR ¹⁾	HK6L-R, HK6L-HCR	HK8-R, HK8-HCR	
Any load direction					
Characteristic resistance C20/25 to C50/60	F _{Rk}	[kN]	1,5	3	5
Partial factor	γ _M ¹⁾	[-]	2,1		1,8
Shear load with lever arm					
Characteristic resistance	M ⁰ _{Rk,s}	[Nm]	4,0	8,4	20,6
Partial factor	γ _{Ms} ³⁾	[N/mm ²]	1,5		

¹⁾ Use in dry internal conditions

²⁾ The installation factor γ_{inst} is included

³⁾ In absence of other national regulations.

Table C3: Characteristic values of resistance under fire exposure in any load direction in concrete C20/25 to C50/60

Fire resistance class	Anchor type		HK6, HK6-R, HK6-HCR	HK6L, HK6-L-R, HK6-L-HCR	HK8, HK8-R, HK8-HCR
R30	Characteristic resistance	$F_{Rk,fi(30)}^0$ [kN]	0,3	0,6	1,2
R60	Characteristic resistance	$F_{Rk,fi(60)}^0$ [kN]	0,3	0,5	1,0
R90	Characteristic resistance	$F_{Rk,fi(90)}^0$ [kN]	0,3	0,3	0,6
R120	Characteristic resistance	$F_{Rk,fi(120)}^0$ [kN]	0,2	0,2	0,4
Spacing and edge distance under fire exposure					
R30 - R120	Spacing	$s_{cr,fi} = s_{min}$ [mm]	200		
	Edge distance	one side only $c_{cr,fi} = c_{min}$ [mm]	150		
	from	more than one side $c_{cr,fi} = c_{min}$ [mm]	300		

In absence of other national regulations the partial safety factor for resistance under fire exposure $\gamma_{M,fi} = 1,0$ is recommended.

Hilti Ceiling anchor HK

Performances

Characteristic resistance

Characteristic resistance under fire

Annex C1