



Public-law institution jointly founded by the federal states and the Federation

European Technical Assessment Body for construction products



European Technical Assessment

ETA-12/0543 of 28 August 2025

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the European Technical Assessment:

Trade name of the construction product

Product family to which the construction product belongs

Manufacturer

Manufacturing plant

This European Technical Assessment contains

This European Technical Assessment is issued in accordance with Regulation (EU) No 305/2011, on the basis of

This version replaces

Deutsches Institut für Bautechnik

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry

Metal Injection anchors for use in masonry

Friulsider S.p.A.
Via Trieste 1
33048 SAN GIOVANNI AL NATISONE (UD)
ITALIEN

Friulsider S.p.A., Plant 2 Germany

77 pages including 3 annexes which form an integral part of this assessment

EAD 330076-01-0604, Edition 10/2022

ETA-12/0543 issued on 15 December 2016

DIBt | Kolonnenstraße 30 B | 10829 Berlin | GERMANY | Phone: +493078730-0 | FAX: +493078730-320 | Email: dibt@dibt.de | www.dibt.de Z198288.25

European Technical Assessment ETA-12/0543

English translation prepared by DIBt



Page 2 of 77 | 28 August 2025

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.



Page 3 of 77 | 28 August 2025

Specific Part

1 Technical description of the product

The "Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry" is a bonded anchor (injection type) consisting of a mortar cartridge with injection mortar KEM-UP + Vinylester or KEM V or KEM-UP + Vinylester Winter or KEM V Winter, a perforated sleeve and an anchor rod with hexagon nut and washer or an Internal threaded rod. The steel elements are made of zinc coated steel, stainless steel or high corrosion resistant steel.

The anchor rod is placed into a drilled hole filled with injection mortar and is anchored via the bond between steel element, injection mortar and masonry and mechanical interlock.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the fastener is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the fastener of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance	
Characteristic resistance for static and quasi-static loading	See Annexes B 5, B 6 C 1 to C 56	
Characteristic resistance and displacements for seismic loading	No performance assessed	

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire under tension and shear loading with and without lever arm. Minimum edge distances and spacing	See Annexes C2, C7, C8, C13, C14, C17, C18, C19, C20, C37, C38, C43, C44, C45, C46, C51 and C52

3.3 Hygiene, health and the environment (BWR 3)

Essential characteristic	Performance
Content, emission and/or release of dangerous substances	No performance assessed

European Technical Assessment ETA-12/0543

English translation prepared by DIBt



Page 4 of 77 | 28 August 2025

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with the European Assessment Document EAD 330076-01-0604 the applicable European legal act is: [97/177/EC].

The system to be applied is: 1

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document


Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.

Issued in Berlin on 28 August 2025 by Deutsches Institut für Bautechnik

Dipl.-Ing. Beatrix Wittstock Head of Section beglaubigt: Baderschneider

Installed condition




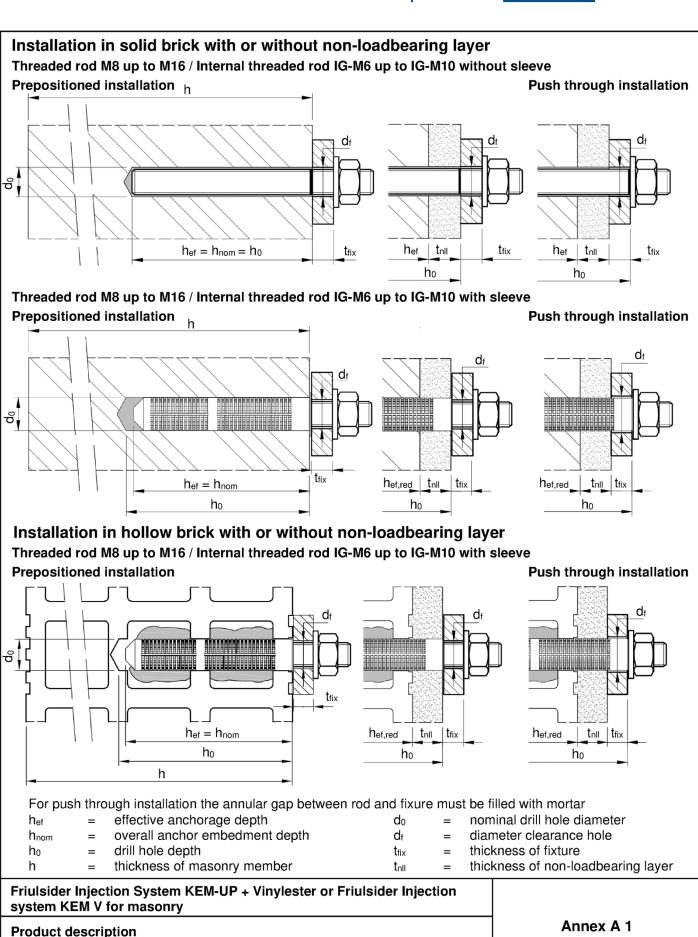





Installation in hollow brick with or without non-loadbearing layer and / or thermal isolation

Threaded rod M8 and M10 / Internal threaded rod IG-M6 with sleeve SH 16x130/330 Push through installation

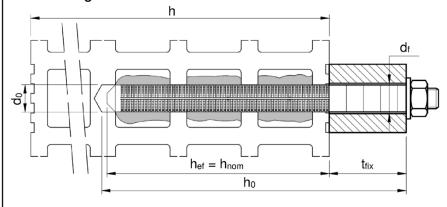




Prepositioned installation

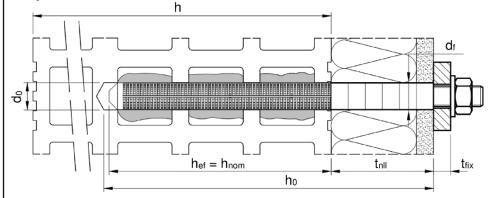

Push through installation



hef = effective anchorage depth

h_{nom} = overall anchor embedment depth

 h_0 = drill hole depth

h = thickness of masonry member

 d_0 = nominal drill hole diameter

d_f = diameter clearance hole

t_{fix} = thickness of fixture

t_{nll} = thickness of non-loadbearing layer

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry

Product description

Installed condition

Annex A 2



Cartridge system

Coaxial Cartridge:

150 ml, 160ml, 280 ml, 300 ml up to 333 ml and 380 ml up to 420 ml




Imprint:

KEM-UP + Vinylester or KEM V or KEM-UP + Vinylester Winter or KEM V Winter

Processing and safety instructions, shelf life, charge number, manufacturer's information, quantity information

Side-by-Side Cartridge: 235 ml, 345 ml up to 360 ml

and 825 ml




Imprint:

KEM-UP + Vinylester or KEM V or KEM-UP + Vinylester Winter or KEM V Winter

Processing and safety instructions, shelf life, charge number, manufacturer's information, quantity information

Foil Tube Cartridge:

165 ml and 300 ml



Imprint:


KEM-UP + Vinylester or KEM V or KEM-UP + Vinylester Winter or KEM V Winter

Processing and safety instructions, shelf life, charge number, manufacturer's information, quantity information

Static mixer MIX



Static mixer MIX+



Mixer extension VL



Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry


Product description


Injection system

Annex A 3



Threaded rod M8 up to M16 with washer and hexagon nut



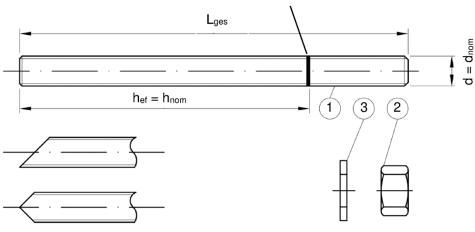



Commercial standard rod with:

- Materials, dimensions and mechanical properties acc. to Table A1
- Inspection certificate 3.1 acc. to EN 10204:2004. The document shall be stored
- Marking of embedment depth

Internal threaded rod IG-M6 to IG-M10

Threaded rod or screw



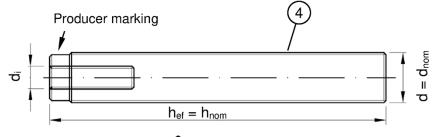

Producer marking: e.g. M8

Marking Internal thread (optional)

Mark

M8 Thread size (Internal thread)
A4 additional mark for stainless steel

HCR additional mark for high-corrosion resistance steel

-8 additional mark for property class 8.8

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry

Product description


Threaded rod and Internal threaded rod

Annex A 4



Ta	ble A1: Materials						
art	Designation	Material					
	el, zinc plated (Steel acc. to E			63:2017)			
- ho	ot-dip galvanised ≥ 40 μm a	acc. to EN ISO 4042:202 acc. to EN ISO 1461:202 acc. to EN ISO 17668:20	22 and	d EN ISO 10684:2004+A0	0:2009 or		
		Property class		Characteristic steel ultimate tensile strength	Characteristic steel yield strength	Elongation a fracture	
			4.6	f _{uk} = 400 N/mm ²	f _{yk} = 240 N/mm ²	A ₅ > 8%	
1	Threaded rod		4.8	f _{uk} = 400 N/mm ²	f _{yk} = 320 N/mm ²	A ₅ > 8%	
	Throadou rou	acc. to EN ISO 898-1:2013	5.6	f _{uk} = 500 N/mm ²	f _{Vk} = 300 N/mm ²	A ₅ > 8%	
		EN 130 090-1.2013		f _{uk} = 500 N/mm ²	f _{Vk} = 400 N/mm ²	A ₅ > 8%	
			8.8	f _{uk} = 800 N/mm ²	f _{VK} = 640 N/mm ²	A ₅ > 8%	
			4	for anchor rod class 4.6	J		
2	Hexagon nut	acc. to EN ISO 898-2:2022	5	for anchor rod class 5.6			
		EN 130 090-2.2022	8	for anchor rod class 8.8			
3	Washer			alvanised or sherardized	7002:2000 or EN IC	O 7004.2000	
			0, EIV	I ISO 7089:2000, EN ISO Characteristic steel	Characteristic steel		
	Internal threaded	Property class		ultimate tensile strength		fracture	
4	anchor rod ²⁾	acc. to	5.8	f _{uk} = 500 N/mm ²	f _{VK} = 400 N/mm ²	A ₅ > 8%	
		EN ISO 898-1:2013	8.8	f _{uk} = 800 N/mm ²	f _{Vk} = 640 N/mm ²	A ₅ > 8%	
	inless steel A4 (Material 1.44) h corrosion resistance steel				Characteristic steel	Elongation fracture	
	Threaded rod ¹⁾		50	$f_{UK} = 500 \text{ N/mm}^2$	f _{VK} = 210 N/mm ²	A ₅ > 8%	
1		acc. to EN ISO 3506-1:2020		f _{uk} = 700 N/mm ²	f _{VK} = 450 N/mm ²	$A_5 > 8\%$	
			80	f _{UK} = 800 N/mm ²	f _{VK} = 600 N/mm ²	$A_5 > 8\%$	
			50	for anchor rod class 50	Тук — 000 тилли	1,5 - 0,70	
2	Hexagon nut ¹⁾	acc. to	70	for anchor rod class 70			
		EN ISO 3506-1:2020	80				
3	Washer	Stainless steel A2, A4 (e.g.: EN ISO 887:200			7093:2000 or EN IS	O 7094:200	
	Internal threaded	Property class		Characteristic steel ultimate tensile strength	-	fracture	
4	anchor rod ²⁾	acc. to	50	f _{uk} = 500 N/mm ²	f _{yk} = 210 N/mm ²	A ₅ > 8%	
		EN ISO 3506-1:2020	70	f _{uk} = 700 N/mm ²	$f_{yk} = 450 \text{ N/mm}^2$	A ₅ > 8%	
²) U a	roperty class 80 only for stainles sing internally threaded anchor and strength class of the internally	rod screws and threaded		incl. nut and washer) must	at least correspond to	o the material	
	stic perforated sleeve ve sleeve SH			Polypropylene (PP)			
510	ve diceve en			Tronypropylene (Fr)			
	ulsider Injection System Kl stem KEM V for masonry	EM-UP + Vinylester or	Friu	Isider Injection			
	oduct description aterials				Annex A	1 5	



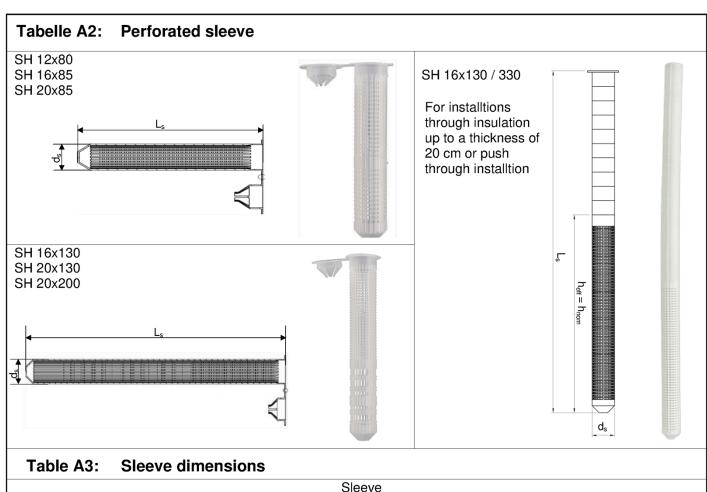

Sleeve								
Size	ds	Ls	$h_{ef} = h_{nom}$					
[mm]	[mm]	[mm]	[mm]					
SH 12x80	12	80	80					
SH 16x85	16	85	85					
SH 16x130	16	130	130					
SH 16x130 / 330 ¹⁾	16	330	130					
SH 20x85	20	85	85					
SH 20x130	20	130	130					
SH 20x200	20	200	200					

¹⁾ In Annxes C4 – C56 this sleeve is covered with SH 16x130

Table A4: Steel parts

Anchor rod									
Size	$d = d_{nom}$	di	Iges						
[mm]	[mm]	[mm]	[mm]						
IG-M6 ¹⁾	10	6	with alastra b Farm						
IG-M8 ¹⁾	12	8	with sleeve: h _{ef} - 5mm without sleeve: h _{ef}						
IG-M10 ¹⁾	16	10	without sleeve. Het						
M8	8	-	$h_{ef} + t_{fix} + 9,5$						
M10	10	-	$h_{ef} + t_{fix} + 11,5$						
M12	12	-	$h_{ef} + t_{fix} + 17,5$						
M16	16	-	$h_{ef} + t_{fix} + 20,0$						

¹⁾ Internal threaded rod with metric external thread

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Product description Sleeves and steel parts	Annex A 6



Specifications of intended use								
Anchorages subject to:	Static and quasi-static loads, fire exposure under tension and shear loads M8 up to M16, IG-M6 up to IG-M10 (with and without sleeve)							
Base material	Masonry group b: Solid brick masonry Annex B 2 Masonry group c: Hollow brick masonry Annex B 2 to B 4 Masonry group d: Autoclaved Aerated Concrete Annex B 2							
	Mortar strength class of the masonry M2,5 at minimum according to EN 998-2:2016. For other bricks in solid masonry and in hollow masonry or in autoclaved aerated concrete, the characteristic resistance of the anchor may be determined by job site tests according to EOTA TR 053, Edition July 2022 under consideration of the β-factor according to Annex C 1, Table C1.							
Hole drilling	See Annex C 4 – C 56							
Use category	Condition d/d: Installation and use in dry masonry Condition w/w: Installation and use in dry or wet masonry (incl. w/d installation in wet masonry and use in dry masonry)							
Temperature Range	T _a : - 40°C to +40°C (max. short term temperature +40°C and max. long term temperature +24°C) T _b : - 40°C to +80°C (max. short term temperature +80°C and max. long term temperature +50°C) T _a : - 40°C to +120°C (max. short term temperature +120°C and max. long term temperature +72°C)							

Note: The characteristic resistance for solid bricks and autoclaved aerated concrete are also valid for larger brick sizes and larger compressive strength of the masonry unit.

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (all materials).
- For all other conditions according to EN 1993-1-4:2006 + A1:2015 corresponding to corrosion resistance classes to Table A1 (stainless steel and high corrosion resistant steel).

Design:

- Verifiable calculation notes and drawings are prepared taking account the relevant masonry in the region of the anchorage, the loads to be transmitted and their transmission to the supports of the structure. The position of the anchor is indicated on the design drawings.
- The anchorages are designed in accordance with the EOTA TR 054, Edition July 2022, under the responsibility of an engineer experienced in anchorages and masonry work.
- Applies to all bricks if no other values are specified:
 - $N_{Rk} = N_{Rk,b} = N_{Rk,p} = N_{Rk,b,c} = N_{Rk,p,c}$
 - $V_{Rk} = V_{Rk,b} = V_{Rk,c,II} = V_{Rk,c,\perp}$
- For the calculation of pulling out a brick under tension loading N_{Rk,pb} or pushing out a brick under shear loading V_{Rk,pb} see EOTA Technical Report TR 054, Edition July 2022.
- $N_{\text{Rk,s}},\,V_{\text{Rk,s}}$ and $M^0_{\text{Rk,s}}$ see Annexes C 1 C 2
- For application with sleeve with drill bit size ≤ 15mm installed in joints not filled with mortar:
 - $N_{Rk,p,j} = 0.18 * N_{Rk,p}$ and $N_{Rk,b,j} = 0.18 * N_{Rk,b}$ ($N_{Rk,p} = N_{Rk,b}$ see Annex C 4 to C 56)
 - $V_{Rk,c,j} = 0.15 * V_{Rk,c}$ and $V_{Rk,b,j} = 0.15 * V_{Rk,b}$ ($V_{Rk,b}$ see Annex C 4 to C 56; and $V_{Rk,c}$ see Annex C 3)
- Application without sleeve installed in joints not filled with mortar is not allowed.

Installation:

- Anchor Installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Intended use Specifications	Annex B 1



Naming Density [kg/dm³] Dimensions LxBxH [mm] Annex	Picture	Anchor rods	Perforated sleeve	Naming Density [kg/dm³] Dimensions LxBxH [mm] Annex	Picture	Anchor rods	Perforated sleeve
lollow light weigh N 771-4:2011+A1	t concrete brick a :2015	cc. to		Hollow light weigh		acc. to	
AAC ρ = 0,35 - 0,60 ≥ 499x240x249 Table C4 - C10	1	M8 - M16 IG-M6 - IG-M10	12x80 16x85 16x130 20x85 20x130 20x200	VBL ρ≥ 0,6 ≥ 240x300x113 Table C187 - C193		M8 - M16 IG-M6 - IG-M10	12x80 16x89 16x13 20x89 20x13 20x20
	Hollow light v	veight cond	crete brid	ck acc. to EN 771-3	3:2011+A1:2015		
HBL 16DF ρ≥ 1,0 500x250x240 Table C172 - C179	T. C. C.	M8 - M16 IG-M6 - IG-M10	16x85 16x130 20x85 20x130 20x200	Bloc creux B40 ρ ≥ 0,8 495x195x190 Table C180 - C186	EFF	M8 - M16 IG-M6 - IG-M10	16x13 20x13
	Calcium si	lica bricks	acc. to E	N 771-2:2011+A1:	2015		
KS ρ≥ 2,0 ≥ 240x115x71 Table C11 - C18		M8 - M16 IG-M6 - IG-M10	12x80 16x85 16x130 20x85 20x130 20x200	KSL-3DF ρ≥1,4 240x175x113 Table C19 - C25	***	M8 - M16 IG-M6 - IG-M10	16x85 16x13 20x85 20x13
KSL-8DF ρ ≥ 1,4 248x240x238 Table C26 - C32		M8 - M16 IG-M6 - IG-M10	16x130 20x130 20x200	KSL-12DF ρ≥ 1,4 498x175x238 Table C33 - C40		M8 - M16 IG-M6 - IG-M10	16x13 20x13
	Solid	d clay brick	s acc. to	EN 771-1:2011+A	1:2015		
Mz-1DF ρ ≥ 2,0 ≥ 240x115x55 Table C41 - C47		M8 - M16 IG-M6 - IG-M10	12x80 16x85 16x130 20x85 20x130 20x200	$Mz - 2 DF$ $\rho \ge 2,0$ $\ge 240x115x113$ Table C48 - C55		M8 - M16 IG-M6 - IG-M10	12x80 16x85 16x13 20x85 20x13 20x20
Potental de la lacia de la	n System VEM III	D . Vinyloo	+or or Er	iulsider Injection			



e	lements (Anch	types an or and S		(Continued)			ı
Naming Density [kg/dm³] Dimensions LxBxH [mm] Annex	Picture	Anchor rods	Perforated sleeve	Naming Density [kg/dm³] Dimensions LxBxH [mm] Annex	Picture	Anchor rods	Perforated
'	Hollov	v clay brick	ks acc. to	EN 771-1:2011+A1	:2015		
Hlz-10DF ρ≥ 1,25 300x240x249 Table C56 - C63		M8 - M16 IG-M6 - IG-M10	12x80 16x85 16x130 20x85 20x130 20x200	Porotherm Homebric ρ≥0,7 500x200x299 Table C64 - C70		M8 - M16 IG-M6 - IG-M10	12x8 16x8 16x1 20x8 20x1
BGV Thermo ρ ≥ 0,6 500x200x314 Table C71 - C77		M8 - M16 IG-M6 - IG-M10	12x80 16x85 16x130 20x85 20x130	Brique creuse C40 ρ ≥ 0,7 500x200x200 Table C92 - C98		M8 - M16 IG-M6 - IG-M10	12x 16x 16x1 20x 20x1
Calibric R+ ρ ≥ 0,6 500x200x314 Table C78 - C84		M8 - M16 IG-M6 - IG-M10	12x80 16x85 16x130 20x85 20x130	Blocchi Leggeri ρ ≥ 0,6 250x120x250 Table C99 - C105		M8 - M16 IG-M6 - IG-M10	12x 16x 16x1 20x 20x1
Urbanbric ρ ≥ 0,7 560x200x274 Table C85 - C91		M8 - M16 IG-M6 - IG-M10	12x80 16x85 16x130 20x85 20x130	Doppio Uni ρ ≥ 0,9 250x120x120 Table C106 - C112		M8 - M16 IG-M6 - IG-M10	12x 16x 16x 20x 20x
ŀ	Hollow clay brick	s with ther	mal insu	lation acc. to EN 77	/1-1:2011+A1:201	5	
Coriso WS07		M8 - M16 IG-M6 - IG-M10	12x80 16x85 16x130 20x85 20x130 20x200	T8P ρ≥ 0,56 248x365x249 Perlite Table C128 - C134		M8 - M16 IG-M6 - IG-M10	12x 16x 16x 20x 20x 20x
T7MW ρ ≥ 0,59 248x365x249 Mineral wool Table C120 - C127		M8 - M16 IG-M6 - IG-M10	12x80 16x85 16x130 20x85 20x130 20x200	MZ90-G ρ ≥ 0,68 248x365x249 Mineral wool Table C135 - C141		M8 - M16 IG-M6 - IG-M10	12x 16x 16x 20x 20x 20x
riulsider Injection		P + Vinyles	ter or Fr	iulsider Injection			
system KEM V for ntended use		nex B 3					



Table B1: Overview brick types and properties with corresponding fastening elements (Anchor and Sleeves) (Continued)									
Naming Density [kg/dm³] Dimensions LxBxH [mm] Annex	Picture	Anchor rods	Perforated sleeve	Naming Density [kg/dm³] Dimensions LxBxH [mm] Annex	Picture	Anchor rods	Perforated sleeve		
	Hollow clay brick	s with ther	mal insu	lation acc. to EN 7	71-1:2011+A1:201	5			
Poroton FZ7,5 ρ≥ 0,90 248x365x249 Mineral wool Table C142 - C149		M8 - M16 IG-M6 - IG-M10	12x80 16x85 16x130 20x85 20x130 20x200	Poroton FZ9 ρ ≥ 0,90 248x365x249 Mineral wool Table C150 - C157		M8 - M16 IG-M6 - IG-M10	12x80 16x85 16x130 20x85 20x130 20x200		
Poroton S9 ρ≥ 0,85 248x365x249 Perlite Table C158 - C164		M8 - M16 IG-M6 - IG-M10	12x80 16x85 16x130 20x85 20x130 20x200	Thermopor TV8+ ρ ≥ 0,70 248x365x249 Mineral wool Table C165 - C171		M8 - M16 IG-M6 - IG-M10	12x80 16x85 16x130 20x85 20x130 20x200		

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Intended use Brick types and properties with corresponding fastening elements	Annex B 4



Table B2:	Installation parameters in autoaerted AAC and solid masonry (without sleeve) for prepositioned or push through installation										
Anchor size				M8	M10	IG-M6	M12	IG-M8	M16	IG-M10	
Nominal drill hole	e diameter	d ₀	[mm]	10 12 14			18				
Drill hole depth		h ₀	[mm]	$h_{ef} + t_{fix}^{1)}$							
Effective anchorage depth		h _{ef}	[mm]	80	≥ 90		≥ '	≥ 100		≥ 100	
Diameter of	Prepositioned installation	d _f ≤	[mm]	9	12	7	14	9	18	12	
clearance hole in the fixture	Push through installation	d _f ≤	[mm]	12	14	14	16	16	20	20	
Maximum installation torque		T _{inst}	[Nm]	See Annexes C 4 – C 56							
Minimum thickness of member		h _{min}	[mm]	h _{ef} + 30							
Minimum spacing		s _{min}	[mm]	See Annexes C 4 – C 56							
Minimum edge distance		C _{min}	[mm]								

 $^{^{1)}\,}$ Consider $t_{\mbox{\scriptsize fix}}$ in case of push through installation.

Table B3: Installation parameters in solid and hollow brick (with perforated sleeve) for prepositioned installation

Anchor size			M8 / M10 / IG-M6				M12 / M16 / IG-M8 / IG-M10		
Perforated sleeve SH			12x80	16x85	16x130	16x130/330	20x85	20x130	20x200
Nominal drill hole diameter	d ₀	[mm]	12	16	16	16	20	20	20
Drill hole depth	h_0	[mm]	85	90	135	330	90	135	205
Effective anchorage depth	h _{ef}	[mm]	80	85	130	130	85	130	200
Diameter of clearance hole in the fixture	d _f ≤	[mm]	9	9 7 (IG-M6) / 9 (M8) / 12 (M10)			9 (IG-M8) / 12 (IG-M10) / 14 (M12) / 18 (M16)		
Maximum installation torque	T_{inst}	[Nm]	See Annexes C 4 – C 56						
Minimum thickness of member	h _{min}	[mm]	115	115	195	195	115	195	240
Minimum spacing	s _{min}	[mm]	See Annexes C 4 − C 56						
Minimum edge distance	c _{min}	[mm]							

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Intended use Installation parameters	Annex B 5



Table B4: Installation parameters in solid and hollow bricks (with perforated sleeve) for prepositioned installation through non-load-bearing layers and/or push-through installation

Anchor size				M10 / ·M6	M12 / M16 / IG-M8 / IG-M10		
Perforated sleeve SH				16x130	16x130/330	20x130	20×200
Nominal drill hol	e diameter	d ₀	[mm]	16	16	20	20
Drill hole depth	h ₀	[mm]		h _{ef} + 5mm	+ t _{nll} + t _{fix} 1)		
Effective embedment depth	Prepositioned installation	h _{ef}	[mm]	130	130	130	200
	Push through installation	h _{ef}	[mm]	85	130	85	85
Maximum thickn loadbearing laye		max t _{nll}	[mm]	45	200	45	115
Diameter of	Prepositioned installation	d _f ≤	[mm]		7 (IG-M6) / 9 (M8) / 12 (M10)		2 (IG-M10) / / 18 (M16)
in the fixture	clearance hole in the fixture Push through installation		[mm]	18		22	
Maximum installation torque		T _{inst}	[Nm]	See Annexe		es C 4 – C 56	
Minimum thickne	ess of member	h _{min}	[mm]	195 (115)	195	195 (115)	240 (115)
Minimum spacing		S _{min}	[mm]	See Annexes C 4 – C 56			
Minimum edge distance		C _{min}	[mm]				

¹⁾ Consider $t_{\mbox{nll}}$ and/or $t_{\mbox{fix}}$ in case of non-loadbearing layers and/or push through installation.

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Intended use Installation parameters	Annex B 6



Table B5: Parameter cleaning and installation tools d_0 d_{b} $d_{b,min}$ **Anchor rod** Perforated sleeve Drill bit - Ø Brush - Ø min. Brush - Ø HD, CA [mm] [mm] [mm] [mm] Autoaerted ACC and solid masonry (without sleeve) M8 SCO10 12 10,5 10 M10 12 SCO12 14 12,5 M12 14 SCO14 16 14,5 M16 18 SCO₁₈ 20 18,5 Solid and hollow masonry (with sleeve) M8 SH 12x80 12 SCO12 14 12,5 SH 16x85 M8 / M10 / IG-M6 SH 16x130 16 **SCO16** 18 16,5 SH 16x130/330 SH 20x85 M12 / M16 / SH 20x130 20 SCO₂₀ 22 20,5 IG-M8 / IG-M10 SH 20x200

Cleaning and installation tools

Hand pump

(Volume ≥ 750 ml)



Compressed air tool

(min 6 bar)



Brush SCO



Brush extension RBL



Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Intended use Cleaning and installation tools	Annex B 7



Temperature in base material			Maximum working time	Minimum curing time 1)	
	Т		t _{work}	t _{cure}	
- 10°C	to	- 6°C	90 min ²⁾	24 h	
- 5°C	to	- 1 °C	90 min	14 h	
0°C	to	+ 4 °C	45 min	7 h	
+ 5°C	to	+ 9 °C	25 min	2 h	
+ 10 °C	to	+ 19°C	15 min	80 min	
+ 20 °C	to	+ 24 °C	6 min	45 min	
+ 25 °C	to	+ 29 °C	4 min	25 min	
+ 30 °C	to	+ 39 °C	2 min	20 min	
	+ 40 °C		1,5 min	15 min	
Cartridge temperature			+5°C to	+40°C	

¹⁾ The minimum curing time is only valid for dry base material. In wet base material the curing time must be doubled.

Table B7: Working and curing time - KEM-UP + Vinylester Winter

Temperature in base material		e material	Maximum working time	Minimum curing time 1)
	Т		t _{work}	t _{cure}
- 20 °C	to	- 16°C	75 min	24 h
- 15°C	to	- 11 °C	55 min	16 h
- 10°C	to	- 6°C	35 min	10 h
- 5 °C	to	- 1 °C	20 min	5 h
0°C	to	+ 4 °C	10 min	2,5 h
+ 5 °C	to	+ 9 °C	6 min	80 min
+ 10 °C			6 min 60 min	
Cartridge temperature			-20°C to	o +10°C

¹⁾ The minimum curing time is only valid for dry base material. In wet base material the curing time must be doubled.

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry

Intended use
Working and curing time

Annex B 8

²⁾ Cartridge temperature must be at minimum +15°C




Installation instructions Drill a hole to the required embedment depth with drilling method according to Annex C 4 - C 56. Drill bit diameter according to Table B5. Blow the bore hole clean minimum 2x from the bottom or back by hand pump or compressed air tool (Annex B 7). For applications in solid masonry with a bore hole depth $h_0 > 100$ mm cleaning with compressed air is required. Attach brush SCO according to Table B5 to a drilling machine or a cordless screwdriver. Brush the bore hole minimum 2x with brush over the entire embedment depth in a twisting motion (if necessary, use a brush extension RBL). Finally blow the bore hole clean minimum 2x from the bottom or back by hand pump or compressed air tool (Annex B 7). For applications in solid masonry with a bore hole depth $h_0 > 100$ mm cleaning with compressed air is required. Screw on static-mixing nozzle MIX / MIX+, and load the cartridge into an appropriate dispensing tool. If necessary, cut off the foil tube clip before use. For every working interruption longer than the maximum working time twork (Annex B 8) as well as for new cartridges, a new static-mixer shall be used. Mark setting position on the anchor rod. Consider t_{nll} and/or t_{fix} in case of installation through non-loadbearing layers and/or push through installation. The anchor rod shall be free of dirt, grease, oil or other foreign material. $h_{ef} + (t_{nll}) + (t_{fix})$ Not proper mixed mortar is not sufficient for fastening. Dispense and discard mortar until an uniform grey colour is shown (at least 3 full strokes; for foil tube cartridges at least 6 full strokes).

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Intended use Installation instructions	Annex B 9




Installation instructions (continuation)


Installation without sleeve



Starting at bottom of the hole and fill the hole up to approximately two-thirds with adhesive. (If necessary, a mixer nozzle extension VL shall be used.) Slowly withdraw of the static mixing nozzle avoid creating air pockets Observe the temperature related working time t_{work} (Annex B 8).




Insert the anchor rod while turning slightly up to the embedment mark.



Annular gap between anchor rod and base material must be completely filled with mortar. For push through installation the annular gap between anchor rod and fixture must be filled with mortar.


Otherwise, the installation must be repeated starting from step 6 before the maximum working time t_{work} has expired.

Installation with sleeve



Insert the perforated sleeve into the hole flush with the surface of the masonry. Never modify the sleeve in anchoring area (h_{ef}).


For installation with sleeve SH 16x130/330 through a non-load-bearing layer and/or fixture the clamping area may be reduced to the thickness of the nonload-bearing layer and/or attachment.



Starting from the bottom or back fill the sleeve with mortar. (If necessary, a mixer nozzle extension VL shall be used.)

Refer to the cartridge label or the technical data sheet for the exact amount of mortar. For push-through installation through the fixture the sleeve must also be completely filled with mortar up to the fixture.

Observe the temperature related working time twork (Annex B 8).



Insert the anchor rod with a slight twist up to the mark

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection	
system KEM V for masonry	


Intended use

Installation instructions (continuation)


Annex B 10



Installation instructions (continuation)



Temperature related curing time t_{cure} (Annex B 8) must be observed. Do not move or load the fastener during curing time.



Install the fixture by using a calibrated torque wrench. Observe maximum installation torque (Annex C 4 to C 56).

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry

Intended use

Installation instructions (continuation)

Annex B 11



					A	nchora	ige				β-Factor			
Base material	anchor	size	Perforate sleeve S			depth	· [-	T _a :	: 40°C /	24°C	Т _ь : 80°С	C / 50°C	T _c : 120°	C / 72°C
						h _{ef}		d	l/d	w/d w/w	d/d	w/d w/w	d/d	w/d w/w
Autoclaved aerated concrete	all siz	es	with and without S			all		0,	,95	0,86	0,81	0,73	0,81	0,73
	d₀ ≤ 14	mm	with SH			all		0,	,93	0,80	0,87	0,74	0,65	0,56
0-1-1	d ₀ ≥ 16	mm	Willi Si i			all		0,	,93	0,93	0,87	0,87	0,65	0,65
Calcium silica bricks	d₀ ≤ 14	mm	without S	ш		100 m		0,	,93	0,80	0,87	0,74	0,65	0,56
bricks	d₀≥ 16	mm	mm williout 3		_	100 m	''''	0,	,93	0,93	0,87	0,87	0,65	0,65
	all siz	es	without S	Н	>	100 m	ım	0,	,93	0,56	0,87	0,52	0,65	0,40
			with SH			all		0,	,86	0,86	0,86	0,86	0,73	0,73
Clay Bricks	all siz	es	without S	Н	<u> </u>	100 m	ım	_		0,80	0,87	0,74	0,65	0,56
,			without S			100 m				0,43	0,86	0,43	0,73	0,37
	d ₀ ≤ 12	mm	with and							0,80	0,87	0,74	0,65	0,56
Concrete bricks	d ₀ ≥ 16		without S			all				0,93	0,87	0,87	0,65	0,65
	au = 10 mm							0,	,50	0,55	0,07	0,07	0,00	0,00
	haracte	ristic	steel resi	star	ice			_		T	T	T	I	I
Anchor size				Ι.			M8	4	M10	M12		IG-M6	IG-M8	IG-M10
Cross section area				A _s		[mm²]	36,6		58	84,3	157	-	-	-
Characteristic tens	sion resis							_						
		4.6 aı	nd 4.8	N _{Rk}	ĸ,s	[kN]	15 (13	3)	23 (21)	34	63	_3)	_3)	_3)
Steel, Property clas	Steel, Property class		nd 5.8	N _{Rk}	ĸ,s	[kN]	18 (17	')	29 (27)	42	78	10	17	29
		8.8		N _{Rk}	۰,s	[kN]	29 (27	')	46 (43)	67	125	16	27	46
Stainless steel A2,	A4 and	50		N _{Rk}		[kN]	18		29	42	79	_3)	_3)	_3)
HCR, class	44 and	70			۱,٥ ۲,۶	[kN]	26	\top	41	59	110	14	26	41
(A2 only class 50 ar	nd 70)	80			N _{Rk,s} [kN]		29	+	46	67	126	_3)	_3)	_3)
Characteristic tens	sion resis		, Partial fac			[[(, 1]			-10	07	1 120			
			nd 5.6	γ _{Ms}		[-]			2	,0			_3)	
Steel, Property clas	S	4.8, 5	5.8 and 8.8	γ _{Ms}		[-]					1,5			
Otainless steel AO	Λ 1 a a a l	50		γ _{Ms}		[-]	2,86				_3)			
Stainless steel A2, AHCR, class	44 and	70		γ _{Ms}		[-]	2,00			 1,87				
(A2 only class 50 ar	nd 70)	80				[-]			1	,6	1,07	T	_3)	
Characteristic she			Steel failure	$\frac{\gamma_{Ms}}{with}$			arm ¹⁾		'	,0		<u> </u>	/	
		T	nd 4.8	V ⁰ _F	?k.s	[kN]	7 (6)		12 (10)	17	31	_3)	_3)	_3)
Steel, Property clas	s		nd 5.8	V ⁰ F	k.s	[kN]	9 (8)	+	15 (13)	+	39	5	9	15
		8.8		V^0	≀k,s	[kN]	15 (13	3)	23 (21)	34	63	8	14	23
Stainless steel A2,	A4 and	50		\V ⁰ B	≀k,s	[kN]	9		15	21	39	_3)	_3)	_3)
HCR, class		70		\V ⁰ B	≀k,s	[kN]	13		20	30	55	7	13	20
(A2 only class 50 and 70) 80			V ⁰ _F	?k,s	[kN]	15		23	34	63	_3)	_3)	_3)	
Friulsider Injecti system KEM V for Performances			M-UP + Vin	ıyles	ster	or Frit	ulsider	· In	njection	1		Anne	x C 1	
β-factors for job s Characteristic ste	•	•			d she	ear loa	d							



Table C2: Characteristic steel resistance (continuation)												
Anchor size				М8	M10	M12	M16	IG-M6	IG-M8	IG-M10		
Cross section area A _s [mm²]					58	84,3	157	-	-	-		
Characteristic shear resistance, Steel failure with lever arm ¹⁾												
	4.6 and 4.8	М ⁰ _{Rk,s}	[Nm]	15 (13)	30 (27)	52	133	_3)	_3)	_3)		
Steel, Property class	5.6 and 5.8	М ⁰ _{Rk,s}	[Nm]	19 (16)	37 (33)	65	166	8	19	37		
	8.8	М ⁰ _{Rk,s}	[Nm]	30 (26)	60 (53)	105	266	12	30	60		
Stainless steel A2, A4 and	50	М ⁰ _{Rk,s}	[Nm]	19	37	66	167	_3)	_3)	_3)		
HCR, class	70	М ⁰ Rk,s	[Nm]	26	52	92	232	11	26	52		
(A2 only class 50 and 70)	80	М ⁰ _{Rk,s}	[Nm]	30	59	105	266	_3)	_3)	_3)		
Characteristic shear resista	nce, Partial facto	r ²⁾										
Stool Property class	4.6 and 5.6	γ _{Ms,V}	[-]		1,6	6 7			_3)			
Steel, Property class	4.8, 5.8 and 8.8	γ _{Ms,V}	[-]				1,25					
Stainless steel A2, A4 and HCR, class	50	γ _{Ms,V}	[-]		2,3	88			_3)			
	70	γ _{Ms,V}	[-]				1,56					
(A2 only class 50 and 70)	80	γ _{Ms,V}	[-]		1,3	33			_3)			

¹⁾ Values are only valid for the given stress area A_s. Values in brackets are valid for undersized threaded rods with smaller stress area A_s for hot-dip galvanised threaded rods according to EN ISO 10684:2004+AC:2009.

Table C3: Characteristic steel resistance under fire exposure 1)

Anchor size		М8	M10	M12	M16	IG-M6	IG-M8	IG-M10		
Characteristic tension resistance, S										
	R30	$N_{Rk,s,fi}$	[kN]	1,1	1,7	3,0	5,7	0,3	1,1	1,7
Steel, Property class 5.8, and higher;	R60	$N_{Rk,s,fi}$	[kN]	0,9	1,4	2,3	4,2	0,2	0,9	1,4
Stainless steel A2, A4 and HCR, class 50 and higher	R90	$N_{Rk,s,fi}$	[kN]	0,7	1,0	1,6	3,0	0,2	0,7	1,0
3	R120	$N_{Rk,s,fi}$	[kN]	0,5	0,8	1,2	2,2	0,1	0,5	0,8
Characteristic shear resistance, Ste	el failure	without	lever a	arm						
	R30	$V_{Rk,s,fi}$	[kN]	1,1	1,7	3,0	5,7	0,3	1,1	1,7
Steel, Property class 5.8, and higher; Stainless steel A2. A4 and HCR.	R60	$V_{Rk,s,fi}$	[kN]	0,9	1,4	2,3	4,2	0,2	0,9	1,4
class 50 and higher	R90	$V_{Rk,s,fi}$	[kN]	0,7	1,0	1,6	3,0	0,2	0,7	1,0
3	R120	$V_{Rk,s,fi}$	[kN]	0,5	0,8	1,2	2,2	0,1	0,5	0,8
Characteristic shear resistance, Ste	el failure	with lev	er arm							
	R30	$M_{Rk,s,fi}$	[Nm]	1,1	2,2	4,7	12,0	0,2	1,1	2,2
Steel, Property class 5.8, and higher;	R60	M _{Rk,s,fi}	[Nm]	0,9	1,8	3,5	9,0	0,2	0,9	1,8
Stainless steel A2, A4 and HCR, class 50 and higher	R90	M _{Rk,s,fi}	[Nm]	0,7	1,3	2,5	6,3	0,1	0,7	1,3
3	R120	M _{Rk,s,fi}	[Nm]	0,5	1,0	1,8	4,7	0,1	0,5	1,0

¹⁾ partial factor in case of fire is 1,0 for all steel types and load directions.


Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances	Annex C 2
Characteristic steel resistance under tension and shear load – under fire exposure	

²⁾ in absence of national regulation

³⁾ Fastener type not part of the ETA







 C_{cr} = Char. Edge distance C_{min} = Minimum Edge distance

S_{cr,II}; (S_{min,II}) = Characteristic (minimum) spacing for anchors placed parallel to horizontal joint

 $S_{cr,\perp}$; $(S_{min,\perp})$ = Characteristic (minimum) spacing for anchors placed perpendicular to horizontal joint

Load direction Anchor position	Tensio	n load	Shear load p	arallel to free e V _{II}	Shear load perpendicular to free edge V ⊥		
Anchors parallel to horizontal joint s _{cr,II} ; (s _{min,II})		$lpha_g$ II,N	V	α _g ,۷	V	$\alpha_{g \text{ II,V} \perp}$	
Anchors vertical to horizontal joint $s_{cr,\perp}$; $(s_{min,\perp})$		$\alpha_{g\perp,N}$	V	$\alpha_{g\perp,V\parallel}$	V •	$\alpha_{g\perp,V\perp}$	

 $\alpha_{\text{edge},N}$ = Reduction factor for tension loads at the free edge for $c_{\text{min}} \le c < c_{\text{cr}}$ (single anchor)

 $\alpha_{\text{edge,V} \perp}$ = Reduction factor for shear loads perpendicular to the free edge for $c_{\text{min}} \leq c < c_{\text{cr}}$ (single anchor)

 $\alpha_{\text{edge,V II}}$ = Reduction factor for shear loads parallel to the free edge for $c_{\text{min}} \le c < c_{\text{cr}}$ (single anchor)

 $\alpha_{g \parallel,N}$ = Group factor for anchors parallel to horizontal joint under tension load

 $\alpha_{g\perp,N}$ = Group factor for anchors perpendicular to horizontal joint under tension load

 $\alpha_{g \parallel,V \parallel}$ = Group factor for anchors parallel to horizontal joint under shear load parallel to the free edge

 $\alpha_{g\perp,V\parallel}$ = Group factor for anchors perpendicular to horizontal joint under shear load parallel to the free edge

 $\alpha_{\alpha \parallel V \perp}$ = Group factor for anchors parallel to horizontal joint under shear load perpendicular to the free edge

 $\alpha_{g\perp,V\perp}$ = Group factor for anchors perpendicular to hor. joint under shear load perpendicular to the free edge

Single anchor at the edge: $N_{Rk,b,c} = \alpha_{edge,N} * N_{RK,b}$ resp. $N_{Rk,p,c} = \alpha_{edge,N} * N_{RK,p}$

 $V_{Rk,c | I} = \alpha_{edge,V | I} * V_{Rk,b}$

 $V_{Rk,c \perp} = \alpha_{edge,V \perp} * V_{Rk,b}$

Group of 2 anchors: $N^{g}_{Rk} = \alpha_{g,N} * N_{RK,b}$

Definition of the reduction- and group factors

 $V^{g}_{Rk \, II} \ = \alpha_{g,V \, II} \,^{\star} \, V_{Rk,b} \qquad \qquad \text{resp.} \ V^{g}_{Rk \, \bot} \ = \alpha_{g,V \, \bot} \,^{\star} \, V_{Rk,b} \qquad \qquad (\text{for } c \geq c_{cr})$

 $V^{g}_{Rk,c \mid I} = \alpha_{g,V \mid I} * V_{Rk,b} \qquad \qquad \text{resp. } V^{g}_{Rk,c \perp} = \alpha_{g,V \perp} * V_{Rk,b} \qquad \qquad (\text{for } c \geq c_{min})$

Group of 4 anchors: $N^{g}_{Rk} = \alpha_{g \; II,N} * \alpha_{g \; \bot,N} * N_{RK,b}$

 $V^{g}_{Rk \mid I} = \alpha_{g \mid I,V \mid I} * \alpha_{g \perp,V \mid I} * V_{Rk,b} \quad resp. \quad V^{g}_{Rk \perp} = \alpha_{g \mid I,V \perp} * \alpha_{g \perp,V \perp} * V_{Rk,b} \quad (\text{for } c \geq c_{cr})$

 $V^{g}_{Rk,c \, II} \ = \alpha_{g \, II,V \, II} \,^{\star} \, \alpha_{g \, \perp,V \, II} \,^{\star} \, V_{Rk,b} \quad resp. \ V^{g}_{Rk,c \, \perp} \ = \alpha_{g \, II,V \, \perp} \,^{\star} \, \alpha_{g \, \perp,V \, \perp} \,^{\star} \, V_{Rk,b} \ \ (for \, c \geq c_{min})$

Equations depend on anchor position and load direction (see table above). Reduction factor, group factor and resistances see annex C 4 - C 56. Reduction for installation in joints see annex B 1.

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances	Annex C 3



Brick type: Autoclaved aerated concrete - AAC

Table C4: Stone description

Brick type		Autoclaved aerated concrete AAC
Density	ρ [kg/dm³]	0,35 – 0,6
Normalised mean compressive strenght	f_b [N/mm ²]	≥ 2, ≥ 4 or ≥ 6
Code		EN 771-4:2011+A1:2015
Producer (Country)		e.g. Porit (DE)
Brick dimensions	[mm]	≥ 499 x 240 x 249
Drilling method		Rotary drilling



Table C5: Installation parameter

Anchor size		[-]	M8	M10	M12	M16	IG-M6	IG-M8	IG-M10			
Installation torque	Tinst	[Nm]	$[Nm] \qquad \leq 5 \qquad \leq 5 \qquad \leq 10 \qquad \leq 10 \qquad \leq 5 \qquad \leq 5$									
Char. Edge distance	Ccr	[mm]	150 (for shear loads perpendicular to the free edge: c _{cr} = 210)									
Minimum Edge Distance	Cmin	[mm]	50									
Characteristic Spacing	Scr, II	[mm]		300								
Characteristic Spacing	Scr, ⊥	[mm]	250									
Minimum Spacing	[mm]	50										
William Spacing	Smin, ⊥	[]		30								

Table C6: Reduction factors for single anchors at the edge

	Tension load			Shear load								
'	ension load		Perpendic	ular to the fre	ee edge	Parallel to the free edge						
+	with c ≥	αedge, N	11	with c ≥	αedge, V⊥		with c ≥	αedge, V II				
	50	0,85	-	50	0,12		50	0,70				
	30	0,03		125	0,50	Ţ	125	0,85				
	150	1,00		210	1,00		150	1,00				

Table C7: Factors for anchor groups under tension load

An	Anchor position parallel to hor. joint				Anchor position perpendicular to hor. joint					
-	with c ≥	with s ≥	αg II, N		with c ≥	with s ≥	αg ⊥, N			
	50	50	1,10	•	50	50	0,75			
	150	50	1,25		150	50	0,90			
	150	300	2,00		150	250	2,00			

Table C8: Factors for anchor groups under shear load

	Anchor	position pa	rallel to hor.	. joint	Anchor position perpendicular to hor. joint				
Shear load		with c ≥	with s ≥	α _g II,V ⊥	1	with c ≥	with s ≥	$\alpha_{g \perp, V \perp}$	
perpendicular	•••	50	50	0,20		50	50	0,25	
to the free		210	50	1,60		210	50	1,80	
edge	***************************************	210	300	2,00	· ;	210	250	2,00	
Shear load		with c ≥	with s ≥	α _g II,V II	1	with c ≥	with s ≥	α _{g ⊥,} ν II	
parallel to the	•	50 50 1,15	•	50	50	0,80			
free edge		150	50	1,60	•	150	50	1,10	
l lice cage	se eage		300	2,00		150	250	2,00	

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry

Performances Autoclaved Aerated Concrete - AAC

Description of the stone, Installation parameters, Reduction- and Group factors

Annex C 4



Brick type: Aut	oclave	ed aerat	ed concr	ete – AA	C					
1					shear loa	d resista	nces			
					cteristic Res			and s ≥ s _{cr}		
	Perforated sleeve					Use condit				
	sle	l de				w/d		d/d		
	ited	Effecitve inchoragi depth		d/d			w/w	w/d w/w		
Anchor size	fore	Effecitve Anchorage depth							All	
	Per							120°C/72°C	temperature ranges	
	ds	h _{ef}	N	$J_{Rk,b} = N_{Rk,p}$	1)	1	$N_{Rk,b} = N_{Rk,b}$	1) p	$V_{Rk,b}^{1)}$	
	[mm]	[mm]				[kN]				
	ed mear		ssive stren			0.0		≥ 0,35 kg/d		
M8	-	80	1,2	0,9	0,9	0,9	0,9	0,9	1,5	
M10 / IG-M6	-	90	1,2	0,9	0,9	0,9	0,9	0,9	2,5	
M12 / M16 / IG-M8 / IG-M10	-	100	2,0	1,5	1,5	1,5	1,5	1,5	2,5	
M8	SH 12	80	1,2	0,9	0,9	0,9	0,9	0,9	1,5	
M8 / M10/ IG-M6	SH 16	≥ 85	1,2	0,9	0,9	0,9	0,9	0,9	2,5	
M12 / M16 / IG-M8 / IG-M10	SH 20	≥ 85	2,0	1,5	1,5	1,5	1,5	1,5	2,5	
1) $N_{Rk,b,c} = N_{Rk,p,c}$ and	d V _{Rk,c} II =	= V _{Rk,c} ⊥ac	cording to An	nex C 3						
				Charac	cteristic Res	istances w	rith c ≥ c _{cr}	and s ≥ s _{cr}		
	ave ave					ion	- 01			
	Perforated sleeve	Effecitve Anchorage depth		d/d			w/d w/w		d/d w/d	
Anchor size	orat	nch					VV/ VV	w/w All		
	Perf		40°C/24°C	80°C/50°C	120°C/72°C	40°C/24°C	80°C/50°C	120°C/72°C	temperature ranges	
	ds	h _{ef}	N	$J_{Rk,b} = N_{Rk,p}$	1)	1	$N_{Rk,b} = N_{Rk,b}$	1) p	V _{Rk,b} ¹⁾	
	[mm]	[mm]		,		[kN]	,2	r	,	
	ed mear	<u> </u>	ssive stren	ght f _b ≥ 4	N/mm²;		Density ρ	≥ 0,50 kg/d		
M8	-	80	3,0	2,5	2,0	2,5	2,0	2,0	4,5	
M10 / IG-M6	-	90	3,0	2,5	2,0	2,5	2,0	2,0	7,5	
M12 / M16 / IG-M8 / IG-M10	-	100	5,0	4,5	4,0	4,5	4,0	4,0	7,5	
M8	SH 12	80	3,0	2,5	2,0	2,5	2,0	2,0	4,5	
M8 / M10/ IG-M6	SH 16	≥ 85	3,0	2,5	2,0	2,5	2,0	2,0	7,5	
M12 / M16 / IG-M8 / IG-M10	SH 20	≥ 85	5,0	4,5	4,0	4,5	4,0	4,0	7,5	
1) $N_{Rk,b,c} = N_{Rk,p,c}$ and	d V _{Rk,c II} =	= V _{Rk,c} ⊥ac	cording to An	nex C 3						
Friulsider Injection system KEM V for			IP + Vinyle	ster or Fri	ulsider Inje	ction				
Performances aut Characteristic Resi				AAC				Annex C	5	



Brick type: Autoclaved aerated concrete – AAC										
		Characteristic Resistances with c ≥ c _{cr} and s ≥ s _{cr}								
						Use condit	ion			
	d sleeve	Effecitve Anchorage depth		d/d			w/d w/w			
Anchor size	Perforated sleeve Effecitve Anchorage	And	40°C/24°C	80°C/50°C	120°C/72°C	40°C/24°C	80°C/50°C	120°C/72°C	All temperature ranges	
	L L	h _{ef}		J _{Rk,b} = N _{Rk,p}	1)	1	$N_{Rk,b} = N_{Rk,b}$	1) p	V _{Rk,b} ¹⁾	
		[mm]				[kN]				
Normalis	ed mear	compre	ssive strer	ight f _b ≥ 6	N/mm²; Density ρ ≥ 0,60 kg/dm³				lm³	
M8	-	80	4,0	3,5	3,0	3,5	3,0	3,0	6,0	
M10 / IG-M6	-	90	4,0	3,5	3,0	3,5	3,0	3,0	10,0	
M12 / M16 / IG-M8 / IG-M10	-	100	7,0	6,0	5,5	6,5	5,5	5,5	10,0	
M8	SH 12	80	4,0	3,5	3,0	3,5	3,0	3,0	6,0	
M8 / M10/ IG-M6	SH 16	≥ 85	4,0	3,5	3,0	3,5	3,0	3,0	10,0	
M12 / M16 / IG-M8 / IG-M10	SH 20	≥ 85	7,0	6,0	5,5	6,5	5,5	5,5	10,0	

¹⁾ $N_{Rk,b,c} = N_{Rk,p,c}$ and $V_{Rk,c \, II} = V_{Rk,c} \bot according to Annex C 3$

Table C10: Displacements

Anghor size	hef	δη / Ν	δΝο	δN∞	δv / V	δνο	δ∨∞
Anchor size	[mm]	[mm/kN]	[mm]	[mm]	[mm/kN]	[mm]	[mm]
M8 – M12 / IG-M6 – M10	all	0,1	0,1*N _{Rk} / 2,8	2*δN0	0,3	0,3*V _{Rk} / 2,8	1,5*δvo
M16	all	,	,		0,1	0,1*V _{Rk} /2,8	1,5*δ∨0

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry

Performances autoclaved aerated concrete – AAC
Characteristic Resistances and Displacements

Annex C 6



Brick type: Solid calcium silica brick KS-NF

Table C11: Stone description

Brick type		Solid calcium silica brick KS-NF		
Density	ρ [kg/dm³]	≥ 2,0		
Normalised mean compressive strenght	f _b [N/mm²]	≥ 28		
Conversion factor for low compressive strengths	ver .	$(f_b / 28)^{0,5} \le 1,0$		
Code		EN 771-2:2011+A1:2015		
Producer (Country)		e.g. Wemding (DE)		
Brick dimensions	[mm]	≥ 240 x 115 x 71		
Drilling method		Hammer drilling		



Table C12: Installation parameter

Anchor size		[-]	M8	M10	M12	M16	IG-M6	IG-M8	IG-M10
Installation torque	T _{inst}	[Nm]	≤ 10	≤ 10	≤ 15	≤ 15	≤ 10	≤ 10	≤ 10
Char. Edge distance (under fire conditions)	Ccr; (Ccr,fi)	[mm]	(for s	hear load		150 (2 h _{ef}) the free e	dae: c _{cr} =	: 240)
Minimum Edge Distance	Cmin	[mm]	(101.0		<u> </u>	60		<u> </u>	
Characteristic Spacing	Scr, II; (Scr,fi, II)	[mm]				240 (4 h _{ef}))		
(under fire conditions)	Scr, ⊥; (Scr,fi, ⊥)	[mm]				150 (4 h _{ef}))		
Minimum Spacing	Smin, II; Smin, ⊥	[mm]				75			

Table C13: Reduction factors for single anchors at the edge

-	Tension load			rpendicular t	o free edge	Shear load parallel to free edge		
	with c ≥	αedge, N		with c ≥	αedge, V ⊥		with c ≥	αedge, V II
	60 ¹⁾	0,50		60	0,30		60	0,60
•	100 ¹⁾	0,50		100	0,50	•	100	1,00
	150 ¹⁾	1,00		240	1.00		150	1.00
	180	1,00		240	1,00		130	1,00

¹⁾ All applications, except for hef = 200mm and without sleeve

Table C14: Factors for anchor groups under tension load

Anchor position parallel to hor. joint				Anchor position perpendicular to hor. joint			
	with c ≥	with s ≥	αg II, N		with c ≥	with s ≥	αg⊥, N
	60 ¹⁾	75	0,70		60 ¹⁾	75	1,15
	150 ¹⁾	75	1,40		150 ¹⁾	75	2,00
• •	150 ¹⁾	240	2,00		150 ¹⁾	150	2,00
	180 ²⁾	75	1,00		180 ²⁾	75	1,15
	180 ²⁾	240	1,70		180 ²⁾	150	2.00
	240 ²⁾	240	2,00				2,00

¹⁾ All applications, except for hef = 200mm and without sleeve

Table C15: Factors for anchor groups under shear load

	Ancho	r position pa	rallel to hor.	joint	Anchor position perpendicular to hor. joint			
Shear load		with c ≥	with s ≥	α _g II,V ⊥		with c ≥	with s ≥	$\alpha_{g\perp,V\perp}$
perpendicular	• • •	60	75	0,75		60	75	0,90
to the free		150	75	2,00		150	75	2,00
edge		150	240	2,00		150	150	2,00
Shear load		with c ≥	with s ≥	αg II,V II		with c ≥	with s ≥	αg ⊥,V II
parallel to the		60	75	2,00	•	60	75	2,00
free edge		150	75	2,00		150	75	2,00
I nee eage		150	240	2.00		150	150	2.00

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry

Performances solid calcium silica brick KS-NF

Description of the stone, Installation parameters, Reduction- and Group factors

Annex C7

²⁾ Only for application with hef = 200mm and without sleeve



Brick type: Solid calcium silica brick KS-NF

Table C16: Characteristic values of tension and shear load resistances

				Characteristic Resistances with $c \ge c_{cr}$ and $s \ge s_{cr}$								
	g e	o o	Use condition									
	lee/	Perforated sleeve Effective Anchorage		d/d				d/d				
	8			u, u			w/w		w/w (w/d)			
Anchor size	ltec	And And							All			
	ora		40°C/24°C	80°C/50°C	120°C/72°C	40°C/24°C	80°C/50°C	120°C/72°C				
Julia	erf								ranges			
	۵.	h _{ef}	$N_{Rk,b} = N_{Rk,p}^{(2)}$			1	$N_{Rk,b} = N_{Rk,b}$	2) p	$V_{Rk,b}^{(2)}$			
		[mm]		[kN]								
	Normalised mean compressive strength f _b ≥ 28 N/mm ^{2 1)}											
M8	-	80										
M10 / IG-M6	-	≥ 90	7,0	6,5	5,0	6,0	5,5	4,0				
M12 / IG-M8	-	≥ 100										
M16 / IG-M10	-	≥ 100	7,0	6,5	5,0	7,0	6,5	5,0				
M10 / M12 / M16 / IG-M6 / IG-M8 / IG-M10	-	200	9,0	8,5	6,5	5,5	5,0	4,0	7,0			
M8	SH 12	80	7,0	6,5	5,0	6,0	5,5	4,0				
M8 / M10/ IG-M6	SH 16	≥ 85										
M12 / M16 / IG-M8 / IG-M10	SH 20	≥ 85	7,0	6,5	5,0	7,0	6,5	5,0				

¹⁾ For lower compressive strengths resistances must be multiplied by the conversion factor according to Table C11. For stones with higher strengths, the shown values are valid without conversion.

Table C17: Displacements

Anchor size	hef	δη / Ν	δΝο	δN∞	δv / V	δνο	δ∨∞
Anchor Size	[mm]	[mm/kN]	[mm]	[mm]	[mm/kN]	[mm]	[mm]
M8 – M12 / IG-M6 – M10	all	0.1	0,1*N _{Rk} / 3,5	2*δΝο	0,3	0,3*V _{Rk} / 3,5	1,5*δvo
M16	all	0,1			0,1	0,1*V _{Rk} /3,5	1,5*δνο

Table C18: Characteristic values of tension and shear load resistances under fire exposure

						-
		Effective		Characteristic	Resistances	
Ancheroize	Perforated	anchorage depth		$N_{Rk,b,fi} = N_R$	$k,p,fi = V_{Rk,b,fi}$	
Anchor size	sleeve	h _{ef}	R30	R60	R90	R120
		[mm]	[kN]			
M8	-	80				
M10 / IG-M6	-	≥ 90	0,48	0,41	0,34	0,30
M12 / IG-M8	-	≥ 100	0,46	0,41	0,34	0,30
M16 / IG-M10	-	≥ 100				
M8	SH 12	80				
M8 / M10 /IG-M6	SH 16	≥ 85	0.47	0.26	_ 1)	_ 1)
M12 / M16 / IG-M8 /IG-M10	SH 20	≥ 85	0,47	0,26	- '/	- '/

¹⁾ no performance assessed

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances solid calcium silica brick KS-NF Characteristic Resistances and Displacements	Annex C 8


²⁾ $N_{Rk,b,c} = N_{Rk,p,c}$ and $V_{Rk,c | II} = V_{Rk,c} \perp$ according to Annex C 3



Brick type: Hollow Calcium silica brick KSL-3DF

Table C19: Stone description

Brick type		Hollow calcium silica brick KSL-3DF
Density	ρ [kg/dm³]	≥ 1,4
Normalised mean compressive strenght	f _b [N/mm ²]	≥ 14
Conversion factor for low compressive strengths	ver	$(f_b / 14)^{0.75} \le 1.0$
Code		EN 771-2:2011+A1:2015
Producer (Country)		e.g. KS-Wemding (DE)
Brick dimensions	[mm]	≥ 240 x 175 x 113
Drilling method		Rotary drilling



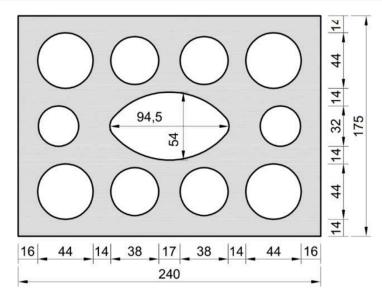


Table C20: Installation parameter

The second secon										
Anchor size	[-]	M8	M10	M12	M16	IG-M6	IG-M8	IG-M10		
Installation torque	Tinst	[Nm]	≤5 ≤5 ≤8 ≤8 ≤5 ≤8 ≤8						≤ 8	
Char. Edge distance	Ccr	[mm]	120 (for shear loads perpendicular to the free edge: c _{cr} = 240)							
Minimum Edge Distance	Cmin	[mm]	60							
Characteristic Spacing	Scr, II	[mm]		240						
Characteristic Spacing	Scr, ⊥	[mm]		120						
Minimum Spacing	Smin, II;	[mm]	120							
William Spacing	Smin, ⊥	[[[]]				120				

Table C21: Reduction factors for single anchors at the edge

Tension load				Shear load							
'	ension load		Perpendic	ular to the fre	ee edge	Parallel to the free edge					
	with c ≥	αedge, N		with c ≥	αedge, V⊥		with c ≥	αedge, V II			
•	60	1,00	→	60	0,30] <u>•</u>	60	1,00			
	120	1,00		240	1,00		120	1,00			

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection
system KEM V for masonry

Performances hollow calcium silica brick KSL-3DF

Description of the stone, Installation parameters, Reductionfactors

Annex C 9



Brick type: Hollow Calcium silica brick KSL-3DF

Table C22: Factors for anchor groups under tension load

Anchor position parallel to hor. joint				Anchor position perpendicular to hor. joint				
11	with c ≥	with s ≥	αg II, N	ļ <u>1</u>	with c ≥	with s ≥	$\alpha_{g\perp,N}$	
• •	60	120	1,50		60	120	1,00	
	120	120	2,00		00	120	1,00	
	120	240	2,00		120	120	2,00	

Table C23: Factors for anchor groups under shear load

	Anchor	position pa	rallel to hor.	joint	Anchor position perpendicular to hor. joint			
Shear load		with c ≥	with s ≥	αg II,V ⊥	1	with c ≥	with s ≥	$\alpha_{g\perp,V\perp}$
perpendicular	•••	60	120	0,30		60	120	0,30
to the free		120	120	1,00		00		0,30
edge	•	120	240	2,00		240	120	2,00
Shear load	-	with c ≥	with s ≥	αg II,V II		with c ≥	with s ≥	αg ⊥,V II
parallel to the	••	60	120	1,00	•	60	120	1,00
free edge		120	120	1,60	•		120	1,00
l lice eage		120	240	2,00	- Firm	120	120	2,00

Table C24: Characteristic values of tension and shear load resistances

				Charac	cteristic Res	sistances w	rith c≥c _{cr} a	and s ≥ s _{cr}			
			Use condition								
Amalaguaiga	d sleeve	Effective Anchorage depth	d/d				d/d w/d w/w				
Anchor size	azis a erforated sleeve		40°C/24°C	80°C/50°C	120°C/72°C	40°C/24°C	80°C/50°C	120°C/72°C	All temperature ranges		
	L L	h _{ef}	N	$N_{Rk,b} = N_{Rk,p}^{2)}$			$N_{Rk,b} = N_{Rk,p}^{2)}$				
		[mm]				[kN]					
		Normalis	sed mean c	ompressi	ve strength	f _b ≥ 14 N/	mm² 1)				
M8 / M10/	01116	≥ 85	2,5	2,5	1,5	2,5	2,5	1,5	6,0		
IG-M6	SH 16	SH 16 130	2,5	2,5	2,0	2,5	2,5	2,0	6,0		
M12 / M16 / IG-M8 / IG-M10	SH 20	≥ 85	6,5	6,0	4,5	6,5	6,0	4,5	6,0		

¹⁾ For lower compressive strengths resistances must be multiplied by the conversion factor according to Table C19. For stones with higher strengths, the shown values are valid without conversion.

Table C25: Displacements

Anghar siza	hef	δη / Ν	δΝο	δN∞	δv / V	δνο	δ∨∞
Anchor size	[mm]	[mm/kN]	[mm]	[mm]	[mm/kN]	[mm]	[mm]
M8 – M12 / IG-M6 – M10	all	0,13	0,13*N _{Rk} / 3,5	2*δΝο	0,55	0,55*V _{Rk} / 3,5	1,5*δνο
M16	all	,	,		0,31	0,31*V _{Rk} / 3,5	1,5 *δvo

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances hollow calcium silica brick KSL-3DF Group factors, characteristic Resistances and Displacements	Annex C 10

²⁾ $N_{Rk,b,c} = N_{Rk,p,c}$ and $V_{Rk,c \parallel} = V_{Rk,c} \perp according to Annex C 3$



Brick type: Hollow Calcium silica brick KSL-8DF

Table C26: Stone description

Brick type		Hollow Calcium silica brick KSL-8DF
Density	ρ [kg/dm³]	≥ 1,4
Normalised mean compressive strenght	f_b [N/mm ²]	≥ 12
Conversion factor for low compressive strengths	ver	$(f_b / 12)^{0.75} \le 1.0$
Code		EN 771-2:2011+A1:2015
Producer (Country)		e.g. KS-Wemding (DE)
Brick dimensions	[mm]	≥ 248 x 240 x 238
Drilling method		Rotary drilling



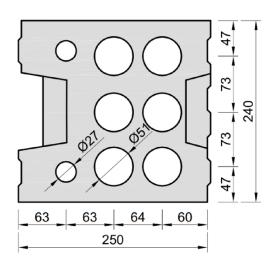


Table C27: Installation parameter

Anchor size			M8	M10	M12	M16	IG-M6	IG-M8	IG-M10	
Installation torque	Tinst	[Nm]	≤5 ≤5 ≤8 ≤8 ≤5 ≤8 ≤8						≤ 8	
Char. Edge distance	Ccr	[mm]	120 (for shear loads perpendicular to the free edge: c _{cr} = 250)							
Minimum Edge Distance	Cmin	[mm]	50							
	Scr, II	[mm]	250							
Characteristic Spacing	Scr, ⊥	[mm]		120						
Minimum Spacing	Smin, II;	[mm]	50							
William Spacing	Smin, ⊥	[[,,,,,,,]				30				

Table C28: Reduction factors for single anchors at the edge

Tension load			Shear load							
Tension load			Perpendic	ular to the fr	ee edge	Parallel to the free edge				
	with c ≥	αedge, N		with c ≥	αedge, V⊥		with c ≥	αedge, V II		
•	50	1,00		50	0,30] •	50	1,00		
	120	1,00		250	1,00		120	1,00		

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection
system KEM V for masonry

Performances hollow calcium silica brick KSL-8DF

Description of the stone, Installation parameters, Reductionfactors

Annex C 11

120

English translation prepared by DIBt

free edge



120

120

120

250

2,00

2,00

Brick type: Hollow Calcium silica brick KSL-8DF Table C29: Factors for anchor groups under tension load Anchor position parallel to hor. joint Anchor position perpendicular to hor. joint with c ≥ with s ≥ with c ≥ with s ≥ $\alpha_{\text{g II, N}}$ $\alpha_{\text{g}}\,\bot,\,\text{N}$ 50 50 1,00 50 50 1,00

2,00

Table C30:	Factors for	actors for anchor groups under shear load									
	Anchor	position pa	rallel to hor.	joint	Anchor position perpendicular to hor. joint						
Shear load		with c ≥	with s ≥	αg II,V ⊥	1	with c ≥	with s ≥	$\alpha_g \perp$, V \perp			
perpendicular	•••	50	50	0,45		50	50	0,45			
to the free		250	50	1,15		250	50	1,20			
edge		250	250	2,00		250	250	2,00			
Shear load		with c ≥	with s ≥	αg II,V II		with c ≥	with s ≥	αg ⊥,V II			
parallel to the	• •	50	50	1.30	1 I	50	50	1.00			

2,00

Table C31: Characteristic values of tension and shear load resistances

250

250

120

		erforated sleeve Effecitve Anchorage depth	Characteristic Resistances with $c \ge c_{cr}$ and $s \ge s_{cr}$									
				Use condition								
Anchor size	Perforated sleeve		d/d			w/d w/w			d/d w/d w/w			
			40°C/24°C	80°C/50°C	120°C/72°C	40°C/24°C	80°C/50°C	120°C/72°C	All Temperature ranges			
		h _{ef}	$N_{Rk,b} = N_{Rk,p}^{2}$			$N_{Rk,b} = N_{Rk,p}^{(2)}$			V _{Rk,b} ²⁾			
		[mm]		[kN]								
		Normalis	sed mean c	ompressi	ve strength	f _b ≥ 12 N/	mm² 1)					
M8 / M10/ IG-M6	SH 16	130	5,0	4,5	3,5	5,0	4,5	3,5	3,5			
M12 / M16 / IG-M8 / IG-M10	SH 20	≥ 130	5,0	4,5	3,5	5,0	4,5	3,5	6,0			

¹⁾ For lower compressive strengths resistances must be multiplied by the conversion factor according to Table C26. For stones with higher strengths, the shown values are valid without conversion.

Table C32: Displacements

Anchor size	hef	δη / Ν	δΝο	δN∞	δv / V	δνο	δ∨∞
Anchor size	[mm]	[mm/kN]	[mm]	[mm]	[mm/kN]	[mm]	[mm]
M8 – M12 / IG-M6 – M10	all	0,13	0,13*N _{Rk} / 3,5	2 *δN0	0,55	0,55*V _{Rk} / 3,5	1,5*δνο
M16	all	, -	-,		0,31	0,31*V _{Rk} / 3,5	1,5*δ∨0

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances hollow calcium silica brick KSL-8DF Group factors, characteristic Resistances and Displacements	Annex C 12

²⁾ $N_{Rk,b,c} = N_{Rk,p,c}$ and $V_{Rk,c|II} = V_{Rk,c} \perp according to Annex C 3$



Brick type: Hollow Calcium silica brick KSL-12DF

Table C33: Stone description

Brick type		Hollow Calcium silica brick KSL-12DF		
Density	ρ [kg/dm³]	≥ 1,4		
Normalised mean compressive strenght	f _b [N/mm²]	≥ 12		
Conversion factor for low strengths	$(f_b / 12)^{0,75} \le 1,0$			
Code		EN 771-2:2011+A1:2015		
Producer (Country)		e.g. KS-Wemding (DE)		
Brick dimensions	[mm]	≥ 498 x 175 x 238		
Drilling method		Rotary drilling		



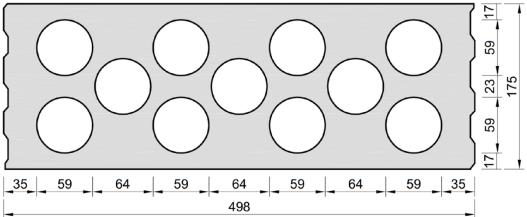


Table C34: Installation parameter

Anchor size	[-]	M8	M10	M12	M16	IG-M6	IG-M8	IG-M10			
Installation torque	Tinst	[Nm]	≤ 4	≤ 4	≤ 5	≤ 5	≤ 4	≤ 5	≤ 5		
Char. Edge distance	Cer; (Cer,fi)	[mm]	120 (2 h _{ef})								
(under fire conditions)	Ocr; (Ocr,ii)	[]	(for shear loads perpendicular to the free edge: $c_{cr} = 500$)								
Minimum Edge Distance	Cmin	[mm]	m] 50								
Characteristic Spacing	Characteristic Spacing Scr, II; (Scr,fi, II)				500 (4 h _{ef})						
(under fire conditions)	Scr, ⊥; (Scr,fi, ⊥)	[mm]	120 (4 h _{ef})								
Minimum Spacing S _{min, II} ; S _{min, ⊥}			50								

Table C35: Reduction factors for single anchors at the edge

Tension load			Shear load								
			Perpendic	ular to the fr	ee edge	Parallel to the free edge					
	with c ≥	αedge, N		with c ≥	αedge, V⊥		with c ≥	αedge, V II			
•	50	1,00		50	0,45	•	50	1,00			
	120	1,00		500	1,00		120	1,00			

Table C36: Factors for anchor groups under tension load

Anchor position	on parallel to he	or. joint		Anchor position perpendicular to hor. joint				
	with c ≥	with s ≥	αg II, N		with c ≥	with s ≥	$\alpha_{g\perp}$, N	
• •	50	50	1,50		50	50	1,00	
	120	500	2,00		120	240	2,00	

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection
system KEM V for masonry

Performances hollow calcium silica brick KSL-12DF

Description of the stone, Installation parameters, Reductionfactors

Annex C 13

free edge



120

250

2,00

Brick type: Hollow Calcium silica brick KSL-12DF Table C37: Factors for anchor groups under shear load Anchor position parallel to hor. joint Anchor position perpendicular to hor. joint Shear load with c ≥ with s ≥ with c ≥ with s ≥ $\alpha_{\text{g II,V}\,\perp}$ $\alpha_{\text{g}}\, \bot,\, \text{V}\, \bot$ perpendicular 0,55 0,50 50 50 50 50 to the free 500 50 1,00 500 50 1,00 edae 500 500 2,00 500 250 2,00 with c ≥ with s ≥ with c ≥ with s ≥ Shear load α_g II,V II $\alpha_{g\perp,V\;II}$ parallel to the 50 50 2,00 50 50 1,30

2,00

Table C38: Characteristic values of tension and shear load resistances

500

120

		Φ.	Characteristic Resistances with $c \ge c_{cr}$ and $s \ge s_{cr}$									
	g e			Use condition								
	 	ffecitve ichorag depth		d/d			w/d		d/d			
Anchor size	<u>N</u>			a, a			w/w		w/w (w/d)			
	ted	Effecitve Anchorage depth							All			
	Perforated sleeve		40°C/24°C	80°C/50°C	120°C/72°C	40°C/24°C	80°C/50°C	120°C/72°C	temperature			
									ranges			
		h _{ef}	$N_{Bk,b} = N_{Bk,p}^{2}$			$N_{Rk,b} = N_{Rk,p}^{2}$			$V_{Rk,b}^{(2)}$			
		[mm]		[kN]								
	_	Normalis	sed mean c	ompressi	ve strength	f _b ≥ 12 N/	mm² 1)					
M8 / M10/ IG-M6	SH 16	130	3,5	3,5	2,5	3,5	3,5	2,5	3,5			
M12 / M16 / IG-M8 / IG-M10	SH 20	≥ 130	3,5	3,5	2,5	3,5	3,5	2,5	7,0			

¹⁾ For lower compressive strengths resistances must be multiplied by the conversion factor according to Table C33. For stones with higher strengths, the shown values are valid without conversion.

Table C39: Displacements

,							
Anchor size	hef	δη / Ν	δΝο	δN∞	δv / V	δνο	δ∨∞
Afficitor size	[mm]	[mm/kN]	[mm]	[mm]	[mm/kN]	[mm]	[mm]
M8 – M12 / IG-M6 – M10	all	0,13	0,13*N _{Rk} / 3,5	2*δΝο	0,55	0,55*V _{Rk} / 3,5	1,5*δνο
M16	all	,			0,31	0,31*V _{Rk} / 3,5	1,5*δ∨0

Table C40: Characteristic values of tension and shear load resistances under fire exposure

		Effective							
Anchor size	Perforated	anchorage depth	$N_{Rk,b,fi} = N_{Rk,p,fi} = V_{Rk,b,fi}$						
Anchor size	sleeve	h _{ef}	R30	R60	R90	R120			
		[mm]	[kN]						
M8 / M10 /IG-M6	SH 16	130				_1)			
M12 / IG-M8	SH 20	≥ 130	0,37	0,27	0,17	- 17			
M16 / IG-M10	SH 20	≥ 130				0,12			

¹⁾ no performance assessed

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances hollow calcium silica brick KSL-12DF Group factors, characteristic Resistances and Displacements	Annex C 14

²⁾ $N_{Rk,b,c} = N_{Rk,p,c}$ and $V_{Rk,c | II} = V_{Rk,c} \perp$ according to Annex C 3



Brick type: Solid clay brick 1DF

Table C41: Stone description

Brick type		Solid clay brick Mz-1DF
Density	ρ [kg/dm³]	≥ 2,0
Normalised mean compressive strenght	f _b [N/mm²]	≥ 20
Conversion factor for lowe strengths	er compressive	$(f_b / 20)^{0.5} \le 1.0$
Code		EN 771-1:2011+A1:2015
Producer (Country)		e.g. Wienerberger (DE)
Brick dimensions	[mm]	≥ 240 x 115 x 55
Drilling method	_	Hammer drilling




Table C42: Installation parameter

Anchor size		[-]	M8 M10 M12 M16 IG-M6 IG-M					IG-M8	IG-M10
Installation torque	Tinst	[Nm]	≤10 ≤10 ≤10 ≤10 ≤10 ≤						≤ 10
Char. Edge distance	Ccr	[mm]	150 (for shear loads perpendicular to the free edge: c _{cr} = 240)						240)
Minimum Edge Distance	Cmin	[mm]	60						
Characteristic Specing	[mm]	240							
Characteristic Spacing $s_{cr, \perp}$ [mm] 130									
Minimum Spacing Smin, II.		[mm]	65						
	[]	30							

Table C43: Reduction factors for single anchors at the edge

۱ -	Tension load		Shear load						
'	rension load		Perpendicular to the free edge			Parallel to the free edge			
	with c ≥	αedge, N	1	with c ≥	αedge, V⊥	1	with c ≥	αedge, V II	
	60	0,75		60	0,10		60	0,30	
	150	1,00		100	0,50	Ţ	100	0,65	
	180	1,00		240	1,00	ļII	150	1,00	

Table C44: Factors for anchor groups under tension load

Anchor position parallel to hor. joint			Anchor position perpendicular to hor. joint				
	with c ≥	with s ≥	αg II, N	1	with c ≥	with s ≥	αg ⊥, N
	60	65	0,85	•	60	65	1,00
• •	150	65	1,15		150	65	1,20
	150	240	2,00		150	130	2,00

Table C45: Factors for anchor groups under shear load

	Anchor position parallel to hor. joint				Anchor position perpendicular to hor. joint			
Shear load		with c ≥	with s ≥	α _g II,V ⊥	1	with c ≥	with s ≥	$\alpha_g \perp$, v \perp
perpendicular	• • •	60	65	0,40		60	65	0,30
to the free		240	65	2,00		240	65	2,00
edge	+	240	240	2,00	i	240	130	2,00
Shear load		with c ≥	with s ≥	α _g II,V II		with c ≥	with s ≥	α _{g ⊥,} ν II
parallel to the	• •	60	65	1,75	•	60	65	1,10
free edge		150	65	2,00	•	150	65	2,00
l liee eage		150	240	2,00	- 	150	130	2,00

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances solid clay brick 1DF Description of the stone, Installation parameters, Reduction- and Group factors	Annex C 15



Table C46: Ch	iaractei	islic vai	ues or ter		shear loa					
				Charac	cteristic Res	istances w	ith c≥c _{cr} a	and s ≥ s _{cr}		
	σ.	45			l	Use conditi	on			
Auchor size Sleeve	eve	age h					w/d		d/d	
	sle	Effecitve Anchorage depth	d/d				w/d			
	ted	Effecitve Anchorage depth							w/w All	
	ora		40°C/24°C	80°C/50°C	120°C/72°C	40°C/24°C	80°C/50°C	120°C/72°C		
	erf								ranges	
		h _{ef}	N	$N_{Rk,b} = N_{Rk,p}^{2}$		N	$N_{Rk,b} = N_{Rk,b}$	2) p	$V_{Rk,b}^{(2)}$	
		[mm]	[kN]							
		Normalis	sed mean c	ompressi	ve strength	f _b ≥ 20 N/	mm² 1)			
M8	-	80								
M10 / IG-M6	-	≥ 90	7,0	6,0	6,0	7,0	6,0	6,0	8,0	
M12 / IG-M8	-	≥ 100								
M16 / IG-M10	-	≥ 100	8,0	6,5	6,5	8,0	6,5	6,5	12,0	
M8	SH 12	80								
M8 / M10/ IG-M6	SH 16		7,0	6,0	6,0	7,0	6,0	6,0	8,0	
M12 / IG-M8	SH 20	≥ 85			,	, -		3,3		
		I .		1						

¹⁾ For lower compressive strengths resistances must be multiplied by the conversion factor according to Table C41. For stones with higher strengths, the shown values are valid without conversion.

6,5

8,0

6,5

6,5

12,0

6,5

8,0

SH 20 ≥ 85

Table C47: Displacements

M16 / IG-M10

Anchor size	hef	δη / Ν	δΝο	δN∞	δv / V	δνο	δ∨∞
Anchor size	[mm]	[mm/kN]	[mm]	[mm]	[mm/kN]	[mm]	[mm]
M8 – M12 / IG-M6 – M10	all	0,1	0,1*N _{Rk} / 3,5	2*δN0	0,3	0,3*V _{Rk} / 3,5	1,5*δνο
M16	all	,		= 3110	0,1	0,1*V _{Rk} /3,5	1,5*δ∨0

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry

Performances solid clay brick 1DF
Characteristic Resistances and Displacements

Annex C 16

²⁾ $N_{Rk,b,c} = N_{Rk,p,c}$ and $V_{Rk,c | II} = V_{Rk,c} \perp$ according to Annex C 3



Brick type: Solid clay brick 2DF

Table C48: Stone description

Brick type		Solid clay brick Mz- 2DF	
Density	ρ [kg/dm³]	≥ 2,0	
Normalised mean compressive strenght	≥ 28		
Conversion factor for lowe strengths	$(f_b / 28)^{0.5} \le 1.0$		
Code		EN 771-1:2011+A1:2015	
Producer (Country)		e.g. Wienerberger (DE)	
Brick dimensions	[mm]	≥ 240 x 115 x 113	
Drilling method	·	Hammer drilling	




Table C49: Installation parameter

Anchor size			M8	M10	M12	M16	IG-M6	IG-M8	IG-M10	
Installation torque	Tinst	[Nm]	≤ 10	≤ 10	≤ 10	≤ 10	≤ 10	≤ 10	≤ 10	
Char. Edge distance	0 (0 %)	[mm]				150 (2 h _{ef})			
(under fire conditions)	C _{cr;} (C _{cr,fi})	[[[]]]	(for shear loads perpendicular to the free edge: c _{cr} = 240)							
Minimum Edge Distance	Cmin	[mm]	50							
Characteristic Spacing	Scr, II; (Scr,fi, II)	[mm]			;	240 (4 h _{ef})			
(under fire conditions)	Scr, ⊥; (Scr,fi, ⊥)	[mm]	m] 240 (4 h _{ef})							
Minimum Spacing	Smin, II; Smin, ⊥	[mm]	n] 50							

Table C50: Reduction factors for single anchors at the edge

Π	Tension load		Shear load pe	rpendicular t	o free edge	Shear load	d parallel to f	ree edge
+	with c ≥	αedge, N		with c ≥	αedge, V⊥		with c ≥	αedge, V II
	50 ¹⁾	1,00		50	0,20		50	1.00
	150 ¹⁾	1,00		125	0,50	Ţ	50	1,00
+	180	1,00		240	1,00	- 	150	1,00

¹⁾ All applications, except for hef = 200mm and without sleeve

Table C51: Factors for anchor groups under tension load

An	chor position pa	arallel to hor. jo	oint	Anchor position perpendicular to hor. joint				
	with c ≥	with s ≥	αg II, N		with c ≥	with s ≥	αg ⊥, N	
	50 ¹⁾	50	1,50		50 ¹⁾	50	0,80	
	150 ¹⁾	240	2,00	•	150 ¹⁾	240	2,00	
	180 ²⁾	180 ²⁾ 60 1,00		180 ²⁾	60	1,00		
	180 ²⁾	240	1,55		180 ²⁾	100	2.00	
	240 ²⁾	240	2,00		1802)	120	2,00	

¹⁾ All applications, except for hef = 200mm and without sleeve

Table C52: Factors for anchor groups under shear load

	Anchor	position pa	rallel to hor.	. joint	Anchor position perpendicular to hor. joint					
Shear load		with c ≥	with s ≥	α _g II,V ⊥		with c ≥	with s ≥	$\alpha_{g\perp}, v_{\perp}$		
	50	50	0,40		50	50	0,20			
perpendicular to the free	11	•••	•••	240	50	1,20		240	50	0,60
edge		240	240	2,00		240	125	1,00		
Leage		240 24	240	2,00		240	240	2,00		
Shear load		with c ≥	with s ≥	αg II,V II		with c ≥	with s ≥	αg ⊥,V II		
parallel to the	• •	50	50	1,20	•	50	50	1,00		
free edge		150 240	240	2,00		50	125	1,00		
			2,00		150	240	2.00			

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry

Performances solid clay brick 2DF

Description of the stone, Installation parameters, Reduction- and Group factors

Annex C 17

²⁾ Only for application with hef = 200mm and without sleeve



Brick type: Solid clay brick 2DF

Table C53: Characteristic values of tension and shear load resistances

				Charac	cteristic Res	sistances w	ith c≥c _{cr}	and s ≥ s _{cr}				
	_	Perforated sleeve Effecitve Anchorage depth		Use condition								
erforated sleeve	d sleeve			d/d			w/d w/w					
	Perforate		40°C/24°C	80°C/50°C	120°C/72°C	40°C/24°C	80°C/50°C	120°C/72°C	All temperature ranges			
		h _{ef}	$N_{Rk,b} = N_{Rk,p}^{2)}$				$N_{Rk,b} = N_{Rk,b}$	2) p	$V_{Rk,b}^{(2)}$			
		[mm]				[kN]						
	Normalised mean compressive strength f _b ≥ 28 N/mm ^{2 1)}											
M8	-	80	0.0	9,0	7,5	9,0	9,0	7,5	9,5			
M10 / IG-M6	-	≥ 90	9,0	9,0	3,0	7,5	9,0	9,0	7,5	9,5		
M12 / IG-M8	-	≥ 100	9,0	9,0	7,5	9,0	9,0	7,5	12			
M16 / IG-M10	-	≥ 100	9,0	9,0	7,5	9,0	9,0	7,5	12 ³⁾			
M10 / M12 / IG-M6 / IG-M8	-	200	11,5	11,5	10,0	6,0	6,0	5,0	8,0			
M16 / IG-M10	-	200	11,5	11,5	10,0	6,0	6,0	5,0	12,0			
M8	SH 12	80	0.0	0.0	7.5	0.0	0.0	7.5	0.5			
M8 / M10/ IG-M6	SH 16	≥ 85	9,0	9,0	7,5	9,0	9,0	7,5	9,5			
M12 / IG-M8	SH 20	≥ 85	9,0	9,0	7,5	9,0	9,0	7,5	12,0			
M16 / IG-M10	SH 20	≥ 85	9,0	9,0	7,5	9,0	9,0	7,5	12,0 ³⁾			

¹⁾ For lower compressive strengths resistances must be multiplied by the conversion factor according to Table C48. For stones with higher strengths, the shown values are valid without conversion.

Table C54: Displacements

Anghor gizo	hef	δη / Ν	δΝο	δN∞	δv / V	δνο	δ∨∞
Anchor size	[mm]	[mm/kN]	[mm]	[mm]	[mm/kN]	[mm]	[mm]
M8 – M12 / IG-M6 – M10	all	0,1	0,1*N _{Rk} / 3,5	2*δN0	0,3	0,3*V _{Rk} / 3,5	1,5*δνο
M16	all	,		2 0110	0,1	0,1*V _{Rk} /3,5	1,5*δvo

Table C55: Characteristic values of tension and shear load resistances under fire exposure

						•			
		Effecitve		Characteristic	Resistances				
Anchor size	Perforated	Anchorage depth	$N_{Rk,b,fi} = N_{Rk,p,fi} = V_{Rk,b,fi}$						
Andrior size	sleeve	h_{ef}	R30	R60	R90	R120			
		[mm]							
M8	-	80							
M10 / IG-M6	-	≥ 90	0.51	0,44	0,36	0,33			
M12 / IG-M8	-	≥ 100	0,51	0,44	0,36	0,33			
M16 / IG-M10	-	≥ 100							
M8	SH 12	80	0,36	0,26	0,15	0,10			
M8 / M10 /IG-	SH 16	≥ 85	0,36	0,26	0,15	0,10			
M6	SH 16	130	0,92	0,74	0,57	0,49			
M12 / M16 /	CH 20	≥ 85	0,36	0,26	0,15	0,10			
IG-M8 /IG-M10	SH 20	≥ 130	0,92	0,74	0,57	0,49			

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances solid clay brick 2DF Characteristic Resistances and Displacements	Annex C 18

²⁾ $N_{Rk,b,c} = N_{Rk,p,c}$ and $V_{Rk,c \mid I} = V_{Rk,c} \perp$ according to Annex C 3

³⁾ Valid for all stone strengths with min. 10 N/mm²



Brick type: Hollow clay brick 10 DF

Table C56: Stone description

	Hollow clay brick HLZ-10DF				
ρ [kg/dm³]	≥ 1,25				
f _b [N/mm²]	≥ 20				
Conversion factor for lower compressive strengths					
	EN 771-1:2011+A1:2015				
	e.g. Wienerberger (DE)				
[mm]	300 x 240 x 249				
	Rotary drilling				
	f _b [N/mm ²] ver compressive				






Table C57: Installation parameter

Anchor size	[-]	M8	M10	M12	M16	IG-M6	IG-M8	IG-M10		
Installation torque	T _{inst}	[Nm]	≤ 5	≤ 10	≤ 10	≤ 10	≤ 5	≤ 5	≤ 10	
Char. Edge distance (under fire conditions)	Ccr; (Ccr,fi)	[mm]	120 (2 h _{ef}) (for shear loads perpendicular to the free edge: c _{cr} = 300)							
Minimum Edge Distance	Cmin	[mm]	50					·		
Characteristic Spacing	Scr, II; (Scr,fi, II)	[mm]		300 (4 h _{ef})						
(under fire conditions)	$Scr, \perp; (Scr,fi, \perp)$	[mm]	250 (4 h _{ef})							
Minimum Spacing	Smin, II; Smin, ⊥	[mm]				50				

Table C58: Reduction factors for single anchors at the edge

,	ension load			Shear load								
<u>'</u>	ension load		Perpendic	ular to the fro	ee edge	Parallel to the free edge						
	with c ≥	αedge, N		with c ≥	αedge, V⊥		with c ≥	αedge, V II				
•	50	1,00		50	0,20	 	50	1,00				
	120	1,00		300	1,00	-	120	1,00				

Table C59: Factors for anchor groups under tension load

An	chor position p	arallel to hor. jo	oint	Anchor position perpendicular to hor. joint				
	with c ≥	with s ≥	αg II, N		with c ≥	with s ≥	$lpha_{g\perp}$, N	
• •	50	50	1,55		50	50	1,00	
	120	300	2,00		120	250	2,00	

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry

Performances hollow clay brick HLZ 10DF

Description of the stone, Installation parameters, Reductionfactors

Annex C 19

free edge



120

250

2,00

Brick type: Hollow clay brick 10 DF											
Table C60:	ble C60: Factors for anchor groups under shear load										
	Anchor	Anchor position parallel to hor. joint Anchor position perpendicular to hor. joint									
Shear load	1	with c ≥	with s ≥	α _g II,V ⊥	†	with c ≥	with s ≥	$\alpha_{g\perp,V\perp}$			
perpendicular		50	50	0,30	•	50	50	0,20			
to the free		300	50	1,40		300	50	1,00			
edge		300	300	2,00	1	300	250	2,00			
Shear load		with c ≥	with s ≥	α _g II,V II		with c ≥	with s ≥	α _{g ⊥,} ν II			
parallel to the	•	50	50	1,85		50	50	1,00			

2,00

Table C61: Characteristic values of tension and shear load resistances

300

120

Tubic coll. Ci	Table 3011 Onaracteristic values of terision and shear resistances												
				Charac	cteristic Res	istances w	vith c≥c _{cr}	and s ≥ s _{cr}					
	Perforated sleeve	Effective Anchorage depth		Use condition									
A mahawaina				d/d			w/d w/w		d/d w/d w/w				
Auchor size cro		erforate E Ar	40°C/24°C	80°C/50°C	120°C/72°C	40°C/24°C	80°C/50°C	120°C/72°C	All temperature ranges				
	"	h _{ef}	$N_{Rk,b} = N_{Rk,p}^{2)}$			1	V _{Rk,b} ²⁾						
		[mm]				[kN]							
		Normalis	sed mean d	ompressi	ve strength	f _b ≥ 20 N/	mm² 1)						
M8	SH 12	80	0.5	0.5	0.0	0.5	0.5	0.0	0.0				
M8 / M10/ IG-M6	SH 16	≥ 85	2,5	2,5	2,0	2,5	2,5	2,0	8,0				
M12 / IG-M8	SH 20	≥ 85	5,0	5,0	4,5	5,0	5,0	4,5	8,0				
M16 / IG-M10	SH 20	≥ 85	5,0	5,0	4,5	5,0	5,0	4,5	11,5				

¹⁾ For lower compressive strengths resistances must be multiplied by the conversion factor according to Table C56. For stones with higher strengths, the shown values are valid without conversion.

Table C62: Displacements

Anghor size	hef	δη / Ν	δΝο	δN∞	δv / V	δνο	δ∨∞
Anchor size	[mm]	[mm/kN]	[mm]	[mm]	[mm/kN]	[mm]	[mm]
M8 – M12 / IG-M6 – M10	all	0,13	0,13*N _{Rk} / 3,5	2*δN0	0,55	0,55*V _{Rk} / 3,5	1,5*δνο
M16	all	,	,		0,31	0,31*V _{Rk} / 3,5	1,5*δνο

Table C63: Characteristic values of tension and shear load resistances under fire exposure

		Effecitve	Characteristic Resistances						
Ancher size	Perforated	Anchorage depth	$N_{Rk,b,fi} = N_{Rk,p,fi} = V_{Rk,b,fi}$						
Anchor size	sleeve	h _{ef}	R30	R60	R90	R120			
		[mm]	[kN]						
M8 / M10 /IG-M6	SH 16	130							
M12 / M16 / IG-M8 IG-M10	SH 20	≥ 130	0,57	0,39	0,21	0,12			

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances hollow clay brick HLZ 10DF Group factors, characteristic Resistances and Displacements	Annex C 20


²⁾ $N_{Rk,b,c} = N_{Rk,p,c}$ and $V_{Rk,c | II} = V_{Rk,c} \perp$ according to Annex C 3



Brick type: Hollow Clay brick Porotherm Homebric

Table C64: Stone description

Brick type		Hollow clay brick Porotherm Homebric
Density	ρ [kg/dm ³]	≥ 0,70
Normalised mean compressive strenght	f _b [N/mm²]	≥ 10
Conversion factor for low strengths	ver compressive	$(f_b / 10)^{0.5} \le 1.0$
Code		EN 771-1:2011+A1:2015
Producer (Country)		e.g. Wienerberger (FR)
Brick dimensions	[mm]	500 x 200 x 300
Drilling method		Rotary drilling



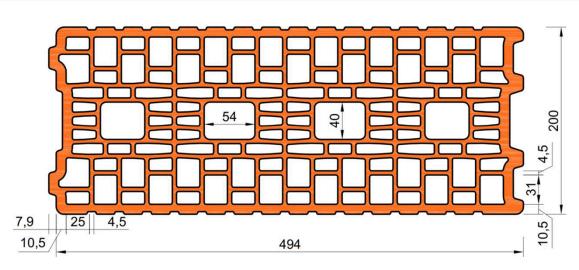


Table C65: Installation parameter

Anchor size		[-]	M8	M10	M12	M16	IG-M6	IG-M8	IG-M10	
Installation torque	T _{inst}	[Nm]	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	
Char. Edge distance	Ccr	[mm]	120 (for shear loads perpendicular to the free edge: c _{cr} = 500)							
Minimum Edge Distance	Cmin	[mm]	120							
Characteristic Spacing	Scr, II	[mm]	500							
Characteristic Spacing	Scr, ⊥	[mm]	300							
Minimum Spacing	Smin, II;	[mm]	120							
Timming Spasing	Smin, ⊥	[]				0				

Table C66: Reduction factors for single anchors at the edge

Tension load			Shear load							
•	ension load		Perpendic	ular to the fr	ee edge	Parallel to the free edge				
+	with c ≥	αedge, N	-	with c ≥	αedge, V⊥		with c ≥	αedge, V II		
•	120	1,00		120	0,30		120	0,60		
	120	1,00		250	0,60	Ţ	120	0,00		
· i · · · · · · · · · · · · · · · · · ·	120	1,00	· i · · · · · · · · · · · · · · · · · ·	500	1,00		200	1,00		

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry

Performances hollow clay brick Porotherm Homebric

Description of the stone, Installation parameters, Reductionfactors

Annex C 21



Brick type: Hollow Clay brick Porotherm Homebric

Table C67: Factors for anchor groups under tension load

An	chor position pa	arallel to hor. jo	oint	Anchor position perpendicular to hor. joint				
	with c ≥	with s ≥	αg II, N	ļ <u>-</u>	with c ≥	with s ≥	αg ⊥, N	
	120	100	1,00	•	120	100	1,00	
	200	100	2,00		200	100	1,20	
	120	500	2,00		120	300	2,00	

Table C68: Factors for anchor groups under shear load

Tubic Goo. I details for unerior groups under shear foud											
Anchor	position pa	rallel to hor.	joint	Anchor position perpendicular to hor. joint							
	with c ≥	with s ≥	αg II,V ⊥		with c ≥	with s ≥	$\alpha_{g\perp,V\perp}$				
	120	100	0,30		120	100	0,30				
•••	250	100	0,60		250	100	0,60				
	500	100	1,00		120	300	2,00				
	120	500	2,00		120	300	2,00				
	with c ≥	with s ≥	αg II,V II		with c ≥	with s ≥	α _{g ⊥,} ν II				
	120	100	1,00	*	120	100	1,00				
	120	500	2,00		120	300	2,00				
	Anchor	Anchor position pa with c ≥ 120 250 500 120 with c ≥ 120	Anchor position parallel to hord with $c \ge 0$ with $s \ge 0$ 120 100 250 100 500 120 500 with $c \ge 0$ with $s \ge 0$ 120 100	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$				

Table C69: Characteristic values of tension and shear load resistances

		01.0 14.1		0.0	onour rout							
			Characteristic Resistances with $c \ge c_{cr}$ and $s \ge s_{cr}$									
		Effective Anchorage depth		Use condition								
Anchor size Seeve	d sleeve		d/d				d/d w/d w/w					
	And							All				
	fora		40°C/24°C	80°C/50°C	120°C/72°C	40°C/24°C	80°C/50°C	120°C/72°C	temperature			
Per								ranges				
		h _{ef}	N	$N_{Rk,b} = N_{Rk,p}$	2)	1	$N_{Rk,b} = N_{Rk,i}$	2) p	$V_{Rk,b}^{(2)}$			
		[mm]				[kN]						
		Normalis	sed mean c	ompressi	ve strength	f _b ≥ 10 N/	mm² 1)					
M8	SH 12	80			1,	2			3,0			
M8 / M10/	SH 16	≥ 85			1,	2			3,0			
IG-M6	SH 10	130		1,5			j					
M12 / M16/	SH 20	≥ 85		1,2				4,0				
IG-M8 / IG-M10	3H 20	≥ 130			1,	5			4,0			

¹⁾ For lower compressive strengths resistances must be multiplied by the conversion factor according to Table C64. For stones with higher strengths, the shown values are valid without conversion.

Table C70: Displacements

Anchor size	hef	δη / Ν	δΝο	δN∞	δv / V	δνο	δ∨∞
Anchor size	[mm]	[mm/kN]	[mm]	[mm]	[mm/kN]	[mm]	[mm]
M8 – M12 / IG-M6 – M10	all	0,13	0,13*N _{Rk} / 3,5	2*δN0	0,55	0,55*V _{Rk} / 3,5	1,5*δνο
M16	all	,	.,	_ = 1.10	0,31	0,31*V _{Rk} / 3,5	1,5*δvo

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances hollow clay brick Porotherm Homebric Group factors, characteristic Resistances and Displacements	Annex C 22

²⁾ $N_{Rk,b,c} = N_{Rk,p,c}$ and $V_{Rk,c \, II} = V_{Rk,c} \perp$ according to Annex C 3



Brick type: Hollow Clay brick BGV Thermo

Table C71: Stone description

Brick type		Hollow clay brick BGV Thermo	
Density	ρ [kg/dm³]	≥ 0,60	
Normalised mean compressive strenght	f _b [N/mm ²]	≥ 10	
Conversion factor for low strengths	$(f_b / 10)^{0.5} \le 1.0$		
Code		EN 771-1:2011+A1:2015	
Producer (Country)		e.g. Leroux (FR)	
Brick dimensions	[mm]	500 x 200 x 314	
Drilling method		Rotary drilling	



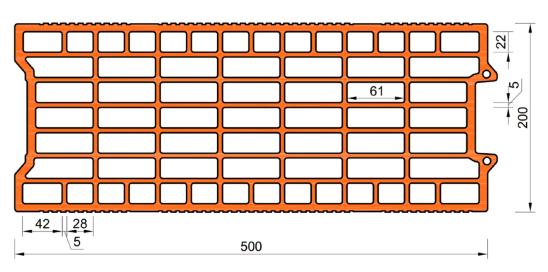


Table C72: Installation parameter

Anchor size	[-]	M8	M10	M12	M16	IG-M6	IG-M8	IG-M10			
Installation torque	T _{inst}	[Nm]	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2		
Char. Edge distance	Ccr	[mm]	120 (for shear loads perpendicular to the free edge: $c_{cr} = 500$)								
Minimum Edge Distance	Cmin	[mm]	120								
	Scr, II	[mm]	500								
Characteristic Spacing	Scr, ⊥	[mm]		315							
Minimum Spacing	Smin, II;	[mm]	120								
Willimum Spacing	Smin, ⊥	[[[]]]	120								

Table C73: Reduction factors for single anchors at the edge

Tension load			Shear load							
'	ension load	Perpendic	ular to the fre	ee edge	Parallel to the free edge					
	with c ≥	αedge, N	·	with c ≥	αedge, V⊥	-	with c ≥	αedge, V II		
•	120	1,00		120	0,30		120	0,60		
	120	1,00		250	0,60	Ţ	120	0,00		
	120	1,00	i i i i i i i i i i i i i i i i i i i	500	1,00		250	1,00		

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection
system KEM V for masonry

Performances hollow clay brick BGV Thermo

Description of the stone, Installation parameters, Reductionfactors

Annex C 23



Brick type: Hollow Clay brick BGV Thermo

Table C74: Factors for anchor groups under tension load

An	chor position pa	arallel to hor. jo	oint	Anchor position perpendicular to hor. joint				
-	with c ≥	with s ≥	αg II, N	· · · · · · · · · · · · · · · · · · ·	with c ≥	with s ≥	αg⊥, N	
	120	100	1,00		120	100	1,00	
	200	100	1,70		200	100	1,10	
	120	500	2,00		120	315	2,00	

Table C75: Factors for anchor groups under shear load

	Anchor position parallel to hor. joint				Anchor position perpendicular to hor. joint							
Shear load		with c ≥	with s ≥	α _g II,V ⊥		with c ≥	with s ≥	$\alpha_g \perp$, $\vee \perp$				
perpendicular to the free	•••	120	100	1,00	-	120	100	1,00				
edge		120	500	2,00		120	315	2,00				
Shear load		with c ≥	with s ≥	α _g II,V II		with c ≥	with s ≥	α _{g ⊥,} ν II				
parallel to the	• •	120	100	1,00		120	100	1,00				
free edge		120	500	2,00		120	315	2,00				

Table C76: Characteristic values of tension and shear load resistances

			Characteristic Resistances with c ≥ c _{cr} and s ≥ s _{cr}								
		_				<u>Use condit</u>	ion				
	sleeve	ge Ge					7-1		d/d		
	99	iš a t		d/d			w/d		w/d		
Perforated s		Effecitve inchorag depth		G/ G			w/w		w/w		
	Itec	Effecitve Anchorage depth							All		
	ora	erfora	40°C/24°C	80°C/50°C	120°C/72°C	40°C/24°C	80°C/50°C	120°C/72°C			
	erf								ranges		
	L L	h _{ef}	N	$N_{Rk,b} = N_{Rk,p}$		$N_{Rk,b} = N_{Rk,p}^{2}$			$V_{Rk,b}^{(2)}$		
		[mm]				[kN]					
		Normalis	sed mean d	ompressi	ve strength	f _b ≥ 10 N/	mm² 1)				
M8	SH 12	80			0,	9			3,5		
M8 / M10/	CH 16	≥ 85			0,	9	,				
IG-M6	IG-M6 SH 16		2	,0	1,5	2	,0	1,5	4,0		
M12 / M16	SH 20	≥ 85		0,9							
IG-M8 / IG-M10	3H 20	≥ 130	2	,0	1,5	2	,0	1,5	4,0		

¹⁾ For lower compressive strengths resistances must be multiplied by the conversion factor according to Table C71. For stones with higher strengths, the shown values are valid without conversion.

Table C77: Displacements

Anchor size	hef	δη / Ν	δΝο	δN∞	δv / V	δνο	δ∨∞
Anchor size	[mm]	[mm/kN]	[mm]	[mm]	[mm/kN]	[mm]	[mm]
M8 – M12 / IG-M6 – M10	all	0,13	0,13*N _{Rk} / 3,5	2*δΝο	0,55	0,55*V _{Rk} / 3,5	1,5*δνο
M16	all	,			0,31	0,31*V _{Rk} / 3,5	1,5*δ∨0

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances hollow clay brick BGV Thermo Group factors, characteristic Resistances and Displacements	Annex C 24


²⁾ $N_{Rk,b,c} = N_{Rk,p,c}$ and $V_{Rk,c \, II} = V_{Rk,c} \perp according to Annex C 3$



Brick type: Hollow Clay brick Calibric R+

Table C78: Stone description

Brick type		Hollow clay brick Calibric R+
Density	ρ [kg/dm³]	≥ 0,60
Normalised mean compressive strenght	f _b [N/mm ²]	≥ 12
Conversion factor for low strengths	ver compressive	$(f_b / 12)^{0.5} \le 1.0$
Code		EN 771-1:2011+A1:2015
Producer (Country)		e.g. Leroux (FR)
Brick dimensions	[mm]	500 x 200 x 314
Drilling method		Rotary drilling



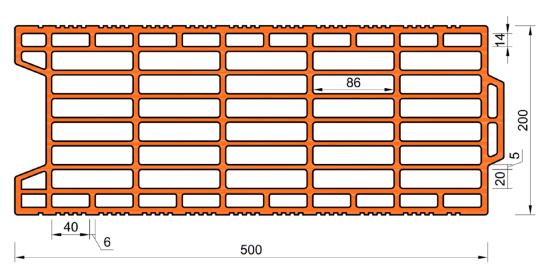


Table C79: Installation parameter

	Table 5 Co. M. Camana Co.								
Anchor size		[-]	M8	M10	M12	M16	IG-M6	IG-M8	IG-M10
Installation torque	T _{inst}	[Nm]	≤ 2	≤2 ≤2 ≤2 ≤2 ≤2 ≤2 ≤2					
Char. Edge distance	Ccr	[mm]	120	120 (for shear loads perpendicular to the free edge: $c_{cr} = 500$)					
Minimum Edge Distance	Cmin	[mm]	120						
Characteristic Spacing	Scr, II	[mm]	500 315						
Characteristic Spacing	Scr, ⊥	[mm]							
Minimum Spacing Smin, II; [mm] 120									
	Smin, ⊥								

Table C80: Reduction factors for single anchors at the edge

Tension load			Shear load						
Tension load			Perpendicular to the free edge			Parallel to the free edge			
	with c ≥	αedge, N	!	with c ≥	αedge, V⊥		with c ≥	αedge, V II	
	120	1,00		120	0,15	I	120	0,30	
	120	1,00		250	0,30	Ţ	120	0,30	
	120	1,00		500	1,00		250	1,00	

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection	1
system KEM V for masonry	

Performances hollow clay brick Calibric R+

Description of the stone, Installation parameters, Reductionfactors

Annex C 25



Brick type: Hollow Clay brick Calibric R+

Table C81: Factors for anchor groups under tension load

An	chor position pa	arallel to hor. jo	pint	Ancho	r position perp	endicular to ho	r. joint
1	with c ≥	with s ≥	αg II, N	+	with c ≥	with s ≥	α _{g ⊥, N}
	120	100	1,00		120	100	1,00
	175	100	1,70		175	100	1,10
- in the second	120	500	2,00		120	315	2,00

Table C82: Factors for anchor groups under shear load

1 0.1010 0 0 0 1	g. out of our or on our or on our or									
	Anchor	position pa	rallel to hor.	. joint	Anchor p	Anchor position perpendicular to hor. joint				
Shear load		with c ≥	with s ≥	αg II,V ⊥		with c ≥	with s ≥	$\alpha_{g\perp,V\perp}$		
perpendicular to the free	•••	120	100	1,00	-	120	100	1,00		
edge		120	500	2,00		120	315	2,00		
Shear load		with c ≥	with s ≥	αg II,V II		with c ≥	with s ≥	α _{g ⊥,} ν II		
parallel to the	120	100	1,00		120	100	1,00			
free edge		120	500	2,00		120	315	2,00		

Table C83: Characteristic values of tension and shear load resistances

		Characteristic Resistances with $c \ge c_{cr}$ and $s \ge s_{cr}$											
			Use condition										
Anchereize	Perforated sleeve	Effective Anchorage depth		d/d w/d w/w				d/d w/d w/w					
Anchor size	rate	Ar A							All				
	ဍ		40°C/24°C	80°C/50°C	120°C/72°C	40°C/24°C	80°C/50°C	120°C/72°C	temperature				
	e e	e.	er Per	Per	Per								ranges
	<u> </u>	h _{ef}	1	$N_{Rk,b} = N_{Rk,p}^{(2)}$			$N_{Rk,b} = N_{Rk,p}^{(2)}$						
		[mm]				[kN]							
		Normalis	sed mean	compressi	ve strengt	h f _b ≥ 12 N	/mm² 1)	_					
M8	SH 12	80	1,2	1,2	0,9	1,2	1,2	0,9	4,0				
M8 / M10/	01140	CLL1C	01146	01140	≥ 85	1,2	1,2	0,9	1,2	1,2	0,9	5,5	
IG-M6	SH 16	130	1,5	1,5	1,2	1,5	1,5	1,2	5,5				
M12 / M16	011.00	≥ 85	1,2	1,2	0,9	1,2	1,2	0,9	8,5				
IG-M8 /IG-M10	SH 20	≥ 130	1,5	1,5	1,2	1,5	1,5	1,2	8,5				

¹⁾ For lower compressive strengths resistances must be multiplied by the conversion factor according to Table C78. For stones with higher strengths, the shown values are valid without conversion.

Table C84: Displacements

Anchor size	hef	δη / Ν	δΝο	δN∞	δv / V	δνο	δ∨∞
Anchor size	[mm]	[mm/kN]	[mm]	[mm]	[mm/kN]	[mm]	[mm]
M8 – M12 / IG-M6 – M10	all	0,13	0,13*N _{Rk} / 3,5	2 *δN0	0,55	0,55*V _{Rk} / 3,5	1,5*δνο
M16	all	,	,	_ = 5.16	0,31	0,31*V _{Rk} / 3,5	1,5*δvo

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances hollow Clay brick Calibric R+ Group factors, characteristic Resistances and Displacements	Annex C 26

²⁾ $N_{Rk,b,c} = N_{Rk,p,c}$ and $V_{Rk,c \mid I} = V_{Rk,c} \perp$ according to Annex C 3



Brick type: Hollow Clay brick Urbanbric Table C85: Stone description Hollow clay brick Brick type Urbanbric Density ≥ 0,70 ρ [kg/dm³] Normalised mean $f_b [N/mm^2]$ ≥ 12 compressive strenght Conversion factor for lower compressive $(f_b / 12)^{0.5} \le 1.0$ strengths EN 771-1:2011+A1:2015 Code Producer (Country) e.g. Imerys (FR) [mm] **Brick dimensions** 560 x 200 x 274 Drilling method Rotary drilling 5,5 040 5 63 Ó, 40_ 9,5 560 Table C86: Installation parameter Anchor size M8 M10 M12 M16 IG-M6 IG-M8 IG-M10 [-] ≤ 2 ≤ 2 ≤ 2 ≤ 2 ≤ 2 ≤ 2 ≤ 2 Installation torque Tinst [Nm] Char. Edge distance [mm] 120 (for shear loads perpendicular to the free edge: $c_{cr} = 500$) Ccr Minimum Edge Distance 120 [mm] Cmin [mm] 560 Scr, II Characteristic Spacing 275 [mm] Scr, ⊥ Smin, II; 100 Minimum Spacing [mm] Smin, ⊥ Table C87: Reduction factors for single anchors at the edge

Tension load			Shear load							
Tension load			Perpendicular to the free edge Parall				el to the free edge			
+	with c ≥	αedge, N	!	with c ≥	αedge, V⊥		with c ≥	αedge, V II		
•	120	1,00		120	0,25		120	0,50		
	120	1,00		250	0,50	Ţ	120	0,50		
	120	1,00	1	500	1,00		250	1,00		

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances hollow clay brick Urbanbric Description of the stone, Installation parameters, Reductionfactors	Annex C 27



2,5

5,0

Brick type: Hollow Clay brick Urbanbric Table C88: Factors for anchor groups under tension load Anchor position parallel to hor. joint Anchor position perpendicular to hor. joint with c ≥ with s ≥ with c ≥ with s ≥ αg II, N $\alpha_{g\perp\!,\;N}$ 120 100 1,00 120 100 1,00 185 100 1,90 185 100 1,10 120 275 560 2,00 120 2,00

Table C89:	Factors for	Factors for anchor groups under shear load									
	Anchor	position pa	rallel to hor.	joint	Anchor position perpendicular to hor. joint						
Shear load		with c ≥	with s ≥	αg II,V ⊥		with c ≥	with s ≥	αg ⊥, V ⊥			
perpendicular to the free edge		120	100	1,00	-	120	100	1,00			
		120	560	2,00		120	275	2,00			
Shear load parallel to the free edge		with c ≥	with s ≥	α _g II,V II		with c ≥	with s ≥	α _{g ⊥,} ν II			
		120	100	1,00		120	100	1,00			
		120	560	2,00		120	275	2,00			

Table C90: Characteristic values of tension and shear load resistances Characteristic Resistances with $c \ge c_{cr}$ and $s \ge s_{cr}$ Use condition Effective Anchorage Perforated sleeve d/d w/d d/d w/d w/w w/w Anchor size ΑII 40°C/24°C | 80°C/50°C | 120°C/72°C | 40°C/24°C | 80°C/50°C | 120°C/72°C temperature ranges $V_{\text{Rk,b}}^{2)}$ $N_{\text{Rk},b} = N_{\text{Rk},p}^{2)}$ $N_{Rk,b} = N_{Rk,p}^{2)}$ h_{ef} [mm] [kN] Normalised mean compressive strength f_b ≥ 12 N/mm² 1) SH 12 80 1,2 0,9 0,9 4,5 **M8** 1,2 1,2 1,2 ≥ 85 1,2 1,2 0,9 0,9 4,5 M8 / M10/ 1,2 1,2 **SH 16** IG-M6 130 3,0 3,0 2,5 3,0 3,0 2,5 4,5 M12 / M16 ≥ 85 1,2 1,2 0,9 1,2 1,2 0,9 5,0

2,5

3,0

3.0

3.0

≥ 130

3,0

SH 20

Table C91: Displacements

IG-M8 / IG-M10

-							
Anchor size	hef	δη / Ν	δΝο	δN∞	δv / V	δνο	δ∨∞
Anchor size	[mm]	[mm/kN]	[mm]	[mm]	[mm/kN]	[mm]	[mm]
M8 – M12 / IG-M6 – M10	all	0,13	0,13*N _{Rk} / 3,5	2 *δN0	0,55	0,55*V _{Rk} / 3,5	1,5*δνο
M16	all	,	, , , , , ,	= 3110	0,31	0,31*V _{Rk} / 3,5	1,5*δ∨0

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances hollow clay brick Urbanbric Group factors, characteristic Resistances and Displacements	Annex C 28

¹⁾ For lower compressive strengths resistances must be multiplied by the conversion factor according to Table C85. For stones with higher strengths, the shown values are valid without conversion.

²⁾ $N_{Rk,b,c} = N_{Rk,p,c}$ and $V_{Rk,c|I} = V_{Rk,c} \perp$ according to Annex C 3



Brick type: Hollow Clay brick Brique creuse C40

Table C92: Stone description

Brick type		Hollow clay brick Brique creuse C40
Density	ρ [kg/dm³]	≥ 0,70
Normalised mean compressive strenght	f _b [N/mm²]	≥ 12
Conversion factor for low strengths	er compressive	$(f_b / 12)^{0.5} \le 1.0$
Code		EN 771-1:2011+A1:2015
Producer (Country)		e.g. Terreal (FR)
Brick dimensions	[mm]	500 x 200 x 200
Drilling method		Rotary drilling






Table C93: Installation parameter

Anchor size	[-]	M8	M10	M12	M16	IG-M6	IG-M8	IG-M10			
Installation torque	Installation torque T _{inst}		≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2		
Char. Edge distance	Ccr	[mm]	120 (for shear loads perpendicular to the free edge: c _{cr} = 500)						500)		
Minimum Edge Distance	Cmin	[mm]	120								
Characteristic Spacing	Scr, II	[mm]	500								
Characteristic Spacing	Scr, ⊥	[mm]	200								
Minimum Spacing	Smin, II;	[mm]	200								
Willimum Spacing	Smin, ⊥	[111111]	200								

Table C94: Reduction factors for single anchors at the edge

Tension load			Shear load						
			Perpendic	ular to the fre	ee edge	Parallel to the free edge			
	with c ≥	αedge, N		with c ≥	αedge, V⊥		with c ≥	αedge, V II	
•	120	1,00		120	0,83	<u>†</u>	120	1,00	
	120	1,00		500	1,00		250	1,00	

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances hollow clay brick Brique Creuse C40 Description of the stone, Installation parameters, Reductionfactors	Annex C 29



Table C95:	Factors f	or ancho	r grou	ups u	ınder ter	sion	load					
Anch	or position							hor po	ositio	n perpe	ndicular to hor	. joint
	with c ≥	with s	5 ≥	α	g II, N	h			with	C≥	with s ≥	$\alpha_g \perp$, N
	120	500)	2	2,00		:		120	0	200	2,00
Table C96:	Factors f	or ancho	r grou	ups u	ınder sh	ear Ic	ad					
		or position		<u> </u>				Ancho	r pos	ition pe	rpendicular to	hor. joint
Shear load		with c	with c ≥ with s ≥		≥ α _g II,	,V _	1			with c ≥	with s ≥	α _{g ⊥, V ⊥}
perpendicular to the free edge	••	120		500	2,0	00		•	•	120	200	2,00
Shear load		with c	≥ V	with s	≥ ag II	,V II				with c ≥	with s ≥	αg ⊥,V II
parallel to the free edge		120		500	2,0	00				120	200	2,00
Table C97:	Characte	ristic val	ues o	f ten	sion and	shea	ar Ioa	d res	sista	nces		
											c _{cr} and s ≥ s _{cr}	
								Use c			01 01	
	Perforated sleeve	Effective Anchorage depth			d/d					w/d w/w		d/d w/d w/w
Anchor size	erforate	An	40°C/2	10°C/24°C 80°C/50°C 120°C/		:/72°C	40°C/	/24°C	80°C/50	0°C 120°C/72°C	All temperature ranges	
	<u> </u>	h _{ef}		N	$R_{k,b} = N_{Rk,p}$	2)			1	$N_{Rk,b} = N$	J _{Rk.p} ²⁾	V _{Rk,b} ²⁾
		[mm]						[ا	kN]	<i>'</i>	7	,
			ed me	an c	ompressi	ve str	ength	f _b ≥ ′	12 N/	mm ^{2 1)}		I
M8	SH 12	80										
M8 / M10/ IG-M6	SH 16	≥ 85	85 1,2		1,2		,9	1,2		1,2	0,9	1,5
M12 / M16 / IG-M8 / IG-M1					1 10 10							
 For lower con with higher st N_{Rk,b,c} = N_{Rk,p,} Table C98: 	rengths, the	shown valu = V _{Rk,c} ⊥aco	es are v	valid w	ithout conv			versio	n ract	or accor	ding to Table Cs	2. For stones
		hef	SNI	ı / N	δι	IU	8	N∞	SV	/ / V	δνο	δ∨∞
Anchor	rsize	[mm]		n/kN]	[m			nm]		n/kN]	[mm]	[mm]
M8 – N IG-M6 -		all		,13	0,13*N			δΝ0		,55	0,55*V _{Rk} / 3,5	
M16		all		,		,			0	,31	0,31*V _{Rk} / 3,5	5 1,5*δvo
Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry Performances hollow clay brick Brigue Crouse C40 Annex C 30												



Brick type: Hollow Clay brick Blocchi Leggeri

Table C99: Stone description

Brick type		Hollow clay brick Blocchi Leggeri
Density	ρ [kg/dm³]	≥ 0,60
Normalised mean compressive strenght	f _b [N/mm ²]	≥ 12
Conversion factor for low strengths	er compressive	$(f_b / 12)^{0.5} \le 1.0$
Code		EN 771-1:2011+A1:2015
Producer (Country)		e.g. Wienerberger (IT)
Brick dimensions	[mm]	250 x 120 x 250
Drilling method		Rotary drilling



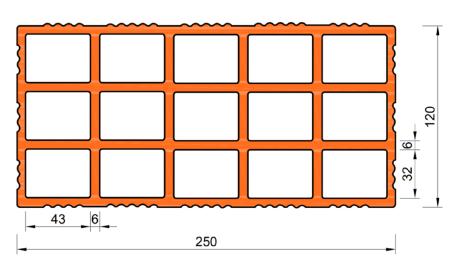


Table C100: Installation parameter

Table 6 1001 inicialiation parameter											
Anchor size		[-]	M8	M10	M12	M16	IG-M6	IG-M8	IG-M10		
Installation torque	Tinst	[Nm]	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2		
Char. Edge distance	Ccr	[mm]	120 (for shear loads perpendicular to the free edge: c _{cr} = 250)								
Minimum Edge Distance	Cmin	[mm]	60								
Characteristic Spacing	Scr, II	[mm]	250								
Characteristic Spacing	Scr, ⊥	[mm]	250								
Minimum Spacing	Smin, II;	[mm]	100								
1	Smin, ⊥										

Table C101: Reduction factors for single anchors at the edge

-	Tension load		Shear load							
'	rension load		Perpendic	ular to the fr	ee edge	Parallel to the free edge				
	with c ≥	αedge, N		with c ≥	αedge, V⊥		with c ≥	αedge, V II		
•	60	1,00		60	0,40	1 !	60	0,40		
	120	1,00		250	1,00		120	1,00		

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances hollow clay brick Blocchi Leggeri Description of the stone, Installation parameters, Reductionfactors	Annex C 31



Brick type: Hollow Clay brick Blocchi Leggeri

Table C102: Factors for anchor groups under tension load

An	chor position p	arallel to hor. jo	pint	Anchor position perpendicular to hor. joint			
	with c ≥	with s ≥	αg II, N		with c ≥	with s ≥	$lpha_{g\perp}$, N
• •	60	100	1,00		60	100	2,00
	120	250	2,00		120	250	2,00

Table C103: Factors for anchor groups under shear load

	Anchor	position pa	rallel to hor.	joint	Anchor position perpendicular to hor. joint			
Shear load perpendicular to the free edge		with c ≥	with s ≥	α _g II,V ⊥	1	with c ≥	with s ≥	$\alpha_{g\perp,V\perp}$
	•••	60	100	0,40		60	100	0,40
		250	100	1,00		250	100	1,00
		250	250	2,00		250	250	2,00
Shear load	- 	with c ≥	with s ≥	α _g II,V II	1	with c ≥	with s ≥	α _{g ⊥,} ν II
parallel to the	••	60	100	0,40	•	60	100	0,40
free edge		120	100	1,00	•	120	100	1,00
		120	250	2,00		120	250	2,00

Table C104: Characteristic values of tension and shear load resistances

		Characteristic Resistances with $c \ge c_{cr}$ and $s \ge s_{cr}$										
		Effective Anchorage depth		Use condition								
Anchor size	Perforated sleeve		d/d				d/d w/d w/w					
			40°C/24°C	80°C/50°C	120°C/72°C	40°C/24°C	80°C/50°C	120°C/72°C	All temperature ranges			
		h _{ef}	١	$J_{Rk,b} = N_{Rk,p}$	2)	1	$N_{Rk,b} = N_{Rk,b}$	2)	$V_{Rk,b}^{(2)}$			
		[mm]				[kN]						
		Normalis	ed mean d	ompressi	ve strength	f _b ≥ 12 N/	mm² 1)					
M8	SH 12	80										
M8 / M10/ IG-M6	SH 16	≥ 85	0,6	0,6	0,6	0,6	0,6	0,6	3,5			
M12 / M16 / IG-M8 / IG-M10	SH 20	≥ 85										

¹⁾ For lower compressive strengths resistances must be multiplied by the conversion factor according to Table C99. For stones with higher strengths, the shown values are valid without conversion.

Table C105: Displacements

Anghor size	hef	δη / Ν	δΝο	δN∞	δv / V	δνο	δ∨∞
Anchor size	[mm]	[mm/kN] [mm]		[mm]	[mm/kN]	[mm]	[mm]
M8 – M12 / IG-M6 – M10	all	0,13	0,13*N _{Rk} / 3,5	2*δΝ0	0,55	0,55*V _{Rk} / 3,5	1,5* δvo
M16	all	,	,		0,31	0,31*V _{Rk} / 3,5	1,5*δ∨0

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances hollow clay brick Blocchi Leggeri Group factors, characteristic Resistances and Displacements	Annex C 32

²⁾ $N_{Rk,b,c} = N_{Rk,p,c}$ and $V_{Rk,c \mid I} = V_{Rk,c} \perp$ according to Annex C 3



Brick type: Hollow Clay brick Doppio Uni

Table C106: Stone description

Brick type		Hollow clay brick Doppio Uni	
Density	ρ [kg/dm³]	≥ 0,90	
Normalised mean compressive strenght	f _b [N/mm²]	≥ 28	
Conversion factor for low strengths	$(f_b / 28)^{0.5} \le 1.0$		
Code		EN 771-1:2011+A1:2015	
Producer (Country)		e.g. Wienerberger (IT)	
Brick dimensions	[mm]	250 x 120 x 120	
Drilling method		Rotary drilling	



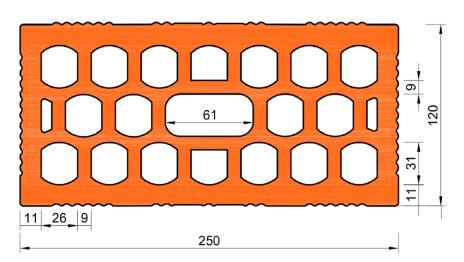


Table C107: Installation parameter

Anchor size		[-]	M8	M10	M12	M16	IG-M6	IG-M8	IG-M10	
Installation torque	Tinst	[Nm]	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	
Char. Edge distance	Ccr	[mm]	120 (for shear loads perpendicular to the free edge: $c_{cr} = 250$)							
Minimum Edge Distance	Cmin	[mm]	100							
<u> </u>	Scr, II	[mm]	250							
Characteristic Spacing	Scr, ⊥	[mm]	120							
Minimum Spacing	Smin, II;	[mm]		100						
Willimum Spacing	Smin, ⊥	[111111]	100							

Table C108: Reduction factors for single anchors at the edge

Tension load			Shear load							
'	ension load		Perpendic	ular to the fr	ee edge	Parallel to the free edge				
	with c ≥	αedge, N		with c ≥	αedge, V⊥		with c ≥	αedge, V II		
•	100	1,00	→	100	0,50	<u>†</u>	100	1,00		
	120	1,00		250	1,00		120	1,00		

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances hollow clay brick Doppio Uni Description of the stone, Installation parameters, Reductionfactors	Annex C 33



Brick type: Hollow Clay brick Doppio Uni

Table C109: Factors for anchor groups under tension load

An	chor position pa	arallel to hor. jo	oint	Anchor position perpendicular to hor. joint				
	with c ≥	with s ≥	αg II, N		with c ≥	with s ≥	$lpha_{g\perp,N}$	
• •	100	100	1,00		100	120	2,00	
	120	250	2,00		120	120	2,00	

Table C110: Factors for anchor groups under shear load

	Anchor	position pa	rallel to hor.	joint	Anchor position perpendicular to hor. joint			
Shear load perpendicular to the free edge		with c ≥	with s ≥	α _g II,V ⊥		with c ≥	with s ≥	$\alpha_{g\perp,V\perp}$
	100	100	1,00	•	100	100	1,00	
		250	250	2,00		250	120	2,00
Shear load		with c ≥	with s ≥	α _g II,V II		with c ≥	with s ≥	$\alpha_{g\perp,V}$ II
parallel to the	• •	100	100	1,00		100	100	1,00
free edge		120	250	2,00		120	120	2,00

Table C111: Characteristic values of tension and shear load resistances

			Characteristic Resistances with $c \ge c_{cr}$ and $s \ge s_{cr}$									
				Use condition								
	Perforated sleeve	Effective Anchorage depth					w/d		d/d			
Anchor size	sle	Effective Anchorage depth		d/d			w/w		w/d			
	l g	# 5 A							w/w			
Alichor Size	ate	Ā							All			
	-for		40°C/24°C	80°C/50°C	120°C/72°C	40°C/24°C	80°C/50°C	120°C/72°C	temperature			
)er								ranges			
"		h _{ef}	N	$N_{Rk,b} = N_{Rk,p}^{2}$			$N_{Rk,b} = N_{Rk,i}$	2) p	$V_{Rk,b}^{(2)}$			
		[mm]				[kN]						
		Normalis	sed mean d	compressiv	ve strength	f _b ≥ 28 N/	mm² 1)					
M8	SH 12	80										
M8 / M10/	SH 16	≥ 85										
IG-M6	511 10	_ 00	1,2	1,2	0,9	1,2	1,2	0,9	2,5			
M12 / M16 / IG-M8 / IG-M10	SH 20	≥ 85										
1) = .		·			1		·					

¹⁾ For lower compressive strengths resistances must be multiplied by the conversion factor according to Table C106. For stones with higher strengths, the shown values are valid without conversion.

Table C112: Displacements

Anchor size	hef	δη / Ν	δΝο	δN∞	δv / V	δνο	δ∨∞
Alichor Size	[mm]	[mm/kN]	[mm]	[mm]	[mm/kN]	[mm]	[mm]
M8 – M12 / IG-M6 – M10	all	0,13	0,13*N _{Rk} / 3,5	2*δN0	0,55	0,55*V _{Rk} / 3,5	1,5*δvo
M16	all	,	,	_ = 1.10	0,31	0,31*V _{Rk} / 3,5	1,5*δvo

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances hollow clay brick Doppio Uni Group factors, characteristic Resistances and Displacements	Annex C 34

²⁾ $N_{Rk,b,c} = N_{Rk,p,c}$ and $V_{Rk,c \, II} = V_{Rk,c} \bot according to Annex C 3$



Brick type: Hollow clay brick Coriso WS07 with insulation

Table C113: Stone description

Brick type		Hollow clay brick Coriso WS07
Insulationmaterial		Rock wool
Density	ρ [kg/dm³]	≥ 0,55
Normalised mean compressive strenght	f _b [N/mm ²]	≥ 6
Conversion factor for lowe strengths	er compressive	$(f_b / 6)^{0,5} \le 1,0$
Code		EN 771-1:2011+A1:2015
Producer (Country)		e.g. Unipor (DE)
Brick dimensions	[mm]	248 x 365 x 249
Drilling method		Rotary drilling



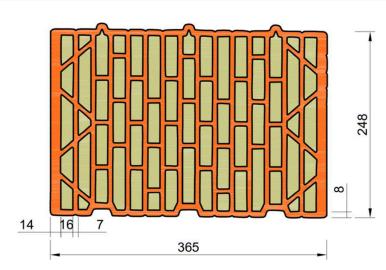


Table C114: Installation parameter

Anchor size	[-]	M8	M10	M12	M16	IG-M6	IG-M8	IG-M10			
Installation torque	Tinst	[Nm]	≤ 5	≤ 5	≤ 10	≤ 10	≤ 5	≤ 5	≤ 5		
Char. Edge distance	Ccr	[mm]	n] 120 (for shear loads perpendicular to the free edge: c _{cr} = 250)								
Minimum Edge Distance	Cmin	[mm]	50								
Characteristic Spacing	Scr, II	[mm]		250							
Characteristic Spacing	Scr, ⊥	[mm]	250								
Minimum Spacing	Smin, II;	[mm]	50								
Smin,		[[[]]				30					

Table C115: Reduction factors for single anchors at the edge

Tension load				Shear load						
rension load			Perpendicular to the free edge			Parallel to the free edge				
	with c ≥	αedge, N		with c ≥	αedge, V⊥		with c ≥	αedge, V II		
•	50	1,00		50	0,30	<u>†</u>	50	1,00		
	120	1,00		250	1,00		120	1,00		

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection
system KEM V for masonry

Performances hollow clay brick Coriso WS07 with insulation

Description of the stone, Installation parameters, Reductionfactors

Annex C 35



Brick type: Hollow clay brick Coriso WS07 with insulation

Table C116: Factors for anchor groups under tension load

An	chor position pa	arallel to hor. jo	oint	Anchor position perpendicular to hor. joint				
	with c ≥	with s ≥	αg II, N		with c ≥	with s ≥	α _{g ⊥, N}	
• •	50	50	1,50		50	50	1,00	
	120	250	2,00		120	250	2,00	

Table C117: Factors for anchor groups under shear load

	Anchor	position pa	rallel to hor.	joint	Anchor position perpendicular to hor. joint			
Shear load	-	with c ≥	with s ≥	α _g II,V ⊥	1	with c ≥	with s ≥	$\alpha_{g\perp,V\perp}$
perpendicular	•••	50	50	0,40		50	50	0,40
to the free		250	50	1,00		250	50	1,20
edge		250	250	2,00	1	250	250	2,00
Shear load		with c ≥	with s ≥	α _g II,V II		with c ≥	with s ≥	α _g ⊥,ν II
parallel to the	•	50	50	1,65		50	50	1,00
free edge		120	250	2,00		120	250	2,00

Table C118: Characteristic values of tension and shear load resistances

		Characteristic Resistances with $c \ge c_{cr}$ and $s \ge s_{cr}$											
		Perforated sleeve Effective Anchorage depth		Use condition									
	d sleeve			d/d	d/d		w/d w/w						
Anchor size	Anchor size ater-		40°C/24°C	80°C/50°C	120°C/72°C	40°C/24°C	80°C/50°C	120°C/72°C	All temperature ranges				
	"	h _{ef}	$N_{Rk,b} = N_{Rk,p}^{2}$			$N_{Rk,b} = N_{Rk,p}^{(2)}$			V _{Rk,b} ²⁾				
		[mm]		[kN]									
		Normali	sed mean o	compressi	ve strengtl	n f _b ≥ 6 N/n	nm² 1)						
M8	SH 12	80											
M8 / M10/ IG-M6	SH 16	≥ 85	1,5	1,5	1,5	1,5	1,5	1,5	5,0				
M12 / M16 / IG-M8 / IG-M10	SH 20	≥ 85											

¹⁾ For lower compressive strengths resistances must be multiplied by the conversion factor according to Table C113. For stones with higher strengths, the shown values are valid without conversion.

Table C119: Displacements

Anghor size	hef	δη / Ν	δΝο	δN∞	δv / V	δνο	δ∨∞
Anchor size	[mm]	[mm/kN]	[mm]	[mm]	[mm/kN]	[mm]	[mm]
M8 – M12 / IG-M6 – M10	all	0,13	0,13*N _{Rk} / 3,5	2*δN0	0,55	0,55*V _{Rk} / 3,5	1,5*δνο
M16	all	,	, ,		0,31	0,31*V _{Rk} / 3,5	1,5*δ∨0

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances hollow Clay brick Coriso WS07 with insulation Group factors, characteristic Resistances and Displacements	Annex C 36

²⁾ $N_{Rk,b,c} = N_{Rk,p,c}$ and $V_{Rk,c | II} = V_{Rk,c} \perp$ according to Annex C 3



Brick type: Hollow clay brick T7 MW with insulation

Table C120: Stone description

Brick type		Hollow clay brick T7 MW
Insulation material		Rock wool
Density	ρ [kg/dm³]	≥ 0,59
Normalised mean compressive strenght	f _b [N/mm ²]	≥ 8
Conversion factor for lowe strengths	$(f_b / 8)^{0.5} \le 1.0$	
Code		EN 771-1:2011+A1:2015
Producer (Country)		e.g. Wienerberger (DE)
Brick dimensions	[mm]	248 x 365 x 249
Drilling method		Rotary drilling






Table C121: Installation parameter

	<u> </u>										
Anchor size		[-]	M8	M10	M12	M16	IG-M6	IG-M8	IG-M10		
Installation torque	T _{inst}	[Nm]	≤ 5	≤ 5	≤ 10	≤ 10	≤ 5	≤ 5	≤ 5		
Char. Edge distance	C _{cr;} (C _{cr,fi})	[mm]	120 (2 h _{ef})								
(under fire conditions)	Ccr; (Ccr,īi)	[[,,,,,,,]	(for shear loads perpendicular to the free edge: c _{cr} = 250)								
Minimum Edge Distance	Cmin	[mm]	50								
Characteristic Spacing	Scr, II; (Scr,fi, II)	[mm]			:	250 (4 h _{ef})				
(under fire conditions)	Scr, ⊥; (Scr,fi, ⊥)	[mm]	250 (4 h _{ef})								
Minimum Spacing	Smin, II; Smin, ⊥	[mm]	50								

Table C122: Reduction factors for single anchors at the edge

Tension load		Shear load							
'	ension load		Perpendic	ular to the fr	ee edge	Parallel to the free edge			
	with c ≥	αedge, N		with c ≥	αedge, V⊥		with c ≥	αedge, V II	
•	50	1,00		50	0,35	1	50	1,00	
	120	1,00		250	1,00		120	1,00	

Table C123: Factors for anchor groups under tension load

An	chor position p	arallel to hor. jo	oint	Anchor position perpendicular to hor. joint				
	with c ≥	with s ≥	αg II, N		with c ≥	with s ≥	$lpha_{g\perp}$, N	
• •	50	50	1,40		50	50	1,15	
	120	250	2,00		120	250	2,00	

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry

Performances hollow clay brick T7 MW with insulation

Description of the stone, Installation parameters, Reductionfactors

Annex C 37

free edge



120

250

2,00

Brick type: Hollow clay brick T7 MW with insulation											
Table C124: Factors for anchor groups under shear load											
	Anchor	position pa	rallel to hor.	joint	Anchor p	osition perpe	endicular to h	or. joint			
Shear load		with c ≥	with s ≥	α _g II,V ⊥		with c ≥	with s ≥	$\alpha_{g\perp,V\perp}$			
perpendicular	•••	50	50	0,60		50	50	0,40			
to the free		250	50	1,55		250	50	1,00			
edge		250	250	2,00		250	250	2,00			
Shear load		with c ≥	with s ≥	αg II,V II		with c ≥	with s ≥	α _{g ⊥,} ν II			
parallel to the	• •	50	50	2.00	1 1	50	50	1.20			

2,00

Table C125: Characteristic values of tension and shear load resistances

250

120

			Characteristic Resistances with $c \ge c_{cr}$ and $s \ge s_{cr}$								
				Use condition							
	eve	Effective Anchorage depth					w/d		d/d		
	l se	ffectiv ichora depth		d/d			w/u w/w		w/d		
Perforated sleeve	000	Effective inchoragi depth					VV/ VV				
	ate	forate E Ar							All		
	for			80°C/50°C 1	120°C/72°C	40°C/24°C	80°C/50°C	120°C/72°C	temperature		
)er								ranges		
		h _{ef}	$N_{Rk,b} = N_{Rk,p}^{2)}$			1	$N_{Rk,b} = N_{Rk,b}$	2) p	$V_{Rk,b}^{(2)}$		
		[mm]				[kN]					
		Normali	sed mean o	compressi	ve strengtl	n f _b ≥8 N/n	nm² ¹⁾				
M8	SH 12	80									
M8 / M10/ IG-M6	SH 16	≥ 85	0.0	0.0	4.5	2,0		1,5	3,0		
M12 / IG-M8	SH 20	≥ 85	2,0	2,0	1,5		2,0		-		
M16 / IG-M10	SH 20	≥ 85							4,5		

¹⁾ For lower compressive strengths resistances must be multiplied by the conversion factor according to Table C120. For stones with higher strengths, the shown values are valid without conversion.

Table C126: Displacements

Anchor size M8 – M12 / IG-M6 – M10 M16	hef	δη / Ν	δΝο	δN∞	δv / V	δνο	δ∨∞
	[mm]	[mm/kN]	[mm]	[mm]	[mm/kN]	[mm]	[mm]
I	all	0,13	0,13*N _{Rk} / 3,5	2*δN0	0,55	0,55*V _{Rk} / 3,5	1,5*δνο
M16	all	,			0,31	0,31*V _{Rk} / 3,5	1,5*δ∨0

Table C127: Characteristic values of tension and shear load resistances under fire exposure

		Effecitve	Characteristic Resistances					
Ancher size Perforate		Anchorage depth	age depth $N_{Rk,b,fi} = N_{Rk,p,fi} = V_{Rk,b,fi}$		$fi = V_{Rk,b,fi}$			
Anchor size sleeve	h _{ef}	R30	R60	R90	R120			
		[mm]	[kN]					
M8 / M10 /IG-M6	SH 16	130						
M12 / M16 / IG-M8 IG-M10	SH 20	≥ 130	0,64	0,37	0,11	_1)		

¹⁾ no performance assessed

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances hollow clay brick T7 MW with insulation Group factors, characteristic Resistances and Displacements	Annex C 38

²⁾ $N_{Rk,b,c} = N_{Rk,p,c}$ and $V_{Rk,c | II} = V_{Rk,c} \perp$ according to Annex C 3



Brick type: Hollow clay brick T8 P with insulation

Table C128: Stone description

Brick type		Hollow clay brick T8 P	
Insulation material		Perlite	
Density	ρ [kg/dm³]	≥ 0,56	
Normalised mean compressive strenght	f _b [N/mm ²]	≥ 6	
Conversion factor for lowe strengths	$(f_b / 6)^{0,5} \le 1,0$		
Code		EN 771-1:2011+A1:2015	
Producer (Country)		e.g. Wienerberger (DE)	
Brick dimensions	[mm]	248 x 365 x 249	
Drilling method		Rotary drilling	



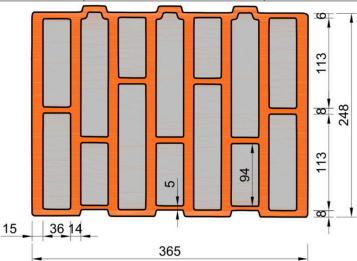


Table C129: Installation parameter

Table Cizer inicianati	o pa.	41110101										
Anchor size		[-]	M8	M10	M12	M16	IG-M6	IG-M8	IG-M10			
Installation torque	Tinst	[Nm]	≤ 4	≤ 4	≤ 10	≤ 10	≤ 4	≤ 4	≤ 4			
Char. Edge distance	Ccr	[mm]	120 (for shear loads perpendicular to the free edge: $c_{cr} = 250$)									
Minimum Edge Distance	Cmin	[mm]	50									
Charactaristic Cassins	Scr, II	[mm]		250								
Characteristic Spacing	Scr, ⊥	[mm]		250								
Minimum Spacing Sr		[mm]	50									
William Spacing	Smin, ⊥	[[,,,,,,]	30									

Table C130: Reduction factors for single anchors at the edge

Tension load		Shear load							
'	ension load		Perpendic	ular to the fro	ee edge	Parallel to the free edge			
	with c ≥	αedge, N		with c ≥	αedge, V⊥		with c ≥	αedge, V II	
•	50	1,00	→	50	0,25	1 •	50	1,00	
	120	1,00		250	1,00		120	1,00	

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection	
system KEM V for masonry	

Performances hollow clay brick T8 P with insulation

Description of the stone, Installation parameters, Reductionfactors

Annex C 39



Brick type: Hollow clay brick T8 P with insulation

Table C131: Factors for anchor groups under tension load

Anchor position parallel to hor. joint				Anchor position perpendicular to hor. joint				
	with c ≥	with s ≥	αg II, N		with c ≥	with s ≥	$lpha_{g\perp,N}$	
• •	50	50	1,30		50	50	1,10	
	120	250	2,00		120	250	2,00	

Table C132: Factors for anchor groups under shear load

	Anchor	position pa	rallel to hor.	joint	Anchor position perpendicular to hor. joint			
Shear load perpendicular to the free edge	+	with c ≥	with s ≥	α _g II,V ⊥	1	with c ≥	with s ≥	$\alpha_{\text{g}}\bot,\text{v}\bot$
	•••	50	50	0,40		50	50	0,30
		250	50	1,35		250	50	1,20
		250	250	2,00	· · · · · · · · · · · · · · · · · · ·	250	250	2,00
Shear load		with c ≥	with s ≥	α _g II,V II		with c ≥	with s ≥	α _g ⊥,ν II
parallel to the free edge	•	50	50	1,70		50	50	1,00
		120	250	2,00		120	250	2,00

Table C133: Characteristic values of tension and shear load resistances

		Perforated sleeve Effective Anchorage depth		Characteristic Resistances with $c \ge c_{cr}$ and $s \ge s_{cr}$								
			Use condition									
Anchor size	d sleeve		d/d				d/d w/d w/w					
	erforate		40°C/24°C	80°C/50°C	120°C/72°C	40°C/24°C	80°C/50°C	120°C/72°C	All temperature ranges			
	"	h _{ef}	$N_{Rk,b} = N_{Rk,p}^{2}$			1	$N_{Rk,b} = N_{Rk,b}$	2) p	V _{Rk,b} ²⁾			
		[mm]				[kN]						
	_	Normali	sed mean o	compressi	ve strengtl	n f _b ≥ 6 N/n	nm² 1)					
M8	SH 12	80										
M8 / M10/ IG-M6	SH 16	≥ 85	1,5	1,5	1,5	1,5	1,5	1,5	4,5			
M12 / IG-M8	SH 20	≥ 85										
M16 / IG-M10	SH 20	≥ 85	2,5	2,5	2,0	2,5	2,5	2,0	7,0			

¹⁾ For lower compressive strengths resistances must be multiplied by the conversion factor according to Table C128. For stones with higher strengths, the shown values are valid without conversion.

Table C134: Displacements

Anchor size	hef	δη / Ν	δΝο	δN∞	δv / V	δνο	δ∨∞
Anchor size	[mm]	[mm/kN]	[mm]	[mm]	[mm/kN]	[mm]	[mm]
M8 – M12 / IG-M6 – M10	all	0,13	0,13*N _{Rk} / 3,5	2 *δN0	0,55	0,55*V _{Rk} / 3,5	1,5*δvo
M16	all	,	,		0,31	0,31*V _{Rk} / 3,5	1,5*δ∨0

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances hollow clay brick T8 P with insulation Group factors, characteristic Resistances and Displacements	Annex C 40

²⁾ $N_{Rk,b,c} = N_{Rk,p,c}$ and $V_{Rk,c \mid I} = V_{Rk,c} \perp$ according to Annex C 3



Brick type: Hollow clay brick Thermoplan MZ90-G with insulation

Table C135: Stone description

Brick type		Hollow clay brick Thermoplan MZ90-G
Insulation material		Rock wool
Density	ρ [kg/dm³]	≥ 0,68
Normalised mean compressive strenght	f _b [N/mm ²]	≥ 12
Conversion factor for low strengths	er compressive	$(f_b / 12)^{0.5} \le 1.0$
Code		EN 771-1:2011+A1:2015
Producer (Country)		e.g. Mein Ziegelhaus (DE)
Brick dimensions	[mm]	248 x 365 x 249
Drilling method		Rotary drilling



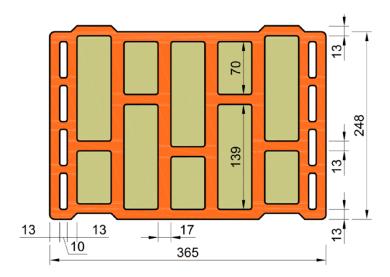


Table C136: Installation parameter

Table Creek moteriati	on pan	41110101								
Anchor size		[-]	M8	M10	M12	M16	IG-M6	IG-M8	IG-M10	
Installation torque	T _{inst}	[Nm]	≤ 4	≤ 4	≤ 10	≤ 10	≤ 4	≤ 4	≤ 4	
Char. Edge distance	Ccr	[mm]	120 (for shear loads perpendicular to the free edge: $c_{cr} = 250$)							
Minimum Edge Distance	Cmin	[mm]	50							
Characteristic Spacing	Scr, II	[mm]		250						
Characteristic Spacing	Scr, ⊥	[mm]	250							
Minimum Spacing	Smin, II;	[mm]	50							
William Spacing	Smin, ⊥	[111111]				30				

Table C137: Reduction factors for single anchors at the edge

,	Tension load			Shear load							
'	ension load		Perpendic	ular to the fro	ee edge	Parallel to the free edge					
	with c ≥	αedge, N		with c ≥	αedge, V⊥		with c ≥	αedge, V II			
•	50	1,00		50	0,25	1 •	50	1,00			
	120	1,00		250	1,00		120	1,00			

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances hollow clay brick Thermoplan MZ90-G with insulation Description of the stone, Installation parameters, Reductionfactors	Annex C 41



Brick type: Hollow clay brick Thermoplan MZ90-G with insulation

Table C138: Factors for anchor groups under tension load

An	chor position pa	arallel to hor. jo	oint	Anchor position perpendicular to hor. joint				
	with c ≥	with s ≥	αg II, N		with c ≥	with s ≥	αg⊥, N	
• •	50	50	1,00		50	50	1,00	
	120	250	2,00		120	250	2,00	

Table C139: Factors for anchor groups under shear load

	Anchor	position pa	rallel to hor.	joint	Anchor position perpendicular to hor. joint			
Shear load perpendicular to the free edge	+	with c ≥	with s ≥	α _g II,V ⊥	1	with c ≥	with s ≥	$\alpha_{g\perp,V\perp}$
	•••	50	50	0,75		50	50	0,50
		250	50	2,00		250	50	1,70
		250	250	2,00		250	250	2,00
Shear load		with c ≥	with s ≥	α _g II,V II		with c ≥	with s ≥	α _g ⊥,ν II
parallel to the free edge	•	50	50	1,65		50	50	1,15
		120	250	2,00		120	250	2,00

Table C140: Characteristic values of tension and shear load resistances

		Effective Anchorage depth		Characteristic Resistances with $c \ge c_{cr}$ and $s \ge s_{cr}$								
			Use condition									
Anchor size	sleeve		d/d				d/d w/d w/w					
	Perforated sleeve		40°C/24°C	80°C/50°C	120°C/72°C	40°C/24°C	80°C/50°C	120°C/72°C	All			
	"	h _{ef}	$N_{Rk,b} = N_{Rk,p}^{2)}$			1	$N_{Rk,b} = N_{Rk,i}$	2) p	V _{Rk,b} ²⁾			
		[mm]				[kN]						
		Normalis	sed mean c	ompressiv	ve strength	f _b ≥ 12 N/	mm² 1)					
M8	SH 12	80										
M8 / M10/ IG-M6	SH 16	≥ 85	3,0	3,0	2,5	3,0	3,0	2,5	4,0			
M12 / IG-M8	SH 20	≥ 85				·						
M16 / IG-M10	SH 20	≥ 85	3,5	3,5	3,0	3,5	3,5	3,0	7,5			

¹⁾ For lower compressive strengths resistances must be multiplied by the conversion factor according to Table C135. For stones with higher strengths, the shown values are valid without conversion.

Table C141: Displacements

Angharaiza	hef	δη / Ν	δΝο	δN∞	δv / V	δνο	δ∨∞
Anchor size	[mm]	[mm/kN]	[mm]	[mm]	[mm/kN]	[mm]	[mm]
M8 – M12 / IG-M6 – M10	all	0,13	0,13*N _{Rk} / 3,5	2*δN0	0,55	0,55*V _{Rk} / 3,5	1,5*δνο
M16	all	,	,		0,31	0,31*V _{Rk} / 3,5	1,5*δ∨0

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances hollow clay brick Thermoplan MZ90-G with insulation Group factors, characteristic Resistances and Displacements	Annex C 42


²⁾ $N_{Rk,b,c} = N_{Rk,p,c}$ and $V_{Rk,c \mid I} = V_{Rk,c} \perp$ according to Annex C 3



Brick type: Hollow clay brick Poroton FZ7,5 with insulation

Table C142: Stone description

Brick type		Hollow clay brick Poroton FZ7,5
Insulation material		Rock wool
Density	ρ [kg/dm³]	≥ 0,70
Normalised mean compressive strenght	f _b [N/mm ²]	≥ 8
Conversion factor for lowe strengths	er compressive	$(f_b / 8)^{0,5} \le 1,0$
Code		EN 771-1:2011+A1:2015
Producer (Country)		e.g. Schlagmann (DE)
Brick dimensions	[mm]	248 x 365 x 249
Drilling method		Rotary drilling






Table C143: Installation parameter

	•								
Anchor size			M8	M10	M12	M16	IG-M6	IG-M8	IG-M10
Installation torque	T _{inst}	[Nm]	≤ 5	≤ 5	≤ 10	≤ 10	≤ 5	≤ 5	≤ 5
Char. Edge distance (under fire conditions)	Ccr; (Ccr,fi)	[mm] $120 (2 h_{ef})$ (for shear loads perpendicular to the free edge: $c_{cr} = 250$)				= 250)			
Minimum Edge Distance	Cmin	[mm] 50				,			
Characteristic Spacing	Scr, II; (Scr,fi, II)	[mm] 250 (4 h _{ef})							
(under fire conditions)	$S_{cr, \perp; (S_{cr,fi, \perp})}$								
Minimum Spacing	Smin, II; Smin, ⊥	[mm]	[mm] 50						

Table C144: Reduction factors for single anchors at the edge

Tension load				Shear load						
'	ension load		Perpendic	ular to the fr	ee edge	Paralle	el to the free edge			
	with c ≥	αedge, N		with c ≥	αedge, V⊥		with c ≥	αedge, V II		
•	50	1,00	 	50	0,35	1	50	1,00		
	120	1,00		250	1,00		120	1,00		

Table C145: Factors for anchor groups under tension load

An	Anchor position parallel to hor. joint			Anchor position perpendicular to hor. joint			
	with c ≥	with s ≥	αg II, N		with c ≥	with s ≥	$lpha_{g\perp}$, N
• •	50	50	1,40		50	50	1,15
	120	250	2,00		120	250	2,00

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry

Performances hollow clay brick Poroton FZ7,5 with insulation Description of the stone, Installation parameters, Reduction factors

Annex C 43



Brick type: Hollow clay brick Poroton FZ7,5 with insulation								
Table C146:	Table C146: Factors for anchor groups under shear load							
	Anchor	position pa	rallel to hor.	joint	Anchor p	osition perpe	endicular to h	or. joint
Shear load		with c ≥	with s ≥	α _g II,V ⊥		with c ≥	with s ≥	$\alpha_{g \perp, V \perp}$
perpendicular	•••	50	50	0,60		50	50	0,40
to the free		250	50	1,55		250	50	1,00
edge		250	250	2,00		250	250	2,00
Shear load		with c ≥	with s ≥	αg II,V II		with c ≥	with s ≥	αg ⊥,V II
parallel to the	•	50	50	2,00]	50	50	1,20
free edge		120	250	2,00		120	250	2,00

Table C147: Characteristic values of tension and shear load resistances

1 4 5 6 6 1 17 1 6 1	iai aotoi	iotio vai	400 O. to.	ololl alla	onour rou	a i coiotai	1000			
			Characteristic Resistances with $c \ge c_{cr}$ and $s \ge s_{cr}$							
			Use condition							
	Perforated sleeve	Effective Anchorage depth					w/d		d/d	
	Se	ffectiv ichora depth		d/d			w/w		w/d	
Anchor size	g	풀호					VV/ VV		w/w	
Allohol Size	ate	Ā							All	
	- for		40°C/24°C	80°C/50°C	120°C/72°C	40°C/24°C	80°C/50°C	120°C/72°C	temperature	
)er								ranges	
	-	h _{ef}	N	$N_{Rk,b} = N_{Rk,p}^{2)}$		N	$N_{Rk,b} = N_{Rk,p}$	2)	$V_{Rk,b}^{(2)}$	
		[mm]				[kN]				
		Normali	sed mean d	compressi	ve strengtl	h f _b ≥8 N/n	nm² ¹⁾			
M8	SH 12	80								
M8 / M10/ IG-M6	SH 16	≥ 85	2.0	2.0	1.5	2.0	2.0	1.5	3,0	
M12 / IG-M8	SH 20	≥ 85	2,0	2,0	1,5	2,0 2,0	2,0	1,5		
M16 / IG-M10	SH 20	≥ 85							4,5	

¹⁾ For lower compressive strengths resistances must be multiplied by the conversion factor according to Table C142. For stones with higher strengths, the shown values are valid without conversion.

Table C148: Displacements

Anghor size	hef	δη / Ν	δΝο	δN∞	δv / V	δνο	δ∨∞
Anchor size	[mm]	[mm/kN]	[mm]	[mm]	[mm/kN]	[mm]	[mm]
M8 – M12 / IG-M6 – M10	all	0,13	0,13*N _{Rk} / 3,5	2*δΝ0	0,55	0,55*V _{Rk} / 3,5	1,5*δvo
M16	all	,	,		0,31	0,31*V _{Rk} / 3,5	1,5*δ∨0

Table C149: Characteristic values of tension and shear load resistances under fire exposure

		Effecitve	Characteristic Resistances					
Anchor size	Perforated Anchorage depth		$N_{Rk,b,fi} = N_{Rk,p,fi} = V_{Rk,b,fi}$					
Anchor Size	sleeve	h _{ef}	R30	R60	R90	R120		
		[mm]	[kN]					
M8 / M10 /IG-M6	SH 16	130						
M12 / M16 / IG-M8 IG-M10	SH 20	≥ 130	0,64	0,37	0,11	_1)		

¹⁾ no performance assessed

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances hollow clay brick Poroton FZ7,5 with insulation Group factors, characteristic Resistances and Displacements	Annex C 44

²⁾ $N_{Rk,b,c} = N_{Rk,p,c}$ and $V_{Rk,c | II} = V_{Rk,c} \perp$ according to Annex C 3



Brick type: Hollow clay brick Poroton FZ9 with insulation

Table C150: Stone description

Brick type		Hollow clay brick Poroton FZ9
Insulation material		Rock wool
Density	ρ [kg/dm³]	≥ 0,90
Normalised mean compressive strenght	f _b [N/mm ²]	≥ 10
Conversion factor for lowe strengths	er compressive	$(f_b / 10)^{0.5} \le 1.0$
Code		EN 771-1:2011+A1:2015
Producer (Country)		e.g. Schlagmann (DE)
Brick dimensions	[mm]	248 x 365 x 249
Drilling method		Rotary drilling






Table C151: Installation parameter

Anchor size			M8	M10	M12	M16	IG-M6	IG-M8	IG-M10
Installation torque	T _{inst}	[Nm]	≤ 5	≤ 5	≤ 10	≤ 10	≤ 5	≤ 5	≤ 5
Char. Edge distance (under fire conditions)	C _{cr;} (C _{cr,fi})	[mm]	120 (2 h_{ef}) (for shear loads perpendicular to the free edge: c_{cr} = 250						= 250)
Minimum Edge Distance	Cmin	[mm]	,			50			•
Characteristic Spacing	Scr, II; (Scr,fi, II)	[mm]			2	250 (4 h _{ef})		
(under fire conditions)	S _{cr, ⊥;} (S _{cr,fi, ⊥})	[mm]	250 (4 h _{ef})						
Minimum Spacing	Smin, II; Smin, ⊥	[mm]	50						

Table C152: Reduction factors for single anchors at the edge

Tension load			Shear load							
Tension load			Perpendic	ular to the fr	ee edge	Parallel to the free edge				
	with c ≥	αedge, N		with c ≥	αedge, V⊥		with c ≥	αedge, V II		
•	50	1,00	 	50	0,35] <u>+</u>	50	1,00		
	120	1,00		250	1,00		120	1,00		

Table C153: Factors for anchor groups under tension load

An	chor position p	arallel to hor. jo	oint	Anchor position perpendicular to hor. joint				
	with c ≥	with s ≥	αg II, N		with c ≥	with s ≥	αg⊥, N	
• •	50	50	1,40		50	50	1,15	
	120	250	2,00		120	250	2,00	

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry

Performances hollow clay brick Poroton FZ9 with insulationDescription of the stone, Installation parameters, Reduction factors

Annex C 45

free edge



120

250

2,00

Brick type:	Brick type: Hollow clay brick Poroton FZ9 with insulation								
Table C154: Factors for anchor groups under shear load									
	Anchor	position pa	rallel to hor.	joint	Anchor p	osition perpe	endicular to h	or. joint	
Shear load		with c ≥	with s ≥	α _g II,V ⊥	1	with c ≥	with s ≥	$\alpha_{g \perp, V \perp}$	
perpendicular	•••	50	50	0,60		50	50	0,40	
to the free		250	50	1,55		250	50	1,00	
edge	•	250	250	2,00		250	250	2,00	
Shear load		with c ≥	with s ≥	αg II,V II		with c ≥	with s ≥	α _g ⊥,ν II	
parallel to the	• •	50	50	2,00		50	50	1,20	

2,00

Table C155: Characteristic values of tension and shear load resistances

250

120

			Characteristic Resistances with $c \ge c_{cr}$ and $s \ge s_{cr}$									
				Use condition								
	Perforated sleeve	Effective Anchorage depth					w/d		d/d			
	<u>8</u>	ffectiv ichora depth		d/d			w/w		w/d			
Anchor size	g	ع کے ہو		VV/ VV				w/w				
Anchor Size	ate	Ā							All			
	Į į		40°C/24°C	80°C/50°C	120°C/72°C	40°C/24°C	80°C/50°C	120°C/72°C	temperature			
)er								ranges			
	_	h _{ef}	N	$N_{Rk,b} = N_{Rk,p}^{(2)}$			$N_{Rk,b} = N_{Rk,p}^{2}$					
		[mm]				[kN]						
		Normalis	sed mean c	ompressiv	ve strength	f _b ≥ 10 N/	mm² 1)					
M8	SH 12	80										
M8 / M10/ IG-M6	SH 16	≥ 85	2.0	2.0	1.5	2.0	2.0	1.5	3,0			
M12 / IG-M8	SH 20	≥ 85	2,0 2,0	1,5	2,0	2,0	1,5					
M16 / IG-M10	SH 20	≥ 85							4,5			

¹⁾ For lower compressive strengths resistances must be multiplied by the conversion factor according to Table C150. For stones with higher strengths, the shown values are valid without conversion.

Table C156: Displacements

Anchor size	hef	δη / Ν	δΝο	δN∞	δv / V	δνο	δ∨∞
Anchor size	[mm]	[mm/kN]	[mm]	[mm]	[mm/kN]	[mm]	[mm]
M8 – M12 / IG-M6 – M10	all	0,13	0,13*N _{Rk} / 3,5	2*δΝ0	0,55	0,55*V _{Rk} / 3,5	1,5*δvo
M16	all	,		= 3140	0,31	0,31*V _{Rk} / 3,5	1,5*δ∨0

Table C157: Characteristic values of tension and shear load resistances under fire exposure

			Characteristic Resistances						
Anchor size	Perforated	Anchorage depth	$N_{Rk,b,fi} = N_{Rk,p,fi} = V_{Rk,b,fi}$						
Anchor size	sleeve		R30	R60	R90	R120			
		[mm]	[kN]						
M8 / M10 /IG-M6	SH 16	130							
M12 / M16 / IG-M8 IG-M10	SH 20	≥ 130	0,64	0,37	0,11	_1)			

¹⁾ no performance assessed

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances hollow clay brick Poroton FZ9 with insulation Group factors, characteristic Resistances and Displacements	Annex C 46


²⁾ $N_{Rk,b,c} = N_{Rk,p,c}$ and $V_{Rk,c | II} = V_{Rk,c} \perp$ according to Annex C 3



Brick type: Hollow clay brick Poroton S9 with insulation

Table C158: Stone description

Brick type		Hollow clay brick Poroton S9
Insulationmaterial		Perlite
Density	ρ [kg/dm³]	≥ 0,85
Normalised mean compressive strenght	f _b [N/mm ²]	≥ 12
Conversion factor for lowe strengths	er compressive	$(f_b / 12)^{0.5} \le 1.0$
Code		EN 771-1:2011+A1:2015
Producer (Country)		e.g. Schlagmann (DE)
Brick dimensions	[mm]	248 x 365 x 249
Drilling method		Rotary drilling



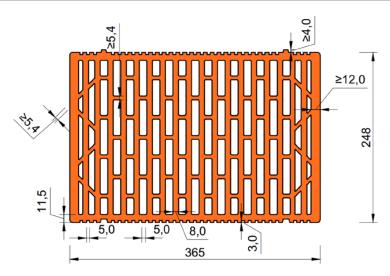


Table C159: Installation parameter

Table Close inclanation parameter										
Anchor size [-]			M8	M10	M12	M16	IG-M6	IG-M8	IG-M10	
Installation torque	T _{inst}	[Nm]	≤ 5	≤5 ≤5 ≤10 ≤10 ≤5 ≤5 ≤5						
Char. Edge distance	Ccr	[mm]	120	120 (for shear loads perpendicular to the free edge: c _{cr} = 250)						
Minimum Edge Distance	Cmin	[mm]		50						
Characteristic Spacing	Scr, II	[mm]		250						
	Scr, ⊥	[mm]		250						
Minimum Spacing	Smin, II;	[mm]	50							
William Spacing	Smin, ⊥	[[,,,,,,,]				30				

Table C160: Reduction factors for single anchors at the edge

Tension load			Shear load							
'	ension load		Perpendic	ular to the fr	ee edge	Parallel to the free edge				
	with c ≥	αedge, N		with c ≥	αedge, V⊥		with c ≥	αedge, V II		
•	50	1,00		50	0,30	1 <u>†</u>	50	1,00		
	120	1,00		250	1,00		120	1,00		

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection
system KEM V for masonry

Performances hollow clay brick Poroton S9 with insulation

Description of the stone, Installation parameters, Reductionfactors

Annex C 47



Brick type: Hollow clay brick Poroton S9 with insulation

Table C161: Factors for anchor groups under tension load

And	chor position p	arallel to hor. jo	oint	Anchor position perpendicular to hor. joint			
	with c ≥	with s ≥	αg II, N		with c ≥	with s ≥	α _{g ⊥, N}
• •	50	50	1,50		50	50	1,00
	120	250	2,00		120	250	2,00

Table C162: Factors for anchor groups under shear load

	Anchor	position pa	rallel to hor.	joint	Anchor position perpendicular to hor. joint			
Shear load perpendicular to the free edge		with c ≥	with s ≥	α _g II,V ⊥	1	with c ≥	with s ≥	$\alpha_{g\perp,V\perp}$
		50	50	0,40		50	50	0,40
		250	50	1,00		250	50	1,20
		250	250	2,00		250	250	2,00
Shear load		with c ≥	with s ≥	α _g II,V II		with c ≥	with s ≥	α _g ⊥,ν II
parallel to the free edge	•	50	50	1,65		50	50	1,00
		120	250	2,00		120	250	2,00

Table C163: Characteristic values of tension and shear load resistances

	Perforated sleeve Effective			Charac	teristic Res	istances w	ith c≥c _{cr} a	and s ≥ s _{cr}				
		Effective Anchorage depth		Use condition								
Anchor size			d/d			w/d w/w			d/d w/d w/w			
			40°C/24°C	80°C/50°C	120°C/72°C	40°C/24°C	80°C/50°C	120°C/72°C	All temperature ranges			
	"	h _{ef}	$N_{Rk,b} = N_{Rk,p}^{2}$				$N_{Rk,b} = N_{Rk,p}$	2)	$V_{Rk,b}^{(2)}$			
		[mm]		[kN]								
		Normalis	ed mean c	ompressiv	e strength	f _b ≥ 12 N/	mm ^{2 1)}					
M8	SH 12	80										
M8 / M10/ IG-M6	SH 16	≥ 85	1,5	1,5	1,5	1,5	1,5	1,5	5,0			
M12 / M16 / IG-M8 / IG-M10	SH 20	≥ 85										

¹⁾ For lower compressive strengths resistances must be multiplied by the conversion factor according to Table C158. For stones with higher strengths, the shown values are valid without conversion.

Table C164: Displacements

Anchor size	hef	δη / Ν	δΝο	δN∞	δv / V	δνο	δ∨∞
Alichor size	[mm]	[mm/kN]	[mm]	[mm]	[mm/kN]	[mm]	[mm]
M8 – M12 / IG-M6 – M10	all	0,13	0,13*N _{Rk} / 3,5	2*δN0	0,55	0,55*V _{Rk} / 3,5	1,5*δvo
M16	all	,	,		0,31	0,31*V _{Rk} / 3,5	1,5 *δvo

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances hollow clay brick Poroton S9 with insulation Group factors, characteristic Resistances and Displacements	Annex C 48

²⁾ $N_{Rk,b,c} = N_{Rk,p,c}$ and $V_{Rk,c | II} = V_{Rk,c} \perp$ according to Annex C 3



Brick type: Hollow clay brick Thermopor TV8+ with insulation

Table C165: Stone description

Brick type		Hollow clay brick Thermopor TV8+
Insulation material		Rock wool
Density	ρ [kg/dm³]	≥ 0,70
Normalised mean compressive strenght	f _b [N/mm ²]	≥ 10
Conversion factor for lowe strengths	er compressive	$(f_b / 10)^{0.5} \le 1.0$
Code		EN 771-1:2011+A1:2015
Producer (Country)		e.g. THERMOPOR GmbH (DE)
Brick dimensions	[mm]	248 x 365 x 249
Drilling method	_	Rotary drilling



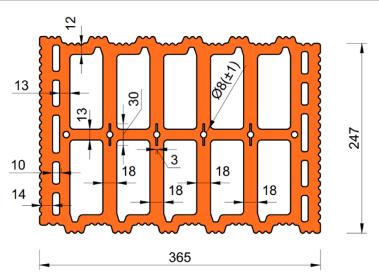


Table C166: Installation parameter

Table 0100. Illatallati	Table 0100. Installation parameter											
Anchor size		[-]	M8	M10	M12	M16	IG-M6	IG-M8	IG-M10			
Installation torque	T _{inst}	[Nm]] ≤ 4 ≤ 4 ≤ 10 ≤ 10 ≤ 4 ≤ 4				≤ 4					
Char. Edge distance	Ccr	[mm]	120 (for shear loads perpendicular to the free edge: $c_{cr} = 250$)									
Minimum Edge Distance	Cmin	[mm]	50									
Characteristic Spacing	Scr, II	[mm]	250									
Orianacteristic Spacing	Scr, ⊥	[mm]	250									
Minimum Spacing	Smin, II;	[mm]	50									
Villimani Spacing	Smin, ⊥	[]				30						

Table C167: Reduction factors for single anchors at the edge

Description of the stone, Installation parameters, Reductionfactors

Tension load			Shear load							
'	ension load		Perpendic	ular to the fr	ee edge	Parallel to the free edge				
	with c ≥	αedge, N		with c ≥	αedge, V⊥		with c ≥	αedge, V II		
•	50	1,00	→	50	0,25	<u> </u>	50	1,00		
	120	1,00		250	1,00		120	1,00		

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances hollow clay brick Thermopor TV8+ with insulation	Annex C 49



Brick type: Hollow clay brick Thermopor TV8+ with insulation

Table C168: Factors for anchor groups under tension load

An	chor position p	arallel to hor. jo	oint	Anchor position perpendicular to hor. joint			
	with c ≥	with s ≥	αg II, N		with c ≥	with s ≥	α _{g ⊥, N}
• •	50	50	1,00		50	50	1,00
	120	250	2,00		120	250	2,00

Table C169: Factors for anchor groups under shear load

	Anchor	position pa	rallel to hor.	joint	Anchor position perpendicular to hor. joint			
Shear load perpendicular to the free edge		with c ≥	with s ≥	α _g II,V ⊥	1	with c ≥	with s ≥	$\alpha_{g\perp,V\perp}$
		50	50	0,75		50	50	0,50
		250	50	2,00		250	50	1,70
		250	250	2,00	1	250	250	2,00
Shear load		with c ≥	with s ≥	α _g II,V II		with c ≥	with s ≥	α _{g ⊥,} ν II
parallel to the free edge	•	50	50	1,65		50	50	1,15
		120	250	2,00		120	250	2,00

Table C170: Characteristic values of tension and shear load resistances

			Characteristic Resistances with $c \ge c_{cr}$ and $s \ge s_{cr}$								
	0	Effective Anchorage depth	Use condition								
Anchor size	Perforated sleeve		d/d				d/d w/d w/w				
			40°C/24°C	80°C/50°C	120°C/72°C	40°C/24°C	80°C/50°C	120°C/72°C	All temperature ranges		
		h _{ef}	$N_{Rk,b} = N_{Rk,p}^{2)}$			1	$N_{Rk,b} = N_{Rk,j}$	2) p	V _{Rk,b} ²⁾		
		[mm]				[kN]					
		Normalis	ed mean c	ompressiv	e strength	f _b ≥ 10 N/	mm² 1)				
M8	SH 12	80									
M8 / M10/ IG-M6	SH 16	≥ 85	3,0	3,0	2,5	3,0	3,0	2,5	3,5		
M12 / IG-M8	SH 20	≥ 85									
M16 / IG-M10	SH 20	≥ 85	3,5	3,5	3,0	3,5	3,5	3,0	7,0		

¹⁾ For lower compressive strengths resistances must be multiplied by the conversion factor according to Table C165. For stones with higher strengths, the shown values are valid without conversion.

Table C171: Displacements

Anchor size	hef	δη / Ν	δΝο	δN∞	δv / V	δνο	δ∨∞
Anchor size	[mm]	[mm/kN]	[mm]	[mm]	[mm/kN]	[mm]	[mm]
M8 – M12 / IG-M6 – M10	all	0,13	0,13*N _{Rk} / 3,5	2*δN0	0,55	0,55*V _{Rk} / 3,5	1,5*δνο
M16	all	,	,		0,31	0,31*V _{Rk} / 3,5	1,5*δ∨0

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances hollow clay brick Thermopor TV8+ with insulation Group factors, characteristic Resistances and Displacements	Annex C 50

²⁾ $N_{Rk,b,c} = N_{Rk,p,c}$ and $V_{Rk,c \mid I} = V_{Rk,c} \perp$ according to Annex C 3



Brick type: Hollow light weight concrete brick HBL 16DF

Table C172: Stone description

	Hollow light weight concrete brick HBL 16DF
ρ [kg/dm³]	≥ 1,0
f _b [N/mm²]	≥ 3,1
er compressive	$(f_b/3,1)^{0.5} \le 1,0$
	EN 771-3:2011+A1:2015
	e.g. KLB Klimaleichtblock (DE)
[mm]	500 x 250 x 240
	Rotary drilling
	f _b [N/mm²] er compressive



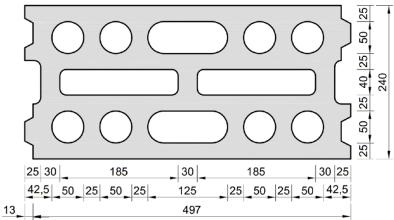


Table C173: Installation parameter

Anchor size	[-]	M8	M10	M12	M16	IG-M6	IG-M8	IG-M10			
Installation torque	T _{inst}	[Nm]	≤ 2	≤ 2	≤ 5	≤ 5	≤ 2	≤ 5	≤ 5		
Char. Edge distance	0 (0 %)	[mm]				120 (2 h _{ef})				
(under fire conditions)	C _{cr} ; (C _{cr} ,fi)	[[,,,,,,,]	(for shear loads perpendicular to the free edge: c _{cr} = 250)								
Minimum Edge Distance	Cmin	[mm]	50								
Characteristic Spacing	Scr, II; (Scr,fi, II)	[mm]	500 (4 h _{ef})								
(under fire conditions)	Scr, ⊥; (Scr,fi, ⊥)	[mm]	250 (4 h _{ef})								
Minimum Spacing	Smin, II; Smin, ⊥	[mm]	()								

Table C174: Reduction factors for single anchors at the edge

Tension load			Shear load							
'	rension load		Perpendic	ular to the fr	ee edge	Parallel to the free edge				
	with c ≥	αedge, N		with c ≥	αedge, V ⊥		with c ≥	αedge, V II		
•	50	1,00		50	0,30	•	50	1,00		
	120	1,00		250	1,00		120	1,00		

Table C175: Factors for anchor groups under tension load

Anchor position parallel to hor. joint			Anchor position perpendicular to hor. joint				
	with c ≥	with s ≥	αg II, N		with c ≥	with s ≥	α _{g ⊥, N}
• •	50	50	2,00		50	50	1,55
	120	500	2,00		120	250	2,00

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry

Performances hollow light weight concrete brick HBL 16DFDescription of the stone, Installation parameters, Reduction factors

Annex C 51



120

250

2,00

Brick type: Hollow light weight concrete brick HBL 16DF Table C176: Factors for anchor groups under shear load Anchor position parallel to hor. joint Anchor position perpendicular to hor. joint with c ≥ with s ≥ with c ≥ with s ≥ lphag II,V $oldsymbol{\perp}$ $\alpha_{\text{g}}\,\bot,\,\text{V}\,\bot$ Shear load 50 50 0,60 50 50 0,35 perpendicular to the free 120 50 2,00 120 50 1,15 edge 120 500 2,00 120 250 2,00 with s ≥ with c ≥ with c ≥ with s ≥ αg II,V II αg ⊥,V II Shear load 50 50 1,30 parallel to the 50 50 1,00 120 250 2,00 free edge

2,00

Table C177: Characteristic values of tension and shear load resistances

500

120

			Characteristic Resistances with $c \ge c_{cr}$ and $s \ge s_{cr}$								
				Use condition							
	eve	Effective Anchorage depth					w/d		d/d		
	sle	ffectiv Ichora depth	d/d				w/d				
Anchor size	g	± 2 ŏ					w/w		w/w		
Anchor Size	Perforated sleeve	Ā							All		
			40°C/24°C	80°C/50°C	120°C/72°C	40°C/24°C	80°C/50°C	120°C/72°C	temperature		
									ranges		
		h _{ef}	N	$J_{Rk,b} = N_{Rk,p}$	2)	1	$N_{Rk,b} = N_{Rk,p}$	2)	$V_{Rk,b}^{(2)}$		
		[mm]				[kN]	[kN]				
		Normalis	ed mean c	ompressiv	e strength	f _b ≥ 3,1 N/	mm² 1)				
M8 / M10/ IG-M6	SH 16	≥ 85	1,2	1,2	0,9	1,2	1,2	0,9	2,0		
M12 / IG-M8	SH 20	≥ 85	1 5	1.5	1.0	1.5	1.5	1.0	3,0		
M16 / IG-M10	SH 20	≥ 85	1,5	1,5	1,2	1,5	1,5	1,2	5,0		

¹⁾ For lower compressive strengths resistances must be multiplied by the conversion factor according to Table C172. For stones with higher strengths, the shown values are valid without conversion.

Table C178: Displacements

Anchor size	hef	δη / Ν	δΝο	δN∞	δv / V	δνο	δ∨∞
Anchor size	[mm]	[mm/kN]	[mm]	[mm]	[mm/kN]	[mm]	[mm]
M8 – M12 / IG-M6 – M10	all	0,13	0,13*N _{Rk} / 3,5	2*δN0	0,55	0,55*V _{Rk} / 3,5	1,5*δνο
M16	all	,	, , , , ,		0,31	0,31*V _{Rk} / 3,5	1,5*δ∨0

Table C179: Characteristic values of tension and shear load resistances under fire exposure

Anaharaiza	Perforated	Effecitve Anchorage depth	Characteristic Resistances $N_{Rk,b,fi} = N_{Rk,b,fi} = V_{Rk,b,fi}$					
Anchor size	sleeve	h _{ef}	rage depth N _{Rk,b,fi} = N _{Rk,p,fi} = V _{Rk,b,fi} h _{ef} R30 R60 R90 [mm] [kN] 130 0,29 0,21 -1)	R120				
		[mm] [kN]						
M8 / M10 / IG-M6	SH 16	130	0.00	0.21	1)	₋ 1)		
M12 / IG-M8	SH 20	≥ 130	0,29	0,21	-1)	-1/		
M16 / IG-M10	SH 20	≥ 130	0,29	0,21	0,12	₋ 1)		

¹⁾ no performance assessed

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances hollow light weight concrete brick HBL 16DF Group factors, characteristic Resistances and Displacements	Annex C 52

²⁾ $N_{Rk,b,c} = N_{Rk,p,c}$ and $V_{Rk,c|II} = V_{Rk,c} \perp$ according to Annex C 3



Brick type: Hollow concrete brick Bloc Creux B40

Table C180: Stone description

Brick type		Hollow concrete brick Bloc Creux B40
Density	ρ [kg/dm³]	≥ 0,8
Normalised mean compressive strenght	f _b [N/mm ²]	≥ 5,2
Conversion factor for low strengths	er compressive	$(f_b / 5,2)^{0,5} \le 1,0$
Code		EN 772-1
Producer (Country)		e.g. Leroux (FR)
Brick dimensions	[mm]	500 x 200 x 200
Drilling method		Rotary drilling



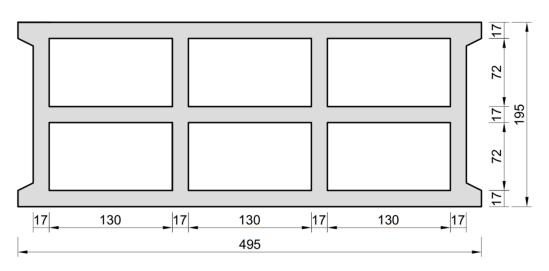


Table C181: Installation parameter

Anchor size		[-]	M8	M10	M12	M16	IG-M6	IG-M8	IG-M10
Installation torque	T _{inst}	[Nm]	≤ 4 ≤ 4 ≤ 4 ≤ 4 ≤ 4 ≤ 4						≤ 4
Char. Edge distance	Ccr	[mm]	120 (for shear loads perpendicular to the free edge: $c_{cr} = 170$)						170)
Minimum Edge Distance	Cmin	[mm]	50						
Characteristic Spacing	Scr, II	[mm]	170						
Characteristic Spacing	Scr, ⊥	[mm]				200		≤ 4	
Minimum Spacing	Smin, II;	[mm]	50						
Williman Spacing	Smin, ⊥	[[,,,,,,,]	50						

Table C182: Reduction factors for single anchors at the edge

Tension load			Snear load							
'	ension load		Perpendicular to the free edge			Parallel to the free edge				
	with c ≥	αedge, N		with c ≥	αedge, V ⊥		with c ≥	αedge, V II		
•	50	1,00	→	50	0,35	<u> </u> [50	1,00		
	120	1,00		170	1,00		120	1,00		

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances hollow concrete brick Bloc Creux B40 Description of the stone, Installation parameters, Reductionfactors	Annex C 53



Brick type: Hollow concrete brick Bloc Creux B40

Table C183: Factors for anchor groups under tension load

An	chor position p	arallel to hor. jo	oint	Anchor position perpendicular to hor. joint				
	with c ≥	with s ≥	αg II, N		with c ≥	with s ≥	αg⊥, N	
	50	50	1,50		50	50	1,40	
	50	170	2,00		50	200	2,00	
	120	170	2,00		120	200	2,00	

Table C184: Factors for anchor groups under shear load

	Anchor	position pa	rallel to hor.	. joint	Anchor position perpendicular to hor. joint				
Shear load perpendicular to the free edge		with c ≥	with s ≥	αg II,V ⊥	1	with c ≥	with s ≥	$\alpha_{g\perp,V\perp}$	
		50	50	0,55		50	50	0,35	
		120	50	1,30		120	50	0,85	
		120	170	2,00		120	200	2,00	
		with c ≥	with s ≥	αg II,V II	† <u>-</u>	with c ≥	with s ≥	α _{g ⊥,} ν II	
Shear load	••	50	50	1,10	•	50	50	1,00	
parallel to the free edge		120	170	2,00	•	50	200	2,00	
		120	170			120	200	2,00	

Table C185: Characteristic values of tension and shear load resistances

	sleeve		Characteristic Resistances with $c \ge c_{cr}$ and $s \ge s_{cr}$										
		Anc Eff		Use condition									
Anchor size			d/d				d/d w/d w/w						
			40°C/24°C	80°C/50°C	120°C/72°C	40°C/24°C	80°C/50°C	120°C/72°C	All temperature ranges				
		h _{ef}	N	$I_{Rk,b} = N_{Rk,p}$	2)		$V_{Rk,b}^{(2)}$						
		[mm]		[kN]									
		Normalis	ed mean c	ompressiv	e strength	f _b ≥ 5,2 N/	mm ^{2 1)}						
M8 / M10/ IG-M6	SH 16	130	2,0	1.5	1.2	2.0	1.5	1.0	6.0				
M12 / M16 / IG-M8 / IG-M10	SH 20	≥ 130	2,0	1,5	1,2	2,0	1,5	1,2	6,0				

¹⁾ For lower compressive strengths resistances must be multiplied by the conversion factor according to Table C180. For stones with higher strengths, the shown values are valid without conversion.

Table C186: Displacements

Anchor size	hef	δη / Ν	δΝο	δN∞	δv / V	δνο	δ∨∞
Anchor size	[mm]	[mm/kN]	[mm]	[mm]	[mm/kN]	[mm]	[mm]
M8 – M12 / IG-M6 – M10	all	0,13	0,13*N _{Rk} / 3,5	2*δΝο	0,55	0,55*V _{Rk} / 3,5	1,5*δνο
M16	all		, ,	= 3140	0,31	0,31*V _{Rk} / 3,5	1,5*δ∨0

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry	
Performances hollow concrete brick Bloc Creux B40 Group factors, characteristic Resistances and Displacements	Annex C 54

²⁾ $N_{Rk,b,c} = N_{Rk,p,c}$ and $V_{Rk,c | II} = V_{Rk,c} \perp$ according to Annex C 3



Brick type: Solid light weight concrete brick

Table C187: Stone description

Brick type		Solid light weight concrete brick	
Density	ρ [kg/dm³]	≥ 0,6	
Normalised mean compressive strenght	f _b [N/mm²]	≥ 2	
Conversion factor for low strengths	$(f_b / 2)^{0.5} \le 1.0$		
Code		EN 771-3:2011+A1:2015	
Producer (Country)		e.g. Bisotherm (DE)	
Brick dimensions	[mm]	≥ 240 x 300 x 113	
Drilling method		Rotary drilling	



Table C188: Installation parameter

Anchor size		[-]	M8	M10	M12	M16	IG-M6	IG-M8	IG-M10		
Installation torque	Tinst	[Nm]	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2		
Char. Edge distance	Ccr	[mm]	150								
Minimum Edge Distance	Cmin	[mm]	60								
Characteristic Spacing	Scr, II	[mm]		300							
Onaracteristic Spacing	Scr, ⊥	[mm]		300							
Minimum Spacing	Smin, II; Smin, ⊥	[mm]				120					

Table C189: Reduction factors for single anchors at the edge

Tension load			Shear load							
'	i ension load		Perpendic	ular to the fr	ee edge	Parallel to the free edge				
	with c ≥	αedge, N		with c ≥	αedge, V⊥		with c ≥	αedge, V II		
•	60	1,00	→	60	0,25	1 •	60	0,40		
	150	1,00		150	1,00		100	1,00		

Table C190: Factors for anchor groups under tension load

An	chor position pa	arallel to hor. jo	oint	Anchor position perpendicular to hor. joint				
	with c ≥	with s ≥	αg II, N		with c ≥	with s ≥	αg⊥, N	
• •	60	120	1,00		60	120	1,00	
	150	300	2,00		150	300	2,00	

Table C191: Factors for anchor groups under shear load

	Anchor	position pa	rallel to hor.	. joint	Anchor position perpendicular to hor. joint				
Shear load perpendicular to the free edge		with c ≥	with s ≥	α _g II,V ⊥		with c ≥	with s ≥	$\alpha_g \perp$, v \perp	
		60	120	0,25		60	120	0,25	
		150	120	1,00		150	120	1,00	
		150	300	2,00		150	300	2,00	
		with c ≥	with s ≥	α _g II,V II	1	with c ≥	with s ≥	α _{g ⊥,} ν II	
Shear load parallel to the		60	120	0,40	•	60	120	0,40	
free edge		100	120	1,00	•	100	120	1,00	
		150	300	2,00		150	300	2,00	

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry

Performances solid light weight concrete brick

Description of the stone, Installation parameters, Reduction- and Group factors

Annex C 55



Brick type: Solid light weight concrete brick

Table C192: Characteristic values of tension and shear load resistances

			Characteristic Resistances with c > c and s > s								
Anchor size	Perforated sleeve	Effective Anchorage depth	Characteristic Resistances with $c \ge c_{cr}$ and $s \ge s_{cr}$								
			Use condition								
			d/d			w/d w/w			d/d		
									w/d w/w		
									All		
			40°C/24°C	80°C/50°C	120°C/72°C	40°C/24°C	80°C/50°C	120°C/72°C			
									ranges		
		h _{ef}	$N_{Rk,b} = N_{Rk,p}^{2)}$			$N_{Rk,b} = N_{Rk,p}^{2)}$			$V_{Rk,b}^{(2)}$		
		[mm]									
Normalised mean compressive strength f _b ≥ 2 N/mm ^{2 1)}											
M8	-	80									
M10 / IG-M6	-	90	3,0	2,5	2,0	2,5	2,0	1,5	3,0		
M12 / M16 / IG-M8 / IG-M10	-	100									
M8	SH 12	80	2,5	2,5	2,0	2,5	2,0	1,5			
M8 / M10/ IG-M6	SH 16	≥ 85									
M12 / M16 / IG-M8 / IG-M10	SH 20	≥ 85									

¹⁾ For lower compressive strengths resistances must be multiplied by the conversion factor according to Table C187. For stones with higher strengths, the shown values are valid without conversion.

Table C193: Displacements

Anghar siza	hef	δη / Ν	δΝο	δN∞	δv / V	δνο	δ∨∞
Anchor size	[mm]	[mm/kN]	[mm]	[mm]	[mm/kN]	[mm]	[mm]
M8 – M12 / IG-M6 – M10	all	0,1	0,1*N _{Rk} / 3,5	2*δΝο	0,3	0,3*V _{Rk} / 3,5	1,5*δνο
M16	all				0,1	0,1*V _{Rk} /3,5	1,5*δvo

Friulsider Injection System KEM-UP + Vinylester or Friulsider Injection system KEM V for masonry

Performances solid light weight concrete brick
Characteristic Resistances and Displacements

Annex C 56

²⁾ $N_{Rk,b,c} = N_{Rk,p,c}$ and $V_{Rk,c | II} = V_{Rk,c} \perp$ according to Annex C 3