

Public-law institution jointly founded by the federal states and the Federation

**European Technical Assessment Body
for construction products**



European Technical Assessment

**ETA-20/0867
of 11 February 2025**

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Hilti screw anchor HUS4

Product family
to which the construction product belongs

Mechanical fastener for use in concrete

Manufacturer

Hilti AG
Feldkircherstraße 100
9494 Schaan
FÜRSTENTUM LIECHTENSTEIN

Manufacturing plant

Hilti Werke

This European Technical Assessment contains

46 pages including 3 annexes which form an integral part of this assessment

This European Technical Assessment is issued in accordance with Regulation (EU) No 305/2011, on the basis of

EAD 330232-01-0601-v05, Edition 01/2024

This version replaces

ETA-20/0867 issued on 25 April 2024

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The Hilti screw anchor HUS4 is an anchor in size 8, 10, 12, 14 and 16 mm made of galvanized and stainless steel. The anchor is screwed into a predrilled cylindrical drill hole. The special thread of the anchor cuts an internal thread into the member while setting. The anchorage is characterised by mechanical interlock in the special thread.

Product and product description are given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading)	See Annex B5 to B9, Annex C1, C3, C5 and C7
Characteristic resistance to shear load (static and quasi-static loading)	See Annex C2, C4, C6 and C7
Displacements (static and quasi-static loading)	See Annex C21 to C23
Characteristic resistance and displacements for seismic performance categories C1 and C2	See Annex C8 to C13 and C24

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	See Annex C14 to C20

3.3 Aspects of durability linked with the Basic Works Requirements

Essential characteristic	Performance
Durability	See Annex B1

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with European Assessment Document EAD No. 330232-01-0601-v05 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document


Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.

Issued in Berlin on 11 February 2025 by Deutsches Institut für Bautechnik


Dipl.-Ing. Beatrix Wittstock
Head of Section

beglaubigt:
Tempel


Installed condition without adjustment

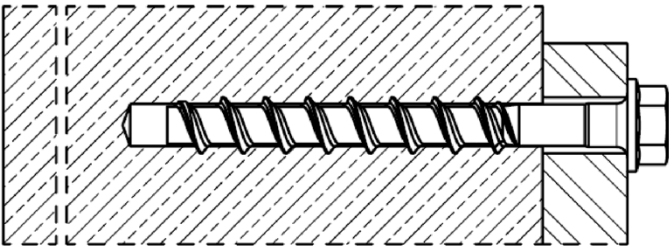

- HUS4-H (hexagon head configuration sizes 8, 10, 12, 14 and 16)
- HUS4 T-H (hexagon head configuration sizes 8 and 10)
- HUS4-HF (hexagon head configuration sizes 8, 10, 12, 14 and 16)
- HUS4 T-HF (hexagon head configuration sizes 8 and 10)
- HUS4-HR (hexagon head configuration sizes 6, 8, 10 and 14)

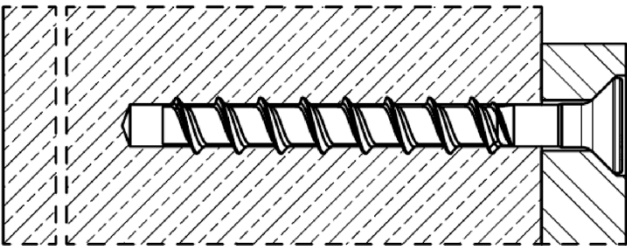


- HUS4 C (countersunk head configuration sizes 8 and 10)
- HUS4 T-C (countersunk head configuration sizes 8 and 10)
- HUS4-CR (countersunk head configuration size 6, 8 and 10)

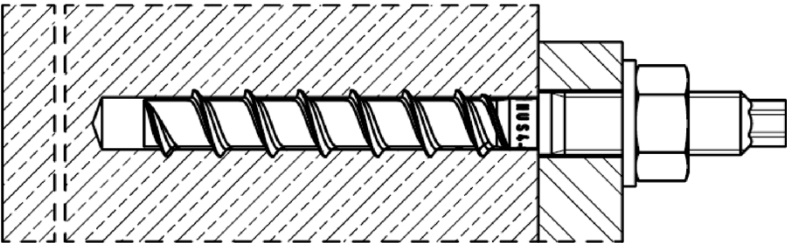


- HUS4-A (threaded rod connection sizes 10 with M12 and 14 with M16)
- HUS4-AF (threaded rod connection sizes 10 with M12 and 14 with M16)

Installed condition with adjustment

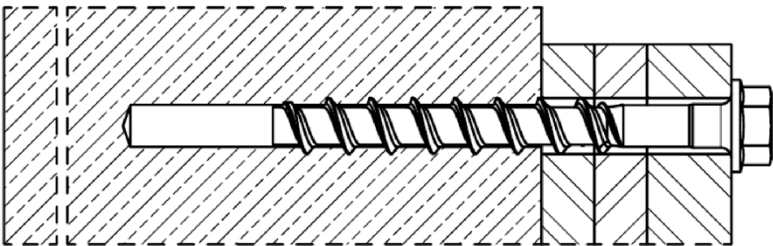

- HUS4-H (hexagon head configuration sizes 8, 10, 12 and 14)
- HUS4 T-H (hexagon head configuration sizes 8 and 10)
- HUS4-HF (hexagon head configuration sizes 8, 10, 12 and 14)
- HUS4 T-HF (hexagon head configuration sizes 8 and 10)

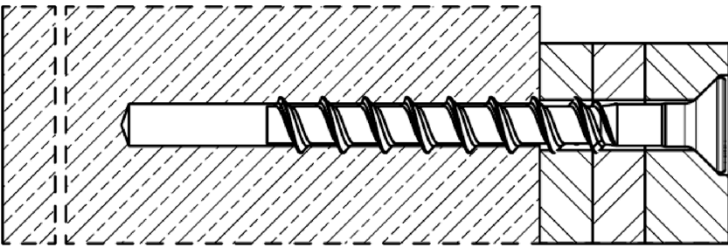





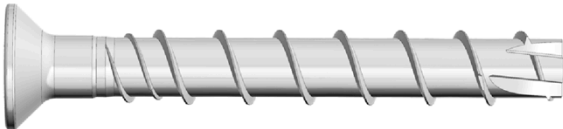


- HUS4-C (countersunk head configuration sizes 8 and 10)
- HUS4 T-C (countersunk head configuration sizes 8 and 10)

Hilti screw anchor HUS4

Product description
Installed condition with and without adjustment

Annex A1

Table A1: Screw types

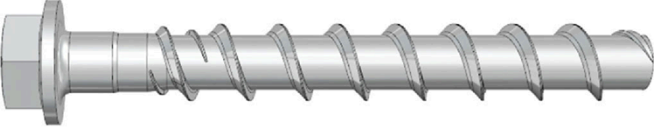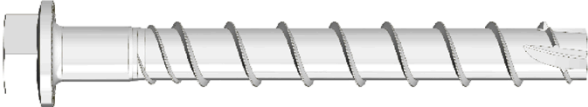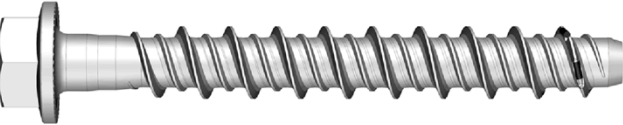Hilti HUS4-H , sizes 8,10, 12, 14 and 16, hexagonal head configuration, carbon steel galvanized Hilti HUS4-HF , sizes 8,10, 12, 14 and 16, hexagonal head configuration, carbon steel multilayer coating	
	
Hilti HUS4 T-H , sizes 8 and 10 hexagonal head configuration, carbon steel galvanized Hilti HUS4 T-HF , sizes 8 and 10, hexagonal head configuration, carbon steel multilayer coating	
	
Hilti HUS4-HR , sizes 6, 8, 10 and 14 hexagonal head configuration, stainless steel	
	
Hilti HUS4-C , sizes 8 and 10, countersunk head configuration, carbon steel galvanized	
	
Hilti HUS4 T-C , sizes 8 and 10, countersunk head configuration, carbon steel galvanized	
	
Hilti HUS4-CR , sizes 6, 8 and 10 countersunk head configuration, stainless steel	
	
Hilti HUS4-A , size 10 with external thread M12 and size 14 with external thread M16, carbon steel galvanized Hilti HUS4-AF , size 10 with external thread M12 and size 14 with external thread M16, carbon steel multilayer coating	
	

Hilti screw anchor HUS4

Product description
HUS4 screw types

Annex A2

Table A2: Hilti filling set (for HUS4 (T)-H(F, R) and HUS4-A (F)) and Hilti injection mortar

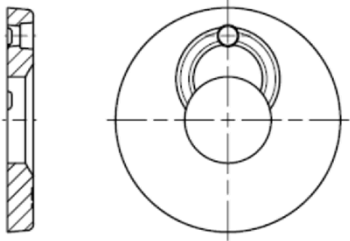
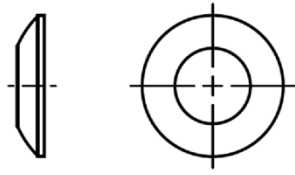

Filling washer	Spherical washer	Injection mortar
		 Hilti HIT-HY ... with ETA Hilti HIT-RE ... with ETA

Table A3: Materials

Part	Material
HUS4 (T)-H(F), HUS4 (T)-C and HUS4-A(F) screw anchor	Carbon steel Rupture elongation $A_5 \leq 8\%$
HUS4-HR and HUS-CR	Stainless steel (A4 grade) Rupture elongation $A_5 > 8\%$ Stainless steel of corrosion resistance class CRC III according to EN 1993-1-4:2006+A1:2015 1.4401 or 1.4404 according to EN 10088-1:2014
Hilti Filling set (carbon steel)	Filling washer: Carbon steel Spherical washer: Carbon steel
Hilti Filling set (stainless steel)	Corrosion resistance class CRC III according to EN 1993-1-4:2006+A1:2015 Filling washer: Stainless steel A4 according to ASTM A240/A 240M:2019 Spherical washer: Stainless steel A4 according to EN 10088-1:2014

Hilti screw anchor HUS4

Product description

HUS4 screw types, Filling set and Hilti injection mortar
Materials

Annex A3

Table A4: Filling set dimensions





Filling set size	M10	M12	M16	M20	
Diameter d_{vs} [mm]	42	44	52	60	
Thickness h_{vs} [mm]	5	5	6	6	
HUS4 (T)-H (F, R)  HUS4-A (F) 	8	10	12 + 14	16	

Table A5: Fastener dimensions and marking HUS4-A(F)

Fastener size HUS4-	A(F) 10			A(F) 14		
Nominal fastener diameter d [mm]	10			14		
Metric thread connection	M12			M16		
Pitch of the thread h_t [mm]	10			14		
Nominal embedment depth h_{nom} [mm]	h_{nom1}	h_{nom2}	h_{nom3}	h_{nom1}	h_{nom2}	h_{nom3}
	55	75	85	65	85	115
Effective embedment depth h_{ef} [mm]	$h_{ef} = 0,85 * (h_{nom} - 5) \leq h_{ef,max}$			$h_{ef} = 0,85 * (h_{nom} - 7) \leq h_{ef,max}$		
Limits of effective embedment depth $h_{ef,max}$ [mm]	68,0			91,8		
Length of screw min / max L [mm]	120 / 165			155 / 205		

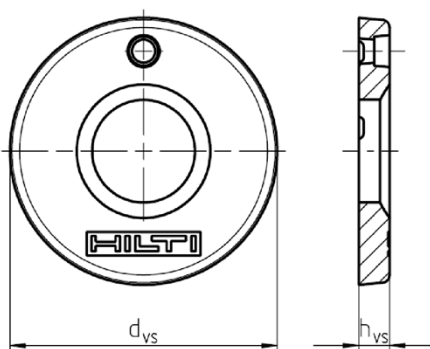

HUS4:	Hilti Universal Screw 4 th generation					
A:	Thread connection, galvanized					
AF:	Thread connection, multilayer coating					
10:	Nominal screw diameter d [mm]					
165:	Length of screw L [mm]					
8:	Carbon steel					
K:	Length identification HUS4-A 10x165					
G	I	K	J	L	N	
10x120	10x140	10x165	14x155	14x185	14x205	

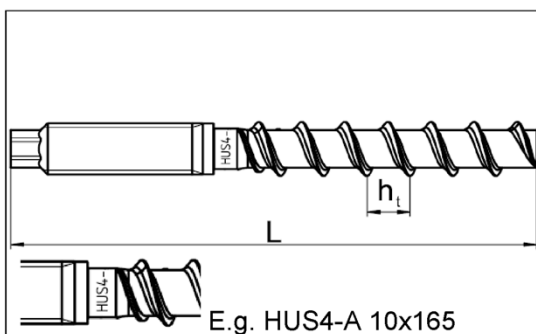Hilti screw anchor HUS4

Production description
Fastener dimensions and head marking

Annex A4

Table A6: Fastener dimensions and marking HUS4 (T)-H(F)

Fastener size HUS4-	H(F) 8	T-H(F) 8	H(F) 10	T-H(F) 10
Nominal fastener diameter d [mm]	8	8	10	10
Pitch of the thread h _t [mm]	8	8	10	10
Nominal embedment depth h _{nom} [mm]	h _{nom1} h _{nom2} h _{nom3} 40 60 70	h _{nom1} h _{nom2} h _{nom3} 50 60 70	h _{nom1} h _{nom2} h _{nom3} 55 75 85	h _{nom1} h _{nom2} h _{nom3} 55 75 85
Effective embedment depth h _{ef} [mm]	$0,85 * (h_{nom} - 4,0) \leq h_{ef,max}$	$0,85 * (h_{nom} - 5,45) \leq h_{ef,max}$	$0,85 * (h_{nom} - 5,0) \leq h_{ef,max}$	$0,85 * (h_{nom} - 6,1) \leq h_{ef,max}$
Limits of effective embedment depth h _{ef,max} [mm]	56,1	54,9	68,0	67,1
Length of screw min / max L [mm]	45 / 150	55 / 150	60 / 305	60 / 150

Fastener size HUS4-	H(F) 12	H(F) 14	H(F) 16
Nominal fastener diameter d [mm]	12	14	16
Pitch of the thread h _t [mm]	12	14	13,2
Nominal embedment depth h _{nom} [mm]	h _{nom1} h _{nom2} h _{nom3} 60 80 100	h _{nom1} h _{nom2} h _{nom3} 65 85 115	h _{nom1} h _{nom2} 85 130
Effective embedment depth h _{ef} [mm]	$h_{ef} = 0,85 * (h_{nom} - 6,0) \leq h_{ef,max}$	$h_{ef} = 0,85 * (h_{nom} - 7,0) \leq h_{ef,max}$	$h_{ef} = 0,85 * (h_{nom} - 6,6) \leq h_{ef,max}$
Limits of effective embedment depth h _{ef,max} [mm]	79,9	91,8	104,9
Length of screw min / max L [mm]	70 / 150	75 / 150	100 / 205



Hilti screw anchor HUS4

Production description
Fastener dimensions and head marking

Annex A5

Table A7: Fastener dimensions and marking HUS4-HR

Fastener size HUS4-	HR 6	HR 8		HR 10		HR 14	
Nominal fastener diameter d [mm]	6	8		10		14	
Pitch of the thread h _t [mm]	4,75	7,6		8,0		9,8	
Nominal embedment depth h _{nom} [mm]	h _{nom1}	h _{nom1}	h _{nom2}	h _{nom1}	h _{nom2}	h _{nom1}	h _{nom2}
	55	60	80	70	90	70	110
Effective embedment depth h _{ef} [mm]	$0,85 \cdot (h_{nom} - 2,37) \leq h_{ef,max}$	$0,85 \cdot (h_{nom} - 4,8) \leq h_{ef,max}$		$0,85 \cdot (h_{nom} - 6,4) \leq h_{ef,max}$		$0,85 \cdot (h_{nom} - 9,0) \leq h_{ef,max}$	
Limits of effective embedment depth h _{ef,max} [mm]	45	64		71		86	
Length of screw min / max L [mm]	60 / 70	65 / 105		75 / 130		80 / 135	

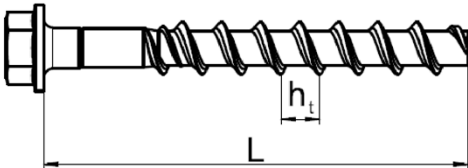		HUS4:	Hilti Universal Screw 4 th generation
		(T-)H:	Hexagonal head, galvanized
		(T-)HF:	Hexagonal head, multilayer coating
		HR:	Hexagonal head, stainless steel
		10:	Nominal screw diameter d [mm]
		100:	Length of screw [mm]

Hilti screw anchor HUS4


Production description
Fastener dimensions and head marking

Annex A6

Table A8: Fastener dimensions and marking HUS4 (T)-C(R)

Fastener size HUS4-			C 8			T-C 8			C 10			T-C 10		
Nominal fastener diameter	d	[mm]	8			8			10			10		
Pitch of the thread	h_t	[mm]	8			8			10			10		
Nominal embedment depth	h_{nom}	[mm]	h_{nom1}	h_{nom2}	h_{nom3}	h_{nom1}	h_{nom2}	h_{nom3}	h_{nom1}	h_{nom2}	h_{nom3}	h_{nom1}	h_{nom2}	h_{nom3}
			40	60	70	50	60	70	55	75	85	55	75	85
Effective embedment depth	h_{ef}	[mm]	$0,85 * (h_{nom} - 4) \leq h_{ef,max}$			$0,85 * (h_{nom} - 5,45) \leq h_{ef,max}$			$0,85 * (h_{nom} - 5) \leq h_{ef,max}$			$0,85 * (h_{nom} - 6,1) \leq h_{ef,max}$		
Limits of effective embedment depth	$h_{ef,max}$	[mm]	56,1			54,9			68,0			67,1		
Length of screw min / max	L	[mm]	55 / 160			65 / 85			70 / 180			70 / 305		

Fastener size HUS4-			CR 6		CR 8		CR 10	
Nominal fastener diameter	d	[mm]	6		8		10	
Pitch of the thread	h_t	[mm]	-		7,6		8,0	
Nominal embedment depth	h_{nom}	[mm]	h_{nom2}		h_{nom2}	h_{nom3}	h_{nom2}	h_{nom3}
			55		60	80	70	90
Effective embedment depth	h_{ef}	[mm]	$0,85 * (h_{nom} - 2,37) \leq h_{ef,max}$		$0,85 * (h_{nom} - 4,8) \leq h_{ef,max}$		$0,85 * (h_{nom} - 6,4) \leq h_{ef,max}$	
Limits of effective embedment depth	$h_{ef,max}$	[mm]	45		64		71	
Length of screw min / max	L	[mm]	60 / 70		65 / 95		75 / 105	

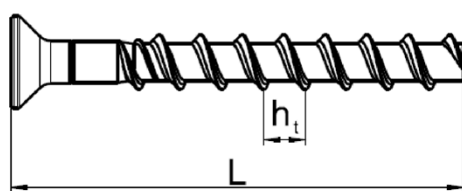

HUS4: Hilti Universal Screw 4th generation

(T)-C: Countersunk head, galvanized

CR: Countersunk head, stainless steel

10: Nominal screw diameter d [mm]

100: Length of screw L [mm]

Hilti screw anchor HUS4

Production description
Fastener dimensions and head marking

Annex A7

Specifications of intended use

Anchorage subject to:

- Static and quasi-static loadings
- Seismic action for performance category C1 and C2 for HUS4 (T)-H(F)/-C/-A(F) (carbon steel screw)
- Seismic action for performance category C1: HUS4-HR/-CR (stainless steel screw)
- Fire exposure

Base materials:

- Compacted reinforced or unreinforced normal weight concrete according to EN 206:2013 +A1:2016.
- Strength classes C20/25 to C50/60 according to EN 206:2013+A1:2016.
- Cracked and uncracked concrete.
- The fastener is intended to be used in fibre reinforced concrete according to EN 206:2013+A2:2021 including steel fibres (SFRC) according to EN 14889-1:2006 clause 1, group I. The maximum content of steel fibres is 80 kg/m³.

Use conditions (Environmental conditions):

- Anchorages subject to dry internal conditions: all screw types
- For all other conditions corresponding to corrosion resistance classes CRC according to EN 1993-1-4:2006+A1:2015
 - Stainless steel according to Annex A3 Table A3, screw types HUS4-HR/-CR: CRC III

Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the fastener is indicated on the design drawings (e. g. position of the fastener relative to reinforcement or to supports, etc.).
- Anchorages are designed in accordance with:
EN 1992-4:2018 and EOTA Technical Report TR 055 edition February 2018.
- In case of requirements to resistance to fire local spalling of the concrete cover must be avoided.
- The design method according to EN 1992-4:2018 applies for use in Steel Fibre Reinforced Concrete (SFRC) with the essential characteristics as specified for plain concrete without fibres.

Installation:

- Fastener installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters on site.
- In case of aborted hole: new drilling at a minimum distance away of twice the depth of the aborted hole or smaller distance if the aborted hole is filled with high strength mortar and if under shear or oblique tension load it is not the direction of the load application.
- After installation further turning of the fastener must not be possible.
- The head of the fastener (HUS4 (T)-H (F, R) and HUS4 (T)-C/-CR) must be supported on the fixture and is not damaged.
- Hilti filling set is suitable for HUS4 (T)-H (F, R) and HUS4-A (F)



Hilti screw anchor HUS4

Intended use
Specifications

Annex B1


Specifications of intended use: Drilling and cleaning for HUS4 carbon steel

Table B1: HUS4 (T)-H(F)/-C/-A(F) intended use for static and quasi static loading

HUS4 (T)-H(F)/-C/-A(F) carbon steel		Fastener size and embedment depth h_{nom}
Cracked and uncracked concrete		
Hammer drilling (HD) ¹⁾	cleaned	sizes 8 to 16 at all h_{nom}
	not cleaned	sizes 8 to 14 at all h_{nom}
Hammer drilling with Hilti hollow drill bit TE-CD (HDB) ¹⁾		sizes 12 and 14 at all h_{nom}
Uncracked concrete		
Diamond coring (DD) DD30-W handheld and with stand DD-EC1 handheld		sizes 10 to 14 at h_{nom3} (HUS4 T excluded)


¹⁾ Adjustment according to Annex B11 is possible for sizes 8 to 10 at h_{nom2+3} and 12 to 14 at all h_{nom}

Table B2: HUS4 (T)-H(F)/-C/-A(F) intended use for seismic performance category C1

HUS4 (T)-H(F)/-C/-A(F) carbon steel		Fastener size and embedment depth h_{nom}
Hammer drilling (HD) ¹⁾	cleaned	sizes 8 to 16 at all h_{nom} (HUS4 8 at h_{nom1} excluded)
	not cleaned	sizes 8 to 14 at all h_{nom} (HUS4 8 at h_{nom1} excluded)
Hammer drilling with Hilti hollow drill bit TE-CD (HDB) ¹⁾		sizes 12 and 14 at all h_{nom}


¹⁾ Adjustment according to Annex B11 is possible for sizes 8 to 10 at h_{nom2+3} and 12 to 14 at all h_{nom}

Table B3: HUS4 (T)-H(F)/-C/-A(F) intended use for seismic performance category C2

HUS4 (T)-H(F)/-C/-A(F) carbon steel		Fastener size and embedment depth h_{nom}
Hammer drilling (HD) ¹⁾	Cleaned and not cleaned	sizes 8 to 14 at all h_{nom} (HUS4 8 at h_{nom1} excluded)
		

¹⁾ Adjustment according to Annex B11 is possible for sizes 8 to 10 at h_{nom2+3} and 12 to 14 at all h_{nom}

Table B4: HUS4 (T)-H(F)/-C/-A(F) intended use for static and quasi static loading under fire exposure

HUS4 (T)-H(F)/-C/-A(F) carbon steel		Fastener size and embedment depth h_{nom}
Hammer drilling (HD) ¹⁾	cleaned	sizes 8 to 16 at all h_{nom}
	not cleaned	sizes 8 to 14 at all h_{nom}
Hammer drilling with Hilti hollow drill bit TE-CD (HDB) ¹⁾		sizes 12 and 14 at all h_{nom}



¹⁾ Adjustment according to Annex B11 is possible for sizes 8 to 10 at h_{nom2+3} and 12 to 14 at all h_{nom}

Hilti screw anchor HUS4

Annex B2

**Intended use
Specifications**

Table B5: Intended use for HUS4 (T)-H(F)/-C/-A(F) in concrete with SFRC (seismic category C2 is excluded)

HUS4 (T)-H(F)/-C/-A(F) carbon steel		Fastener size and embedment depth h_{nom}
Cracked and uncracked concrete		
Hammer drilling (HD) ¹⁾	cleaned	sizes 8 to 16 at all h_{nom}
	not cleaned	sizes 8 to 14 at all h_{nom}
Hammer drilling with Hilti hollow drill bit TE-CD (HDB) ¹⁾		sizes 12 and 14 at all h_{nom}
Uncracked concrete		
Diamond coring (DD) DD30-W handheld and with stand DD-EC1 handheld		sizes 10 to 14 at h_{nom3} (HUS4 T excluded)

¹⁾ Adjustment according to Annex B11 is possible for sizes 8 to 10 at h_{nom2+3} and 12 to 14 at all h_{nom}

Specifications of intended use: Drilling and cleaning for HUS4 stainless steel

Table B6: HUS4-HR/-CR intended use for static and quasi static loading

HUS4-HR/-CR stainless steel		Fastener size and embedment depth h_{nom}
Cracked and uncracked concrete		
Hammer drilling (HD)	cleaned	sizes 6 to 14 at all h_{nom}
	not cleaned	

Table B7: HUS4-HR/-CR intended use for seismic performance category C1

HUS4-HR/-CR stainless steel		Fastener size and embedment depth h_{nom}
Hammer drilling (HD)	cleaned	sizes 8 to 14 at h_{nom2}
	not cleaned	sizes 8 to 14 at h_{nom2}

Table B8: HUS4-HR/-CR intended use for static and quasi static loading under fire exposure


HUS4-HR/-CR stainless steel		Fastener size and embedment depth h_{nom}
Hammer drilling (HD)	cleaned	sizes 6 to 14 at all h_{nom}
	not cleaned	sizes 6 to 14 at all h_{nom}

Hilti screw anchor HUS4

Annex B3

Intended use
Specifications

Installation parameters

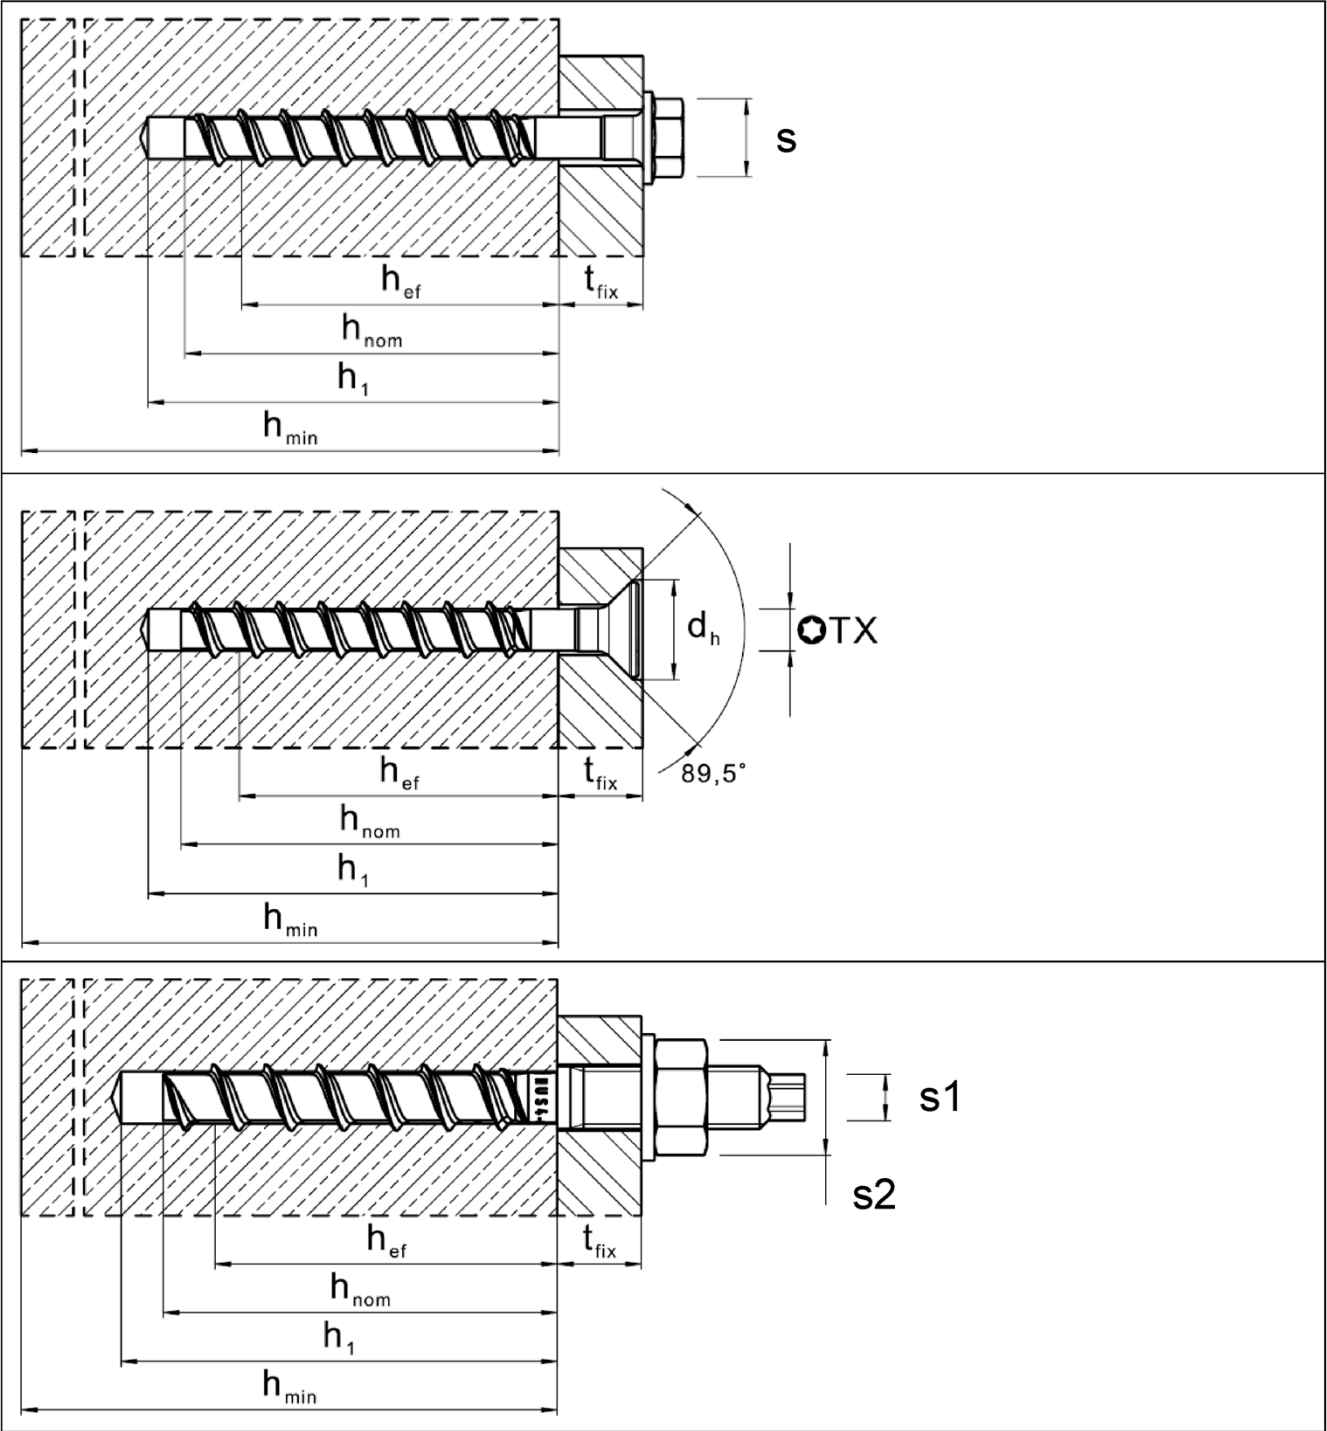

Hilti screw anchor HUS4

Intended use
Installation parameters

Annex B4

Table B9: Installation parameters HUS4 8 and 10

Fastener size HUS4			8			8			10		
Type			H(F), C			T-H(F), C			H(F), C, A(F)		
			h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}
Nominal embedment depth	h _{nom}	[mm]	40	60	70	50	60	70	55	75	85
Nominal drill hole diameter	d ₀	[mm]	8			8			10		
Cutting diameter of drill bit	d _{cut} ≤	[mm]	8,45			8,45			10,45		
Cutting diameter of diamond core bit	d _{cut} ≤	[mm]	-			-			9,9		
Clearance hole diameter through setting	d _f $\frac{\text{min}}{\text{max}}$	[mm]	11			11			13		
			12			12			14		
Clearance hole diameter pre setting (A-type)	d _f ≤	[mm]	-			-			14		
Wrench size (H, HF-type)	s	[mm]	13			13			15		
Wrench size for hex head (A-type)	s1	[mm]	-			-			8		
Wrench size for nut (A-type)	s2	[mm]	-			-			19		
Maximum installation torque (A-type)	max T _{inst}	[Nm]	-			-			40		
Torx size (C-type)	TX	-	45			45			50		
Diameter of countersunk head	d _h	[mm]	18			18			21		
Depth of drill hole for cleaned hole hammer drilling, diamond coring or for uncleanded hole when drilling upwards	h ₁ ≥	[mm]	(h _{nom} + 10 mm)								
			50	70	80	60	70	80	65	85	95
Depth of drill hole for uncleanded hole hammer drilling in wall and floor position	h ₁ ≥	[mm]	(h _{nom} + 10 mm) + 2 * d ₀								
			66	86	96	76	86	96	85	105	115
Depth of drill hole (with adjustability) for cleaned hole hammer drilling, diamond coring or for uncleanded hole when drilling upwards	h ₁ ≥	[mm]	(h _{nom} + 20 mm)								
			-	80	90	70	80	90	-	95	105
Depth of drill hole (with adjustability) for uncleanded hole hammer drilling in wall and floor position	h ₁ ≥	[mm]	(h _{nom} + 20 mm) + 2 * d ₀								
			-	96	106	86	96	106	-	115	125
Minimum thickness of concrete member	h _{min} ≥	[mm]	(h ₁ + 30 mm)								
			80	100	120	100	100	120	100	130	140
Minimum spacing	s _{min} ≥	[mm]	35			50 ²⁾	50	50	40		
Minimum edge distance	c _{min} ≥	[mm]	35			40	40	40	40		
Hilti Setting tool ¹⁾			SIW 4(AT)-22 1/2" SIW 6(AT)-A22 1/2" SIW 6(AT)-22 1/2" gear 1						SIW 6(AT)-22 1/2" SIW 22T-A 1/2" SIW 8-22 1/2" gear 1 SIW 9-A22 3/4"		

¹⁾ Installation with other impact screw driver of equivalent power is possible.

²⁾ s_{min} = 40 mm is possible if c_{min} ≥ 50 mm.

Hilti screw anchor HUS4

Intended use
Installation parameters

Annex B5

Table B10: Installation parameters HUS4 10 to 14

Fastener size HUS4			10			12			14		
Type			T-H(F), C			H(F)			H(F), A(F)		
			h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}
Nominal embedment depth	h _{nom}	[mm]	55	75	85	60	80	100	65	85	115
Nominal drill hole diameter	d ₀	[mm]	10			12			14		
Cutting diameter of drill bit	d _{cut} ≤	[mm]	10,45			12,50			14,50		
Cutting diameter of diamond core bit	d _{cut} ≤	[mm]	-			12,2			14,2		
Clearance hole diameter through setting	d _f $\frac{\min}{\max}$	[mm]	14			16			18		
Clearance hole diameter pre setting (A-type)	d _f ≤	[mm]	-			-			18		
Wrench size (H, HF-type)	s	[mm]	15			17			21		
Wrench size for hex head (A-type)	s1	[mm]	-			-			12		
Wrench size for nut (A-type)	s2	[mm]	-			-			24		
Maximum installation torque (A-type)	max T _{inst}	[Nm]	-			-			80		
Torx size (C-type)	TX	-	50			-			-		
Diameter of countersunk head	d _h	[mm]	21			-			-		
Depth of drill hole for cleaned hole hammer drilling, diamond coring or for uncleaned hole when drilling upwards	h ₁ ≥	[mm]	(h _{nom} + 10 mm)								
			65	85	95	70	90	110	75	95	125
Depth of drill hole for uncleaned hole hammer drilling in wall and floor position	h ₁ ≥	[mm]	(h _{nom} + 10 mm) + 2 * d ₀								
			85	105	115	94	114	134	103	123	153
Depth of drill hole (with adjustability) for cleaned hole hammer drilling, diamond coring or for uncleaned hole when drilling upwards	h ₁ ≥	[mm]	(h _{nom} + 20 mm)								
			75	95	105	-	100	120	-	105	135
Depth of drill hole (with adjustability) for uncleaned hole hammer drilling in wall and floor position	h ₁ ≥	[mm]	(h _{nom} + 20 mm) + 2 * d ₀								
			95	115	125	-	124	144	-	133	163
Minimum thickness of concrete member	h _{min} ≥	[mm]	(h ₁ + 30 mm)								
			100	130	140	110	130	150	120	160	200
Minimum spacing	s _{min} ≥	[mm]	50			50			60		
Minimum edge distance	c _{min} ≥	[mm]	50			50			60		
Hilti Setting tool ¹⁾			SIW 6(AT)-22 1/2" SIW 22T-A 1/2" SIW 8-22 1/2" gear 1 SIW 9-A22 3/4"			SIW 22T-A 1/2" SIW 6(AT)-22 1/2" SIW 8-22 1/2" SIW 9-A22 3/4"			SIW 22T-A 1/2" SIW 6(AT)-22 1/2" SIW 8-22 1/2" SIW 9-A22 3/4"		

¹⁾ Installation with other impact screw driver of equivalent power is possible.

Hilti screw anchor HUS4

Intended use
Installation parameters

Annex B6

Table B11: Installation parameters HUS4-16

Fastener size HUS4			16	
Type			H(F)	
			h_{nom1}	h_{nom2}
Nominal embedment depth	h_{nom}	[mm]	85	130
Nominal drill hole diameter	d_0	[mm]	16	
Cutting diameter of drill bit	$d_{cut} \leq$	[mm]	16,50	
Clearance hole diameter through setting	$d_f \leq$	[mm]	20	
Wrench size	s	[mm]	24	
Depth of drill hole for cleaned hole hammer drilling or for uncleanded hole when drilling upwards	$h_1 \geq$	[mm]	$(h_{nom} + 10 \text{ mm})$	
			95	140
Minimum thickness of concrete member	$h_{min} \geq$	[mm]	130	195
Minimum spacing	$s_{min} \geq$	[mm]	90	
Minimum edge distance	$c_{min} \geq$	[mm]	65	
Hilti Setting tool ¹⁾			SIW 22T-A 1/2" SIW 6(AT)-22 1/2" SIW 8-22 1/2" SIW 9-A22 3/4"	

¹⁾ Installation with other impact screw driver of equivalent power is possible.

Hilti screw anchor HUS4

Intended use
Installation parameters

Annex B7

Table B12: Installation parameters HUS4-HR/-CR 6 and 8

Fastener size HUS4			6	8
Type			HR, CR	HR, CR
			h_{nom1}	h_{nom1} h_{nom2}
Nominal embedment depth	h_{nom}	[mm]	55	60 80
Nominal drill hole diameter	d_0	[mm]	6	8
Cutting diameter of drill bit	$d_{cut} \leq$	[mm]	6,40	8,45
Clearance hole diameter	$d_f \leq$	[mm]	9	12
Wrench size (H-type)	s	[mm]	13	13
Torx size (C-type)	TX	[-]	30	45
Diameter of countersunk head	d_h	[mm]	11	18
Depth of drill hole for cleaned hole hammer drilling or for uncleanded hole when drilling upwards	$h_1 \geq$	[mm]	$(h_{nom} + 10\text{mm})$	
			65	70 90
Depth of drill hole for uncleanded hole hammer drilling in wall and floor position	$h_1 \geq$	[mm]	$(h_{nom} + 10\text{ mm}) + 2 \cdot d_0$	
			77	86 106
Minimum thickness of concrete member	$h_{min} \geq$	[mm]	$(h_1 + 30\text{ mm})$	
			100	100 120
Minimum spacing	$s_{min} \geq$	[mm]	35	45 50
Minimum edge distance	$c_{min} \geq$	[mm]	35	45 50
Hilti Setting tool ¹⁾			SIW 6(AT)-A22 1/2" SIW 4(AT)- 22 1/2"	SIW 22T-A 1/2" SIW 6(AT)-A22 1/2" SIW 4(AT)- 22 1/2" SIW 6(AT)-22 1/2"

¹⁾ Installation with other impact screw driver of equivalent power is possible.

Hilti screw anchor HUS4

Intended use
Installation parameters

Annex B8

Table B13: Installation parameters HUS4-HR/-CR 10 and 14

Fastener size HUS4			10		14	
Type			HR, CR		HR	
			h _{nom1}	h _{nom2}	h _{nom1}	h _{nom2}
Nominal embedment depth	h _{nom}	[mm]	70	90	70	110
Nominal drill hole diameter	d ₀	[mm]	10		14	
Cutting diameter of drill bit	d _{cut} ≤	[mm]	10,45		14,50	
Clearance hole diameter	d _f ≤	[mm]	14		18	
Wrench size (H-type)	s	[mm]	15		21	
Torx size (C-type)	TX	[-]	50		-	
Diameter of countersunk head	d _h	[mm]	21		-	
Depth of drill hole for cleaned hole hammer drilling, diamond coring or for uncleaned hole when drilling upwards	h ₁ ≥	[mm]	(h _{nom} + 10mm)			
			80	100	80	120
Depth of drill hole for uncleaned hole hammer drilling in wall and floor position	h ₁ ≥	[mm]	(h _{nom} + 10 mm) + 2 * d ₀			
			100	120	108	148
Installation Torque	T _{inst}	[Nm]	45		65	
Minimum thickness of concrete member	h _{min} ≥	[mm]	120	140	140	160
Minimum spacing	s _{min} ≥	[mm]	50		50	60
Minimum edge distance	c _{min} ≥	[mm]	50		50	60
Hilti Setting tool ¹⁾			SIW 22T-A 1/2” SIW 6(AT)-A22 1/2” SIW 4(AT)- 22 1/2” SIW 6(AT)-22 1/2”		SIW 22T-A 1/2” SIW 6(AT)-22 1/2” SIW 8-22 1/2" gear 1 SIW 9-A22 3/4”	

¹⁾ Installation with other impact screw driver of equivalent power is possible.

Hilti screw anchor HUS4


Intended use
Installation parameters

Annex B9


Installation instructions

Hole drilling and cleaning

Hammer drilling (HD) all sizes for carbon and stainless steel screw types (size 16 with cleaning only)




Mark drilling depth h_1 for pre or through installation.
Details for drilling depth h_1 see table B5 to B9.



Cleaning needed in downward and horizontal installation direction with drill hole depth.

$$h_1 = h_{nom} + 10 \text{ mm}$$




No cleaning is allowed in upward installation direction.

No cleaning is allowed in downward and horizontal installation direction when 3x ventilation¹⁾ after drilling is executed.

$$\text{Drill hole depth } h_1 = h_{nom} + 10 \text{ mm} + 2 \cdot d_0$$

¹⁾ moving the drill bit in and out of the drill hole 3 times after the recommended drilling depth h_1 is achieved. This procedure shall be done with both revolution and hammer functions activated in the drilling machine. For more details read the relevant installation instruction (MPII).


Hammer drilling with Hilti hollow drill bit (HDB) TE-CD size 12 and 14 for carbon steel screw types



No cleaning needed.

$$h_1 = h_{nom} + 10 \text{ mm}$$

Diamond coring with DD-EC1 or DD-30W size 10 to 14 for carbon steel screw types



Cleaning needed in all installation directions.

$$h_1 = h_{nom} + 10 \text{ mm}$$

Hilti screw anchor HUS4

Intended use
Installation instructions

Annex B10

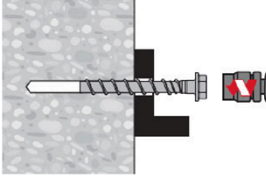
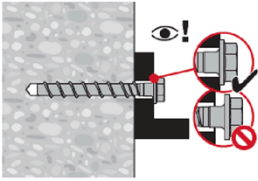
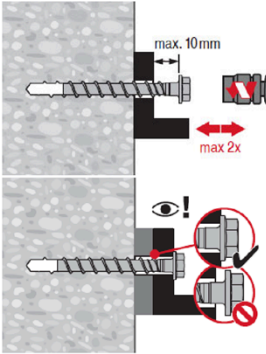
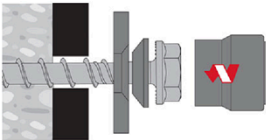
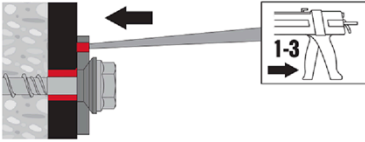
Fastener setting without adjustment	
Setting by impact screw driver	
	Setting parameters listed in Table B5 to B7.
Setting check	
	
Fastener setting with adjustment for carbon steel screw types	
Adjusting process	
	A screw can be adjusted maximum two times. The total allowed thickness of shims added during the adjustment process is 10 mm. The final embedment depth after adjustment process must be larger or equal than the required one of h_{nom1} , h_{nom2} or h_{nom3} .
Fastener setting with Hilti filling set	
	
Injection of Hilti HIT mortar and curing time	
	Fill the annular gap between screw and fixture with 1-3 strokes of a Hilti injection mortar HIT-HY ... or HIT-RE Follow the installation instructions supplied with the respective Hilti injection mortar. After required curing time t_{cure} the fastening can be loaded.
Hilti screw anchor HUS4	
Intended use Installation instructions	
Annex B11	

Table C1: Essential characteristics under static and quasi-static load in concrete for HUS4 carbon steel size 8 and 10

Fastener size HUS4			8			8			10		
Type			H(F), C			T-H(F), T-C			H(F), C, A(F)		
			h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}
Nominal embedment depth h _{nom} [mm]			40	60	70	50	60	70	55	75	85
Adjustment											
Total max. thickness of adjustment layers t _{adj} [mm]			-	10	10	-	10	10	-	10	10
Max. number of adjustments n _a [-]			-	2	2	-	2	2	-	2	2
Steel failure for tension load											
Characteristic resistance N _{Rk,s} [kN]			36,0			39,2			55,0		
Partial factor γ _{Ms,N} ¹⁾ [-]			1,5			1,4			1,5		
Pull-out failure											
Characteristic resistance in uncracked concrete C20/25 N _{Rk,p,ucr} [kN]			≥ N ⁰ _{Rk,c} ³⁾			9	12	16	13	22	≥ N ⁰ _{Rk,c} ³⁾
Characteristic resistance in cracked concrete C20/25 N _{Rk,p,cr} [kN]			5,5	≥ N ⁰ _{Rk,c} ³⁾		6	9	12	≥ N ⁰ _{Rk,c} ³⁾		
Increasing factor for N _{Rk,p} = N _{Rk,p} (C20/25) * ψ _c ψ _c [-]			(f _{ck} /20) ^{0,5}								
Concrete cone and splitting failure											
Effective embedment depth h _{ef} ²⁾ [mm]			30,6	47,6	56,1	40	46,4	54,9	42,5	59,5	68,0
Factor for	Uncracked	k _{ucr,N} [-]	11,0								
	Cracked	k _{cr,N} [-]	7,7								
Concrete cone failure	Edge distance	c _{cr,N} [mm]	1,5 h _{ef}								
	Spacing	s _{cr,N} [mm]	3 h _{ef}								
Characteristic resistance N ⁰ _{Rk,sp} [kN]			N _{Rk,p}								
Splitting failure	Edge distance	c _{cr,sp} [mm]	1,5 h _{ef}			60	70	85	1,65 h _{ef}		
	Spacing	s _{cr,sp} [mm]	3,0 h _{ef}			120	140	170	3,30 h _{ef}		
Installation factor γ _{inst} [-]			1,0						1,2	1,0	

¹⁾ In absence of other national regulations.

²⁾ In case $h_{nom} > h_{nom1}$ and $< h_{nom3}$ the actual h_{ef} for concrete failure can be calculated according to Tables A5, A6 or A8

³⁾ $N_{Rk,c}^{0}$ according to EN 1992-4:2018

Hilti screw anchor HUS4

Performances

Essential characteristics under static and quasi-static load in concrete

Annex C1

Table C1 continued

Fastener size HUS4 Type			8 H(F), C			8 T-H(F), T-C			10 H(F), C, A(F)		
			h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}
Nominal embedment depth	h _{nom}	[mm]	40	60	70	50	60	70	55	75	85
Steel failure for shear load											
Characteristic resistance	V ⁰ _{Rk,s}	[kN]	18,8		21,9	19,0		22,0	28,8		32,0
Partial factor	γ _{Ms,V} ¹⁾	[-]	1,25			1,50			1,25		
Ductility factor	k ₇	[-]	0,8								
Characteristic resistance	M ⁰ _{Rk,s}	[Nm]	32			46			64		
Concrete pry-out failure											
Pry-out factor	k ₈	[-]	1,0	2,0		1,0	2,0		1,0	2,0	
Concrete edge failure											
Effective length of fastener	l _f	[mm]	40	60	70	50	60	70	55	75	85
Outside diameter of fastener	d _{nom}	[mm]	8			8			10		

¹⁾ In absence of other national regulations.

Hilti screw anchor HUS4

Performances

Essential characteristics under static and quasi-static load in concrete

Annex C2

Table C2: Essential characteristics under static and quasi-static load in concrete for HUS4 carbon steel size 10 to 14

Fastener size HUS4			10			12			14		
Type			T-H(F), T-C			H(F)			H(F), A(F)		
			h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}
Nominal embedment depth	h _{nom}	[mm]	55	75	85	60	80	100	65	85	115
Adjustment											
Total max. thickness of adjustment layers	t _{adj}	[mm]	-	10	10	10	10	10	10	10	10
Max. number of adjustments	n _a	[-]	-	2	2	2	2	2	2	2	2
Steel failure for tension load											
Characteristic resistance	N _{Rk,s}	[kN]	62,2			79,0			101,5		
Partial factor	γ _{Ms,N} ¹⁾	[-]	1,4			1,5					
Pull-out failure											
Characteristic resistance in uncracked concrete C20/25	N _{Rk,p,ucr}	[kN]	12	20	32	≥ N ⁰ _{Rk,c} ³⁾					
Characteristic resistance in cracked concrete C20/25	N _{Rk,p,cr}	[kN]	9	15	19	10	≥ N ⁰ _{Rk,c} ³⁾				
Increasing factor for N _{Rk,p} = N _{Rk,p} (C20/25) * ψ _c	ψ _c	[-]	(f _{ck} /20) ^{0,5}								
Concrete cone and splitting failure											
Effective embedment depth	h _{ef} ²⁾	[mm]	41,6	58,6	67,1	45,9	62,9	79,9	49,3	66,3	91,8
Factor for	Uncracked	k _{ucr,N}	11,0								
	Cracked	k _{cr,N}	7,7								
Concrete cone failure	Edge distance	c _{cr,N}	1,5 h _{ef}								
	Spacing	s _{cr,N}	3 h _{ef}								
Characteristic resistance	N ⁰ _{Rk,sp}	[kN]	N _{Rk,p}								
Splitting failure	Edge distance	c _{cr,sp}	65	90	110	1,65 h _{ef}			1,60 h _{ef}		
	Spacing	s _{cr,sp}	130	180	220	3,30 h _{ef}			3,20 h _{ef}		
Installation factor	γ _{inst}	[-]	1,0								

¹⁾ In absence of other national regulations.

²⁾ In case $h_{nom} > h_{nom1}$ and $< h_{nom3}$ the actual h_{ef} for concrete failure can be calculated according to Tables A5, A6 or A8

³⁾ $N_{Rk,c}$ according to EN 1992-4:2018

Hilti screw anchor HUS4

Performances

Essential characteristics under static and quasi-static load in concrete

Annex C3

Table C2 continued

Fastener size HUS4			10			12			14		
Type			T-H(F), T-C			H(F)			H(F), A(F)		
			h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}
Nominal embedment depth	h _{nom}	[mm]	55	75	85	60	80	100	65	85	115
Steel failure for shear load											
Characteristic resistance	V ⁰ _{Rk,s}	[kN]	30		34	38,9		44,9	55		62
Partial factor	γ _{Ms,V} ¹⁾	[-]	1,50			1,25					
Ductility factor	k ₇	[-]	0,8								
Characteristic resistance	M ⁰ _{Rk,s}	[Nm]	92			120			186		
Concrete pry-out failure											
Pry-out factor	k ₈	[-]	1,0	2,0		2,0					
Concrete edge failure											
Effective length of fastener	l _f	[mm]	55	75	85	60	80	100	65	85	115
Outside diameter of fastener	d _{nom}	[mm]	10			12			14		

¹⁾ In absence of other national regulations.

Hilti screw anchor HUS4

Performances
Essential characteristics under static and quasi-static load in concrete

Annex C4

Table C3: Essential characteristics under static and quasi-static load in concrete for HUS4 carbon steel size 16

Fastener size HUS4			16	
Type			H(F)	
			h _{nom1}	h _{nom2}
Nominal embedment depth	h _{nom}	[mm]	85	130
Adjustment				
Total max. thickness of adjustment layers	t _{adj}	[mm]	-	-
Max. number of adjustments	n _a	[-]	-	-
Steel failure for tension load				
Characteristic resistance	N _{Rk,s}	[kN]	107,7	
Partial factor	γ _{Ms,N} ¹⁾	[-]	1,5	
Pull-out failure				
Characteristic resistance in uncracked concrete C20/25	N _{Rk,p,ucr}	[kN]	22	46
Characteristic resistance in cracked concrete C20/25	N _{Rk,p,cr}	[kN]	16	32
Increasing factor for N _{Rk,p} = N _{Rk,p(C20/25)} * ψ _c	ψ _c	[-]	(f _{ck} /20) ^{0,5}	
Concrete cone and splitting failure				
Effective embedment depth	h _{ef} ²⁾	[mm]	66,6	104,9
Factor for	Uncracked	k _{ucr,N}	11,0	
	Cracked	k _{cr,N}	7,7	
Concrete cone failure	Edge distance	c _{cr,N}	1,5 h _{ef}	
	Spacing	s _{cr,N}	3 h _{ef}	
Characteristic resistance	N ⁰ _{Rk,sp}	[kN]	N _{Rk,p}	
Splitting failure	Edge distance	c _{cr,sp}	1,60 h _{ef}	
	Spacing	s _{cr,sp}	3,20 h _{ef}	
Installation factor	γ _{inst}	[-]	1,0	

¹⁾ In absence of other national regulations.

²⁾ In case $h_{nom} > h_{nom1}$ and $< h_{nom2}$ the actual h_{ef} for concrete failure can be calculated according to Table A6

Hilti screw anchor HUS4

Performances

Essential characteristics under static and quasi-static load in concrete

Annex C5

Table C3 continued

Fastener size HUS4			16	
Type			H(F)	
			h_{nom1}	h_{nom2}
Nominal embedment depth	h_{nom}	[mm]	85	130
Steel failure for shear load				
Characteristic resistance	$V^0_{RK,s}$	[kN]	65,1	73,1
Partial factor	$\gamma_{Ms,V}^{1)}$	[-]	1,25	
Ductility factor	k_7	[-]	0,8	
Characteristic resistance	$M^0_{RK,s}$	[Nm]	240	
Concrete pry-out failure				
Pry-out factor	k_8	[-]	2,0	
Concrete edge failure				
Effective length of fastener	l_f	[mm]	85	130
Outside diameter of fastener	d_{nom}	[mm]	16	

¹⁾ In absence of other national regulations.

Hilti screw anchor HUS4

Performances
Essential characteristics under static and quasi-static load in concrete

Annex C6

Table C4: Essential characteristics under static and quasi-static load in concrete for HUS4 stainless steel

Fastener size HUS4			6	8		10		14	
Type			HR, CR	HR, CR		HR, CR		HR	
			h _{nom1}	h _{nom1}	h _{nom2}	h _{nom1}	h _{nom2}	h _{nom1}	h _{nom2}
Nominal embedment depth h _{nom} [mm]			55	60	80	70	90	70	110
Steel failure for tension and shear load									
Characteristic resistance N _{Rk,s} [kN]			24,0	34,0		52,6		102,2	
Partial factor γ _{Ms,N¹⁾} [-]			1,4						
Characteristic resistance V _{Rk,s} [kN]			17,0	26,0		33,0		55,0	77,0
Partial factor γ _{Ms,V¹⁾} [-]			1,5						
Ductility factor k ₇ [-]			1,0						
Characteristic resistance M ⁰ _{Rk,s} [Nm]			19	36		66		193	
Pull-out failure									
Characteristic resistance in cracked concrete C20/25 N _{Rk,p,cr} [kN]			5	8,5	15	12	16	12	25
Characteristic resistance in uncracked concrete C20/25 N _{Rk,p,ucr} [kN]			9	12	16	16	25	≥N ⁰ _{Rk,c³⁾}	
Increasing factor for N _{Rk,p} = N _{Rk,p(C20/25)} * ψ _c ψ _c [-]			(f _{ck} /20) ^{0,5}						
Concrete cone and splitting failure									
Effective anchorage depth h _{ef} ²⁾ [mm]			45	47	64	54	71	52	86
Factor for	Cracked	k _{cr,N} [-]	7,7						
	Uncracked	k _{ucr,N} [-]	11,0						
Concrete cone failure	Edge distance	c _{cr,N} [mm]	1,5 h _{ef}						
	Spacing	s _{cr,N} [mm]	3 h _{ef}						
Splitting failure	Edge distance	c _{cr,sp} [mm]	1,5 h _{ef}	1,5 h _{ef}		1,8 h _{ef}		1,8 h _{ef}	
	Spacing	s _{cr,sp} [mm]	3 h _{ef}	3 h _{ef}		3,6 h _{ef}		3,6 h _{ef}	
Robustness γ _{inst} [-]			1,4	1,0	1,2	1,2	1,0	1,2	
Concrete pry-out failure									
Pry-out factor k ₈ [mm]			1,5	2,0					
Concrete edge failure									
Effective length of anchor l _f [mm]			55	60	80	70	90	70	110
Effective diameter of anchor d _{nom} [mm]			6	8		10		14	

¹⁾ In absence of other national regulations.

²⁾ In case $h_{nom} > h_{nom1}$ and $< h_{nom2}$ the actual h_{ef} for concrete failure can be calculated according to Tables A7 or A8

³⁾ $N^0_{Rk,c}$ according to EN 1992-4:2018

Hilti screw anchor HUS4

Performances

Essential characteristics under static and quasi-static load in concrete

Annex C7

Table C5: Essential characteristics for seismic performance category C1 in concrete for HUS4 carbon steel size 8 to 10

Fastener size HUS4			8		8			10		
Type			H(F), C		T-H(F), T-C			H(F), C, A(F)		
			h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}
Nominal embedment depth	h _{nom}	[mm]	60	70	50	60	70	55	75	85
Adjustment										
Total max. thickness of adjustment layers	t _{adj}	[mm]	10	10	-	10	10	-	10	10
Max. number of adjustments	n _a	[-]	2	2	-	2	2	-	2	2
Steel failure for tension and shear load										
Characteristic resistance	N _{Rk,s,C1}	[kN]	36,0		39,2			55,0		
Partial factor	γ _{Ms,N} ¹⁾	[-]	1,5		1,4			1,5		
Characteristic resistance	V _{Rk,s,C1}	[kN]	18,8		16,5			26,1	26,7	
Partial factor	γ _{Ms,V} ¹⁾	[-]	1,25		1,5			1,25		
Reduction factor acc. to EN 1992-4:2018 annular gap unfilled	α _{gap}	[-]	0,5							
Reduction factor acc. to EN 1992-4:2018 annular gap filled	α _{gap}	[-]	1,0							
Pull-out failure										
Characteristic resistance in cracked concrete	N _{Rk,p,C1}	[kN]	≥ N ⁰ _{Rk,c} ³⁾		6	9	12	≥ N ⁰ _{Rk,c} ³⁾		
Concrete cone failure										
Effective embedment depth	h _{ef} ²⁾	[mm]	47,6	56,1	40	46,4	54,9	42,5	59,5	68,0
Concrete cone failure	Edge distance	c _{cr,N}	1,5 h _{ef}							
	Spacing	s _{cr,N}	3 h _{ef}							
Installation factor	γ _{inst}	[-]	1,0					1,2	1,0	
Concrete pry-out failure										
Pry-out factor	k ₈	[-]	2,0		1,0	2,0		1,0	2,0	
Concrete edge failure										
Effective length of fastener	l _f	[mm]	60	70	50	60	70	55	75	85
Outside diameter of fastener	d _{nom}	[mm]	8		8			10		

¹⁾ In absence of other national regulations.

²⁾ In case $h_{nom} > h_{nom1}$ and $< h_{nom3}$ the actual h_{ef} for concrete failure can be calculated according to Tables A5, A6 or A8

³⁾ $N_{Rk,c}^{0}$ according to EN 1992-4:2018

Hilti screw anchor HUS4

Performances

Essential characteristics for seismic performance category C1 in concrete

Annex C8

Table C6: Essential characteristics for seismic performance category C1 in concrete for HUS4 carbon steel size 10 to 14

Fastener size HUS4			10			12			14		
Type			T-H(F), T-C			H(F)			H(F), A(F)		
			h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}
Nominal embedment depth	h _{nom}	[mm]	55	75	85	60	80	100	65	85	115
Adjustment											
Total max. thickness of adjustment layers	t _{adj}	[mm]	-	10	10	10	10	10	10	10	10
Max. number of adjustments	n _a	[-]	-	2	2	2	2	2	2	2	2
Steel failure for tension and shear load											
Characteristic resistance	N _{Rk,s,C1}	[kN]	62,2			79,0			101,5		
Partial factor	γ _{Ms,N¹⁾}	[-]	1,5								
Characteristic resistance	V _{Rk,s,C1}	[kN]	25,7			33,2	38,9		46,0		
Partial factor	γ _{Ms,V¹⁾}	[-]	1,5			1,25					
Reduction factor acc. to EN 1992-4:2018 annular gap unfilled	α _{gap}	[-]	0,5								
Reduction factor acc. to EN 1992-4:2018 annular gap filled	α _{gap}	[-]	1,0								
Pull-out failure											
Characteristic resistance in cracked concrete	N _{Rk,p,C1}	[kN]	9	15	19	≥ N ⁰ _{Rk,c³⁾}					
Concrete cone failure											
Effective embedment depth	h _{ef²⁾}	[mm]	41,6	58,6	67,1	45,9	62,9	79,9	49,3	66,3	91,8
Concrete cone failure	Edge distance	c _{cr,N}	1,5 h _{ef}								
	Spacing	s _{cr,N}	3 h _{ef}								
Installation factor	γ _{inst}	[-]	1,0								
Concrete pry-out failure											
Pry-out factor	k ₈	[-]	1,0	2,0		2,0					
Concrete edge failure											
Effective length of fastener	l _f	[mm]	55	75	85	60	80	100	65	85	115
Outside diameter of fastener	d _{nom}	[mm]	10			12			14		

¹⁾ In absence of other national regulations.

²⁾ In case $h_{nom} > h_{nom1}$ and $< h_{nom3}$ the actual h_{ef} for concrete failure can be calculated according to Tables A5, A6 or A8

³⁾ $N_{Rk,c}^0$ according to EN 1992-4:2018

Hilti screw anchor HUS4

Performances

Essential characteristics for seismic performance category C1 in concrete

Annex C9

Table C7: Essential characteristics for seismic performance category C1 in concrete for HUS4 carbon steel size 16

Fastener size HUS4			16	
Type			H(F)	
			h _{nom1}	h _{nom2}
Nominal embedment depth h _{nom} [mm]			85	130
Steel failure for tension and shear load				
Characteristic resistance N _{Rk,s,C1} [kN]			107,7	
Partial factor γ _{Ms,N} ¹⁾ [-]			1,5	
Characteristic resistance V _{Rk,s,C1} [kN]			42,9	25,3
Partial factor γ _{Ms,V} ¹⁾ [-]			1,25	
Reduction factor acc. to EN 1992-4:2018 annular gap unfilled α _{gap} [-]			0,5	
Reduction factor acc. to EN 1992-4:2018 annular gap filled α _{gap} [-]			1,0	
Pull-out failure				
Characteristic resistance in cracked concrete N _{Rk,p,C1} [kN]			7,5	19,0
Concrete cone failure				
Effective embedment depth h _{ef} ²⁾ [mm]			66,6	104,9
Concrete cone failure	Edge distance	c _{cr,N} [mm]	1,5 h _{ef}	
	Spacing	s _{cr,N} [mm]	3 h _{ef}	
Installation factor γ _{inst} [-]			1,0	
Concrete pry-out failure				
Pry-out factor k ₈ [-]			2,0	
Concrete edge failure				
Effective length of fastener l _f [mm]			85	130
Outside diameter of fastener d _{nom} [mm]			16	

¹⁾ In absence of other national regulations.

²⁾ In case $h_{nom} > h_{nom1}$ and $< h_{nom2}$ the actual h_{ef} for concrete failure can be calculated according to Table A6

Hilti screw anchor HUS4

Performances

Essential characteristics for seismic performance category C1 in concrete

Annex C10

Table C8: Essential characteristics for seismic performance category C1 in concrete for HUS4 stainless steel

Fastener size HUS4			8	10	14
Type			HR, CR	HR, CR	HR
			h_{nom2}	h_{nom2}	h_{nom2}
Nominal embedment depth	h_{nom}	[mm]	80	90	110
Steel failure for tension and shear load					
Characteristic resistance	$N_{Rk,s,C1}$	[kN]	34,0	52,6	102,2
Partial factor	$\gamma_{Ms,N}^{1)}$	[-]	1,4		
Characteristic resistance	$V_{Rk,s,C1}$	[kN]	11,1	17,9	53,9
Partial factor	$\gamma_{Ms,V}^{1)}$	[-]	1,5		
Pull-out failure					
Characteristic resistance in cracked concrete	$N_{Rk,p,C1}$	[kN]	7,7	12,5	17,5
Concrete cone failure					
Effective embedment depth	h_{ef}	[mm]	64	71	86
Concrete cone failure	Edge distance	$c_{cr,N}$	$1,5 h_{ef}$		
	Spacing	$s_{cr,N}$	$3 h_{ef}$		
Robustness	γ_{inst}	[-]	1,2	1,0	1,2
Concrete pry-out failure					
Pry-out factor	k_8	[-]	2,0		
Concrete edge failure					
Effective length of fastener	$l_f = h_{ef}$	[mm]	64	71	86
Outside diameter of fastener	d_{nom}	[mm]	8	10	14

¹⁾ In absence of other national regulations.

Hilti screw anchor HUS4

Performances

Essential characteristics for seismic performance category C1 in concrete

Annex C11

Table C9: Essential characteristics for seismic performance category C2 in concrete for HUS4 carbon steel size 8 to 10

Fastener size HUS4			8		8			10		
Type			H(F), C		T-H(F), T-C			H(F), C, A(F)		
			h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}
Nominal embedment depth		h _{nom} [mm]	60	70	50	60	70	55	75	85
Adjustment										
Total max. thickness of adjustment layers		t _{adj} [mm]	10	10	-	10	10	-	10	10
Max. number of adjustments		n _a [-]	2	2	-	2	2	-	2	2
Steel failure for tension										
Characteristic resistance		N _{Rk,s,C2} [kN]	36,0		39,2			55,0		
Partial factor		γ _{Ms,N} ¹⁾ [-]	1,5		1,4			1,5		
Steel failure for shear load										
Partial factor		γ _{Ms,V} ¹⁾ [-]	1,25		1,5			1,25		
Installation with Hilti filling set (HUS4-H and HUS4-A)										
Characteristic resistance		V _{Rk,s,C2} [kN]	8,7	16,0	9,2		14,7	15,1		23,2
Partial factor annular gap filled		α _{gap} [-]	1,0							
Installation without Hilti filling set										
Characteristic resistance		V _{Rk,s,C2} [kN]	8,7	10,8	9,2		10,8	14,8		
Partial factor annular gap not filled		α _{gap} [-]	0,5							
Pull-out failure										
Characteristic resistance in cracked concrete		N _{Rk,p,C2} [kN]	1,8	2,7	2,3	2,8	3,2	2,6	3,6	5,4
Concrete cone failure										
Effective embedment depth		h _{ef} ²⁾ [mm]	47,6	56,1	40	46,4	54,9	42,5	59,5	68,0
Concrete cone failure	Edge distance	c _{cr,N} [mm]	1,5 h _{ef}							
	Spacing	s _{cr,N} [mm]	3 h _{ef}							
Installation factor		γ _{inst} [-]	1,0					1,2	1,0	
Concrete pry-out failure										
Pry-out factor		k ₈ [-]	2,0		1,0	2,0		1,0	2,0	
Concrete edge failure										
Effective length of fastener		l _f [mm]	60	70	50	60	70	55	75	85
Outside diameter of fastener		d _{nom} [mm]	8		8			10		

¹⁾ In absence of other national regulations.

²⁾ In case $h_{nom} > h_{nom1}$ and $< h_{nom3}$ the actual h_{ef} for concrete failure can be calculated according to Tables A5, A6 or A8

Hilti screw anchor HUS4

Performances

Essential characteristics for seismic performance category C2 in concrete

Annex C12

Table C10: Essential characteristics for seismic performance category C2 in concrete for HUS4 carbon steel size 10 to 14

Fastener size HUS4 Type			10 T-H(F), T-C			12 H(F)			14 H(F), A(F)		
			h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}
Nominal embedment depth	h _{nom}	[mm]	55	75	85	60	80	100	65	85	115
Adjustment											
Total max. thickness of adjustment layers	t _{adj}	[mm]	-	10	10	10	10	10	10	10	10
Max. number of adjustments	n _a	[-]	-	2	2	2	2	2	2	2	2
Steel failure for tension											
Characteristic resistance	N _{Rk,s,C2}	[kN]	62,2			79,0			101,5		
Partial factor	γ _{Ms,N} ¹⁾	[-]	1,4			1,5					
Steel failure for shear load											
Partial factor	γ _{Ms,V} ¹⁾	[-]	1,5			1,25					
Installation with Hilti filling set (HUS4-H and HUS4-A)											
Characteristic resistance	V _{Rk,s,C2}	[kN]	13,3		25,6	20,0		28,6	29,2		46,5
Partial factor annular gap filled	α _{gap}	[-]	1,0								
Installation without Hilti filling set											
Characteristic resistance	V _{Rk,s,C2}	[kN]	13,3		17,7	20,0		23,7	29,2		34,4
Partial factor annular gap not filled	α _{gap}	[-]	0,5								
Pull-out failure											
Characteristic resistance in cracked concrete	N _{Rk,p,C2}	[kN]	2,8	5,4	6,4	5,7	8,5	11,4	5,4	8,9	17,7
Concrete cone failure											
Effective embedment depth	h _{ef} ²⁾	[mm]	41,6	58,6	67,1	45,9	62,9	79,9	49,3	66,3	91,8
Concrete cone failure	Edge distance	c _{cr,N}	1,5 h _{ef}								
	Spacing	s _{cr,N}	3 h _{ef}								
Installation factor	γ _{inst}	[-]	1,0								
Concrete pry-out failure											
Pry-out factor	k ₈	[-]	1,0	2,0		2,0					
Concrete edge failure											
Effective length of fastener	l _f	[mm]	55	75	85	60	80	100	65	85	115
Outside diameter of fastener	d _{nom}	[mm]	10			12			14		

¹⁾ In absence of other national regulations.

²⁾ In case $h_{nom} > h_{nom1}$ and $< h_{nom3}$ the actual h_{ef} for concrete failure can be calculated according to Tables A5, A6 or A8

Hilti screw anchor HUS4

Performances

Essential characteristics for seismic performance category C2 in concrete

Annex C13

Table C11: Essential characteristics under fire exposure in concrete for HUS4 (T)-H carbon steel sizes 8 and 10

Fastener size HUS4 (T)-H(F)				8			T-8			10		
				h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}
Nominal embedment depth		h _{nom}	[mm]	40	60	70	50	60	70	55	75	85
Adjustment												
Total max. thickness of adjustment layers		t _{adj}	[mm]	-	10	10	-	10	10	-	10	10
Max. number of adjustments		n _a	[-]	-	2	2	-	2	2	-	2	2
Steel failure for tension and shear load (F _{Rk,s,fi} = N _{Rk,s,fi} = V _{Rk,s,fi})												
Characteristic resistance	R30	F _{Rk,s,fi}	[kN]	2,6			3,2	3,5	3,8	4,1	4,2	
	R60	F _{Rk,s,fi}	[kN]	1,9			2,4	2,6	2,8	3,1	3,1	
	R90	F _{Rk,s,fi}	[kN]	1,2			1,6	1,6	1,9	2,2	2,3	
	R120	F _{Rk,s,fi}	[kN]	0,9			1,2	1,2	1,5	1,5	1,7	
	R30	M ⁰ _{Rk,s,fi}	[Nm]	2,3			3,8	4,1	4,4	4,8	4,9	
	R60	M ⁰ _{Rk,s,fi}	[Nm]	1,7			2,8	3,0	3,4	3,6	3,7	
	R90	M ⁰ _{Rk,s,fi}	[Nm]	1,1			1,9	1,9	2,3	2,6	2,7	
	R120	M ⁰ _{Rk,s,fi}	[Nm]	0,8			1,5	1,4	1,7	1,8	1,9	
Pull-out failure												
Characteristic resistance	R30 R60 R90	N ⁰ _{Rk,p,fi}	[kN]	1,3	2,8	3,6	1,5	2,3	3,0	2,3	3,9	4,7
	R120	N ⁰ _{Rk,p,fi}	[kN]	1,0	2,2	2,8	1,2	1,8	2,4	1,9	3,1	3,7
Concrete cone failure												
Characteristic resistance	R30 R60 R90	N ⁰ _{Rk,c,fi}	[kN]	0,8	2,6	4,0	1,8	2,6	4,0	2,0	4,7	6,5
	R120	N ⁰ _{Rk,c,fi}	[kN]	0,7	2,1	3,2	1,4	2,1	3,2	1,6	3,7	5,2
Edge distance												
R30 to R120			C _{cr,fi}	[mm]	2 h _{ef}							
In case of fire attack from more than one side, the minimum edge distance shall be ≥ 300 mm												
Fastener spacing												
R30 to R120			S _{cr,fi}	[mm]	2 C _{cr,fi}							
Concrete pry-out failure												
R30 to R120			k ₈	[-]	1,0	2,0	1,0	2,0	1,0	2,0		
The anchorage depth shall be increased for wet concrete by at least 30 mm compared to the given value												

Hilti screw anchor HUS4

Performances
Essential characteristics under fire exposure in concrete

Annex C14

Table C12: Essential characteristics under fire exposure in concrete for HUS4 (T)-H carbon steel sizes 10 to 14

Fastener size HUS4 (T)-H(F)				T-10			12			14		
				h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}
Nominal embedment depth		h _{nom}	[mm]	55	75	85	60	80	100	65	85	115
Adjustment												
Total max. thickness of adjustment layers		t _{adj}	[mm]	-	10	10	10	10	10	10	10	10
Max. number of adjustments		n _a	[-]	-	2	2	2	2	2	2	2	2
Steel failure for tension and shear load (F _{Rk,s,fi} = N _{Rk,s,fi} = V _{Rk,s,fi})												
Characteristic resistance	R30	F _{Rk,s,fi}	[kN]	6,1	6,2	7,5	7,6	7,6	10,3	10,4	10,5	
	R60	F _{Rk,s,fi}	[kN]	4,6	4,7	5,5	5,7	5,8	7,7	7,9	8,0	
	R90	F _{Rk,s,fi}	[kN]	3,1	3,2	3,7	3,9	4,1	5,2	5,6	5,8	
	R120	F _{Rk,s,fi}	[kN]	2,4	2,5	2,8	3,0	3,1	3,9	4,2	4,4	
	R30	M ⁰ _{Rk,s,fi}	[Nm]	9,1	9,2	11,4	11,6	11,6	18,9	19,2	19,3	
	R60	M ⁰ _{Rk,s,fi}	[Nm]	6,9	7,0	8,4	8,8	8,9	14,1	14,6	14,8	
	R90	M ⁰ _{Rk,s,fi}	[Nm]	4,6	4,8	5,7	6,0	6,2	9,5	10,2	10,7	
	R120	M ⁰ _{Rk,s,fi}	[Nm]	3,5	3,7	4,3	4,6	4,7	7,2	7,7	8,1	
Pull-out failure												
Characteristic resistance	R30 R60 R90	N ⁰ _{Rk,p,fi}	[kN]	2,4	4,0	4,9	2,6	4,2	6,1	2,9	4,5	7,5
	R120	N ⁰ _{Rk,p,fi}	[kN]	1,9	3,2	3,9	2,1	3,4	4,9	2,3	3,6	6,0
Concrete cone failure												
Characteristic resistance	R30 R60 R90	N ⁰ _{Rk,c,fi}	[kN]	2,0	4,7	6,6	2,4	5,4	9,8	2,9	6,1	13,9
	R120	N ⁰ _{Rk,c,fi}	[kN]	1,6	3,8	5,3	1,9	4,3	7,8	2,3	4,9	11,1
Edge distance												
R30 to R120			C _{cr,fi}	[mm]	2 h _{ef}							
In case of fire attack from more than one side, the minimum edge distance shall be ≥ 300 mm												
Fastener spacing												
R30 to R120			S _{cr,fi}	[mm]	2 C _{cr,fi}							
Concrete pry-out failure												
R30 to R120			k ₈	[-]	1,0	2,0	2,0					
The anchorage depth shall be increased for wet concrete by at least 30 mm compared to the given value												

Hilti screw anchor HUS4

Performances
Essential characteristics under fire exposure in concrete

Annex C15

**Table C13: Essential characteristics under fire exposure in concrete for HUS4-H
carbon steel size 16**

Fastener size HUS4-H(F)				16	
				h _{nom1}	h _{nom2}
Nominal embedment depth		h _{nom}	[mm]	85	130
Steel failure for tension and shear load (F _{Rk,s,fi} = N _{Rk,s,fi} = V _{Rk,s,fi})					
Characteristic resistance	R30	F _{Rk,s,fi}	[kN]	10,6	10,7
	R60	F _{Rk,s,fi}	[kN]	8,1	8,2
	R90	F _{Rk,s,fi}	[kN]	5,7	5,9
	R120	F _{Rk,s,fi}	[kN]	4,3	4,5
	R30	M ⁰ _{Rk,s,fi}	[Nm]	23,7	23,9
	R60	M ⁰ _{Rk,s,fi}	[Nm]	18,1	18,3
	R90	M ⁰ _{Rk,s,fi}	[Nm]	12,7	13,2
	R120	M ⁰ _{Rk,s,fi}	[Nm]	9,6	10,0
Pull-out failure					
Characteristic resistance	R30	N ⁰ _{Rk,p,fi}	[kN]	4,6	8,7
	R60				
	R90				
	R120	N ⁰ _{Rk,p,fi}	[kN]	3,7	7,0
Concrete cone failure					
Characteristic resistance	R30	N ⁰ _{Rk,c,fi}	[kN]	6,2	19,4
	R60				
	R90				
	R120	N ⁰ _{Rk,c,fi}	[kN]	4,9	15,5
Edge distance					
R30 to R120		c _{cr,fi}	[mm]	2 h _{ef}	
In case of fire attack from more than one side, the minimum edge distance shall be ≥ 300 mm					
Fastener spacing					
R30 to R120		s _{cr,fi}	[mm]	2 c _{cr,fi}	
Concrete pry-out failure					
R30 to R120		k ₈	[-]	2,0	
The anchorage depth shall be increased for wet concrete by at least 30 mm compared to the given value					

Hilti screw anchor HUS4

Performances
Essential characteristics under fire exposure in concrete

Annex C16

**Table C14: Essential characteristics under fire exposure in concrete for HUS4 (T)-C
carbon steel size 8**

Fastener size HUS4 (T)-C				8			T-8		
				h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}
Nominal embedment depth		h _{nom}	[mm]	40	60	70	50	60	70
Adjustment									
Total max. thickness of adjustment layers		t _{adj}	[mm]	-	10	10	-	10	10
Max. number of adjustments		n _a	[-]	-	2	2	-	2	2
Steel failure for tension and shear load (F _{Rk,s,fi} = N _{Rk,s,fi} = V _{Rk,s,fi})									
Characteristic resistance	R30	F _{Rk,s,fi}	[kN]	0,5			0,5		
	R60	F _{Rk,s,fi}	[kN]	0,4			0,4		
	R90	F _{Rk,s,fi}	[kN]	0,3			0,3		
	R120	F _{Rk,s,fi}	[kN]	0,2			0,2		
	R30	M ⁰ _{Rk,s,fi}	[Nm]	0,4			0,6		
	R60	M ⁰ _{Rk,s,fi}	[Nm]	0,3			0,5		
	R90	M ⁰ _{Rk,s,fi}	[Nm]	0,2			0,4		
	R120	M ⁰ _{Rk,s,fi}	[Nm]	0,2			0,3		
Pull-out failure									
Characteristic resistance	R30	N ⁰ _{Rk,p,fi}	[kN]	1,3	2,8	3,6	1,5	2,3	3,0
	R60								
	R90								
	R120	N ⁰ _{Rk,p,fi}	[kN]	1,0	2,2	2,8	1,2	1,8	2,4
Concrete cone failure									
Characteristic resistance	R30	N ⁰ _{Rk,c,fi}	[kN]	0,8	2,6	4,0	1,8	2,6	4,0
	R60								
	R90								
	R120	N ⁰ _{Rk,c,fi}	[kN]	0,7	2,1	3,2	1,5	2,1	3,2
Edge distance									
R30 to R120		c _{cr,fi}	[mm]	2 h _{ef}					
In case of fire attack from more than one side, the minimum edge distance shall be ≥ 300 mm									
Fastener spacing									
R30 to R120		s _{cr,fi}	[mm]	2 c _{cr,fi}					
Concrete pry-out failure									
R30 to R120		k ₈	[-]	1,0	2,0		1,0	2,0	
The anchorage depth shall be increased for wet concrete by at least 30 mm compared to the given value									

Hilti screw anchor HUS4

Performances
Essential characteristics under fire exposure in concrete

Annex C17

**Table C15: Essential characteristics under fire exposure in concrete for HUS4 (T)-C
carbon steel size 10**

Fastener size HUS4 (T)-C				10			T-10		
				h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}
Nominal embedment depth		h _{nom}	[mm]	55	75	85	55	75	85
Adjustment									
Total max. thickness of adjustment layers		t _{adj}	[mm]	-	10	10	-	10	10
Max. number of adjustments		n _a	[-]	-	2	2	-	2	2
Steel failure for tension and shear load (F _{Rk,s,fi} = N _{Rk,s,fi} = V _{Rk,s,fi})									
Characteristic resistance	R30	F _{Rk,s,fi}	[kN]	1,0			1,2		
	R60	F _{Rk,s,fi}	[kN]	0,9			1,0		
	R90	F _{Rk,s,fi}	[kN]	0,7			0,8		
	R120	F _{Rk,s,fi}	[kN]	0,6			0,6		
	R30	M ⁰ _{Rk,s,fi}	[Nm]	1,2			1,7		
	R60	M ⁰ _{Rk,s,fi}	[Nm]	1,0			1,5		
	R90	M ⁰ _{Rk,s,fi}	[Nm]	0,8			1,1		
	R120	M ⁰ _{Rk,s,fi}	[Nm]	0,6			0,9		
Pull-out failure									
Characteristic resistance	R30	N ⁰ _{Rk,p,fi}	[kN]	2,3	3,9	4,7	2,4	4,0	5,0
	R60								
	R90								
	R120	N ⁰ _{Rk,p,fi}	[kN]	1,9	3,1	3,7	1,9	3,2	4,0
Concrete cone failure									
Characteristic resistance	R30	N ⁰ _{Rk,c,fi}	[kN]	2,0	4,7	6,5	2,0	4,7	6,6
	R60								
	R90								
	R120	N ⁰ _{Rk,c,fi}	[kN]	1,6	3,7	5,2	1,6	3,8	5,3
Edge distance									
R30 to R120		C _{cr,fi}	[mm]	2 h _{ef}					
In case of fire attack from more than one side, the minimum edge distance shall be ≥ 300 mm									
Fastener spacing									
R30 to R120		S _{cr,fi}	[mm]	2 C _{cr,fi}					
Concrete pry-out failure									
R30 to R120		k ₈	[-]	1,0	2,0		1,0	2,0	
The anchorage depth shall be increased for wet concrete by at least 30 mm compared to the given value									

Hilti screw anchor HUS4

Performances
Essential characteristics under fire exposure in concrete

Annex C18

Table C16: Essential characteristics under fire exposure in concrete for HUS4-A carbon steel

Fastener size HUS4-A(F)				10			14		
				h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}
Nominal embedment depth		h _{nom}	[mm]	55	75	85	65	85	115
Adjustment									
Total max. thickness of adjustment layers		t _{adj}	[mm]	-	10	10	10	10	10
Max. number of adjustments		n _a	[-]	-	2	2	2	2	2
Steel failure for tension and shear load (F _{Rk,s,fi} = N _{Rk,s,fi} = V _{Rk,s,fi})									
Characteristic resistance	R30	F _{Rk,s,fi}	[kN]	4,2			8,4		
	R60	F _{Rk,s,fi}	[kN]	3,3			6,8		
	R90	F _{Rk,s,fi}	[kN]	2,5			5,1		
	R120	F _{Rk,s,fi}	[kN]	2,1			4,3		
	R30	M ⁰ _{Rk,s,fi}	[Nm]	4,8			15,4		
	R60	M ⁰ _{Rk,s,fi}	[Nm]	3,8			12,4		
	R90	M ⁰ _{Rk,s,fi}	[Nm]	2,9			9,3		
	R120	M ⁰ _{Rk,s,fi}	[Nm]	2,4			7,8		
Pull-out failure									
Characteristic resistance	R30	N ⁰ _{Rk,p,fi}	[kN]	2,3	3,9	4,7	2,9	4,5	7,5
	R60								
	R90								
	R120	N ⁰ _{Rk,p,fi}	[kN]	1,9	3,1	3,7	2,3	3,6	6,0
Concrete cone failure									
Characteristic resistance	R30	N ⁰ _{Rk,c,fi}	[kN]	2,0	4,7	6,5	2,9	6,1	13,9
	R60								
	R90								
	R120	N ⁰ _{Rk,c,fi}	[kN]	1,6	3,7	5,2	2,3	4,9	11,1
Edge distance									
R30 to R120		c _{cr,fi}	[mm]	2 h _{ef}					
In case of fire attack from more than one side, the minimum edge distance shall be ≥ 300 mm									
Fastener spacing									
R30 to R120		s _{cr,fi}	[mm]	2 c _{cr,fi}					
Concrete pry-out failure									
R30 to R120		k ₈	[-]	1,0	2,0				
The anchorage depth shall be increased for wet concrete by at least 30 mm compared to the given value									

Hilti screw anchor HUS4

Annex C19

Performances
Essential characteristics under fire exposure in concrete

Table C17: Essential characteristics under fire exposure in concrete for HUS4 stainless steel

Fastener size HUS4				6		8				10				14	
Type				HR	CR	HR		CR		HR		CR		HR	
				h _{nom1}		h _{nom1}	h _{nom2}	h _{nom1}	h _{nom2}	h _{nom1}	h _{nom2}	h _{nom1}	h _{nom2}	h _{nom1}	h _{nom2}
Nominal embedment depth h _{nom} [mm]				55		60	80	60	80	70	90	70	90	70	110
Steel failure for tension and shear load (F _{Rk,s,fi} = N _{Rk,s,fi} = V _{Rk,s,fi})															
Characteristic resistance	R30	F _{Rk,s,fi}	[kN]	4,9	0,2	9,3		0,8		18,5		1,4		41,7	
	R60	F _{Rk,s,fi}	[kN]	3,3	0,2	6,3		0,6		12,0		1,1		26,9	
	R90	F _{Rk,s,fi}	[kN]	1,8	0,2	3,2		0,5		5,4		0,9		12,2	
	R120	F _{Rk,s,fi}	[kN]	1,0	0,1	1,7		0,4		2,4		0,8		5,4	
	R30	M ⁰ _{Rk,s,fi}	[Nm]	4,0	0,2	8,2		0,8		19,4		1,5		65,6	
	R60	M ⁰ _{Rk,s,fi}	[Nm]	2,7	0,2	5,5		0,7		12,6		1,2		42,4	
	R90	M ⁰ _{Rk,s,fi}	[Nm]	1,4	0,1	2,8		0,5		5,7		0,9		19,2	
	R120	M ⁰ _{Rk,s,fi}	[Nm]	0,8	0,1	1,5		0,4		2,5		0,8		8,5	
Concrete pull-out failure															
Characteristic resistance	R30 R60 R90	N _{Rk,p,fi}	[kN]	1,3		1,5	3,0	1,5	3,0	2,3	4,0	2,3	4,0	3,0	6,3
	R120	N _{Rk,p,fi}	[kN]	1,0		1,2	2,4	1,2	2,4	1,8	3,2	1,8	3,2	2,4	5,0
Edge distance															
R30 to R120 c _{cr,fi} [mm]				2 h _{ef}											
Anchor spacing															
R30 to R120 s _{cr,fi} [mm]				2 c _{cr,fi}											
Concrete pry-out failure															
R30 to R120 k ₈ [-]				1,5		2,0									

Hilti screw anchor HUS4

Performances
Essential characteristics under fire exposure in concrete

Annex C20

Table C18: Displacements under tension loads for HUS4 carbon steel

Fastener size HUS4				8			8			10		
Type				H(F), C			T-H(F), T-C			H(F), C, A(F)		
				h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}
Nominal embedment depth		h _{nom}	[mm]	40	60	70	50	60	70	55	75	85
Cracked concrete C20/25 to C50/60	Tension Load	N	[kN]	2,6	5,4	6,9	4,3	5,7	7,6	3,8	7,5	8,6
		δ _{N0}	[mm]	0,1	0,3	0,4	0,3	0,4	0,3	0,2	0,4	0,4
	Displacement	δ _{N∞}	[mm]	0,3	0,4	0,4	0,7	0,7	0,6	0,7	0,7	0,9
Uncracked concrete C20/25 to C50/60	Tension Load	N	[kN]	3,7	7,1	9,1	6,6	8,9	11,8	5,2	10,5	12,2
		δ _{N0}	[mm]	0,1	0,2	0,2	0,1	0,2	0,1	0,1	0,3	0,3
	Displacement	δ _{N∞}	[mm]	0,3	0,4	0,4	0,3	0,3	0,3	0,7	0,7	0,9

Fastener size HUS4				10			12			14		
Type				T-H(F), T-C			H			H(F), A(F)		
				h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}
Nominal embedment depth		h _{nom}	[mm]	55	75	85	60	80	100	65	85	115
Cracked concrete C20/25 to C50/60	Tension Load	N	[kN]	5,7	9,5	13,2	5,1	8,2	11,7	5,7	8,6	14,4
		δ _{N0}	[mm]	0,4	0,4	0,4	0,3	0,4	0,6	0,3	0,4	0,7
	Displacement	δ _{N∞}	[mm]	0,4	0,4	0,5	0,9	0,9	1,2	1,3	1,3	1,5
Uncracked concrete C20/25 to C50/60	Tension Load	N	[kN]	8,7	14,8	20,5	6,8	10,8	15,5	7,5	11,7	19,1
		δ _{N0}	[mm]	0,1	0,1	0,1	0,2	0,3	0,4	0,2	0,3	0,5
	Displacement	δ _{N∞}	[mm]	0,2	0,2	0,2	0,9	0,9	1,2	1,3	1,3	1,5

Fastener size HUS4				16	
Type				H(F)	
				h _{nom1}	h _{nom2}
Nominal embedment depth		h _{nom}	[mm]	85	130
Cracked concrete C20/25 to C50/60	Tension Load	N	[kN]	8,7	16,7
		δ _{N0}	[mm]	0,1	0,4
	Displacement	δ _{N∞}	[mm]	1,3	1,4
Uncracked concrete C20/25 to C50/60	Tension Load	N	[kN]	11,5	22,9
		δ _{N0}	[mm]	0,4	0,3
	Displacement	δ _{N∞}	[mm]	1,3	1,4

Hilti screw anchor HUS4

Performances
Displacement values in case of static and quasi-static loading

Annex C21

Table C19: Displacements under tension loads for HUS4 stainless steel

Fastener size HUS				6	8		10				14	
Type				HR, CR	HR, CR		HR, CR		H		HR	
				h_{nom1}	h_{nom1}	h_{nom2}	h_{nom1}	h_{nom2}	h_{nom1}	h_{nom2}	h_{nom1}	h_{nom2}
Nominal anchorage depth		h_{nom}	[mm]	55	60	80	70	90	70	85	70	110
Cracked concrete C20/25 to C50/60	Tension load	N	[kN]	1,7	2,4	4,8	3,6	6,3	3,0	4,1	4,8	9,9
		δ_{N0}	[mm]	0,4	0,5	0,7	0,3	0,6	0,2	0,3	0,9	1,4
	Displacement	$\delta_{N\infty}$	[mm]	0,5	0,7	1,1	0,6	1,1	0,3	0,7	1,1	1,4
		$\delta_{N,seis}$	[mm]	1)	1)	1,2	1)	1,2	1)	1,2	1)	0,4
Uncracked concrete C20/25 to C50/60	Tension load	N	[kN]	3,1	4,8	6,3	6,3	9,9	4,8	6,8	7,5	16,0
		δ_{N0}	[mm]	0,8	0,7	1,6	0,3	1,3	0,2	0,3	0,7	1,0
	Displacement	$\delta_{N\infty}$	[mm]	0,8	0,7	1,6	0,3	1,3	0,3	0,7	0,7	1,0

1) No performance assessed.

Hilti screw anchor HUS4

Performances

Displacement values in case of static and quasi-static loading

Annex C22

Table C20: Displacements under shear loads for HUS4 carbon steel

Fastener size HUS4				8			8			10		
Type				H(F), C			T-H(F), T-C			H(F), C, A(F)		
				h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}
Nominal embedment depth		h _{nom}	[mm]	40	60	70	40	60	70	55	75	85
Concrete C20/25 to C50/60	Shear Load	V	[kN]	10,7	10,7	12,5	8,1	8,1	8,1	16,5	16,5	18,3
	Displacement	δ _{V0}	[mm]	1,3	1,1	0,9	2,5	3,4	2,9	1,4	1,3	1,0
		δ _{V∞}	[mm]	2,0	1,7	1,4	3,7	5,1	4,4	2,1	2,0	1,5

Fastener size HUS4				10			12			14		
Type				T-H(F), T-C			H(F)			H(F), A(F)		
				h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}
Nominal embedment depth		h _{nom}	[mm]	55	75	85	60	80	100	65	85	115
Concrete C20/25 to C50/60	Shear Load	V	[kN]	13,3			22,2	22,2	25,7	31,4	35,4	35,4
	Displacement	δ _{V0}	[mm]	3,8	3,7	3,2	1,6	1,6	0,9	5,3	5,3	4,0
		δ _{V∞}	[mm]	5,7	5,5	4,9	2,3	2,4	1,4	7,9	7,9	6,0

Fastener size HUS4				16		
Type				H(F)		
				h _{nom1}		h _{nom2}
Nominal embedment depth		h _{nom}	[mm]	85		130
Concrete C20/25 to C50/60	Shear Load	V	[kN]	37,2		41,8
	Displacement	δ _{V0}	[mm]	2,3		1,8
		δ _{V∞}	[mm]	3,5		2,7

Table C21: Displacements under shear loads for HUS4 stainless steel

Fastener size HUS4				6	8		10		14	
Type				HR, CR	HR, CR		HR, CR		HR	
				h _{nom1}	h _{nom1}	h _{nom2}	h _{nom1}	h _{nom2}	h _{nom1}	h _{nom2}
Nominal anchorage depth		h _{nom}	[mm]	55	60	80	70	90	70	110
Concrete C20/25 to C50/60	Shear load	V	[kN]	7,8	11,0	12,4	13,6	15,7	12,9	27,3
	Displacement	δ _{V0}	[mm]	0,4	2,0	2,3	1,1	1,7	3,5	3,9
		δ _{V∞}	[mm]	0,5	2,4	2,9	1,5	2,4	3,9	4,3
		δ _{V,C1}	[mm]	1)	1)	4,8	1)	5,3	1)	7,6

1) No performance assessed.

Hilti screw anchor HUS4

Performances

Displacement values in case of static and quasi-static loading

Annex C23

**Table C22: Displacements under tension and shear loads for seismic category 2
for HUS 4 carbon steel**

Fastener size HUS4			8		8			10		
Type			H(F), C		T-H(F), T-C			H(F), C, A(F)		
			h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}
Nominal embedment depth	h _{nom}	[mm]	60	70	50	60	70	55	75	85
Tension load										
Displacement DLS	δ _{N,C2} (DLS)	[mm]	0,59		0,35			0,80		
Displacement ULS	δ _{N,C2} (ULS)	[mm]	1,36		0,65			3,66		
Shear load with Hilti filling set (HUS4-H and HUS4-A)										
Displacement DLS	δ _{V,C2} (DLS)	[mm]	3,57	1,85	3,37		1,81	4,32		1,72
Displacement ULS	δ _{V,C2} (ULS)	[mm]	5,56	5,44	5,38		4,60	7,72		6,88
Shear load without Hilti filling set										
Displacement DLS	δ _{V,C2} (DLS)	[mm]	3,57	4,64	3,37		3,93	4,32		5,02
Displacement ULS	δ _{V,C2} (ULS)	[mm]	5,56	7,96	5,38		5,55	7,72		8,97

Fastener size HUS4			10			12			14		
Type			T-H(F), T-C			H(F)			H(F), A(F)		
			h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}	h _{nom1}	h _{nom2}	h _{nom3}
Nominal embedment depth	h _{nom}	[mm]	55	75	85	60	80	100	65	85	115
Tension load											
Displacement DLS	δ _{N,C2} (DLS)	[mm]	0,57			0,77			1,06		
Displacement ULS	δ _{N,C2} (ULS)	[mm]	2,08			2,78			3,89		
Shear load with Hilti filling set (HUS4-H and HUS4-A)											
Displacement DLS	δ _{V,C2} (DLS)	[mm]	4,07		1,80	4,05		1,73	4,00		2,52
Displacement ULS	δ _{V,C2} (ULS)	[mm]	7,50		4,03	7,07		5,62	6,09		6,79
Shear load without Hilti filling set											
Displacement DLS	δ _{V,C2} (DLS)	[mm]	4,07		4,15	4,05		4,90	4,00		4,93
Displacement ULS	δ _{V,C2} (ULS)	[mm]	7,50		6,15	7,07		7,00	6,09		9,14

Hilti screw anchor HUS4

Performances

Displacement values in case of seismic C2 loading

Annex C24