

Public-law institution jointly founded by the federal states and the Federation

European Technical Assessment Body
for construction products



European Technical Assessment

ETA-15/0765
of 9 February 2026

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

ZX FAST ETA 1

Product family to which the construction product belongs

Mechanical anchor for use in concrete

Manufacturer

Ter Laare B.V.
Postbus 355
NL-3140 AJ MAASSLUIS
NIEDERLANDE

Manufacturing plant

Ter Laare Verankeringsstechnieken B.V.
Herstellwerk 3

This European Technical Assessment contains

22 pages including 3 annexes which form an integral part of this assessment

This European Technical Assessment is issued in accordance with Article 95(4) of Regulation (EU) No 2024/3110, on the basis of

EAD 330232-02-0601

This version replaces

ETA-15/0765 issued on 12 November 2015

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 36(3) of Regulation (EU) No 2024/3110.

Specific Part

1 Technical description of the product

The ZX FAST ETA 1 is an anchor made of galvanised steel or made of stainless steel which is placed into a drilled hole and anchored by torque-controlled expansion. The following anchor types are covered:

- Anchor type ZX-M FAST ETA 1 with threaded bolt,
- Anchor type ZX-B FAST ETA 1 with hexagon head screw,
- Anchor type ZX-V FAST ETA 1 with countersunk washer and countersunk screw.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the fastener is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the fastener of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading)	See Annex B3, B4, C1 to C4
Characteristic resistance to shear load (static and quasi-static loading)	See Annex C5 to C6
Displacements	See Annex C10 to C11
Stiffness	No performance assessed
Characteristic resistance for seismic performance category C1 and C2	See Annex C7 to C8

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	See Annex C9

3.3 Aspects of durability

Essential characteristic	Performance
Durability	See Annex B1

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with the European Assessment Document EAD 330232-02-0601 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.


Issued in Berlin on 9 February 2026 by Deutsches Institut für Bautechnik

Dipl.-Ing. Beatrix Wittstock
Head of Section

beglaubigt:
Baderschneider

ZX FAST ETA 1


Fastener type ZX-M FAST ETA 1 with threaded bolt

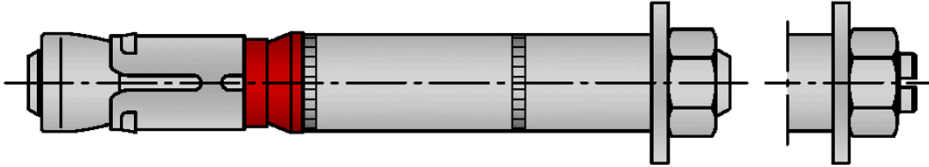

ZX-M FAST ETA 1 EV
(M6-M24)

ZX-M FAST ETA 1 A4
(M8-M16) A4


Fastener type ZX-B FAST ETA 1 with hexagon head screw

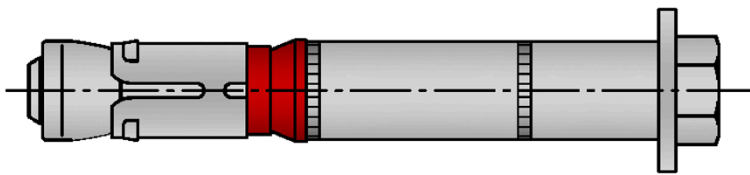

ZX-B FAST ETA 1 EV
(M6-M24)

ZX-B FAST ETA 1 A4
(M8-M16) A4


Fastener type ZX-V FAST ETA 1 with countersunk washer and countersunk screw

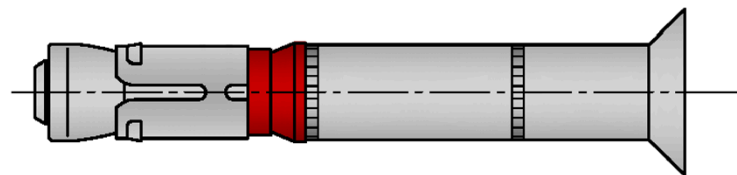

ZX-V FAST ETA 1 EV
(M6-M12)

ZX-V FAST ETA 1 A4
(M8-M12) A4

Installation situation

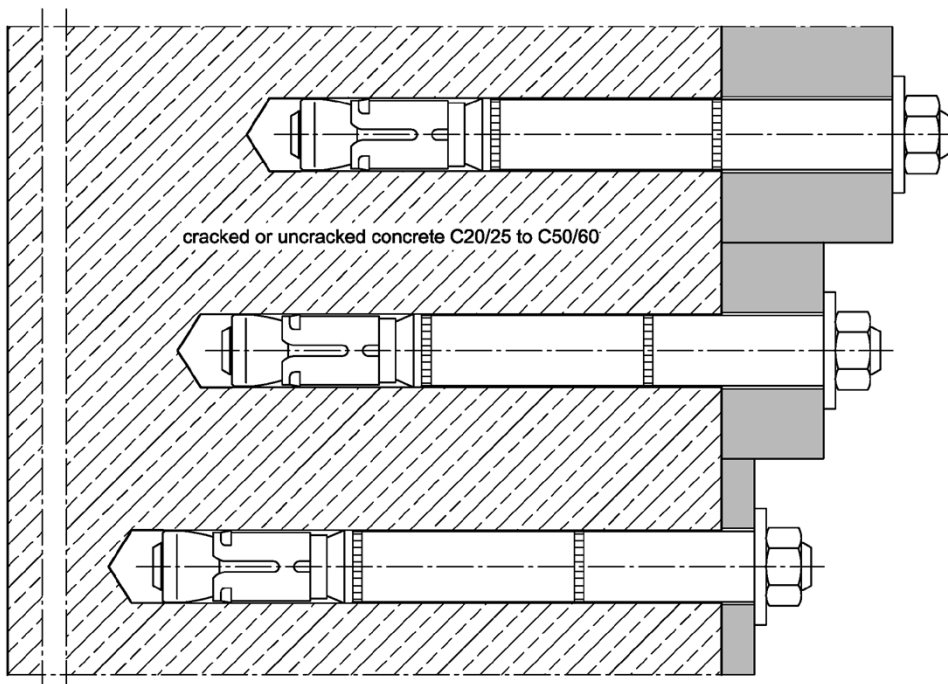


ZX FAST ETA 1


Product description
Product and installation situation

Annex A1


ZX-M FAST ETA 1

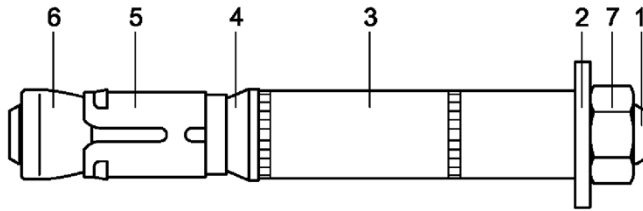

ZX-B FAST ETA 1

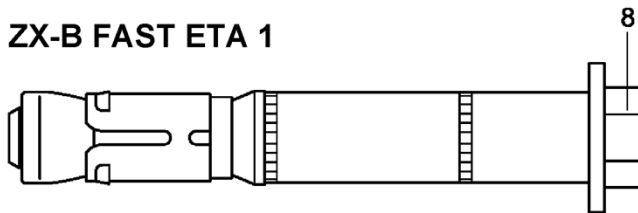

ZX-V FAST ETA 1

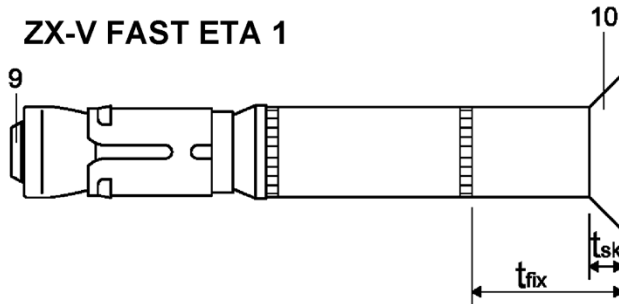

Marking:

expansion sleeve:

- Identifying mark of manufacturing plant ◇
- additional marking of stainless steel A4 A4
- Anchor identity (alternatively on distance sleeve) SZ
- size of thread (alternatively M10 on distance sleeve)

Distance sleeve:

- Diameter 15
- max. thickness of fixture $t_{fix,max}$ for $h_{ef,min}$ 25
- additional marking for countersunk version SK

marking on the washer of anchor size SZ 24/M16L L

Table A1: Designation of fastener parts and materials

Part	Designation	Steel galvanized $\geq 5 \mu\text{m}$, acc. to EN ISO 4042:2022	Stainless steel A4 CRC III
1	Threaded bolt	Steel, Strength class 8.8	Stainless steel, 1.4401, 1.4404 or 1.4571
2	Washer	Steel	Stainless steel
3	Distance sleeve	Steel tube	Steel tube stainless steel, 1.4401, 1.4404 or 1.4571
4	Ring	Polyethylene	Polyethylene
5	Expansion sleeve	Steel	Stainless steel, 1.4401, 1.4404 or 1.4571
6	Threaded cone	Steel	Stainless steel, 1.4401, 1.4404 or 1.4571
7	Hexagon nut	Steel, Strength class 8	Stainless steel, Strength class 70
8	Hexagon head screw	Steel, Strength class 8.8	Stainless steel, Strength class 70
9	Countersunk screw	Steel, Strength class 8.8	Stainless steel, Strength class 70
10	Countersunk washer	Steel	Stainless steel, 1.4401, 1.4404 or 1.4571, zinc plated

ZX FAST ETA 1

Product description
Marking and materials

Annex A2

Specification of intended use

ZX FAST ETA EV, steel zinc plated	10/M6	12/M8	15/M10	18/M12	24/M16	24/ M16L	28/M20	32/M24
Static or quasi-static action	✓							
Seismic action (ZX-M and ZX-B)	- ¹⁾	C1 + C2						
Seismic action (ZX-V)	- ¹⁾	C1 + C2				- ¹⁾		
Fire exposure	R 30 ... R 120							
ZX FAST ETA A4, stainless steel A4	12/M8	15/M10	18/M12	24/M16				
Static or quasi-static action	✓							
Seismic action (ZX-M and ZX-B)	C1 + C2							
Seismic action (ZX-V)	C1 + C2				- ¹⁾			
Fire exposure	R30 ... R120							

¹⁾ No performance assessed

Base materials:

- Cracked and uncracked concrete
- Compacted, reinforced or unreinforced normal weight concrete (without fibers) according to EN 206:2013 + A2:2021
- Strength classes C20/25 to C50/60 according to EN 206:2013 + A2:2021

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (zinc plated steel or stainless steel).
- For all other conditions according to EN 1993-1-2006 + A1:2015, corresponding to corrosion resistance classes CRC according to Annex A2, Table A1

Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the fastener is indicated on the design drawings (e.g. position of the fastener relative to reinforcement or to supports, etc.).
- Design according to EN 1992-4:2018 and Technical Report TR055, Edition February 2018

Installation:


- Fastener installation carried out by appropriately qualified personnel and under the obligation of the person responsible for technical matters on site.
- Compliance with the effective anchorage depth. For fastenings with anchorage depths $h_{ef} > h_{ef,min}$ the usable thickness of fixture is reduced by $h_{ef} - h_{ef,min}$.
- Use as supplied by the manufacturer without replacing individual parts.
- Drilling of hole only by hammer drilling (use of vacuum drill bits is admissible)

ZX FAST ETA 1

Intended use
Specification of intended use

Annex B1

Installation situation

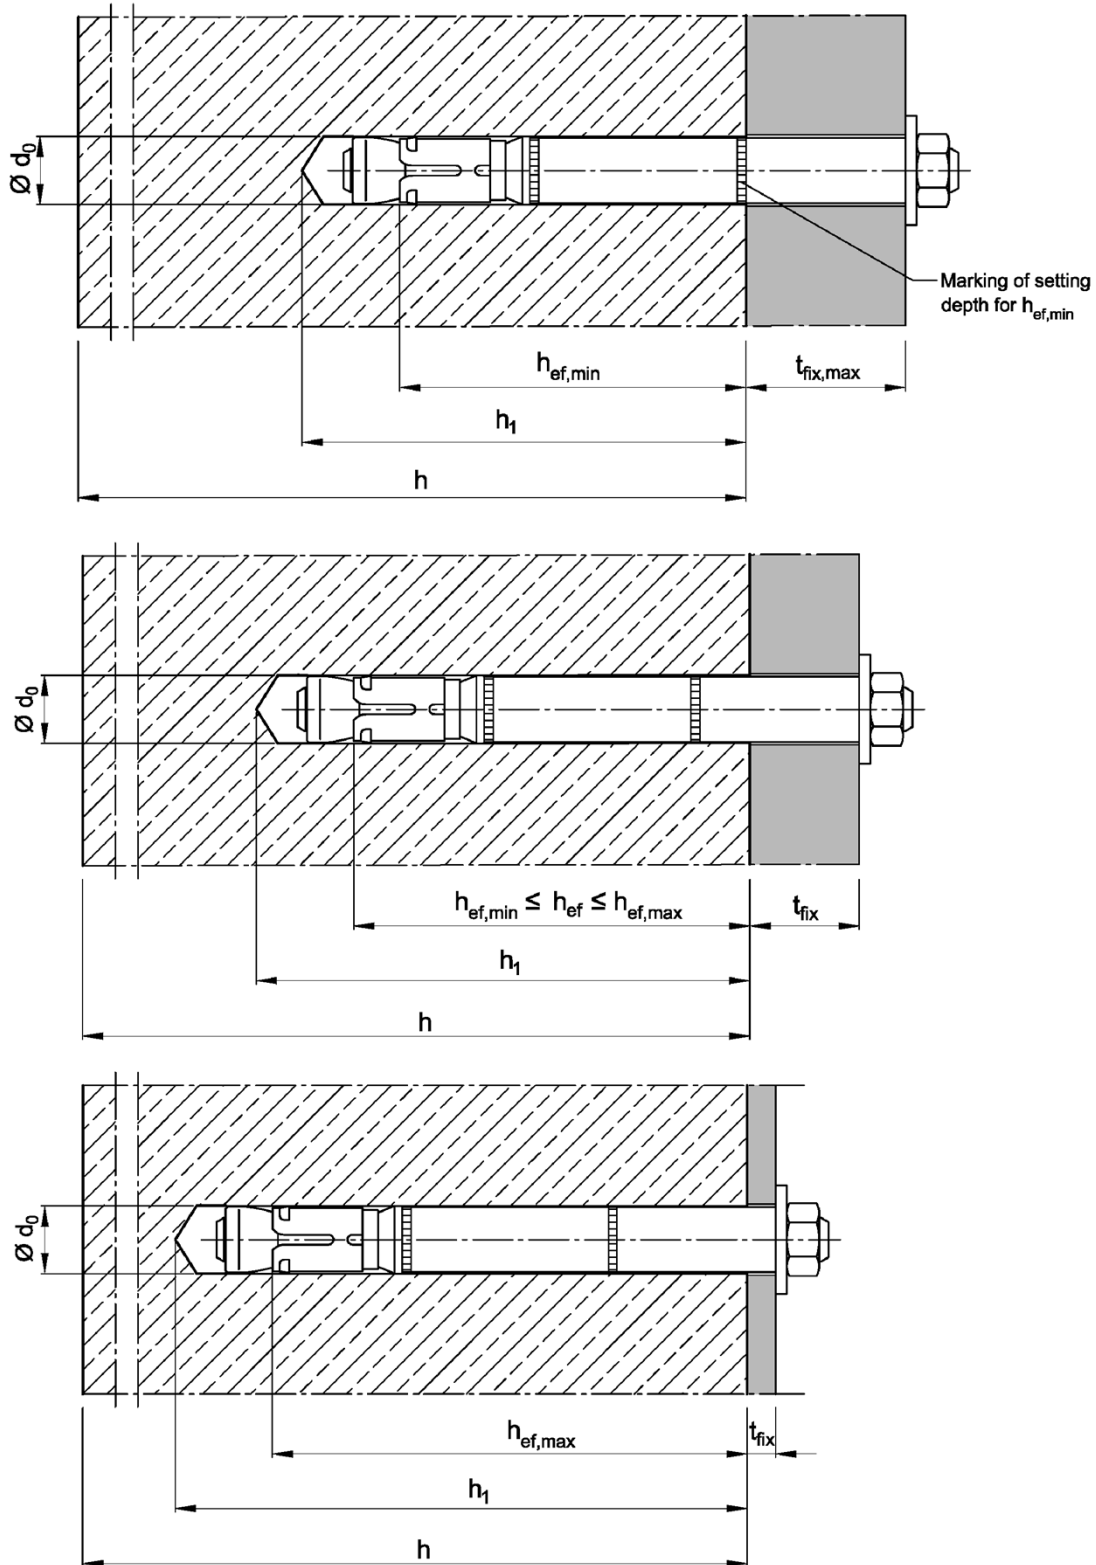

ZX FAST ETA 1

Intended use
Installation situation

Annex B2

Table B1: Installation parameters, steel zinc plated

Fastener size			10/M6	12/M8	15/M10	18/M12	24/M16	24/ M16L	28/M20	32/M24
Size of thread		[-]	M6	M8	M10	M12	M16	M16	M20	M24
Minimum effective anchorage depth	$h_{ef,min}$	[mm]	50	60	71	80	100	115	125	150
Maximum effective anchorage depth	$h_{ef,max}$	[mm]	76	100	110	130	114	150	185	210
Nominal diameter of drill bit	$d_0 =$	[mm]	10	12	15	18	24	24	28	32
Cutting diameter of drill bit	$d_{cut} \leq$	[mm]	10,45	12,5	15,5	18,5	24,55	24,55	28,55	32,7
Depth of drill hole	$h_1 \geq$	[mm]	$h_{ef} + 15$	$h_{ef} + 20$	$h_{ef} + 24$	$h_{ef} + 25$	$h_{ef} + 30$	$h_{ef} + 30$	$h_{ef} + 35$	$h_{ef} + 30$
Diameter of clearance hole in the fixture	$d_f \leq$	[mm]	12	14	17	20	26	26	31	35
Thickness of countersunk washer ZX-V	t_{sk}	[mm]	4	5	6	7	- ⁴⁾	- ⁴⁾	- ⁴⁾	- ⁴⁾
Minimum thickness of fixture ZX-V	$t_{fix min}^{2)}$	[mm]	8	10	14	18	- ⁴⁾	- ⁴⁾	- ⁴⁾	- ⁴⁾
Installation torque	T_{inst} (ZX-M, ZX-B)	[Nm]	15	30	50	80	160	160	280	280
	T_{inst} (ZX-V)	[Nm]	10	25	55	70	- ⁴⁾	- ⁴⁾	- ⁴⁾	- ⁴⁾
Minimum thickness of member	h_{min}	[mm]	$h_{ef} + 50$	$h_{ef} + 60$	$h_{ef} + 69$	$h_{ef} + 80$	$h_{ef} + 100$	$h_{ef} + 115$	$h_{ef} + 125$	$h_{ef} + 150$
Minimum spacing ^{1) 3)} cracked concrete	s_{min}	[mm]	50	50	60	70	100	100	125	150
	for $c \geq$	[mm]	50	80	120	140	180	180	300	300
Minimum edge distance ^{1) 3)} cracked concrete	c_{min}	[mm]	50	55	60	70	100	100	200	150
	for $s \geq$	[mm]	50	100	120	160	220	220	350	300
Minimum spacing ^{1) 3)} uncracked concrete	s_{min}	[mm]	50	60	60	70	100	100	125	150
	for $c \geq$	[mm]	80	100	120	140	180	180	300	300
Minimum edge distance ^{1) 3)} uncracked concrete	c_{min}	[mm]	50	60	60	70	100	100	200	150
	for $s \geq$	[mm]	100	120	120	160	220	220	350	300

¹⁾ Intermediate values by linear interpolation

²⁾ Depending on the existing shear load, the thickness of the fixture may be reduced to the thickness of the countersunk washer t_{sk} (see Annex A2). It must be verified that the present shear load can be transferred completely into the distance sleeve (bearing of hole).

³⁾ For fire exposure from more than one side $c \geq 300$ mm or $c_{min} \geq 300$ mm applies.

⁴⁾ No performance assessed

ZX FAST ETA 1

Intended use
Installation parameters, steel zinc plated

Annex B3

Table B2: Installation parameters, stainless steel A4

Fastener size			12/M8	15/M10	18/M12	24/M16
Size of thread		[-]	M8	M10	M12	M16
Minimum effective anchorage depth	$h_{ef,min}$	[mm]	60	71	80	100
Maximum effective anchorage depth	$h_{ef,max}$	[mm]	100	110	130	150
Nominal diameter of drill bit	$d_0 =$	[mm]	12	15	18	24
Cutting diameter of drill bit	$d_{cut} \leq$	[mm]	12,5	15,5	18,5	24,55
Depth of drill hole	$h_1 \geq$	[mm]	$h_{ef} + 20$	$h_{ef} + 24$	$h_{ef} + 25$	$h_{ef} + 30$
Diameter of clearance hole in the fixture	$d_f \leq$	[mm]	14	17	20	26
Thickness of countersunk washer ZX-V	t_{sk}	[mm]	5	6	7	⁻⁴⁾
Minimum thickness of fixture ZX-V	$t_{fix min}^{2)}$	[mm]	10	14	18	⁻⁴⁾
Installation torque	$T_{inst} (ZX-M)$	[Nm]	35	55	90	170
	$T_{inst} (ZX-B)$	[Nm]	30	50	80	170
	$T_{inst} (ZX-V)$	[Nm]	17,5	42,5	50	⁻⁴⁾
Minimum thickness of member	h_{min}	[mm]	$h_{ef} + 60$	$h_{ef} + 69$	$h_{ef} + 80$	$h_{ef} + 100$
Minimum spacing ^{1) 3)} cracked concrete	s_{min}	[mm]	50	60	70	80
	for $c \geq$	[mm]	80	120	140	180
Minimum edge distance ^{1) 3)} cracked concrete	c_{min}	[mm]	50	60	70	80
	for $s \geq$	[mm]	80	120	160	200
Minimum spacing ^{1) 3)} uncracked concrete	s_{min}	[mm]	50	60	70	80
	for $c \geq$	[mm]	80	120	140	180
Minimum edge distance ^{1) 3)} uncracked concrete	c_{min}	[mm]	50	85	70	180
	for $s \geq$	[mm]	80	185	160	80

¹⁾ Intermediate values by linear interpolation

²⁾ Depending on the existing shear load, the thickness of the fixture may be reduced to the thickness of the countersunk washer t_{sk} (see Annex A2). It must be verified that the present shear load can be transferred completely into the distance sleeve (bearing of hole).

³⁾ For fire exposure from more than one side $c \geq 300$ mm or $c_{min} \geq 300$ mm applies.





⁴⁾ No performance assessed

ZX FAST ETA 1

Intended use
Installation parameters, **stainless steel A4**

Annex B4

Installation instructions

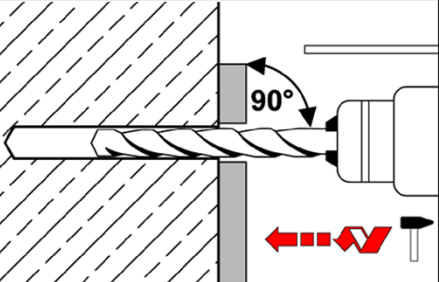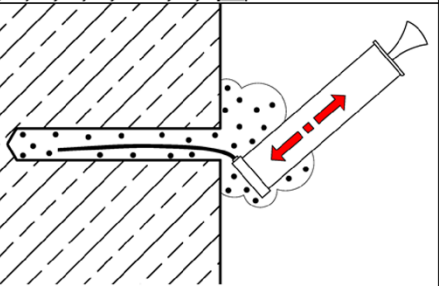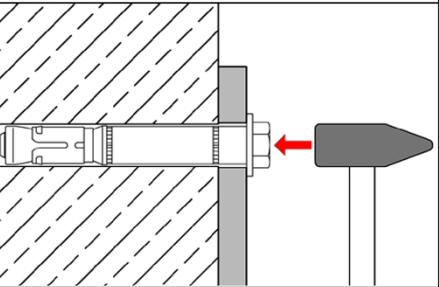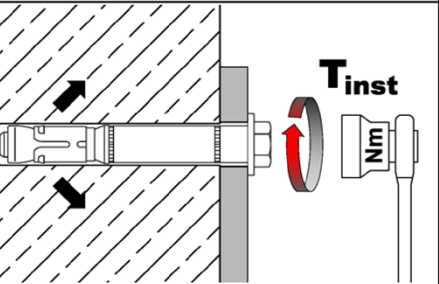1		<p>Drill hole perpendicular to concrete surface. If using a vacuum drill bit, proceed with step 3.</p>
2		<p>Blow out dust. Alternatively vacuum clean down to the bottom of the hole.</p>
3		<p>Drive in fastener.</p>
4		<p>Apply installation torque T_{inst}.</p>

ZX FAST ETA 1

Intended use
Installation instructions

Annex B5

Table C1: Characteristic values for tension load, cracked concrete, static or quasi-static action, steel zinc plated

Fastener size			10/M6	12/M8	15/M10	18/M12	24/M16	24/ M16L	28/M20	32/M24
Installation factor	γ_{inst}	[-]	1,0							
Steel failure										
Characteristic resistance	$N_{Rk,s}$	[kN]	16	29	46	67	126	126	196	282
Partial factor	γ_{Ms}	[-]	1,5							
Pull-out failure										
Characteristic resistance in cracked concrete C20/25	$N_{Rk,p}$	[kN]	5	12	16	25	36	44	50	65
Increasing factor for $N_{Rk,p} = \psi_C \cdot N_{Rk,p}(C20/25)$	ψ_C	[-]	$\left(\frac{f_{ck}}{20}\right)^{0,5}$							
Concrete cone failure										
Minimum effective anchorage depth	$h_{ef,min}$	[mm]	50	60	71	80	100	115	125	150
Maximum effective anchorage depth	$h_{ef,max}$	[mm]	76	100	110	130	114	150	185	210
Factor for cracked concrete	$k_{cr,N}$	[-]	7,7							

ZX FAST ETA 1

Performance
Characteristic values for **tension load, cracked concrete**, static or quasi-static action, **steel zinc plated**

Annex C1

Table C2: Characteristic values for tension load, cracked concrete, static or quasi-static action, stainless steel A4

Fastener size			12/M8	15/M10	18/M12	24/M16
Installation factor	γ_{inst}	[-]	1,0			
Steel failure						
ZX-M						
Characteristic resistance	$N_{Rk,s}$	[kN]	26	41	60	110
Partial factor	γ_{Ms}	[-]	1,5			
ZX-B and ZX-V						
Characteristic resistance	$N_{Rk,s}$	[kN]	26	41	60	110
Partial factor	γ_{Ms}	[-]	1,87			
Pull-out failure						
Characteristic resistance in cracked concrete C20/25	$N_{Rk,p}$	[kN]	9	16	25	36
Increasing factor for $N_{Rk,p} = \psi_C \cdot N_{Rk,p} (C20/25)$	ψ_C	[-]	$\left(\frac{f_{ck}}{20}\right)^{0,5}$			
Concrete cone failure						
Minimum effective anchorage depth	$h_{ef,min}$	[mm]	60	71	80	100
Maximum effective anchorage depth	$h_{ef,max}$	[mm]	100	110	130	150
Factor for cracked concrete	$k_{cr,N}$	[-]	7,7			

ZX FAST ETA 1

Performance
Characteristic values for **tension load, cracked concrete**, static or quasi-static action, **stainless steel A4**

Annex C2

Table C3: Characteristic values for tension load, uncracked concrete, static or quasi-static action, steel zinc plated

Fastener size			10/M6	12/M8	15/M10	18/M12	24/M16	24/ M16L	28/M20	32/M24
Installation factor	γ_{inst}	[-]	1,0							
Steel failure										
Characteristic resistance	$N_{Rk,s}$	[kN]	16	29	46	67	126	126	196	282
Partial factor	γ_{Ms}	[-]	1,5							
Pull-out failure										
Characteristic resistance in uncracked concrete C20/25	$N_{Rk,p}$	[kN]	17	20	30	36	50	1)	70	1)
Increasing factor for $N_{Rk,p} = \psi_C \cdot N_{Rk,p} (C20/25)$	ψ_C	[-]	$\left(\frac{f_{ck}}{20}\right)^{0,5}$					-2)	$\left(\frac{f_{ck}}{20}\right)^{0,5}$	-2)
Splitting failure (The higher resistance of case 1 and case 2 may be applied)										
Case 1										
Characteristic resistance in uncracked concrete C20/25	$N^0_{Rk,sp}$	[kN]	12	16	25	30	40	70	50	70
Edge distance	$c_{cr,sp}$	[mm]	1,5 h_{ef}							
Increasing factor for $N^0_{Rk,sp} = \psi_C \cdot N^0_{Rk,sp} (C20/25)$	ψ_C	[-]	$\left(\frac{f_{ck}}{20}\right)^{0,5}$							
Case 2										
Characteristic resistance in uncracked concrete	$N^0_{Rk,sp}$	[kN]	$\min(N_{Rk,p}; N^0_{Rk,c})$							
Edge distance	$c_{cr,sp}$	[mm]	2,5 h_{ef}					1,5 h_{ef}	2,5 h_{ef}	2 h_{ef}
Concrete cone failure										
Minimum effective anchorage depth	$h_{ef,min}$	[mm]	50	60	71	80	100	115	125	150
Maximum effective anchorage depth	$h_{ef,max}$	[mm]	76	100	110	130	114	150	185	210
Edge distance	$c_{cr,N}$	[mm]	1,5 h_{ef}							
Factor for uncracked concrete	$k_{ucr,N}$	[-]	11,0							

1) $N_{Rk,p} = N^0_{Rk,c}$ calculated with $h_{ef,min}$

2) No performance assessed

ZX FAST ETA 1

Performance
Characteristic values for **tension load, uncracked concrete**, static or quasi-static action,
steel zinc plated

Annex C3

Table C4: Characteristic values for tension load, uncracked concrete, static or quasi-static action, stainless steel A4

Fastener size			12/M8	15/M10	18/M12	24/M16
Installation factor	γ_{inst}	[-]	1,0			
Steel failure						
ZX-M						
Characteristic resistance	$N_{Rk,s}$	[kN]	26	41	60	110
Partial factor	γ_{Ms}	[-]	1,5			
ZX-B and ZX-V						
Characteristic resistance	$N_{Rk,s}$	[kN]	26	41	60	110
Partial factor	γ_{Ms}	[-]	1,87			
Pull-out failure						
Characteristic resistance in uncracked concrete C20/25	$N_{Rk,p}$	[kN]	16	25	35	50
Increasing factor for $N_{Rk,p} = \psi_C \cdot N_{Rk,p} (C20/25)$	ψ_C	[-]	$\left(\frac{f_{ck}}{20}\right)^{0,5}$			
Splitting failure						
Edge distance	$c_{cr,sp}$	[mm]	180	235	265	300
Concrete cone failure						
Minimum effective anchorage depth	$h_{ef,min}$	[mm]	60	71	80	100
Maximum effective anchorage depth	$h_{ef,max}$	[mm]	100	110	130	150
Edge distance	$c_{cr,N}$	[mm]	1,5 h_{ef}			
Factor for uncracked concrete	$k_{ucr,N}$	[-]	11,0			

ZX FAST ETA 1

Performance
Characteristic values for **tension loads, uncracked concrete**, static or quasi-static action, **stainless steel A4**

Annex C4

Table C5: Characteristic values of shear load, static or quasi-static action, steel zinc plated

Fastener size			10/M6	12/M8	15/M10	18/M12	24/M16	24/ M16L	28/M20	32/M24
Steel failure without lever arm										
ZX-M										
Characteristic resistance	$V_{Rk,s}^0$	[kN]	16	25	36	63	91	91	122	200
Ductility factor	k_7	[-]	1,0							
Partial factor	γ_{Ms}	[-]	1,25							
ZX-B and ZX-V										
Characteristic resistance	$V_{Rk,s}^0$	[kN]	18	30	48	73	126	126	150	200
Ductility factor	k_7	[-]	1,0							
Partial factor	γ_{Ms}	[-]	1,25							
Steel failure with lever arm										
ZX-M, ZX-B and ZX-V										
Anchorage depth	$h_{ef,min} \geq$	[mm]	50	60	71	80	100	115	125	150
Characteristic bending resistance	$M_{Rk,s}^0$	[Nm]	12	30	60	105	266	266	519	898
Partial factor	γ_{Ms}	[-]	1,25							
Anchorage depth	$h_{ef} \geq$	[mm]	64	73	90	106	138	138	158	188
Characteristic bending resistance	$M_{Rk,s}^0$	[Nm]	40	58	119	234	529	529	847	1343
Partial factor	γ_{Ms}	[-]	1,25							
Concrete pry-out failure										
Pry-out factor	k_8	[-]	1,8 ¹⁾	2,0						
Concrete edge failure										
Effective length of fastener in shear loading	l_f	[mm]	h_{ef}							
Outside diameter of fastener	d_{nom}	[mm]	10	12	15	18	24	24	28	32

¹⁾ $k_8 = 2,0$ for $h_{ef} \geq 60$ mm

ZX FAST ETA 1

Performance
Characteristic values for **shear load**, static or quasi-static action,
steel zinc plated

Annex C5

Table C6: Characteristic values for shear load, static or quasi-static action, stainless steel A4

Fastener size			12/M8	15/M10	18/M12	24/M16
Steel failure without lever arm						
Characteristic resistance	$V_{Rk,s}^0$	[kN]	24	37	62	92
ZX-M						
Ductility factor	k_7	[-]	1,0			
Partial factor	γ_{Ms}	[-]	1,25			
ZX-B						
Ductility factor	k_7	[-]	1,0			
Partial factor	γ_{Ms}	[-]	1,36			
ZX-V						
Ductility factor	k_7	[-]	0,8			- ¹⁾
Partial factor	γ_{Ms}	[-]	1,36			- ¹⁾
Steel failure with lever arm						
Anchorage depth	$h_{ef,min} \geq$	[mm]	60	71	80	100
Characteristic bending resistance	$M_{Rk,s}^0$	[Nm]	26	52	92	232
ZX-M						
Partial factor	γ_{Ms}	[-]	1,25			
ZX-B and ZX-V						
Partial factor	γ_{Ms}	[-]	1,56			
ZX-M, ZX-B and ZX-V						
Anchorage depth	$h_{ef} \geq$	[mm]	73	90	106	138
Characteristic bending resistance	$M_{Rk,s}^0$	[Nm]	103	211	374	847
Partial factor	γ_{Ms}	[-]	1,25			
Concrete pry-out failure						
Pry-out factor	k_8	[-]	2,0			
Concrete edge failure						
Effective length of fastener in shear loading	l_f	[mm]	h_{ef}			
Outside diameter of fastener	d_{nom}	[mm]	12	15	18	24

¹⁾ No performance assessed

ZX FAST ETA 1

Performance
Characteristic values for **shear load**, static or quasi-static action,
stainless steel A4

Annex C6

Table C7: Characteristic values for seismic action, Category C1 and C2, steel zinc plated

Fastener size			12/M8	15/M10	18/M12	24/M16	24/M16L	28/M20	32/M24
Tension load									
Installation factor	γ_{inst}	[-]	1,0						
Steel failure									
Characteristic resistance category C1	$N_{Rk,s,C1}$	[kN]	29	46	67	126	126	196	282
Characteristic resistance category C2	$N_{Rk,s,C2}$	[kN]	29	46	67	126	126	196	282
Partial factor	γ_{Ms}	[-]	1,5						
Pull-out failure									
Characteristic resistance category C1	$N_{Rk,p,C1}$	[kN]	12,0	16,0	25,0	36,0	44,0	50,0	63,3
Characteristic resistance category C2	$N_{Rk,p,C2}$	[kN]	5,4	16,0	22,6	29,0	41,2	43,6	63,3
Shear load									
Steel failure without lever arm									
ZX-M									
Characteristic resistance category C1	$V_{Rk,s,C1}$	[kN]	18,0	27,1	43,4	51,9	51,9	96,4	160,1
Characteristic resistance category C2	$V_{Rk,s,C2}$	[kN]	12,7	20,5	31,5	50,1	50,1	67,1	108,1
ZX-B									
Characteristic resistance category C1	$V_{Rk,s,C1}$	[kN]	18,0	27,1	43,4	51,9	51,9	96,4	160,1
Characteristic resistance category C2	$V_{Rk,s,C2}$	[kN]	12,7	20,5	31,5	69,3	69,3	67,1	108,1
ZX-V									
Characteristic resistance category C1	$V_{Rk,s,C1}$	[kN]	25,2	36,5	50,4	- ¹⁾	- ¹⁾	- ¹⁾	- ¹⁾
Characteristic resistance category C2	$V_{Rk,s,C2}$	[kN]	19,2	29,3	39,4	- ¹⁾	- ¹⁾	- ¹⁾	- ¹⁾
Factor for annular gap	α_{gap}	[-]	0,5						
Partial factor	γ_{Ms}	[-]	1,25						

¹⁾ No performance assessed

ZX FAST ETA 1

Performance
Characteristic values for **seismic action, steel zinc plated**

Annex C7

Table C8: Characteristic values for seismic action, Category C1 and C2, stainless steel A4

Fastener size			12/M8	15/M10	18/M12	24/M16
Tension load						
Installation factor	γ_{inst}	[-]	1,0			
Steel failure						
Characteristic resistance, category C1	$N_{Rk,s,C1}$	[kN]	26	41	60	110
Characteristic resistance, category C2	$N_{Rk,s,C2}$	[kN]	26	41	60	110
Partial factor ZX-M	γ_{Ms}	[-]	1,5			
Partial factor ZX-B and ZX-V	γ_{Ms}	[-]	1,87			
Pull-out failure						
Characteristic resistance, category C1	$N_{Rk,p,C1}$	[kN]	9,0	16,0	25,0	36,0
Characteristic resistance, category C2	$N_{Rk,p,C2}$	[kN]	4,8	16,0	24,8	36,0
Shear load						
Steel failure without lever arm						
ZX-M						
Characteristic resistance, category C1	$V_{Rk,s,C1}$	[kN]	9,6	13,3	25,4	75,4
Characteristic resistance, category C2	$V_{Rk,s,C2}$	[kN]	9,7	14,0	18,0	32,2
Partial factor	γ_{Ms}	[-]	1,25			
ZX-B						
Characteristic resistance, category C1	$V_{Rk,s,C1}$	[kN]	9,6	13,3	25,4	75,4
Characteristic resistance, category C2	$V_{Rk,s,C2}$	[kN]	9,7	14,0	18,0	32,2
Partial factor	γ_{Ms}	[-]	1,36			
ZX-V						
Characteristic resistance, category C1	$V_{Rk,s,C1}$	[kN]	11,5	23,3	31,6	- ¹⁾
Characteristic resistance, category C2	$V_{Rk,s,C2}$	[kN]	10,8	17,4	15,4	- ¹⁾
Partial factor	γ_{Ms}	[-]	1,36			- ¹⁾
Factor for annular gap	α_{gap}	[-]	0,5			

¹⁾ No performance assessed

ZX FAST ETA 1

Performance
Characteristic values for seismic action, stainless steel A4

Annex C8

Table C9: Characteristic values under fire exposure in cracked and uncracked concrete C20/25 to C50/60

Fastener size		10/M6	12/M8	15/M10	18/M12	24/M16	24/ M16L	28/M20	32/M24	
Tension load										
Steel failure										
Steel zinc plated										
Characteristic resistance	R30	$N_{Rk,s,fi}$ [kN]	1,0	1,9	4,3	6,3	11,6	18,3	26,3	
	R60		0,8	1,5	3,2	4,6	8,6	13,5	19,5	
	R90		0,6	1,0	2,1	3,0	5,0	7,7	12,6	
	R120		0,4	0,8	1,5	2,0	3,1	4,9	9,2	
Stainless steel A4										
Characteristic resistance	R30	$N_{Rk,s,fi}$ [kN]	- ¹⁾	6,1	10,2	15,7	29,2	- ¹⁾	- ¹⁾	- ¹⁾
	R60		- ¹⁾	4,4	7,3	11,1	20,6	- ¹⁾	- ¹⁾	- ¹⁾
	R90		- ¹⁾	2,6	4,3	6,4	12,0	- ¹⁾	- ¹⁾	- ¹⁾
	R120		- ¹⁾	1,8	2,8	4,1	7,7	- ¹⁾	- ¹⁾	- ¹⁾
Shear load										
Steel failure without lever arm										
Steel zinc plated										
Characteristic resistance	R30	$V_{Rk,s,fi}$ [kN]	1,0	1,9	4,3	6,3	11,6	18,3	26,3	
	R60		0,8	1,5	3,2	4,6	8,6	13,5	19,5	
	R90		0,6	1,0	2,1	3,0	5,0	7,7	12,6	
	R120		0,4	0,8	1,5	2,0	3,1	4,9	9,2	
Stainless steel A4										
Characteristic resistance	R30	$V_{Rk,s,fi}$ [kN]	- ¹⁾	14,3	22,7	32,8	61,0	- ¹⁾	- ¹⁾	- ¹⁾
	R60		- ¹⁾	11,1	17,6	25,5	47,5	- ¹⁾	- ¹⁾	- ¹⁾
	R90		- ¹⁾	7,9	12,6	18,3	34,0	- ¹⁾	- ¹⁾	- ¹⁾
	R120		- ¹⁾	6,3	10,0	14,6	27,2	- ¹⁾	- ¹⁾	- ¹⁾
Steel failure with lever arm										
Steel zinc plated										
Characteristic bending resistance	R30	$M^0_{Rk,s,fi}$ [Nm]	0,8	2,0	5,6	9,7	24,8	42,4	83,6	
	R60		0,6	1,5	4,1	7,2	18,3	29,8	61,9	
	R90		0,4	1,0	2,7	4,7	11,9	17,1	40,1	
	R120		0,3	0,8	1,9	3,1	6,6	10,7	29,2	
Stainless steel A4										
Characteristic bending resistance	R30	$M^0_{Rk,s,fi}$ [Nm]	- ¹⁾	6,2	13,2	24,4	61,8	- ¹⁾	- ¹⁾	- ¹⁾
	R60		- ¹⁾	4,5	9,4	17,2	43,6	- ¹⁾	- ¹⁾	- ¹⁾
	R90		- ¹⁾	2,7	5,6	10,0	25,3	- ¹⁾	- ¹⁾	- ¹⁾
	R120		- ¹⁾	1,8	3,6	6,4	16,2	- ¹⁾	- ¹⁾	- ¹⁾

¹⁾ No performance assessed

ZX FAST ETA 1

Performance
Characteristic values under fire exposure

Annex C9

Table C10: Displacements under tension and shear load, steel zinc plated

Fastener size			10/ M6	12/ M8	15/ M10	18/ M12	24/ M16	24 /M16L	28/ M20	32/ M24
Tension load										
Tension load in cracked concrete	N	[kN]	2,4	5,7	7,6	12,3	17,1	21,1	24	26,2
Displacement	δ_{N0}	[mm]	0,5	0,5	0,5	0,7	0,8	0,7	0,9	1,4
	$\delta_{N\infty}$	[mm]	2,0	2,0	1,3	1,3	1,3	1,3	1,4	1,9
Tension load in uncracked concrete	N	[kN]	8,5	9,5	14,3	17,2	24	29,6	34	43
Displacement	δ_{N0}	[mm]	0,8	1,0		1,1		1,3	0,3	0,7
	$\delta_{N\infty}$	[mm]	3,4			1,7		2,3	1,4	0,7
Seismic action C2										
Displacement	$\delta_{N,C2(0,5)}$	[mm]	- ¹⁾	3,3	3,0	5,0	3,0	3,0	4,0	5,3
Displacement	$\delta_{N,C2(0,8)}$	[mm]	- ¹⁾	12,2	11,3	16,0	9,2	9,2	13,8	12,4
Shear load										
ZX-M										
Shear load in cracked and uncracked concrete	V	[kN]	9,1	14	20,7	35,1	52,1	52,1	77	86,6
Displacement	δ_{V0}	[mm]	2,5	2,1	2,7	3,0	5,1	5,1	4,3	10,5
	$\delta_{V\infty}$	[mm]	3,8	3,1	4,1	4,5	7,6	7,6	6,5	15,8
Seismic action C2										
Displacement	$\delta_{N,C2(0,5)}$	[mm]	- ¹⁾	2,3	3,1	3,0	2,6	2,6	1,6	6,1
Displacement	$\delta_{N,C2(0,8)}$	[mm]	- ¹⁾	4,8	6,4	6,1	6,6	6,6	4,8	9,5
ZX-B										
Shear load in cracked and uncracked concrete	V	[kN]	10,1	17,1	27,5	41,5	72	72	77	86,6
Displacement	δ_{V0}	[mm]	2,9	2,5	3,6	3,5	7,0	7,0	4,3	10,5
	$\delta_{V\infty}$	[mm]	4,4	3,8	5,4	5,3	10,5	10,5	6,5	15,8
Seismic action C2										
Displacement	$\delta_{N,C2(0,5)}$	[mm]	- ¹⁾	2,3	3,1	3,0	3,3	3,3	1,6	6,1
Displacement	$\delta_{N,C2(0,8)}$	[mm]	- ¹⁾	4,8	6,4	6,1	8,2	8,2	4,8	9,5
ZX-V										
Shear load in cracked and uncracked concrete	V	[kN]	10,1	17,1	27,5	41,5	- ¹⁾	- ¹⁾	- ¹⁾	- ¹⁾
Displacement	δ_{V0}	[mm]	2,9	2,5	3,6	3,5	- ¹⁾	- ¹⁾	- ¹⁾	- ¹⁾
	$\delta_{V\infty}$	[mm]	4,4	3,8	5,4	5,3	- ¹⁾	- ¹⁾	- ¹⁾	- ¹⁾
Seismic action C2										
Displacement	$\delta_{N,C2(0,5)}$	[mm]	- ¹⁾	3,1	3,9	3,9	- ¹⁾	- ¹⁾	- ¹⁾	- ¹⁾
Displacement	$\delta_{N,C2(0,8)}$	[mm]	- ¹⁾	10,2	11,8	13,0	- ¹⁾	- ¹⁾	- ¹⁾	- ¹⁾

¹⁾ No performance assessed

ZX FAST ETA 1

Performance
Displacements under tension and shear load, steel zinc plated

Annex C10

Table C11: Displacements under tension and shear load, stainless steel A4

Fastener size		12/M8	15/M10	18/M12	24/M16
Tension load					
Tension load in cracked concrete	N [kN]	4,3	7,6	12,1	17,0
Displacement	δ_{N0} [mm]	0,5	0,5	1,3	0,5
	$\delta_{N\infty}$ [mm]	1,2	1,6	1,8	1,6
Tension load in uncracked concrete	N [kN]	7,6	11,9	16,7	24,1
Displacement	δ_{N0} [mm]	0,2	0,3	1,2	1,5
	$\delta_{N\infty}$ [mm]	1,1	1,1	1,1	1,1
Seismic action C2					
Displacement	$\delta_{N,C2(0,5)}$ [mm]	4,7	4,5	4,3	4,9
Displacement	$\delta_{N,C2(0,8)}$ [mm]	13,3	12,7	9,7	10,1
Shear load					
Shear load in cracked concrete	V [kN]	13,9	21,1	34,7	50,8
Displacement	δ_{V0} [mm]	3,4	4,9	4,8	6,7
	$\delta_{V\infty}$ [mm]	5,1	7,4	7,1	10,1
Seismic action C2					
ZX-M and ZX-B					
Displacement	$\delta_{N,C2(0,5)}$ [mm]	2,8	3,1	2,6	3,3
Displacement	$\delta_{N,C2(0,8)}$ [mm]	5,6	5,8	5,0	6,9
ZX-V					
Displacement	$\delta_{N,C2(0,5)}$ [mm]	2,5	2,8	2,9	- ¹⁾
Displacement	$\delta_{N,C2(0,8)}$ [mm]	5,8	5,9	6,9	- ¹⁾

¹⁾ No performance assessed

ZX FAST ETA 1

Performance
Displacements under tension and shear load, **stainless steel A4**

Annex C11