

Public-law institution jointly founded by the
federal states and the Federation

**European Technical Assessment Body
for construction products**



European Technical Assessment

**ETA-26/0309
of 11 May 2026**

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Permalast concrete screw SCREW BOLT-1000 LT

Product family
to which the construction product belongs

Screw anchor for use in masonry

Manufacturer

Permalast GmbH
Hanns-Martin-Schleyer-Straße 33
47877 Willich
GERMANY

Manufacturing plant

Plant 1, Germany

This European Technical Assessment
contains

36 pages including 3 annexes which form an integral part
of this assessment

This European Technical Assessment is
issued in accordance with Article 95(4) of
Regulation (EU) 2024/3110, on the basis of

EAD 330460-00-0604

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 36(3) of Regulation (EU) No 2024/3110.

Specific Part

1 Technical description of the product

The Permalast concrete screw SCREW BOLT-1000 LT is an anchor in size 6, 8 and 10 mm made of stainless steel. The anchor is screwed into a predrilled cylindrical drill hole. The special thread of the anchor cuts an internal thread into the member while setting. The anchorage is characterised by mechanical interlock in the special thread.

Product and product description are given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchors of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance to steel failure of a single screw anchor under tension loading	$N_{Rk,s}$ see Annex C1
Characteristic resistance to steel failure of a single screw anchor under shear loading	$V_{Rk,s}$ [kN], $M_{Rk,s}^0$ see Annex C1
Characteristic resistance to pull-out failure or brick breakout failure of a single screw anchor under tension loading	$N_{Rk,p}$, $N_{Rk,b}$, $N_{Rk,p,c}$, $N_{Rk,b,c}$ see Annex B7, C4, C9, C14, C19 $\alpha_{j,N}$ see Annex C4, C9, C14, C19
Characteristic resistance to local brick failure and brick edge failure of a single screw anchor under shear loading	$V_{Rk,b,II}$, $V_{Rk,b,\perp}$, $V_{Rk,c,II}$, $V_{Rk,c,\perp}$ see Annex B7, C4, C9, C14, C19 $\alpha_{j,VII}$, $\alpha_{j,V\perp}$ see Annex C3, C8, C13, C18
Characteristic resistance to brick breakout failure of a screw anchor group under tension loading	N_{Rk}^g see Annex B7 $\alpha_{g,N}$ see Annex B7, C2, C8, C13, C18
Characteristic resistance to local brick failure and brick edge failure of a screw anchor group under shear loading	$V_{Rk,b,II}^g$, $V_{Rk,b,\perp}^g$, $V_{Rk,c,II}^g$, $V_{Rk,c,\perp}^g$ see Annex B7 $\alpha_{g,VII}$, $\alpha_{g,V\perp}$ see Annex B7, C2, C8, C13, C18

Essential characteristic	Performance
Edge distances, joint distances, spacing, member thickness	C_{cr} , S_{crII} , $S_{cr\perp}$ see Annex B7, C3, C8, C13, C18 C_{min} , C_{jII} , $C_{j\perp}$, S_{minII} , $S_{min\perp}$ see Annex C3, C8, C13, C18 h_{min} see Annex C3, C7, C12, C17
Resistance to combined tension and shear loading (hollow and perforated bricks)	No performance assessed
Displacements	δ_{N0} , $\delta_{N\infty}$, δ_{V0} , $\delta_{V\infty}$ see Annex C2, C10, C15, C20

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A 1
Resistance to fire	$N_{Rk,s,fi}$, $N_{Rk,p,fi}$, $N_{Rk,b,fi}$, $V_{Rk,s,fi}$, $M^0_{Rk,s,fi}$, $C_{min,fi}$, $C_{j,fi}$ see Annex C6, C11, C16, C21 $N^g_{Rk,fi}$, $S_{min,fi}$, $C_{min,fi}$, $C_{j,fi}$ see Annex C5, C10, C15, C20

3.3 Aspects of durability

Essential characteristic	Performance
Durability	see Annex B1

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with the European Assessment Document EAD 330460-00-0604 the applicable European legal act is: 97/177/EC.

The system to be applied is: 1

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document


Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.

Issued in Berlin on 11 May 2026 by Deutsches Institut für Bautechnik

Dipl.-Ing. Beatrix Wittstock
Head of Section


beglaubigt:
Aksünger

Product in installed condition

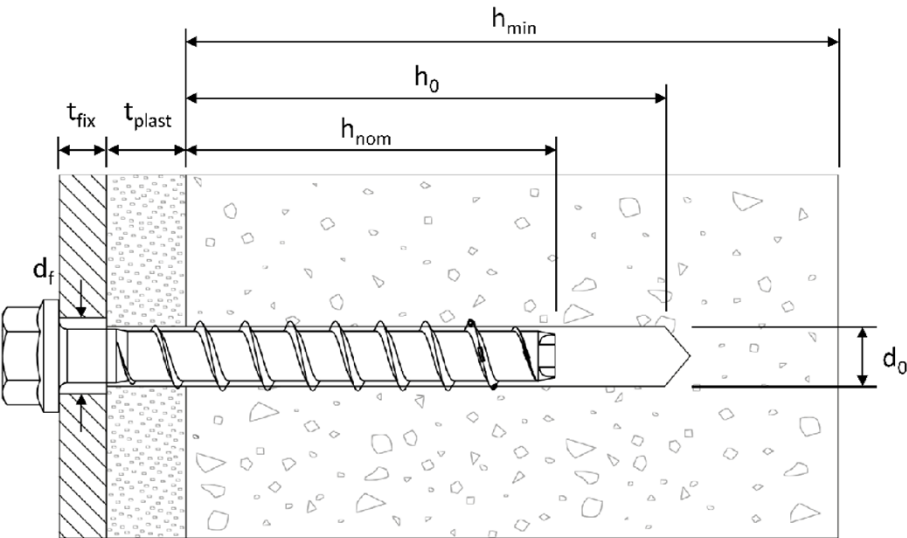


Permalast
concrete screw
SCREW BOLT-1000 LT

in solid and perforated
brick with non-load-
bearing layer

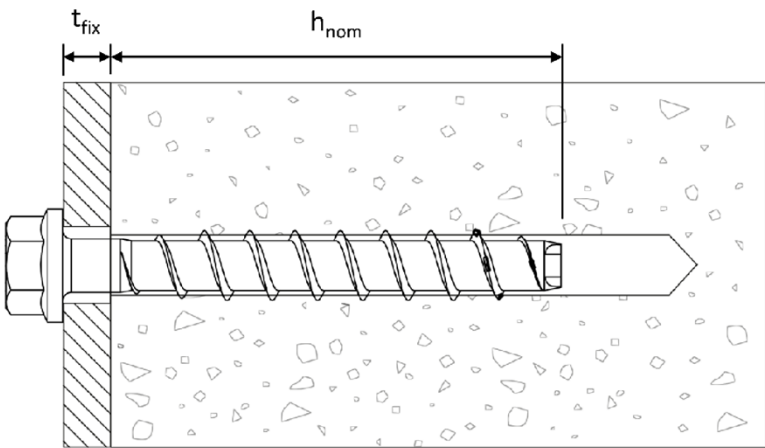

Permalast
concrete screw
SCREW BOLT-1000 LT

in solid brick

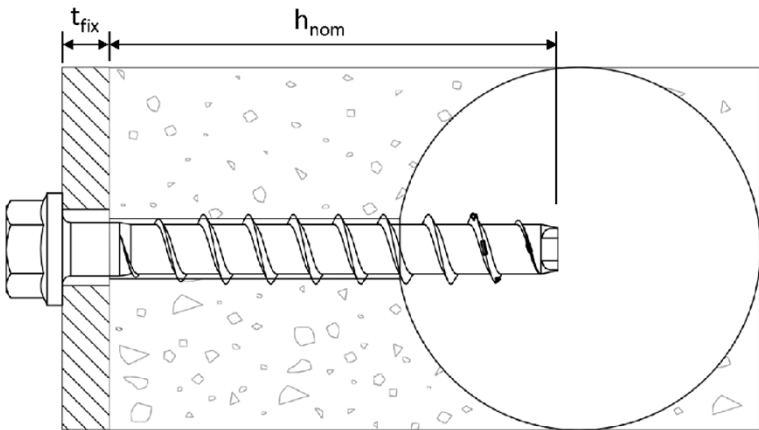

Permalast
concrete screw
SCREW BOLT-1000 LT

in perforated brick

d_0 = nominal drill hole diameter
 t_{fix} = thickness of fixture
 d_f = clearance hole diameter
 t_{plast} = thickness of non-load-bearing layer

h_{min} = minimum thickness of member
 h_{nom} = nominal embedment depth
 h_0 = drill hole depth

Permalast concrete screw SCREW BOLT-1000 LT

Product description
Product in installed condition

Annex A1










		Configuration with metric connection thread and hexagon drive; Type TR HEX
		Configuration with washer and hexagon head; Type HEX
		Configuration with washer, hexagon head and TORX drive; Type HEX
		Configuration with hexagon head; Type HEX
		Configuration with countersunk head and TORX drive; Type CSK
		Configuration with pan head and TORX drive; Type PH
		Configuration with large pan head and TORX drive; Type TH
		Configuration with countersunk head and connection thread; Type TR-6
		Configuration with hexagon drive and connection thread; Type TR-6
		Configuration with internal thread and hexagon drive; Type IT HEX
Permalast concrete screw SCREW BOLT-1000 LT		Annex A2
Product description Screw types		

Table 1: Material

Part	Product name	Material		
All types	SCREW BOLT-1000 LT A4	1.4401; 1.4404; 1.4571; 1.4578		
	SCREW BOLT-1000 LT HCR	1.4529		
Part	Product name	Nominal characteristic steel		Elongation A_5 [%]
		Yield strength f_{yk} [N/mm ²]	Ultimate strength f_{uk} [N/mm ²]	
All types	SCREW BOLT-1000 LT A4	560	700	≤ 8
	SCREW BOLT-1000 LT HCR			


Table 2: Dimensions

Concrete screw size			6	8	10
Nominal embedment depth	h_{nom}		h_{nom1}	h_{nom1}	h_{nom1}
	[mm]		45	55	75
Screw length	$\leq L$	[mm]	500		
Core diameter	d_k	[mm]	5,1	7,2	9,2
Thread outer diameter	d_s	[mm]	7,6	10,5	12,5

Marking:


SCREW BOLT-1000 LT A4

Screw type: TSM
Screw size: 10
Screw length: 100
Material: A4



SCREW BOLT-1000 LT HCR

Screw type: TSM
Screw size: 10
Screw length: 100
Material: HCR

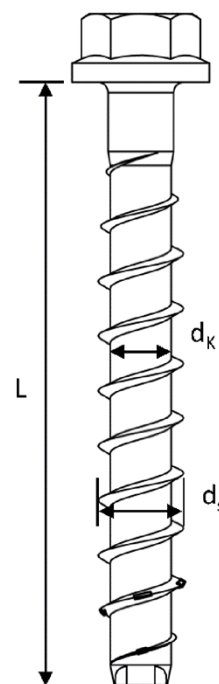

Permalast concrete screw SCREW BOLT-1000 LT

Product description

Material, dimensions and markings

Annex A3

Specification of Intended use

Anchorage subject to:

- Static or quasi-static actions in tension, shear or combined tension and shear or bending
- Exposure to fire (for dry masonry only)

Base materials:

- Masonry made of solid bricks and perforated bricks see Annex B3
- Minimum thickness of member $h_{\min}$ see Annexes C2, C7, C12, C17
- Bearing joints must be completely filled with mortar of at least compressive strength class M5 according to EN 998-2:2016. Butt joints may, but do not have to be filled with mortar.
- In case of fire, all joints must be completely filled with mortar according to EN 998-2:2016 with strength class at minimum M5
- Dry or wet masonry (during installation)

Use conditions (Environmental conditions):

- Concrete screws subject to dry internal conditions: all screw types.
- For all other conditions corresponding to corrosion resistance classes CRC according to EN 1993-1-4:2006 + A1:2015
 - Stainless steel according to Annex A3, screw with marking A4: CRC III
 - High corrosion resistant steel according to Annex A3, screw with marking HCR: CRC V
- Temperature range of the masonry over the period of use: -40°C to +80°C

Design:

- The anchorage is designed in accordance with EOTA Technical Report TR 054:2022-07.
- Anchorages are to be designed under the responsibility of an engineer experienced in anchorages and masonry work.
- Screws with nominal embedment depth smaller than 50 mm may only be used for anchoring of statically indeterminate systems
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor to supports, etc.).
- The screw may be placed in the wall side and in the reveal side of the masonry. The installation parameters for installation in the reveal side must be observed in accordance with Annex B8. In case of Silka XL solid calcium silicate brick KS 12DF, the installation is possible in the wall side only.
- For solid blocks, the characteristic load-bearing capacities also apply to larger block formats, greater compressive strengths and densities of the masonry blocks.
- Installation in the joint and close to the joint is not permitted; the distances to joints according to annexes C3, C8, C13, C18 must be observed.

Permalast concrete screw SCREW BOLT-1000 LT

Intended use
Specification

Annex B1

Specification of Intended use - continuation

Installation:

- Bridging of non-load-bearing layers (e.g. plaster) is possible. When selecting the screw length L, the thickness of the plaster layer t_{plast} must be considered.
 $L \geq h_{\text{nom}} + t_{\text{plast}} + t_{\text{fix}}$ (see figures in Annex A1)
- During installation, the joint, spacing and edge distances specified by the planner must be considered.
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters on site.
- The borehole is drilled with hammer, percussion, suction or masonry drills in hammer mode or rotary mode. The masonry must not be damaged during hammer drilling. If cracks occur during drilling, the rotary mode must be used. In this case, the drill hole must be discarded.
- Incorrectly drilled holes must be filled with high-strength mortar.

Permalast concrete screw SCREW BOLT-1000 LT	Annex B2
Intended use Specification continuation	

Table 3: Solid and perforated bricks, dimensions and properties

	Solid calcium silicate brick KS acc. to DIN EN 771-2:2015-11				
	Nomenclature	Dimensions [mm]	Mean compressive strength [N/mm ²]	Bulk density [kg/dm ³]	Annex
	KS 20 - 2,0 - NF	L: ≥ 240 B: ≥ 115 H: ≥ 71	≥ 26,0	≥ 2,0	C2 – C6
	Silka XL solid calcium silicate brick KS 12DF acc. to DIN EN 771-2:2015-11				
	Nomenclature	Dimensions [mm]	Mean compressive strength [N/mm ²]	Bulk density [kg/dm ³]	Annex
	KS - R (P) 20 - 2,0 - 12DF	L: ≥ 498 B: ≥ 175 H: ≥ 248	≥ 14,0	≥ 1,8	C7 – C11
	Perforated calcium silicate brick KSL 3DF acc. to DIN EN 771-2:2015-11				
	Nomenclature	Dimensions [mm]	Mean compressive strength [N/mm ²]	Bulk density [kg/dm ³]	Annex
	SWKV KSL 12 - 1,6 - 3DF	L: ≥ 240 B: ≥ 175 H: ≥ 113	≥ 17,0	≥ 1,5	C12 – C16
	Solid clay brick MZ acc. to DIN EN 771-1:2015-11				
	Nomenclature	Dimensions [mm]	Mean compressive strength [N/mm ²]	Bulk density [kg/dm ³]	Annex
	MZ 20 - 2,0 - NF	L: ≥ 240 B: ≥ 115 H: ≥ 71	≥ 21,0	≥ 2,1	C17 – C21

Permalast concrete screw SCREW BOLT-1000 LT

Intended use

Solid and perforated bricks, dimensions and properties

Annex B3

Table 4: General installation parameters

Concrete screw size			6	8	10
Nominal embedment depth		h_{nom}	h_{nom1}	h_{nom1}	h_{nom1}
		[mm]	45	55	75
Nominal drill hole diameter	d_0	[mm]	6	8	10
Cutting diameter of drill bit	$d_{cut} \leq$	[mm]	6,40	8,45	10,45
Drill hole depth	$h_0 \geq$	[mm]	55	65	85
Clearance hole diameter	$d_f \leq$	[mm]	8	12	14


Permalast concrete screw SCREW BOLT-1000 LT

Intended use
General installation parameters

Annex B4


Installation Instructions

1

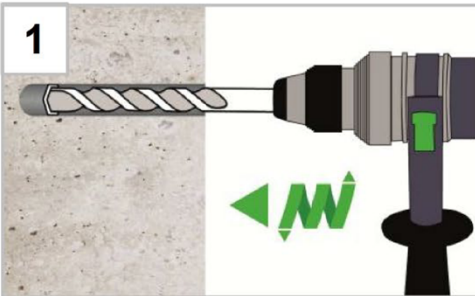


Drill hole in hammer
moder or rotary mode

2

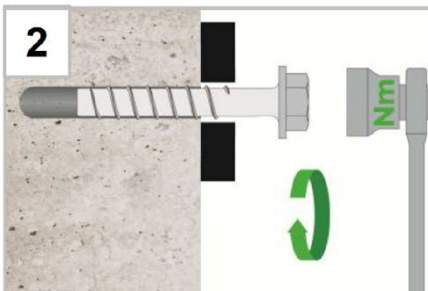

Install with tangential
impact screwdriver,
cordless screwdriver or
torque wrench

3

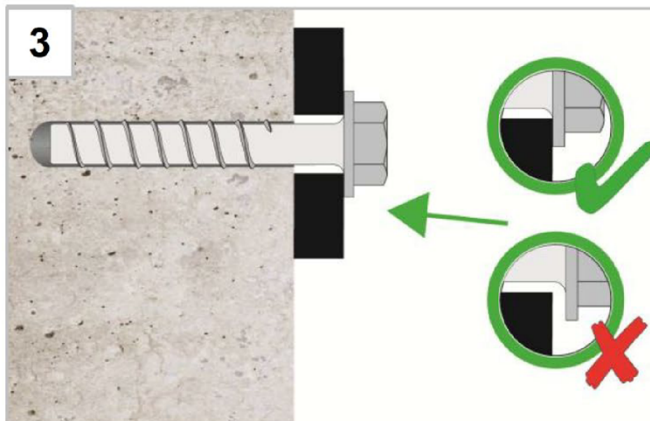

The head must be
undamaged and in
contact with the fixture

Note:

Step 1: Joint distances, spacing and edge distances must be considered.

Step 2a + 2b: For further details on screwing in, see brick type related Annex C2 – C21.
The tightening torque must not exceed $T_{inst,max}$

Step 3a + 3b: It must not be possible to turn the screw. $T_{inst,max}$ must not be exceeded during the check.




Permalast concrete screw SCREW BOLT-1000 LT

Intended use
Installation Instructions




Annex B5

Installation Instructions – Adjustment

1. Adjustment

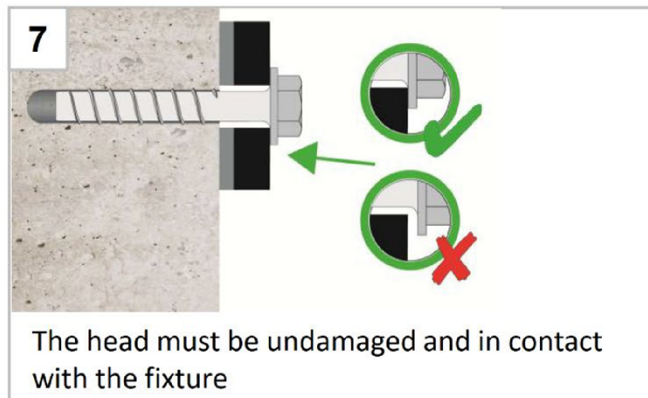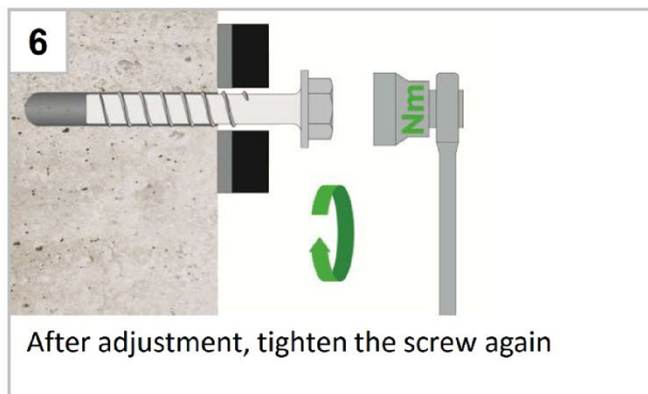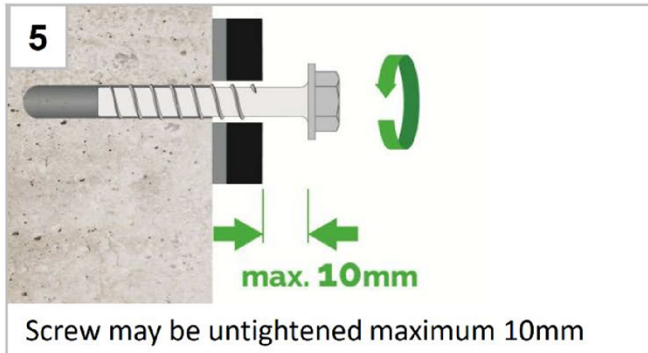

2. Adjustment

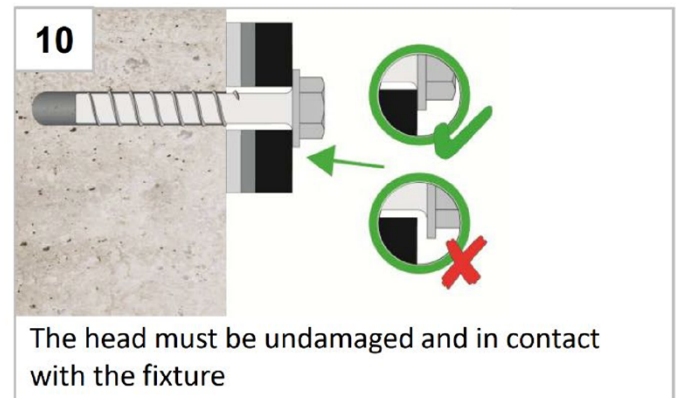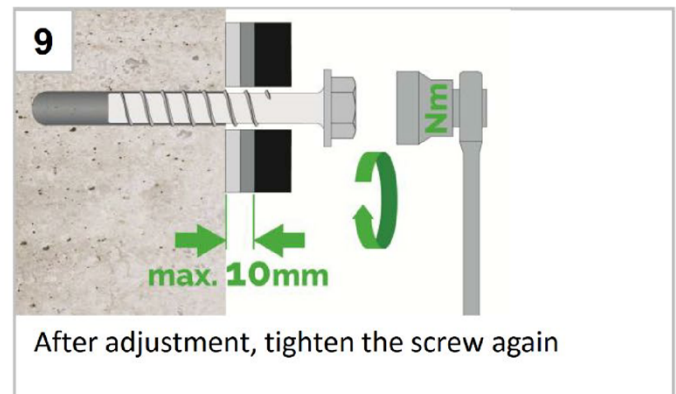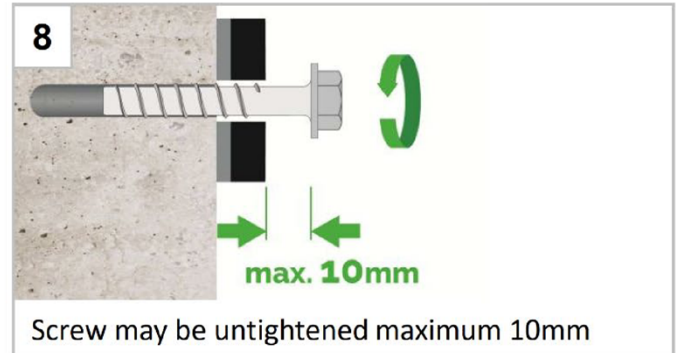

Note:


1. The screw can be adjusted maximum two times. The total allowed thickness of shims added during the adjustment process is 10mm. The final embedment depth after adjustment process must be larger or equal than h_{nom} .
2. For further details on screwing in, see brick type-related annexes C2 – C21

Permalast concrete screw SCREW BOLT-1000 LT

Intended use
Installation instruction – adjustment

Annex B6

Possible installation positions, the distance c_j must be observed

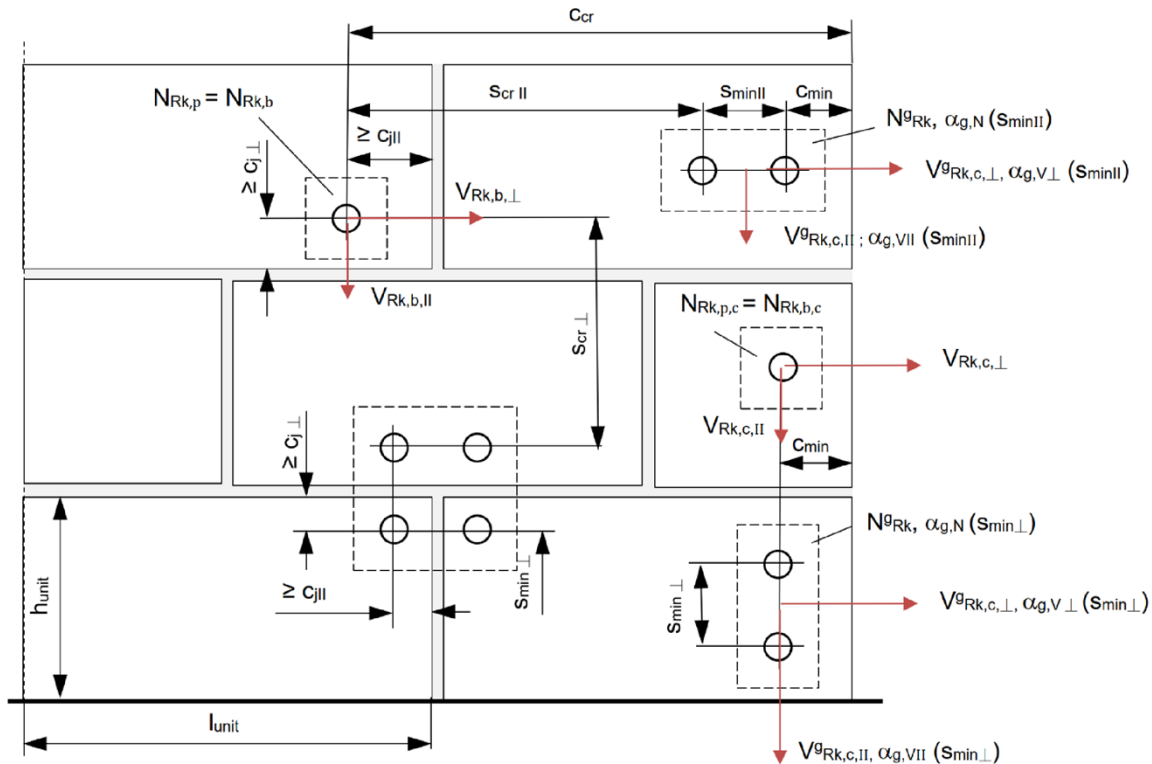

C_{min}	= minimum edge distance to the free edge of the wall
$C_{j \parallel}$	= distance to the vertical joints without influence on resistance of the screw anchor
$C_{j \perp}$	= distance to the horizontal joints without influence on resistance of the screw anchor
$S_{min \parallel}$	= minimum spacing parallel to horizontal joint
$S_{min \perp}$	= minimum spacing perpendicular to the horizontal joint
C_{cr}	= edge distance for transmission of the characteristic resistance of single screw anchor = $1,5h_{nom}$
$S_{cr \parallel}$	= characteristic spacing parallel to the horizontal joint = $3,0h_{nom}$
$S_{cr \perp}$	= characteristic spacing perpendicular to the horizontal joint = $3,0h_{nom}$
l_{unit}	= length of the masonry unit
h_{unit}	= height of the masonry unit
$\alpha_{g,N} (S_{min \parallel})$	= group factor under tension load for minimum spacing parallel to horizontal joint
$\alpha_{g,N} (S_{min \perp})$	= group factor under tension load for minimum spacing perpendicular to the horizontal joint
$\alpha_{g,V \parallel}$	= group factor under shear load parallel to the edge ($\alpha_{g,V \parallel} = \alpha_{g,V \parallel} (S_{min \parallel}) = \alpha_{g,V \parallel} (S_{min \perp})$)
$\alpha_{g,V \perp}$	= group factor under shear load perpendicular to the edge ($\alpha_{g,V \perp} = \alpha_{g,V \perp} (S_{min \parallel}) = \alpha_{g,V \perp} (S_{min \perp})$)

$$N_{Rk} = N_{Rk,b} = N_{Rk,p} = N_{Rk,b,c} = N_{Rk,p,c}$$

$$V_{Rk,\perp} = V_{Rk,b\perp} = V_{Rk,c\perp}; V_{Rk,\parallel} = V_{Rk,b\parallel} = V_{Rk,c\parallel}$$

Für $s \geq s_{cr}$: $\alpha_{g,N}(s_{min II}) = \alpha_{g,N}(s_{min I}) = \alpha_{g,V II} = \alpha_{g,V I} = 2$
 Für $s_{min} \leq s \leq s_{cr}$: $\alpha_{g,N}(s_{min II})$; $\alpha_{g,N}(s_{min I})$; $\alpha_{g,V II}$; $\alpha_{g,V I}$ according to installation parameters of brick in Annex C
 $N_{Rk}(s_{min II}) = \alpha_{g,N}(s_{min II}) \times N_{Rk}$ (group of 2 anchors with minimum spacing parallel to horizontal joint)
 $N_{Rk}(s_{min I}) = \alpha_{g,N}(s_{min I}) \times N_{Rk}$ (group of 2 anchors with minimum spacing perpendicular to horizontal joint)
 $V_{Rk II} = \alpha_{g,V II} \times V_{Rk, II}$; $V_{Rk, I} = \alpha_{g,V I} \times V_{Rk, I}$ (group of 2 anchors)
 $N_{Rk} = \alpha_{g,N}(s_{min II}) \times \alpha_{g,N}(s_{min I}) \times N_{Rk}$ (group of 4 anchors)
 $V_{Rk II} = \alpha_{g,V II}^2 \times V_{Rk, II}$; $V_{Rk, I} = \alpha_{g,V I}^2 \times V_{Rk, I}$ (group of 4 anchors)

Permalast concrete screw SCREW BOLT-1000 LT


Intended use
Possible installation position

Annex B7


Installations parameter for installation in the reveal site

Positioning in reveal in brick types KS NF, MZ NF

Single anchor

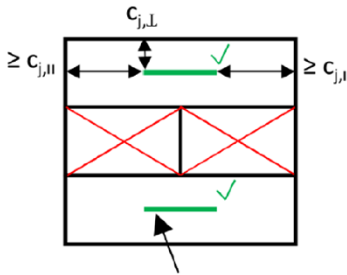


Double anchor group




Positioning in reveal in brick type KSL 3DF


Single anchor

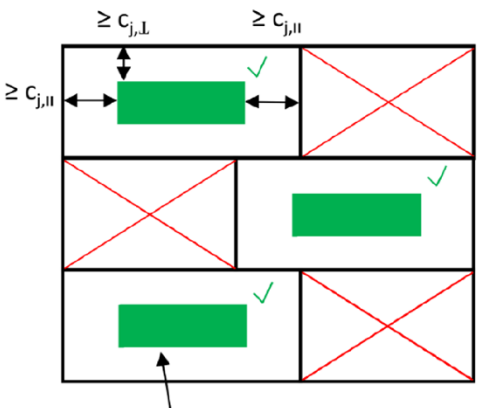


Double anchor group

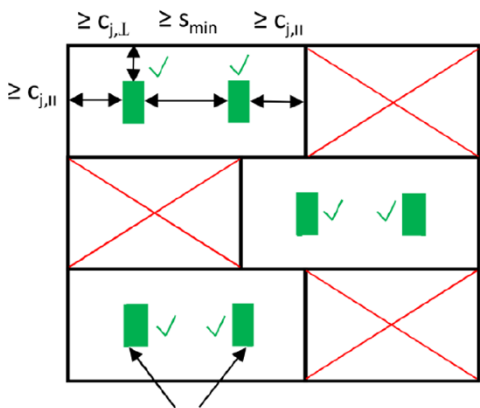

Top view



Top view



Permalast concrete screw SCREW BOLT-1000 LT

Intended use
Possible installation in reveal

Annex B8

Table 5: Characteristic resistance to steel failure

SCREW BOLT concrete screw size			6	8	10
Nominal embedment depth	h_{nom}		h_{nom1}	h_{nom1}	h_{nom1}
	[mm]		45	55	75
Steel failure for tension and shear loading					
Characteristic resistance under tension loading	$N_{Rk,s}$	[kN]	14,0	27,0	45,0
Partial factor	$\gamma_{Ms,N}^{1)}$	[-]	1,5		
Characteristic resistance under shear loading	$V_{Rk,s}$	[kN]	7,0	13,5	34,0
Partial factor	$\gamma_{Ms,V}^{1)}$	[-]	1,25		
Ductility factor	k_7	[-]	0,8		
Characteristic bending moment	$M^0_{Rk,s}$	[Nm]	10,9	26,0	56,0

¹⁾ In absence of other national regulations

Permalast concrete screw SCREW BOLT-1000 LT

Performance

Characteristic resistance to steel failure

Annex C1

Table 6: Material characteristics solid calcium silicate brick KS

	Solid calcium silicate brick KS acc. to DIN EN 771-2:2015-11				
	Nomenclature	Dimensions [mm]	Mean compressive strength [N/mm ²]	Bulk density [kg/dm ³]	Min. wall thickness h _{min} [mm]
	KS 20 - 2,0 - NF	L: ≥ 240 B: ≥ 115 H: ≥ 71	26,0 ≤ f _{mean} ≤ 38,0	≥ 2,0	240

Table 7: Installation parameters solid calcium silicate brick KS

Use category (installation)			dry or wet		
SCREW BOLT concrete screw size			6	8	10
Nominal embedment depth	h _{nom} [mm]	h _{nom1}	h _{nom1}	h _{nom1}	h _{nom1}
Nominal drill hole diameter	d ₀	[mm]	6	8	10
Cutting diameter of drill bit	d _{cut} ≤	[mm]	6,40	8,45	10,45
Drill hole depth	h ₀ ≥	[mm]	55	65	85
Clearance hole diameter	d _f ≤	[mm]	8	12	14
Torque for manual installation	max. T _{inst}	[Nm]	11	24	41
Impact screw driver	T _{imp,max}	[Nm]	Max. torque according to the manufacturer's instructions		
			185	300	

Table 8: Min. edge distance, spacing, group factors

SCREW BOLT concrete screw size			6	8	10
Nominal embedment depth		h_{nom}	h_{nom1}	h_{nom1}	h_{nom1}
		[mm]	45	55	75
Min. edge distance	c_{min}	[mm]	80		
Min. spacing	$s_{min,II} = s_{min, \perp}$	[mm]	80		
Group factors	$\alpha_{g,N} (s_{min \perp})$	[-]	1,50	1,15	1,65
	$\alpha_{g,N} (s_{min II})$	[-]	1,80	1,15	1,20
	$\alpha_{g,V,II} (s_{min \perp})/(s_{min II})$	[-]	1,55	1,55	1,05
	$\alpha_{g,V, \perp} (s_{min \perp})/(s_{min II})$	[-]	1,50	1,75	1,75

Permalast concrete screw SCREW BOLT-1000 LT

Performances

Solid calcium silicate brick KS – material characteristics, installation parameters, min. edge distance and spacing, group

Annex C2

Table 9: Reduction factors depending on the distance to joints

SCREW BOLT concrete screw size			6	8	10
Distance to joints	$c_{j \perp}$	[mm]	≥ 35		
	$c_{j \parallel}$		≥ 80		
Reduction factor	$\alpha_{j, N}$	[-]	1 (full resistance)		
	$\alpha_{j, V \parallel} = \alpha_{j, V \perp}$				
Distance to joints	$c_{j \perp}$	[mm]	< 35		
	$c_{j \parallel}$		< 80		
Reduction factor	$\alpha_{j, N}$	[-]	Screw must not be used		

Permalast concrete screw SCREW BOLT-1000 LT

Performances

Solid calcium silicate brick KS – installation parameters close to the joints

Annex C3

Tabelle 10: Characteristic resistance to pull-out failure or brick breakout failure of a single screw anchor under tension loading and to local brick failure and brick edge failure of a single screw anchor under shear loading

Use category (installation)			dry or wet		
SCREW BOLT concrete screw size			6	8	10
Nominal embedment depth	h_{nom}		h_{nom1}	h_{nom1}	h_{nom1}
	[mm]		45	55	75
Compressive strength f_{mean}	[N/mm ²]		≥ 26,0		
Characteristic resistance to tension load	N_{Rk}	[kN]	2,5	4,1	4,5
Characteristic resistance to shear load	$V_{Rk,II}$	[kN]	5,3		7,7
	$V_{Rk,I}$	[kN]	2,8	2,1	
Compressive strength f_{mean}	[N/mm ²]		≥ 30,0		
Characteristic resistance to tension load	N_{Rk}	[kN]	2,7	4,4	4,8
Characteristic resistance to shear load	$V_{Rk,II}$	[kN]	5,7		8,3
	$V_{Rk,I}$	[kN]	3,0	2,3	
Compressive strength f_{mean}	[N/mm ²]		≥ 35,0		
Characteristic resistance to tension load	N_{Rk}	[kN]	3,0	4,8	5,2
Characteristic resistance to shear load	$V_{Rk,II}$	[kN]	6,1		8,9
	$V_{Rk,I}$	[kN]	3,2	2,5	
Compressive strength f_{mean}	[N/mm ²]		≥ 38,0		
Characteristic resistance to tension load	N_{Rk}	[kN]	3,1	5,0	5,4
Characteristic resistance to shear load	$V_{Rk,II}$	[kN]	6,4		9,3
	$V_{Rk,I}$	[kN]	3,4	2,6	

Permalast concrete screw SCREW BOLT-1000 LT

Performance

Solid calcium silicate brick KS – characteristic resistances

Annex C4

Table 11: Displacements

Use category (installation)			dry or wet		
SCREW BOLT concrete screw size			6	8	10
Nominal embedment depth	h_{nom}		h_{nom1}	h_{nom1}	h_{nom1}
	[mm]		45	55	75
Tension load	F_N	[kN]	0,6	1,1	1,1
Displacement in tension direction	δ_{N0}	[mm]	0,01		
	$\delta_{N\infty}$	[mm]	0,02		
Shear load parallel to the edge	$F_{V,II}$	[kN]	1,5		2,2
Displacement in shear direction parallel to the edge	$\delta_{V0,II}$	[mm]	0,76		0,37
	$\delta_{V\infty,II}$	[mm]	1,14		0,57
Shear load perpendicular to the edge	$F_{V,\perp}$	[kN]	0,8	0,6	
Displacement in shear direction perpendicular to the edge	$\delta_{V0,\perp}$	[mm]	0,57	0,31	0,01
	$\delta_{V\infty,\perp}$	[mm]	0,85	0,47	0,02

Table 12: Performance under fire exposure for anchor groups- resistance to fire

SCREW BOLT concrete screw size			6	8	10
Nominal embedment depth	h_{nom}	[mm]	45	55	75
Characteristic resistance to local brick failure of groups under fire exposure					
$N_{Rk,fi}^g$	[kN]	R30-R90	$0,12 \cdot N_{Rk}$	$0,14 \cdot N_{Rk}$	$0,24 \cdot N_{Rk}$
		R120	$0,10 \cdot N_{Rk}$	$0,11 \cdot N_{Rk}$	$0,19 \cdot N_{Rk}$
Min. edge distance and spacing	[mm]	$C_{min,fi} = C_{j,fi}$	$2 \times h_{nom}^{1)}$		
		$S_{min,fi}$	$4 \times h_{nom}$		

¹⁾ At least the distances set out in Table 13 shall be observed

Permalast concrete screw SCREW BOLT-1000 LT

Performances

Solid calcium silicate brick KS – displacements and performance under fire exposure for anchor groups

Annex C5

Table 13: Fire exposure – resistance to fire

SCREW BOLT concrete screw size				6	8	10
Nominal embedment depth			h _{nom}	h _{nom1}	h _{nom1}	h _{nom1}
			[mm]	45	55	75
Steel failure for tension and shear load						
Characteristic resistance	R30	N _{Rk,s,fi30}	[kN]	1,30		3,40
	R60	N _{Rk,s,fi60}	[kN]	1,00		2,70
	R90	N _{Rk,s,fi90}	[kN]	0,60		2,00
	R120	N _{Rk,s,fi120}	[kN]	0,50		1,70
	R30	V _{Rk,s,fi30}	[kN]	1,30		3,40
	R60	V _{Rk,s,fi60}	[kN]	1,00		2,70
	R90	V _{Rk,s,fi90}	[kN]	0,60		2,00
	R120	V _{Rk,s,fi120}	[kN]	0,50		1,70
	R30	M ⁰ _{Rk,s,fi30}	[Nm]	1,10	1,50	4,90
	R60	M ⁰ _{Rk,s,fi60}	[Nm]	0,80	1,10	4,00
	R90	M ⁰ _{Rk,s,fi90}	[Nm]	0,50	0,80	3,00
	R120	M ⁰ _{Rk,s,fi120}	[Nm]	0,40	0,60	2,50
Pull-out failure						
Characteristic resistance	R30	N _{Rk,p,fi30}	[kN]	1,30		3,40
	R60	N _{Rk,p,fi60}	[kN]	1,00		2,70
	R90	N _{Rk,p,fi90}	[kN]	0,60		2,00
	R120	N _{Rk,p,fi120}	[kN]	0,50		1,70
Breakout failure						
Characteristic resistance	R30	N _{Rk,b,fi30}	[kN]	1,30		3,40
	R60	N _{Rk,b,fi60}	[kN]	1,00		2,70
	R90	N _{Rk,b,fi90}	[kN]	0,60		2,00
	R120	N _{Rk,b,fi120}	[kN]	0,50		1,70
Edge and joint distance						
R30 - R120		C _{min,fi} = C _{j,fi,II}	[mm]	120		
		C _{j,fi,I}	[mm]	35		
Spacing						
R30 - R120		S _{min,fi}	[mm]	4 x h _{nom}		

Permalast concrete screw SCREW BOLT-1000 LT

Performances

Solid calcium silicate brick KS – resistance to fire

Annex C6

Table 14: Material characteristics Silka XL solid calcium silicate brick KS 12DF



Silka XL solid calcium silicate brick KS 12DF acc. to DIN EN 771-2:2015-11				
Nomenclature	Dimensions [mm]	Mean compressive strength [N/mm ²]	Bulk density [kg/dm ³]	Min. wall thickness h _{min} [mm]
KS - R (P) 20 - 2,0 - 12DF	L: ≥ 498 B: ≥ 175 H: ≥ 248	14,0 ≤ f _{mean} ≤ 38,0	≥ 1,8	175

Table 15: Installation parameters Silka XL solid calcium silicate brick KS 12DF

Use category (installation)			dry or wet		
SCREW BOLT concrete screw size			6	8	10
Nominal embedment depth		h _{nom}	h _{nom1}	h _{nom1}	h _{nom1}
		[mm]	45	55	75
Nominal drill hole diameter	d ₀	[mm]	6	8	10
Cutting diameter of drill bit	d _{cut} ≤	[mm]	6,40	8,45	10,45
Drill hole depth	h ₀ ≥	[mm]	55	65	85
Clearance hole diameter	d _f ≤	[mm]	8	12	14
Torque for manual installation	max. T _{inst}	[Nm]	11	25	41
Torque for rotary screwdriver installation	T _{imp,max}	[Nm]	10	No performance assessed	
Impact screw driver	T _{imp,max}	[Nm]	Max. torque according to the manufacturer's instructions		
			185	300	

Permalast concrete screw SCREW BOLT-1000 LT

Performances

Silka XL solid calcium silicate brick KS 12DF – material characteristics, installation parameters

Annex C7

Table 16: Min edge distance, spacing, group factors

SCREW BOLT concrete screw size			6	8	10
Nominal embedment depth	h_{nom}		h_{nom1}	h_{nom1}	h_{nom1}
	[mm]		45	55	75
Min. edge distance	c_{min}	[mm]	80		
Min. spacing	$s_{min,II} = s_{min, \perp}$	[mm]	80		
Group factors	$\alpha_{g,N} (s_{min \perp})$	[-]	1,65	1,55	1,60
	$\alpha_{g,N} (s_{min II})$	[-]	1,30	1,80	1,40
	$\alpha_{g,V,II} (s_{min \perp})/(s_{min II})$	[-]	2,00		1,90
	$\alpha_{g,V, \perp} (s_{min \perp})/(s_{min II})$	[-]	2,00		1,40

Table 17: Reduction factors depending on the distance to joints

SCREW BOLT concrete screw size			6	8	10
Distance to joints	$c_{j \perp}$	[mm]	≥ 40		
	$c_{j II}$		≥ 80		
Reduction factor	$\alpha_{j, N}$	[-]	1 (full resistance)		
	$\alpha_{j, VII} = \alpha_{j, V \perp}$				
Distance to joints	$c_{j \perp}$	[mm]	< 40		
	$c_{j II}$		< 80		
Reduction factor	$\alpha_{j, N}$	[-]	Screw must not be used		

Permalast concrete screw SCREW BOLT-1000 LT

Performances

Silka XL solid calcium silicate brick KS 12DF – min. edge distance and spacing, group factors group factors and installation parameters close to the joints

Annex C8

Table 18: Characteristic resistance to pull-out failure or brick breakout failure of a single screw anchor under tension loading and to local brick failure and brick edge failure of a single screw anchor under shear loading

Use category (installation)			dry or wet		
SCREW BOLT concrete screw size			6	8	10
Nominal embedment depth	h_{nom}		h_{nom1}	h_{nom1}	h_{nom1}
	[mm]		45	55	75
Compressive strength f_{mean}	[N/mm ²]		$\geq 14,0$		
Characteristic resistance to tension load	N_{Rk}	[kN]	2,3	7,1	6,4
Characteristic resistance to shear load	$V_{Rk,II}$	[kN]	3,2		12,8
	$V_{Rk,L}$	[kN]	3,6		5,9
Compressive strength f_{mean}	[N/mm ²]		$\geq 15,0$		
Characteristic resistance to tension load	N_{Rk}	[kN]	2,4	7,4	6,9
Characteristic resistance to shear load	$V_{Rk,II}$	[kN]	3,3		13,3
	$V_{Rk,L}$	[kN]	3,7		6,1
Compressive strength f_{mean}	[N/mm ²]		$\geq 20,0$		
Characteristic resistance to tension load	N_{Rk}	[kN]	2,8	8,5	8,0
Characteristic resistance to shear load	$V_{Rk,II}$	[kN]	3,8		15,3
	$V_{Rk,L}$	[kN]	4,3		7,0

Permalast concrete screw SCREW BOLT-1000 LT

Performances

Silka XL solid calcium silicate brick KS 12DF – characteristic resistances

Annex C9

Table 19: Displacements

Use category (installation)			dry or wet		
SCREW BOLT concrete screw size			6	8	10
Nominal embedment depth	h_{nom}		h_{nom1}	h_{nom1}	h_{nom1}
	[mm]		45	55	75
Tension load	F_N	[kN]	0,7	2,2	1,8
Displacement in tension direction	δ_{N0}	[mm]	0,01	0,02	0,01
	$\delta_{N\infty}$	[mm]	0,02	0,04	0,02
Shear load parallel to the edge	$F_{V,II}$	[kN]	0,9		3,7
Displacement in shear direction parallel to the edge	$\delta_{V0,II}$	[mm]	0,37		1,70
	$\delta_{V\infty,II}$	[mm]	0,55		2,55
Shear load perpendicular to the edge	$F_{V,\perp}$	[kN]	1,0		1,7
Displacement in shear direction perpendicular to the edge	$\delta_{V0,\perp}$	[mm]	0,40		1,50
	$\delta_{V\infty,\perp}$	[mm]	0,60		2,25

Table 20: Performance under fire exposure for anchor groups - resistance to fire

SCREW BOLT concrete screw size			6
Nominal embedment depth	h_{nom}	[mm]	45
Characteristic resistance to local brick failure of groups under fire exposure			
$N_{Rk,fi}^B$	[kN]	R30-R90	$0,12 \cdot N_{Rk}$
		R120	$0,10 \cdot N_{Rk}$
Min. edge distance and spacing	[mm]	$C_{min,fi} = C_{j,fi}$	$2 \times h_{nom}^{1)}$
		$S_{min,fi}$	$4 \times h_{nom}$

¹⁾ At least the distances set out in Table 21 shall be observed

Permalast concrete screw SCREW BOLT-1000 LT

Performance

Silka XL solid calcium silicate brick KS 12DF – displacements and performance under fire exposure for anchor groups

Annex C10

Table 21: Fire exposure – resistance to fire

SCREW BOLT concrete screw size				6
Nominal embedment depth		h_{nom}	h_{nom1}	
		[mm]	45	
Steel failure for tension and shear load				
Characteristic resistance	R30	$N_{Rk,s,fi30}$	[kN]	1,50
	R60	$N_{Rk,s,fi60}$	[kN]	1,10
	R90	$N_{Rk,s,fi90}$	[kN]	0,60
	R120	$N_{Rk,s,fi120}$	[kN]	0,40
	R30	$V_{Rk,s,fi30}$	[kN]	1,50
	R60	$V_{Rk,s,fi60}$	[kN]	1,10
	R90	$V_{Rk,s,fi90}$	[kN]	0,60
	R120	$V_{Rk,s,fi120}$	[kN]	0,40
	R30	$M^0_{Rk,s,fi30}$	[Nm]	1,20
	R60	$M^0_{Rk,s,fi60}$	[Nm]	0,90
	R90	$M^0_{Rk,s,fi90}$	[Nm]	0,50
	R120	$M^0_{Rk,s,fi120}$	[Nm]	0,30
Pull-out failure				
Characteristic resistance	R30	$N_{Rk,p,fi30}$	[kN]	0,40
	R60	$N_{Rk,p,fi60}$	[kN]	0,40
	R90	$N_{Rk,p,fi90}$	[kN]	0,40
	R120	$N_{Rk,p,fi120}$	[kN]	0,32
Breakout failure				
Characteristic resistance	R30	$N_{Rk,b,fi30}$	[kN]	0,28
	R60	$N_{Rk,b,fi60}$	[kN]	0,28
	R90	$N_{Rk,b,fi90}$	[kN]	0,28
	R120	$N_{Rk,b,fi120}$	[kN]	0,23
Edge and joint distance				
R30 - R120	$c_{min,fi} =$	[mm]	120	
	$c_{j,fi,II}$	[mm]	35	
Spacing				
R30 - R120	$s_{min,fi}$	[mm]	$4 \times h_{nom}$	

Permalast concrete screw SCREW BOLT-1000 LT		Annex C11
Performance		
Perforated calcium silicate brick KSL 3DF - resistance to fire		

Table 22: Material characteristics perforated calcium silicate brick KSL 3DF



Perforated calcium silicate brick KSL 3DF acc. to DIN EN 771-2:2015-11				
Nomenclature	Dimensions [mm]	Mean compressive strength [N/mm ²]	Bulk density [kg/dm ³]	Min. wall thickness h _{min} [mm]
SWKV KSL 12 - 1,6 - 3DF	L: ≥ 240 B: ≥ 175 H: ≥ 113	17,0 ≤ f _{mean} ≤ 29,0	≥ 1,5	175

Table 23: Installation parameters perforated calcium silicate brick KSL 3DF

Use category (installation)			dry or wet		
SCREW BOLT concrete screw size			6	8	10
Nominal embedment depth		h _{nom}	h _{nom1}	h _{nom1}	h _{nom1}
		[mm]	45	55	75
Nominal drill hole diameter	d ₀	[mm]	6	8	10
Cutting diameter of drill bit	d _{cut} ≤	[mm]	6,40	8,45	10,45
Drill hole depth	h ₀ ≥	[mm]	55	65	85
Clearance hole diameter	d _f ≤	[mm]	8	12	14
Torque for manual installation	max. T _{inst}	[Nm]	2	5	7
Torque for rotary screwdriver installation	T _{imp,max}	[Nm]	8	9	
Impact screw driver	T _{imp,max}	[Nm]	Max. torque according to the manufacturer's instructions		
			no performance assessed	200	

Permalast concrete screw SCREW BOLT-1000 LT

Performances

Perforated calcium silicate brick KSL 3DF- material characteristics, installation parameters



Annex C12

Table 24: Min. edge distance, spacing, group factors

SCREW BOLT concrete screw size			6	8	10
Nominal embedment depth	h_{nom}		h_{nom1}	h_{nom1}	h_{nom1}
	[mm]		45	55	75
Min. edge distance	C_{min}	[mm]	80		
Min. spacing	$S_{min,II} = S_{min,I}$	[mm]	80		
Group factors	$\alpha_{g,N} (S_{min,I})$	[-]	2,00	1,55	1,95
	$\alpha_{g,N} (S_{min,II})$	[-]	2,00	1,55	1,45
	$\alpha_{g,V,II} (S_{min,I})/(S_{min,II})$	[-]	2,00		
	$\alpha_{g,V,I} (S_{min,I})/(S_{min,II})$	[-]	1,80		1,30

Table 25: Reduction factors depending on the distance to joints

SCREW BOLT concrete screw size			6	8	10
Distance to joints	$C_{j,I}$	[mm]	≥ 35		
	$C_{j,II}$		≥ 58		
Reduction factor	$\alpha_{j,N}$	[-]	1 (full resistance)		
	$\alpha_{j,V,II} = \alpha_{j,V,I}$				
Distance to joints	$C_{j,I}$	[mm]	< 35		
	$C_{j,II}$		< 58		
Reduction factor	$\alpha_{j,N}$	[-]	Screw must not be used		

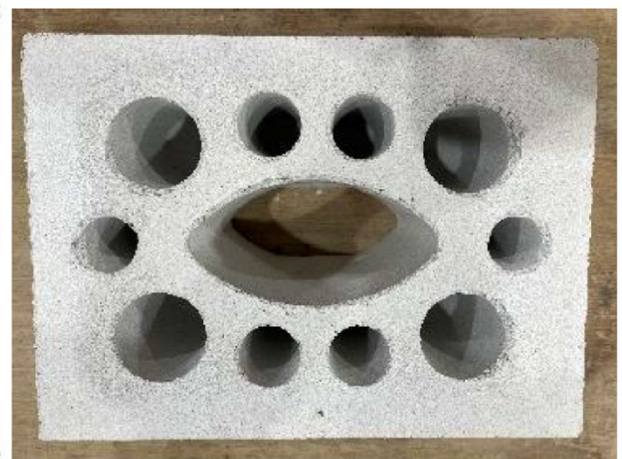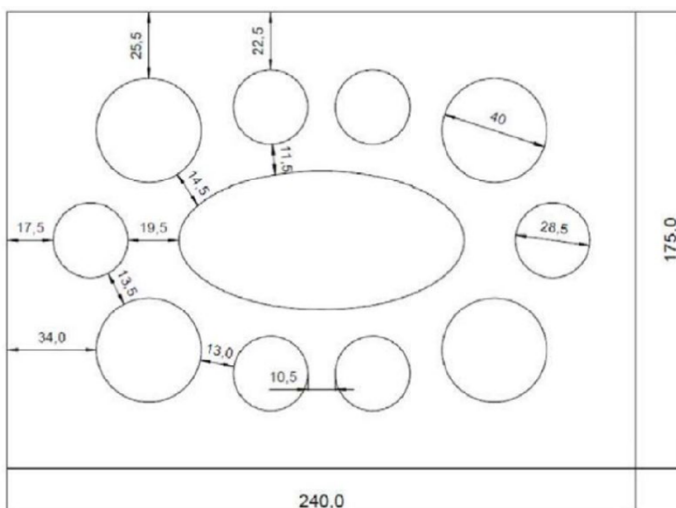

Permalast concrete screw SCREW BOLT-1000 LT

Performance

Perforated calcium silicate brick KSL 3DF – min. edge distance and spacing, group factors and installation parameters close to the joints

Annex C13

Table 26: Characteristic resistance to pull-out failure or brick breakout failure of a single screw anchor under tension loading and to local brick failure and brick edge failure of a single screw anchor under shear loading

Use category (installation)			dry or wet		
SCREW BOLT concrete screw size			6	8	10
Nominal embedment depth	h_{nom}		h_{nom1}	h_{nom1}	h_{nom1}
	[mm]		45	55	75
Compressive strength f_{mean}	[N/mm ²]		$\geq 17,0$		
Characteristic resistance to tension load	N_{Rk}	[kN]	0,9	1,6	2,2
Characteristic resistance to shear load	$V_{Rk,II}$	[kN]	3,4		
	$V_{Rk,L}$	[kN]	1,6		2,2
Compressive strength f_{mean}	[N/mm ²]		$\geq 20,0$		
Characteristic resistance to tension load	N_{Rk}	[kN]	0,9	1,8	2,5
Characteristic resistance to shear load	$V_{Rk,II}$	[kN]	3,8		
	$V_{Rk,L}$	[kN]	1,8		2,5
Compressive strength f_{mean}	[N/mm ²]		$\geq 25,0$		
Characteristic resistance to tension load	N_{Rk}	[kN]	1,1	2,2	2,9
Characteristic resistance to shear load	$V_{Rk,II}$	[kN]	4,5		4,6
	$V_{Rk,L}$	[kN]	2,1		2,9
Interaction	X	[-]	1,0		

Permalast concrete screw SCREW BOLT-1000 LT

Performance

Perforated calcium silicate brick KSL 3DF – characteristic resistances

Annex C14

Table 27: Displacements

Use category (Installation)			dry or wet		
SCREW BOLT concrete screw size			6	8	10
Nominal embedment depth	h_{nom}		h_{nom1}	h_{nom1}	h_{nom1}
	[mm]		45	55	75
Tension load	F_N	[kN]	0,3	0,5	0,6
Displacement in tension direction	δ_{N0}	[mm]	0,01		
	$\delta_{N\infty}$	[mm]	0,02		
Shear load parallel to the edge	$F_{V,II}$	[kN]	1,0		
Displacement in shear direction parallel to the edge	$\delta_{V0,II}$	[mm]	0,68		0,29
	$\delta_{V\infty,II}$	[mm]	1,02		0,43
Shear load perpendicular to the edge	$F_{V,\perp}$	[kN]	0,5		0,6
Displacement in shear direction perpendicular to the edge	$\delta_{V0,\perp}$	[mm]	0,01		
	$\delta_{V\infty,\perp}$	[mm]	0,01		

Table 28: Performance under fire exposure for anchor groups - resistance to fire

SCREW BOLT concrete screw size			6
Nominelle Einschraubtiefe	h_{nom}	[mm]	45
Characteristic resistance to local brick failure of groups under fire exposure			
$N_{RK,fi}^B$	[kN]	R30-R90	$0,12 \cdot N_{RK}$
		R120	$0,10 \cdot N_{RK}$
Min. edge distance and spacing	[mm]	$c_{min,fi} = c_{j,fi}$	$2 \times h_{nom}^{1)}$
		$s_{min,fi}$	$4 \times h_{nom}$

¹⁾ At least the distances set out in Table 29 shall be observed

Permalast concrete screw SCREW BOLT-1000 LT

Performances

Perforated calcium silicate brick KSL 3DF – displacements and performance under fire exposure for anchor groups

Annex C15

Table 29: Fire exposure – resistance to fire

SCREW BOLT concrete screw size				6
Nominal embedment depth		h_{nom}	h_{nom1}	
		[mm]	45	
Steel failure for tension and shear load				
Characteristic resistance	R30	$N_{Rk,s,fi30}$	[kN]	1,0
	R60	$N_{Rk,s,fi60}$	[kN]	0,8
	R90	$N_{Rk,s,fi90}$	[kN]	0,5
	R120	$N_{Rk,s,fi120}$	[kN]	0,4
	R30	$V_{Rk,s,fi30}$	[kN]	1,0
	R60	$V_{Rk,s,fi60}$	[kN]	0,8
	R90	$V_{Rk,s,fi90}$	[kN]	0,5
	R120	$V_{Rk,s,fi120}$	[kN]	0,4
	R30	$M^0_{Rk,s,fi30}$	[Nm]	0,8
	R60	$M^0_{Rk,s,fi60}$	[Nm]	0,6
	R90	$M^0_{Rk,s,fi90}$	[Nm]	0,4
	R120	$M^0_{Rk,s,fi120}$	[Nm]	0,3
Pull-out failure				
Characteristic resistance	R30	$N_{Rk,p,fi30}$	[kN]	0,60
	R60	$N_{Rk,p,fi60}$	[kN]	0,40
	R90	$N_{Rk,p,fi90}$	[kN]	0,30
	R120	$N_{Rk,p,fi120}$	[kN]	0,20
Breakout failure				
Characteristic resistance	R30	$N_{Rk,b,fi30}$	[kN]	0,60
	R60	$N_{Rk,b,fi60}$	[kN]	0,40
	R90	$N_{Rk,b,fi90}$	[kN]	0,30
	R120	$N_{Rk,b,fi120}$	[kN]	0,20
Edge and joint distance				
R30 - R120		$C_{min,fi} = C_{j,fi,II}$	[mm]	101
		$C_{j,fi,I}$	[mm]	56
Spacing				
R30 - R120		$S_{min,fi}$	[mm]	$4 \times h_{nom}$

Permalast concrete screw SCREW BOLT-1000 LT

Performance

Perforated calcium silicate brick KSL 3DF – resistance to fire

Annex C16

Table 30: Material characteristic solid clay brick MZ



Solid clay brick MZ acc. to DIN EN 771-1:2015-11				
Nomenclature	Dimensions [mm]	Mean compressive strength [N/mm ²]	Bulk density [kg/dm ³]	Min. wall thickness h _{min} [mm]
MZ 20 - 2,0 - NF	L: ≥ 240 B: ≥ 115 H: ≥ 71	21,0 ≤ f _{mean} ≤ 31,0	≥ 2,1	240

Table 31: Installation parameters solid clay brick MZ

Use category (installation)			dry or wet		
SCREW BOLT concrete screw size			6	8	10
Nominal embedment depth	h _{nom} [mm]		h _{nom1}	h _{nom1}	h _{nom1}
			45	55	75
Nominal drill hole diameter	d ₀	[mm]	6	8	10
Cutting diameter of drill bit	d _{cut} ≤	[mm]	6,40	8,45	10,45
Drill hole depth	h ₀ ≥	[mm]	55	65	85
Clearance hole diameter	d _f ≤	[mm]	8	12	14
Torque for manual installation	max. T _{inst}	[Nm]	0,3	12	26
Torque for rotary screwdriver installation	T _{imp,max}	[Nm]	6	10	No performance assessed
Impact screw driver	T _{imp,max}	[Nm]	Max. torque according to the manufacturer's instructions		
			no performance assessed		155

Permalast concrete screw SCREW BOLT-1000 LT

Performance

Solid clay brick MZ – material characteristic, installation parameters

Annex C17

Table 32: Min. edge distance, spacing, group factors

SCREW BOLT concrete screw size			6	8	10
Nominal embedment depth	h_{nom}		h_{nom1}	h_{nom1}	h_{nom1}
	[mm]		45	55	75
Min. edge distance	c_{min}	[mm]	80		
Min. spacing	$s_{min,II} = s_{min, \perp}$	[mm]	80		
Group factors	$\alpha_{g,N} (s_{min \perp})$	[-]	1,60	1,00	1,70
	$\alpha_{g,N} (s_{min II})$	[-]	1,75	1,15	1,45
	$\alpha_{g,V,II} (s_{min \perp})/(s_{min II})$	[-]	1,45		2,00
	$\alpha_{g,V, \perp} (s_{min \perp})/(s_{min II})$	[-]	1,70		1,50

Table 33: Reduction factors depending on the distance to joints

SCREW BOLT concrete screw size			6	8	10
Distance to joints	$c_{j \perp}$	[mm]	≥ 35		
	$c_{j II}$		≥ 80		
Reduction factor	$\alpha_{j, N}$	[-]	1 (full resistance)		
	$\alpha_{j, V,II} = \alpha_{j, V \perp}$				
Distance to joints	$c_{j \perp}$	[mm]	<35		
	$c_{j II}$		<80		
Reduction factor	$\alpha_{j, N}$	[-]	Screw must not be used		

Permalast concrete screw SCREW BOLT-1000 LT

Performance

Solid clay brick MZ – min. edge distance, spacing, group factors and installation parameters close to the joints

Annex C18

Table 34: Characteristic resistance to pull-out failure or brick breakout failure of a single screw anchor under tension loading and to local brick failure and brick edge failure of a single screw anchor under shear loading

Use category (installation)		dry or wet		
SCREW BOLT concrete screw size		6	8	10
Nominal embedment depth	h_{nom}	h_{nom1}	h_{nom1}	h_{nom1}
	[mm]	45	55	75
Compressive strength f_{mean}	[N/mm ²]	$\geq 21,0$		
Characteristic resistance to tension load	N_{Rk} [kN]	1,4	2,2	2,8
Characteristic resistance to shear load	$V_{Rk,II}$ [kN]	2,5		2,6
	$V_{Rk,L}$ [kN]	1,9		2,1
Compressive strength f_{mean}	[N/mm ²]	$\geq 25,0$		
Characteristic resistance to tension load	N_{Rk} [kN]	1,6	2,4	3,1
Characteristic resistance to shear load	$V_{Rk,II}$ [kN]	2,7		2,8
	$V_{Rk,L}$ [kN]	2,0		2,3
Compressive strength f_{mean}	[N/mm ²]	$\geq 30,0$		
Characteristic resistance to tension load	N_{Rk} [kN]	1,7	2,7	3,4
Characteristic resistance to shear load	$V_{Rk,II}$ [kN]	2,9		3,1
	$V_{Rk,L}$ [kN]	2,2		2,5
Compressive strength f_{mean}	[N/mm ²]	$\geq 31,0$		
Characteristic resistance to tension load	N_{Rk} [kN]	1,8	2,7	3,4
Characteristic resistance to shear load	$V_{Rk,II}$ [kN]	3,0		3,2
	$V_{Rk,L}$ [kN]	2,3		2,6

Permalast concrete screw SCREW BOLT-1000 LT

Performances

Solid clay brick MZ – characteristic resistances

Annex C19

Table 35: Displacements

Use category (installation)			dry or wet		
SCREW BOLT concrete screw size			6	8	10
Nominal embedment depth	h_{nom} [mm]	h_{nom1}	h_{nom1}	h_{nom1}	h_{nom1}
		45	55	75	
Tension load	F_N	[kN]	0,4	0,6	0,8
Displacement in tension direction	δ_{N0}	[mm]	0,01		
	$\delta_{N\infty}$	[mm]	0,02		
Shear load parallel to the edge	$F_{V,II}$	[kN]	0,7		0,7
Displacement in shear direction parallel to the edge	$\delta_{V0,II}$	[mm]	0,14		0,13
	$\delta_{V\infty,II}$	[mm]	0,22		0,20
Shear load perpendicular to the edge	$F_{V,\perp}$	[kN]	0,5		0,6
Displacement in shear direction perpendicular to the edge	$\delta_{V0,\perp}$	[mm]	0,34		0,33
	$\delta_{V\infty,\perp}$	[mm]	0,5		0,5

Table 36: Performance under fire exposure for anchor groups - resistance to fire

SCREW BOLT concrete screw size			6	8	10
Nominal embedment depth	h_{nom}	[mm]	45	55	75
Characteristic resistance local brick failure of groups under fire exposure					
$N_{Rk,fi}^B$	[kN]	R30-R90	$0,12 \cdot N_{Rk}$	$0,14 \cdot N_{Rk}$	$0,24 \cdot N_{Rk}$
		R120	$0,10 \cdot N_{Rk}$	$0,11 \cdot N_{Rk}$	$0,19 \cdot N_{Rk}$
Min. edge distance and spacing	[mm]	$c_{min,fi} = c_{j,fi}$	$2 \times h_{nom}^{1)}$		
		$s_{min,fi}$	$4 \times h_{nom}$		

¹⁾ At least the distances set out in Table 37 shall be observed

Permalast concrete screw SCREW BOLT-1000 LT

Performances

Solid clay brick MZ – displacements and performance under fire exposure for anchor groups

Annex C20

Table 37: Fire exposure – resistance to fire

SCREW BOLT concrete screw size				6	8	10
Nominal embedment depth		h_{nom}		h_{nom1}	h_{nom1}	h_{nom1}
		[mm]		45	55	75
Steel failure for tension and shear load						
Characteristic resistance	R30	$N_{Rk,s,fi30}$	[kN]	1,30		1,70
	R60	$N_{Rk,s,fi60}$	[kN]	1,00		1,60
	R90	$N_{Rk,s,fi90}$	[kN]	0,60		1,60
	R120	$N_{Rk,s,fi120}$	[kN]	0,50		1,50
	R30	$V_{Rk,s,fi30}$	[kN]	1,30		1,70
	R60	$V_{Rk,s,fi60}$	[kN]	1,00		1,60
	R90	$V_{Rk,s,fi90}$	[kN]	0,60		1,60
	R120	$V_{Rk,s,fi120}$	[kN]	0,50		1,50
	R30	$M^0_{Rk,s,fi30}$	[Nm]	1,10	1,50	2,50
	R60	$M^0_{Rk,s,fi60}$	[Nm]	0,80	1,10	2,40
	R90	$M^0_{Rk,s,fi90}$	[Nm]	0,50	0,80	2,30
	R120	$M^0_{Rk,s,fi120}$	[Nm]	0,40	0,60	2,20
Pull-out failure						
Characteristic resistance	R30	$N_{Rk,p,fi30}$	[kN]	1,30		1,70
	R60	$N_{Rk,p,fi60}$	[kN]	1,00		1,60
	R90	$N_{Rk,p,fi90}$	[kN]	0,60		1,60
	R120	$N_{Rk,p,fi120}$	[kN]	0,50		1,50
Breakout failure						
Characteristic resistance	R30	$N_{Rk,b,fi30}$	[kN]	1,30		1,70
	R60	$N_{Rk,b,fi60}$	[kN]	1,00		1,60
	R90	$N_{Rk,b,fi90}$	[kN]	0,60		1,60
	R120	$N_{Rk,b,fi120}$	[kN]	0,50		1,50
Edge and joint distance						
R30 - R120		$c_{min,fi} = c_{j,fi,II}$	[mm]	120		
		$c_{j,fi,I}$	[mm]	35		
Spacing						
R30 - R120		$s_{min,fi}$	[mm]	4 x h_{nom}		

Permalast concrete screw SCREW BOLT-1000 LT

Performances

Solid clay brick MZ – resistance to fire

Annex C21